

LOKI SERIES

150lm/w @CRI 80

ECO option with 3 years warranty



LOKI SERIES



FN-H2835L-XXX-XX



Color Available



IP Rating	IP22(N)	IP64(WP)	IP65(WS)	IP67(WT)	IP67(WHE)	IP68(WE)	IP68(WTS/WTU)
Graphical							
PCB Width(mm)	10 14	10 14	10 14	10 14	10 14	10 14	10 14

DC 24V 3yrs warranty

Optical & Electrical Parameters

Model No.	Voltage[V DC]	Light Color	CCT[K]	Ra	Luminous Flux[lm/m]	Efficacy[lm/W]	Power[W/m]
FN-H2835L-64-24	24	W	4000	80+	1137	148	7.68
FN-H2835L-128-24					1693	147	11.52
FN-H2835L-160-24					2146	149	14.40
FN-H2835L-240-24					3110	144	21.60


Other Parameters

Model No.	LED QTY (pcs/m)	Max Run[m/inch]	Min Cuttable Length (mm/inch)	Standard Packing Size/Reel L*W(mm/inch)
FN-H2835L-64-24	64	6.0[236.22]	125.0[4.92]	5000X10[196.85X0.39]
FN-H2835L-128-24	128	4.5[177.16]	62.5[2.46]	
FN-H2835L-160-24	160	4.0[157.48]	50.0[1.96]	
FN-H2835L-240-24	240	4.0[157.48]	33.3[1.31]	5000X14[196.85X0.55]

Profile Drawings

Length Unit : mm/inch


FN-H2835L-64-24




FN-H2835L-128-24



FN-H2835L-160-24



FN-H2835L-240-24

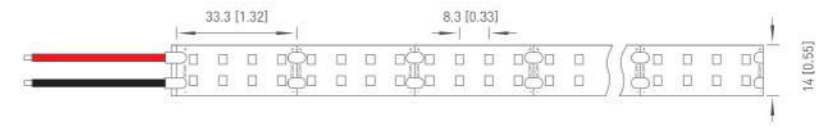

Quick Connector



FN-W10FF2



FN-W10CF2



FN-W10FF2G



FN-W10CF2G



S10W0



S10W1



S10W2

Suitable for 10mm width product with LED density less than 120LEDs/m.

Suitable for 10mm width product with LED density above 120LEDs/m.

Suitable for 10mm width product.

Note: IP22 Non-waterproof accessories listed above, please check accessory page for waterproof accessories.

Wire




20awg UL2464 jacket wire




20awg UL2468 wire


Aluminum Profile



SL250712-A



SL170712-A



SL171512-A




SL251512-A



SL161610-A



SL161610-B




SL201017-A




SL202017-A

Note: Only limited profile models illustrated, please check our profile catalog for more information.

LOKI SERIES

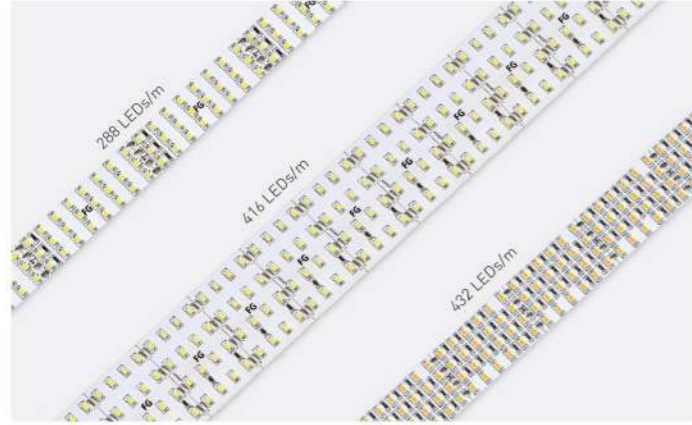

FN-H2835L-XXX-XX



DC 24V 3 yrs warranty

Optical & Electrical Parameters

Model No.	Voltage(V DC)	Light Color	CCT(K)	Ra	Luminous Flux(lm/m)	Efficacy(lm/W)	Power(W/m)
FN-H2835L-288-24	24	W	4000	80+	3732	144	25.92
FN-H2835L-416-24					5391	144	37.44
FN-H2835L-432-24					5832	150	38.88


Other Parameters

Model No.	LED QTY(pcs/m)	Max Run(m/inch)	Min Cuttable Length(mm/inch)	Standard Packing Size/Reel L*W(mm/inch)
FN-H2835L-288-24	288	5.0[196.85]	83.3[3.27]	5000X22[196.85X0.86]
FN-H2835L-416-24	416	6.0[236.22]	38.46[1.51]	5000X50[196.85X1.96]
FN-H2835L-432-24	432	4.0[157.48]	18.5[0.72]	5000X28[196.85X1.10]


Profile Drawings

Length Unit : mm/inch


FN-H2835L-288-24




FN-H2835L-416-24

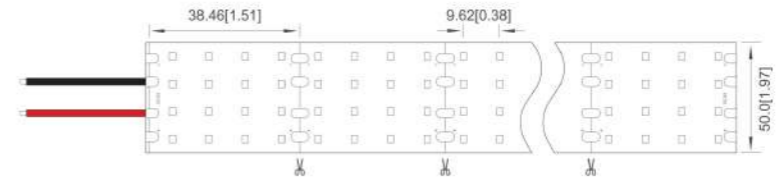

FN-H2835L-432-24

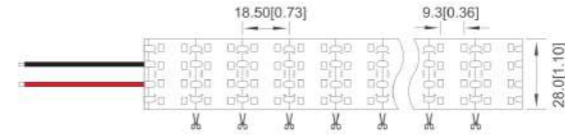

Aluminum Profile




SL303027-A



SL303027-A




SL262624-A




XT403530-A




XT606030-A




XT553530-A



XT913555-A



XT917655-A



XT763555-A

Note: Only limited profile models illustrated, please check our profile catalog for more information.