

# BENDING SERIES

► SL140711



Installation: Surface Mounted  
 Length Available: 1-3m  
 Profile Color: Silver, Black Anodized, White Powder Coating  
 Lens: Opal, Diffuser, Clear  
 Input Cable: Endcaps, Profile Bottom, Profile Sides  
 Quick Female/Male Connectors Input cable & Junction Box available

# BENDING SERIES

► SL140711

## ORDERING CODE

LUMINAIRE	FINISH	LENS	Vol.	Power	Ra	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
SL140711	W White	D Diffuser	24 24VDC	16.42W±10%	90 90+	22-2200K , 24-2400K 25-2500K , 27-2700K 30-3000K , 35-3500K 40-4000K , 50-5000K 65-6500K	01 - Black&Red 22AWG	A - AMP male/female	E - Through Endcaps
	B Black	O Opal				TW Tunable White - check your executive sales	02 - Black&White 22AWG	M - Molex male/female	B - Through profile end bottom
	S Silver	C Clear				D2W Dim To Warm - check your executive sales	03 - White PU protected 2 pin	D - DC male/female	S - Through profile side
							04 - 3Pin cable for Tunable white		

## RECOMMEND LIGHT SOURCE

Performance	Part Code	LED QTY	Input Vol.	Power	CRI	Light Source Lumen	Diffuser Lens Lumen	Cutttable length	Max Run	PCB Width
General	FN-2016-266	266pcs/m	24VDC	16.42W ± 10%	90+	1700 lm/m	lm/m	26.3mm	3M	10mm



# BENDING SERIES


► SL150712



PROFILE COLORS



LENS

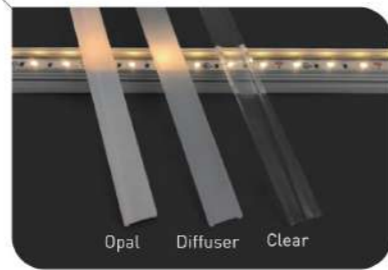

Installation: Surface Mounted  
 Length Available: 1-3m  
 Profile Color: Silver, Black Anodized, White Powder Coating  
 Lens: Opal, Diffuser, Clear  
 Input Cable: Endcaps, Profile Bottom, Profile Sides  
 Quick Female/Male Connectors Input cable & Junction Box available

# BENDING SERIES

► SL150712

## ORDERING CODE

LUMINAIRE	FINISH	LENS	Vol.	Power	Ra	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
SL150712	W White	D Diffuser	24 24VDC	16.42W±10%	90 90+	22-2200K , 24-2400K 25-2500K , 27-2700K 30-3000K , 35-3500K 40-4000K , 50-5000K 65-6500K	01 - Black&Red 22AWG	A - AMP male/female	E - Through Endcaps
	B Black	O Opal					02 - Black&White 22AWG	M - Molex male/female	B - Through profile end bottom
	S Silver	C Clear				TW Tunable White - check your executive sales	03 - White PU protected 2 pin	D - DC male/female	S - Through profile side
						D2W Dim To Warm - check your executive sales	04 - 3Pin cable for Tunable white		

## RECOMMEND LIGHT SOURCE

Performance	Part Code	LED QTY	Input Vol.	Power	CRI	Light Source Lumen	Diffuser Lens Lumen	Cutttable length	Max Run	PCB Width
General	FN-2016-266	266pcs/m	24VDC	16.42W ± 10%	90+	1700 lm/m	lm/m	26.3mm	3M	10mm



# BENDING SERIES


► SL180715



PROFILE COLORS



LENS

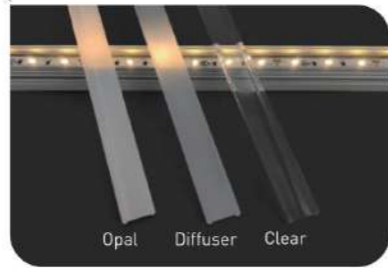

Installation: Surface Mounted  
 Length Available: 1-3m  
 Profile Color: Silver, Black Anodized, White Powder Coating  
 Lens: Opal, Diffuser, Clear  
 Input Cable: Endcaps, Profile Bottom, Profile Sides  
 Quick Female/Male Connectors Input cable & Junction Box available

# BENDING SERIES

► SL180715

## ORDERING CODE

LUMINAIRE	FINISH	LENS	Vol.	Power	Ra	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
SL180715	W White  B Black  S Silver	D Diffuser  O Opal  C Clear	24 24VDC	16.42W±10%	90 90+	22-2200K , 24-2400K 25-2500K , 27-2700K 30-3000K , 35-3500K 40-4000K , 50-5000K 65-6500K	01 - Black&Red 22AWG  02 - Black&White 22AWG  03 - White PU protected 2 pin  04 - 3Pin cable for Tunable white	A - AMP male/female  M - Molex male/female  D - DC male/female	E - Through Endcaps  B - Through profile end bottom  S - Through profile side
					TW	Tunable White - check your executive sales			
					D2W	Dim To Warm - check your executive sales			

## RECOMMEND LIGHT SOURCE

Performance	Part Code	LED QTY	Input Vol.	Power	CRI	Light Source Lumen	Diffuser Lens Lumen	Cutttable length	Max Run	PCB Width
General	FN-2016-266	266pcs/m	24VDC	16.42W ± 10%	90+	1700 lm/m	lm/m	26.3mm	3M	10mm

