

LUZ SERIES

U5085/ U7085/ U10085 DIFFUSER LINEAR LIGHT



SPECIFICATIONS

Finish 	Lens Anti-glare film , Prismatic lens , Diffuser	Installations Pendant , Ceiling mounted , Wall mounted Trimmed recessed , Trimless recessed
Width / Height 51mm×85mm , 70mm×85mm , 100mm×85mm		Length 1200mm , 1500mm , 2400mm , Customized
Efficacy up to 100lm/W		Power 31.1W/pc , 37.8W/pc , 62W/pc
Color Quality 3-step MacAdam		CRI 80+ , 90+
Color Temperature [Tunable White] 		Voltage 220-240 VAC , 100-277 VAC
Optical Dimension 		Control DALI , 0-10V , On/off
		IP Grade IP22
		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD


1. standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+ , 90+ in Epistar and Samsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

LUZ OPTICAL




5IN1 Louver Optical Kit is flexible in any multiple lengths as W30=132.5mm, W38=L189.8mm. Available in various beam angles which is most satisfying for lighting environments. The Anti-glaring performance is up to UGR<16.

Reflector Louver-38mm



Reflector Louver-30mm



Wall Washer



LUZ SERIES

U5085/ U7085/ U10085 REFLECTOR LOUVER LINEAR LIGHT



SPECIFICATIONS

Finish 	Lens Reflector louver-38mm	Installations Pendant , Ceiling mounted , Wall mounted Trimmed recessed , Trimless recessed
Width / Hight 51mm×85mm , 70mm×85mm , 100mm×85mm	Length 1200mm with 3sets Reflector Kit , Customized	
Efficacy up to 90lm/W	Power 23W/pc	
Color Quality 3-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White] 	Voltage 220-240 VAC , 100-277 VAC	
	Control DALI , 0-10V , On/off	
Optical Dimension 	IP Grade IP22	
	LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD	

1. standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+ , 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

LUZ SERIES

U5085/ U7085/ U10085 REFLECTOR LOUVER LINEAR LIGHT



SPECIFICATIONS

Finish 	Lens Reflector louver-30mm	Installations Pendant , Ceiling mounted , Wall mounted Trimmed recessed , Trimless recessed
Width / Hight 51mm×85mm , 70mm×85mm , 100mm×85mm	Length 1200mm with 4sets Reflector Kit , Customized	
Efficacy up to 90lm/W	Power 23W/pc	
Color Quality 3-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White] 	Voltage 220-240 VAC , 100-277 VAC	
	Control DALI , 0-10V , On/off	
Optical Dimension 	IP Grade IP22	
	LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD	

1. standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+ , 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

LUZ SERIES

U5085/ U7085/ U10085 WALL WASHER LINEAR LIGHT



SPECIFICATIONS

Finish 	Lens Wall washer	Installations Pendant , Ceiling mounted , Wall mounted Trimmed recessed , Trimless recessed
Width / Hight 51mm×85mm , 70mm×85mm , 100mm×85mm	Length 1200mm-with 4sets ww kit , Customized	
Efficacy up to 70lm/W	Power 23W/pc	
Color Quality 3-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K	Voltage 220-240 VAC , 100-277 VAC	
Optical Dimension 190 [7.48] 38 [1.5]	Control DALI , 0-10V , On/off	
IP Grade IP22		LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD


1. standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

LUZ OPTICAL

Accurate Injected Lens

Beam angle in Asymmetric, Batwing, 60°, 90°.

Beam Angle

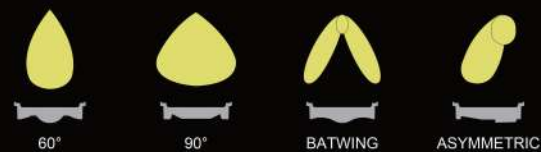




LUZ SERIES

U5085 / U7085 / U10085 REFLECTOR LOUVER LINEAR LIGHT



SPECIFICATIONS

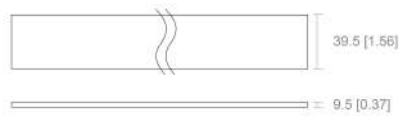Finish 	Lens Accurate injected lens	Installations Pendant , Ceiling mounted , Wall mounted
Width / Hight 51mm×85mm		Length 1182mm
Efficacy up to 110lm/W		Power 26W/pc
Color Quality 3-step MacAdam		CRI 80+ , 90+
Color Temperature [Tunable White]  2700K 3000K 3500K 4000K 5000K 6000K 6500K		Voltage 220-240 VAC , 100-277 VAC Control DALI , 0-10V , On/off
Optical Dimension 		IP Grade IP22 LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD

1. standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Samsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.