


ZOLI External Driver Linear Light

U5168 is linear LED lighting fixture that features a down lighting. It's offering multiple angular module options and the flexible joining solution in filed with less labor operations.

ZOLI SERIES U5168 EXTERNAL DRIVER LINEAR LIGHT

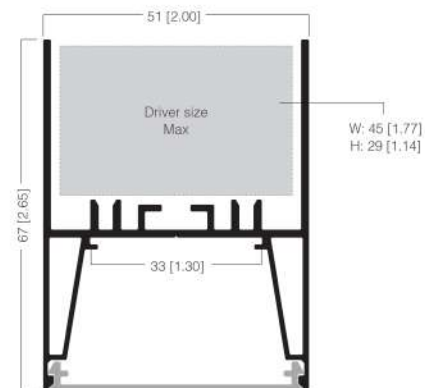

Unit:mm[in]

DIMENSIONS



U516833

Pendant Installation




ANGULAR MODULE

U5168 is offering multiple angular module options and the flexible joining solution in filed with less labor operations.

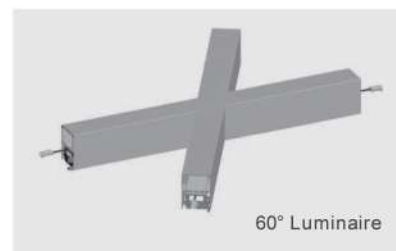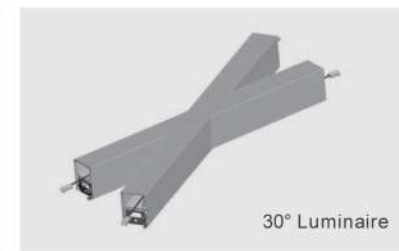

ZOLI SERIES

U5141/ U6741 EXTERNAL DRIVER LINEAR LIGHT

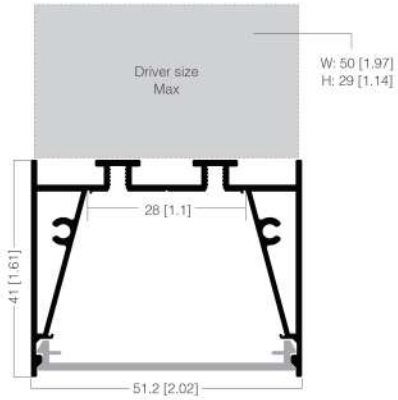

U514128

Surface Installation
(Pendant, Surface Mounted)



U674128

Trimmed Recessed
Installation



Unit:mm[in]

U5168/ U5141/ 5741 OPTICAL

Diffuser




UGR<19 Flush Optical Kit
Creating the most
human friendly lighting.



Prismatic Lens available for
anti-glaring lighting requirements.



General PC lens
with high transmission.

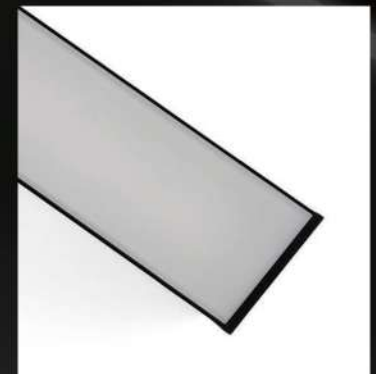

ZOLI SERIES

U5168 EXTERNAL DRIVER LINEAR LIGHT



SPECIFICATIONS

Finish 	Lens Anti-glare film , Prismatic lens , Diffuser	Installations Aircraft cable pendant
Width / Hight 51mm×68mm	Length 1200mm , 1500mm , 2400mm , Customized	
Efficacy up to 100lm/W	Power 31.1W/pc , 37.8W/pc , 62W/pc	
Color Quality 3-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K	Voltage 220-240 VAC , 100-277 VAC	
	Control DALI , 0-10V , On/off	
Optical Dimension 	IP Grade IP22	
	LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD	

1. standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+ , 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

ZOLI SERIES

U5141/ U6741 EXTERNAL DRIVER LINEAR LIGHT



SPECIFICATIONS

Finish 	Lens Anti-glare film , Prismatic lens , Diffuser	Installations Aircraft cable pendant , Trimed recessed
Width / Hight 51mm×41mm , 67mm×41mm	Length 1200mm , 1500mm , 2400mm , Customized	
Efficacy up to 100lm/W	Power 26W/pc , 32W/pc , 52W/pc	
Color Quality 3-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White] 2700K 3000K 3500K 4000K 5000K 6000K 6500K	Voltage 220-240 VAC , 100-277 VAC	
	Control DALI , 0-10V , On/off	
Optical Dimension 	IP Grade IP22	
	LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD	

1. standard is 3-Step MacAdam
2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+ , 90+ in Epistar and Sumsung chips, pls. check the list on following page.
3. For more options, pls. check with your executive sales.

ZOLI SERIES



U3537/ U4633 EXTERNAL DRIVER LINEAR LIGHT

ZOLI SERIES



U3537/ U4633 OPTICAL

MULTIPLE OPTICAL OPTIONS


5in1 TIR Louver

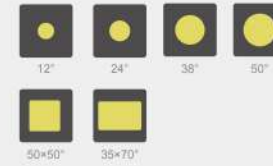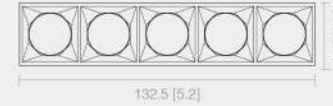


Crystal Louver / Cone Louver

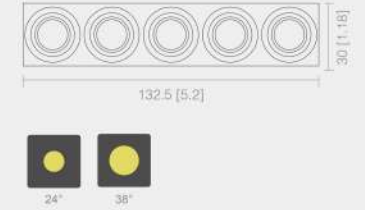


TIR Lens

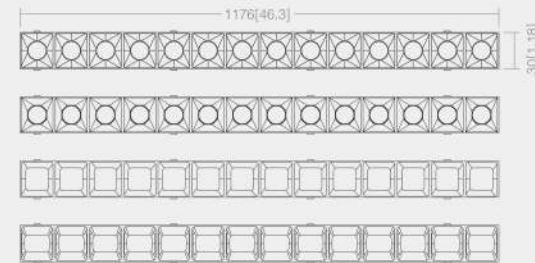

Reflector Louver

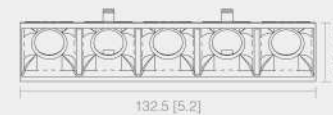


Wall Washer

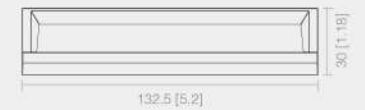

DIMENSIONS


U353728

Pendant Installation

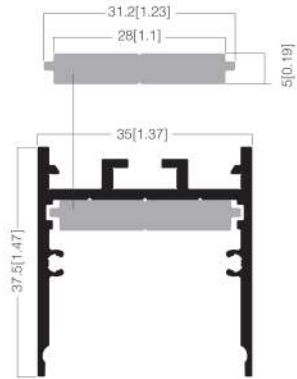

U463328

Trimmed Recessed Installation

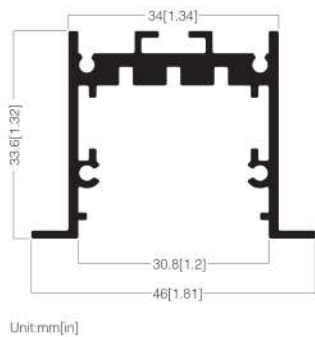

Unit:mm[in]



ZOLI SERIES

U3537/ U4633 EXTERNAL DRIVER LINEAR LIGHT



UGR
<16

SPECIFICATIONS

Finish 	Lens Multiple optical options	Installations Aircraft cable pendant , Trimed recessed
Width / Hight 35mm×37mm , 46mm×33mm	Length 1200mm , 1600mm , 2400mm , Customized	
Efficacy up to 100lm/W	Power 25W/pc , 33W/pc , 50W/pc	
Color Quality 3-step MacAdam	CRI 80+ , 90+	
Color Temperature [Tunable White] 	Voltage 220-240 VAC , 100-277 VAC	Control DALI , 0-10V , On/off
LED Chips And Driver Options NICHIA , EPISTAR , SAMSUNG TRIDONIC , OSRAM , LIFUD	IP Grade IP22	

1 standard is 3-Step MacAdam

2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Samsung chips, pls. check the list on following page.

3. For more options, pls. check with your executive sales.