

A

N

G



éclipse  
conseil  
LIGHTING SENSITIVITY

L

E



Angle series is an integrated residential downlight solution for better performance and installation. This collection has Angle and Angle PRO to meet more needs accordingly.


Angle series is very installation-friendly. It's low profile (45mm and 55mm height) and insulation coverable, which can be installed in plaster ceilings and concrete ceilings. It's available in triac and DALI dimming. The driver is configured with a power selectable function (8W-10W) and is tool-free with a quick connector (loop in&out). It also allows a max. 16mm conduit to be put in.

Angle, with the adjustability of 355°\*30°, considers the most common requirements, IP54, switchable CCT, and compatible cutout (68mm and 83mm).



Angle PRO, with the adjustability of all way 360°, considers the more demanding requirements, IP65, more functional LED options like super high CRI97 or tunable, and interchangeable optics including honeycomb to lessen the glare.



ANGLE




ANGLE

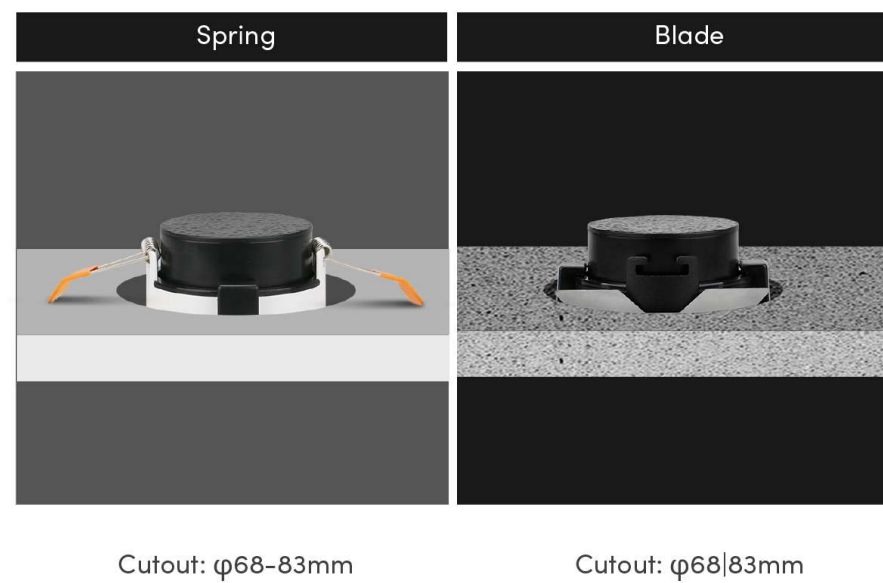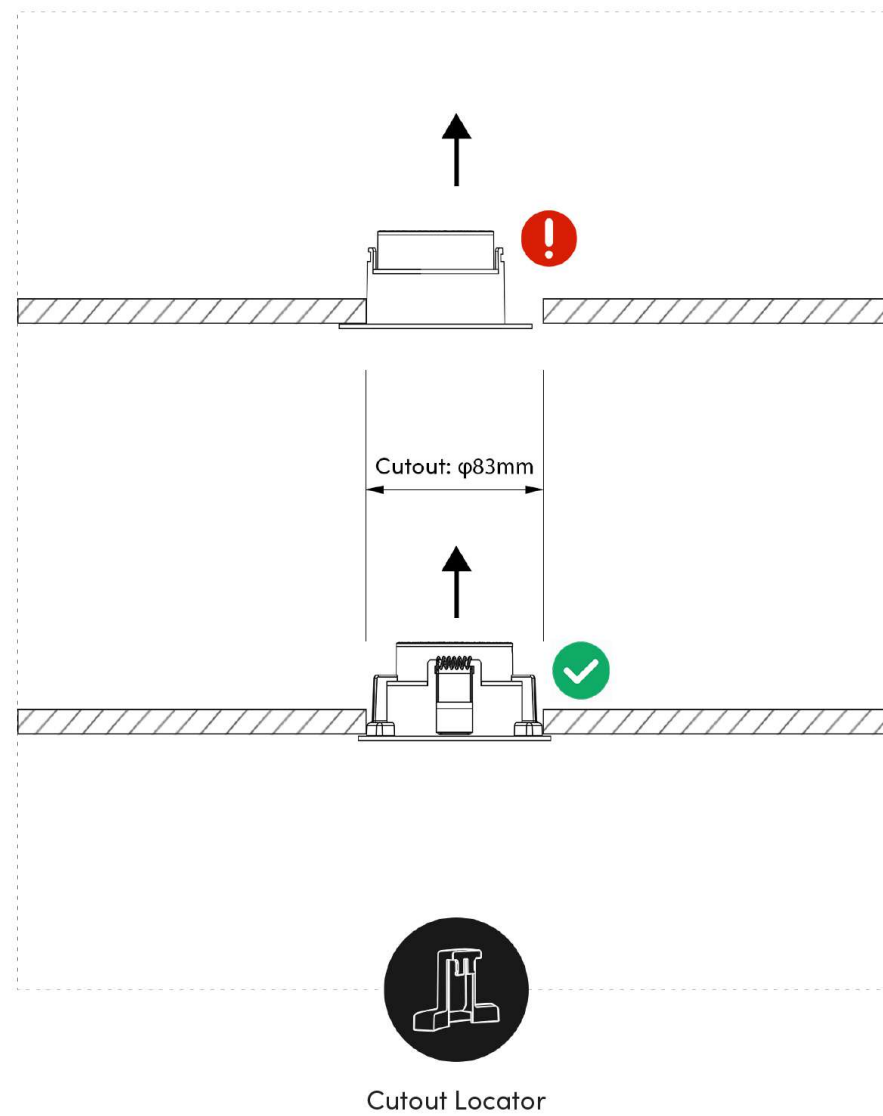

There has light, there has option.

Dim to Warm

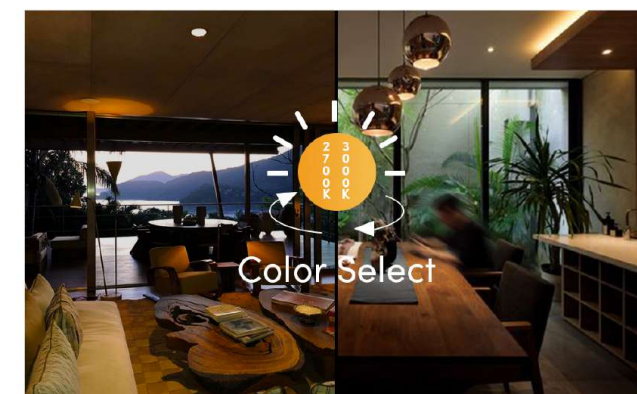




2700K-3000K

IP54





# PRO ANGLE

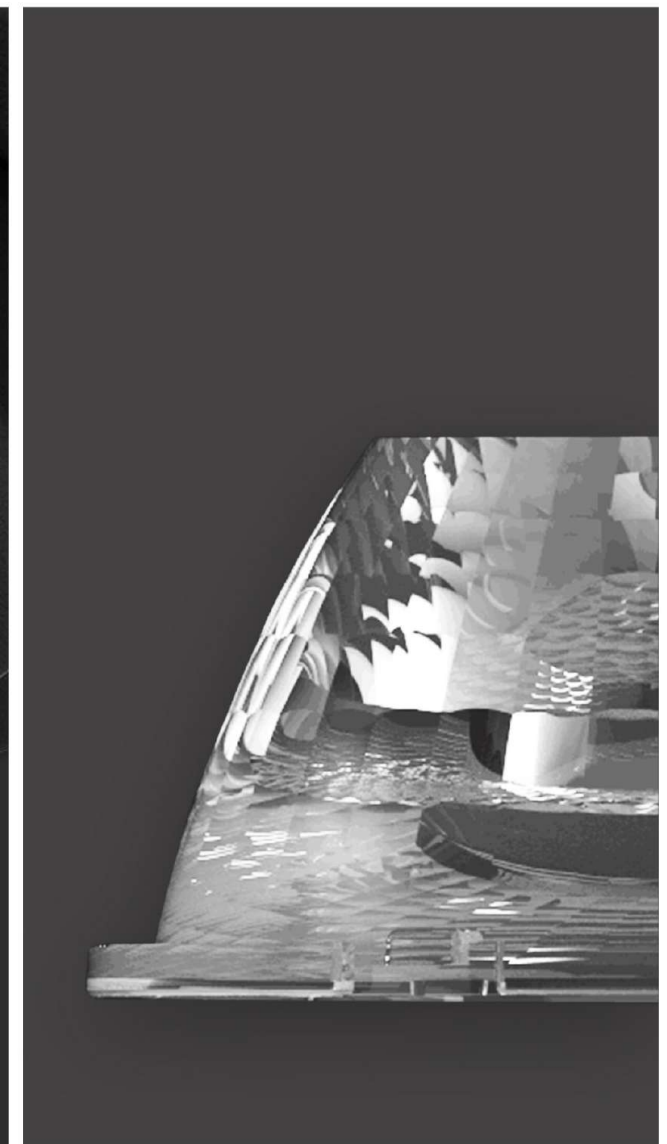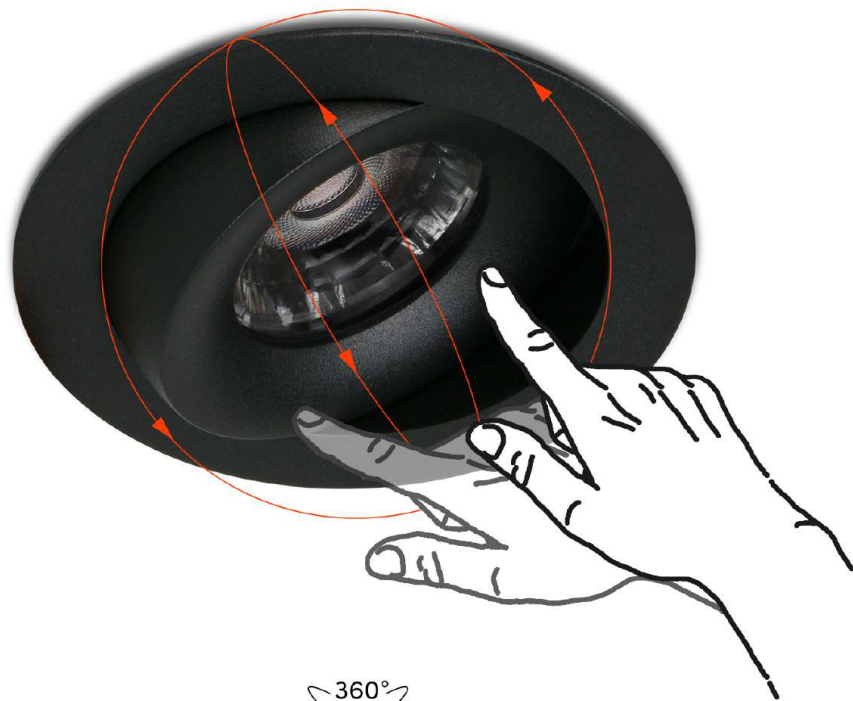


Angle Pro is configured with lens with high transmission and low glare lighting control.  
Honeycomb is also optional for more demanding request.






Ra90


Dim to Warm

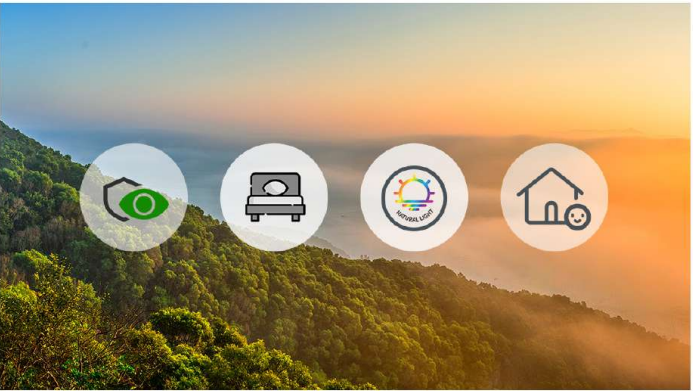


THRIVETM (Ra97+)

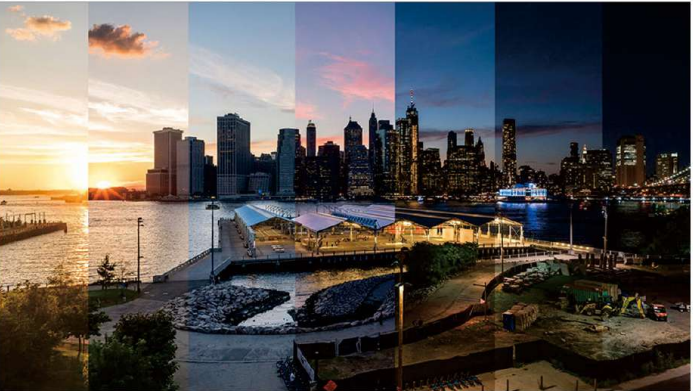

Tunable White

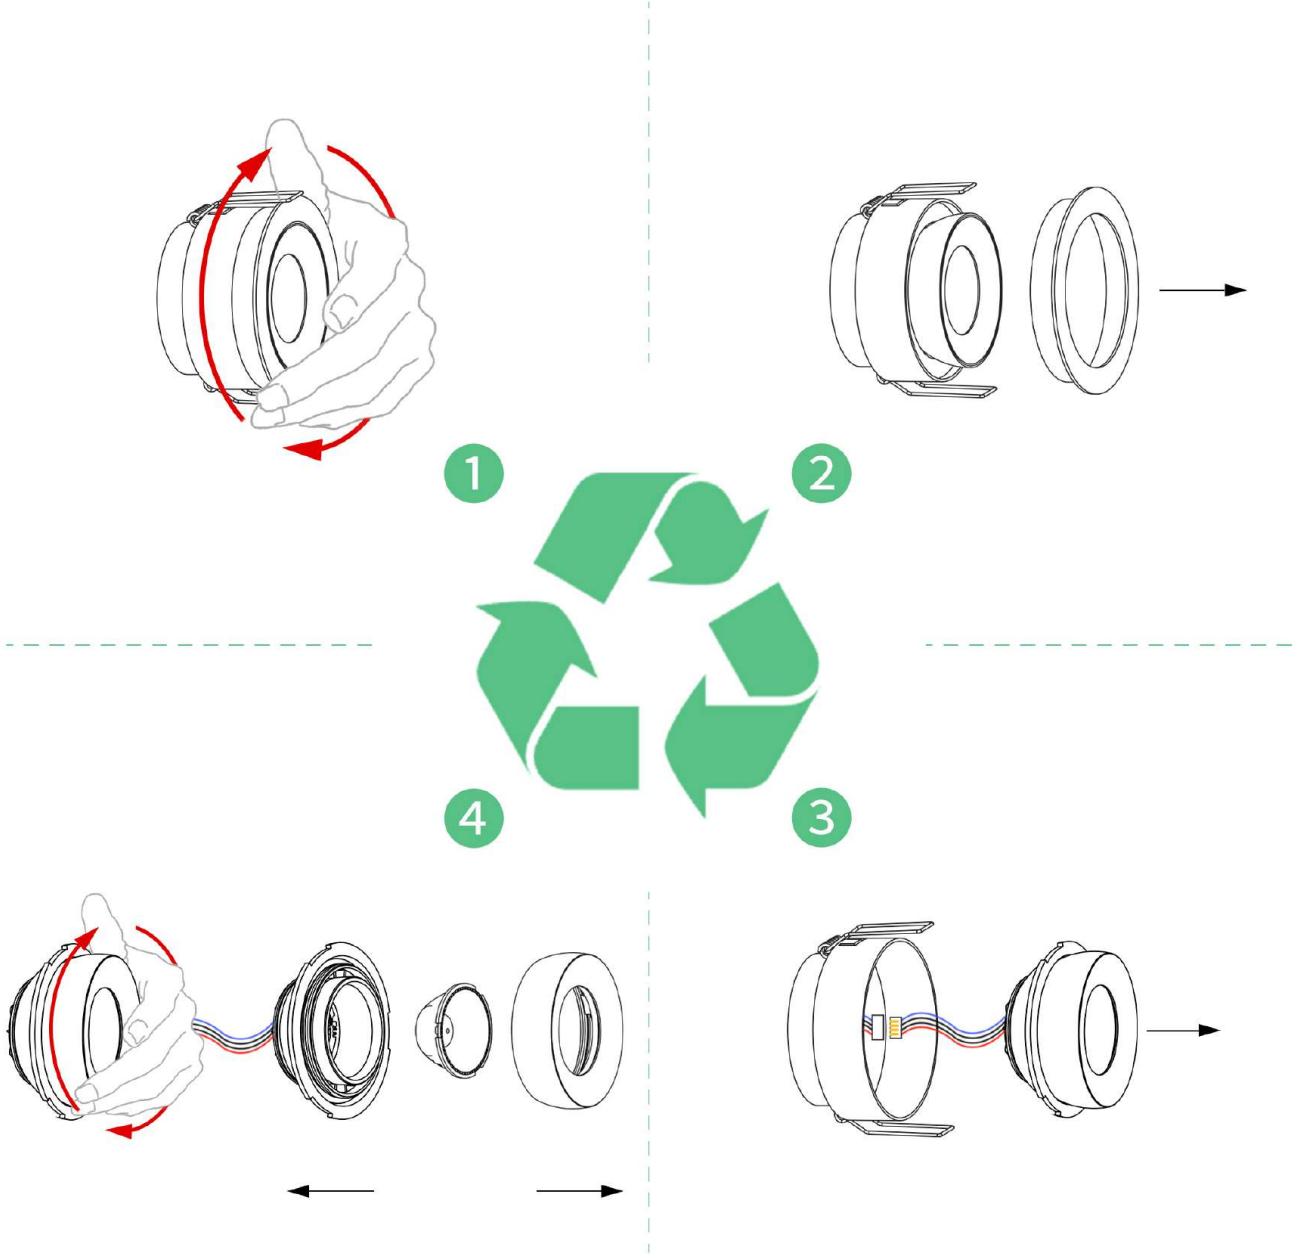


IP65

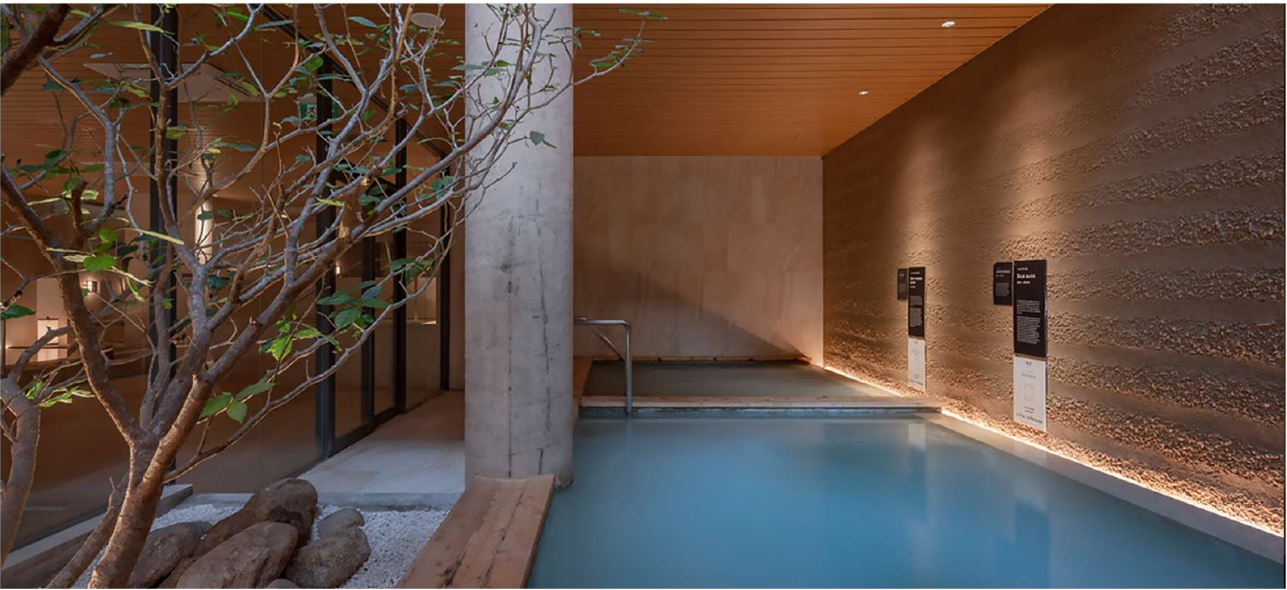


Angle Pro is easily disassemble the whole fitting into parts and recycle.




Angle and Angle Pro also share some user-friendly features.

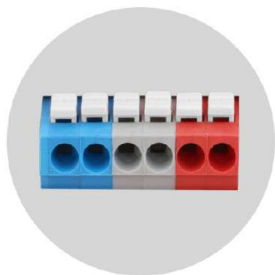

Quick Connector

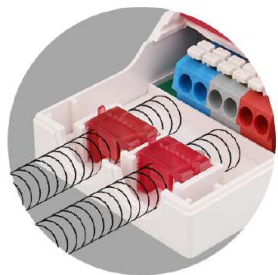


Input Connecting 0.75~2.5mm  
Max.16mm Conduit

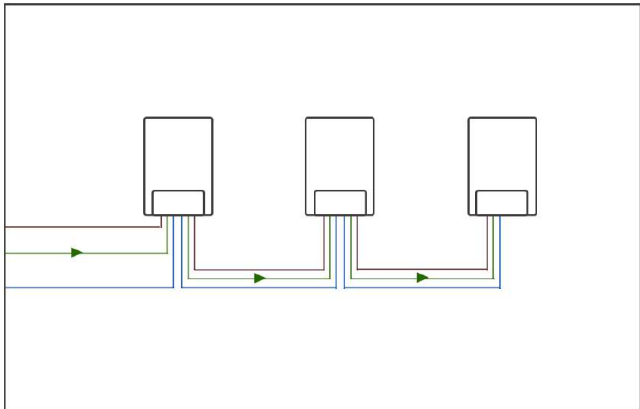


Loop in&out

Power Selectable

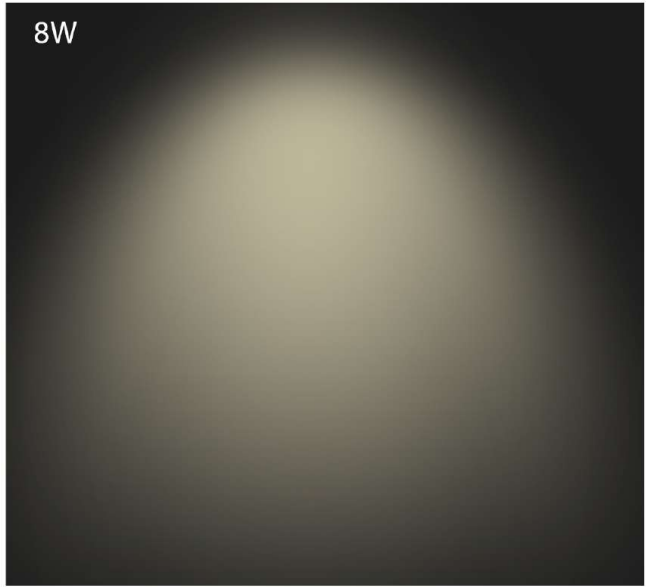



# Angle

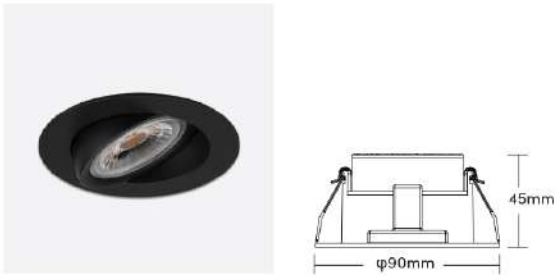

Finish  
● ○ ●

Installation

Spring



Cutout: φ68-83mm

Blade



Cutout: φ68/83mm

Power  
8W-10W

Color temperature



Optics




Dimmability

Triac DALI

Ingress Protection

IP54

# Angle Pro

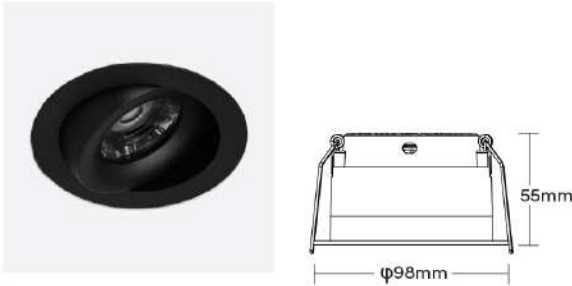

Finish  
● ○ ●

Installation

Spring



Cutout: φ83-90mm

Blade



Cutout: φ83mm

Power  
8W-10W

Color temperature



Optics



Dimmability

Triac DALI

Ingress Protection

IP65

## ECLIPSE CONSEIL

LAURENT GORGET

Siège : +33 (1) 79 30 48 19 - Showroom Paris : +33 (1) 78 95 50 14 - Mobi : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS  
TVA : FR 40753042696 - RCS Nanterre 753 042 696