



GAMME STRATA

**STRONG
POWER BEATUY**

15W | 25W | 35W | 40W

**MODULAR
DESIGN**

TOOL FREE

Smart mechanical
design for easy
assembly

**MULTIPLE
MOUNTING WAY**





Engine

STRATA



Fixture



Optics



More Module
Possibilities



01

4-9
Overview

02

10-11
Engine

03

12
Optics

04

13
Fixture Options

05

14-19
Mechanical
Technology

06

24-28
Parameter


Overview




Strata is a series of modular lighting solutions for lobbies, offices, retail shops, and supermarkets. Luminaires in commercial lighting nowadays are considering more than efficiency. It's versatile to meet more needs in different ways like the texture of lighting, lighting control, and style of luminaires.


Strata would greatly help maintain consistency and create possibilities in the whole commercial area as it offers CRI > 90, light modular with multiple mounting ways, interchangeable optics, and high visual-comfort reflectors as its standard configuration.

STRATA

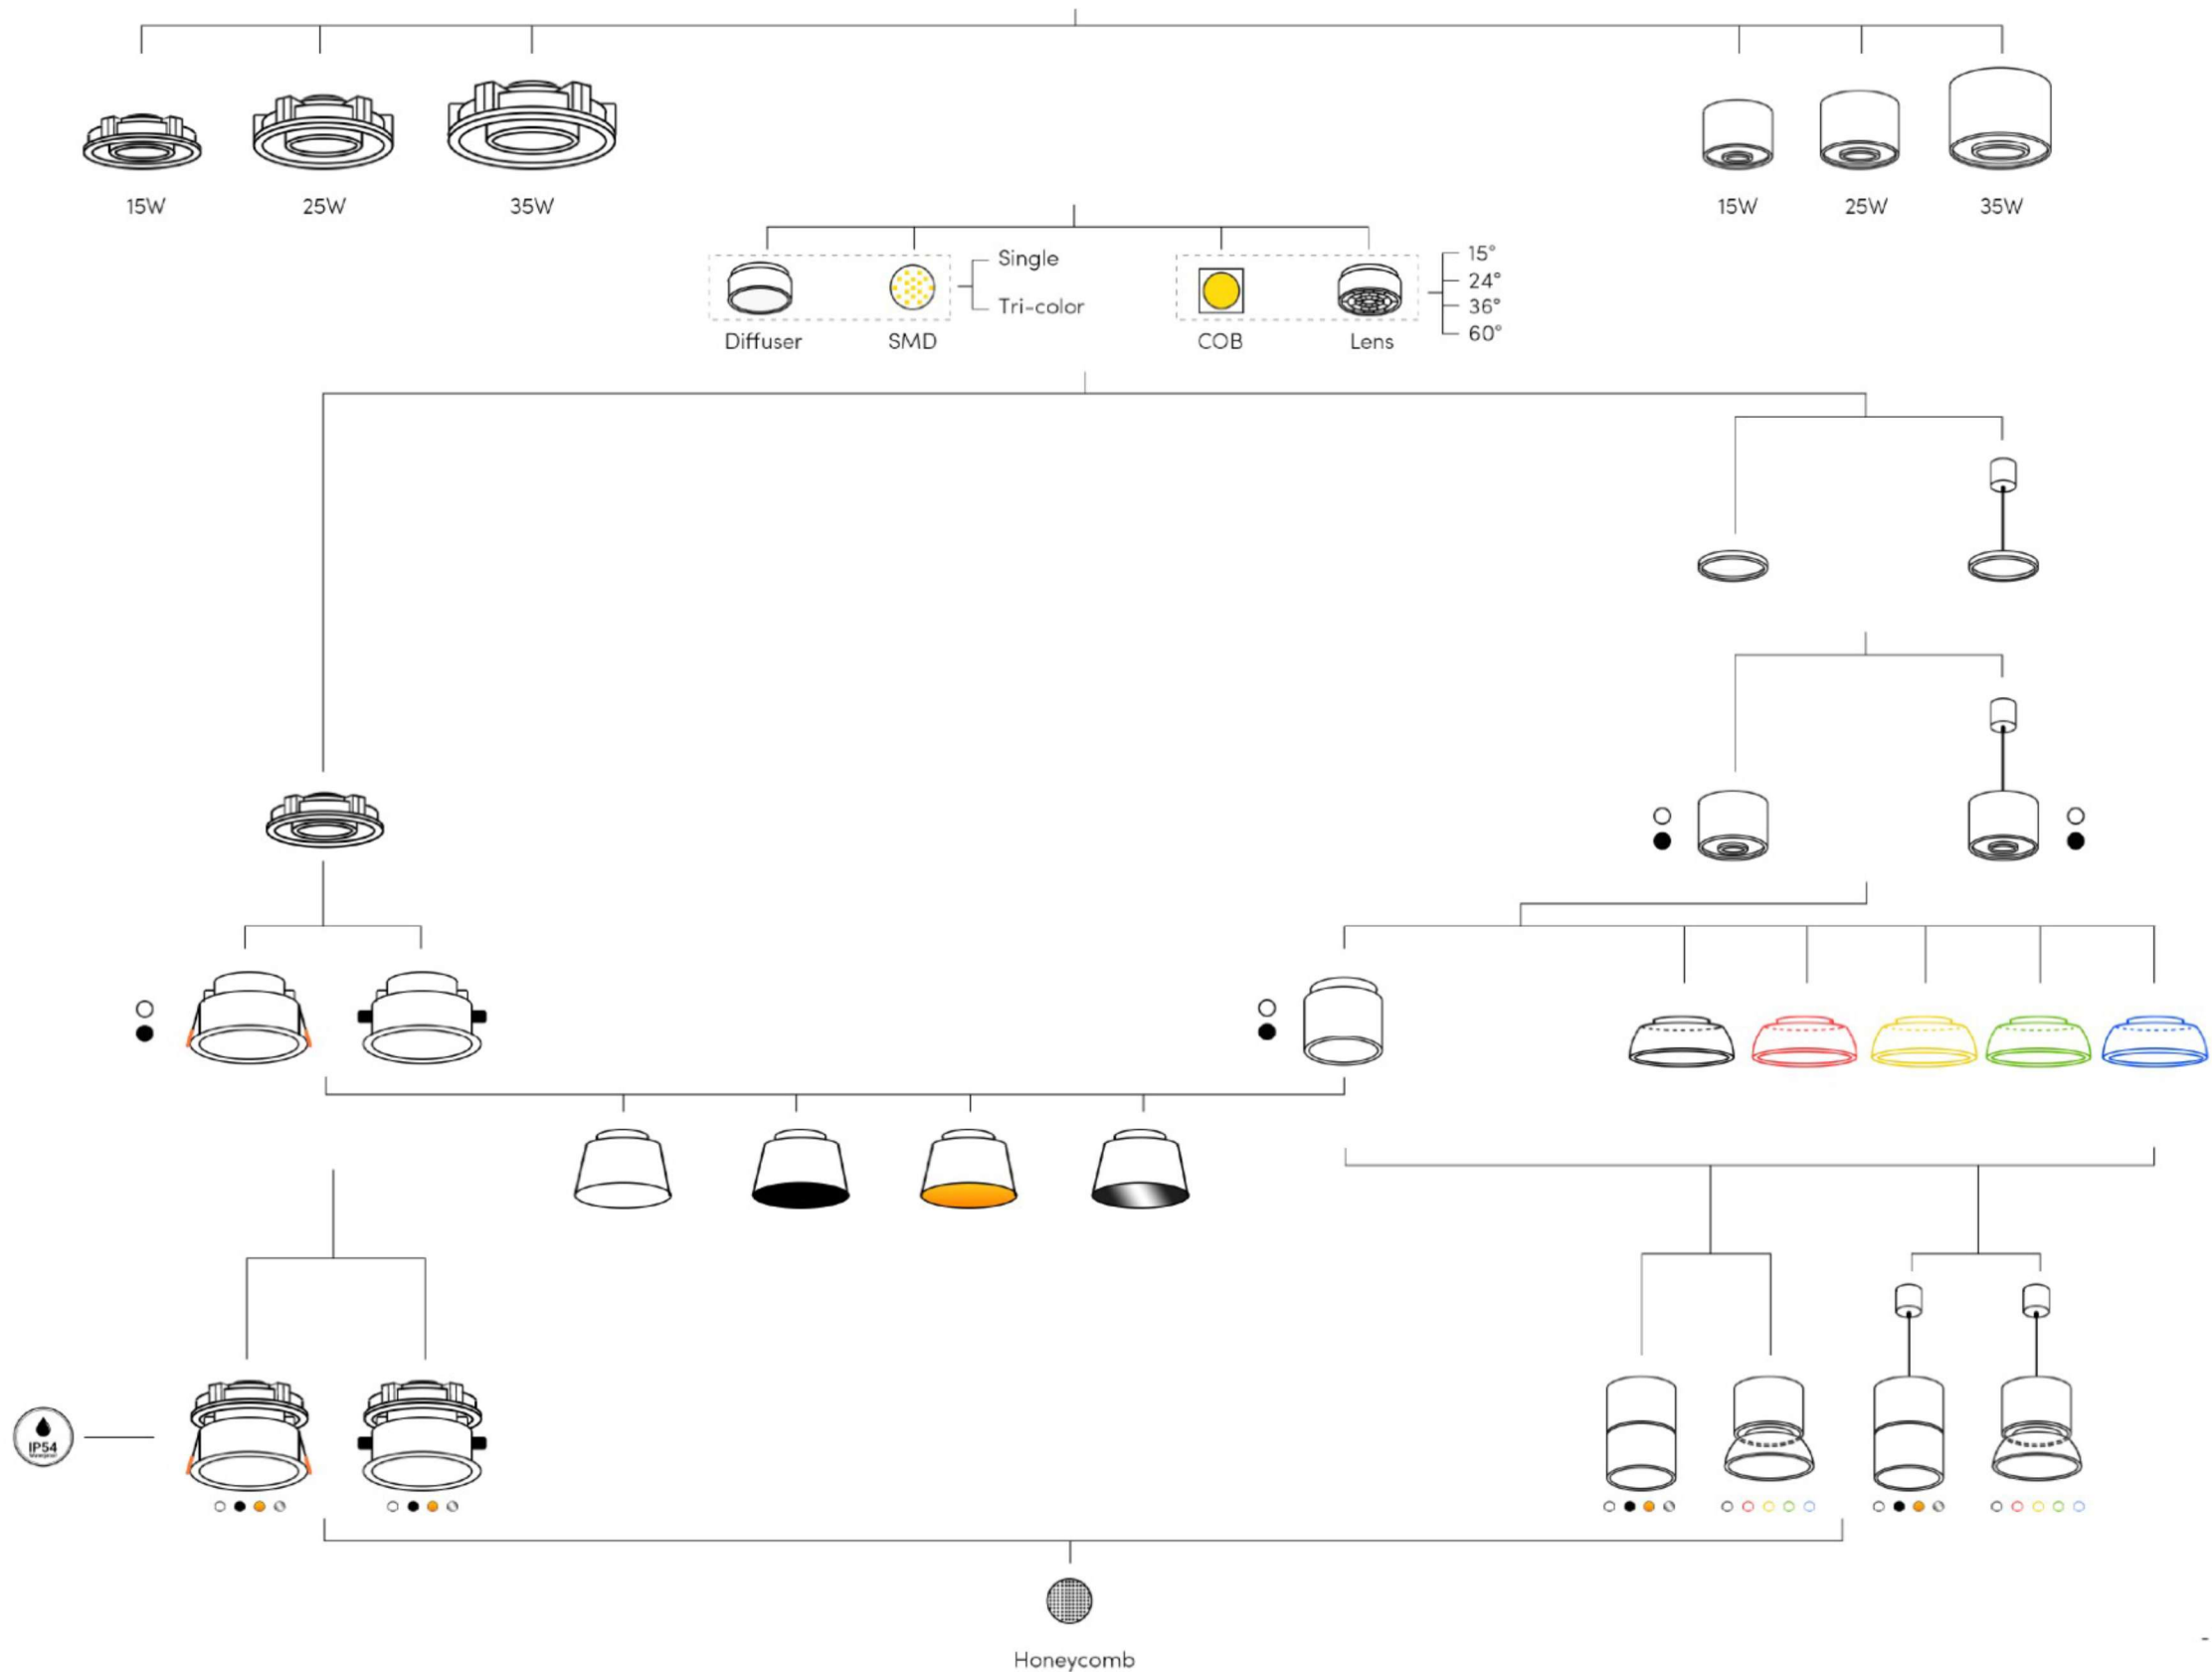

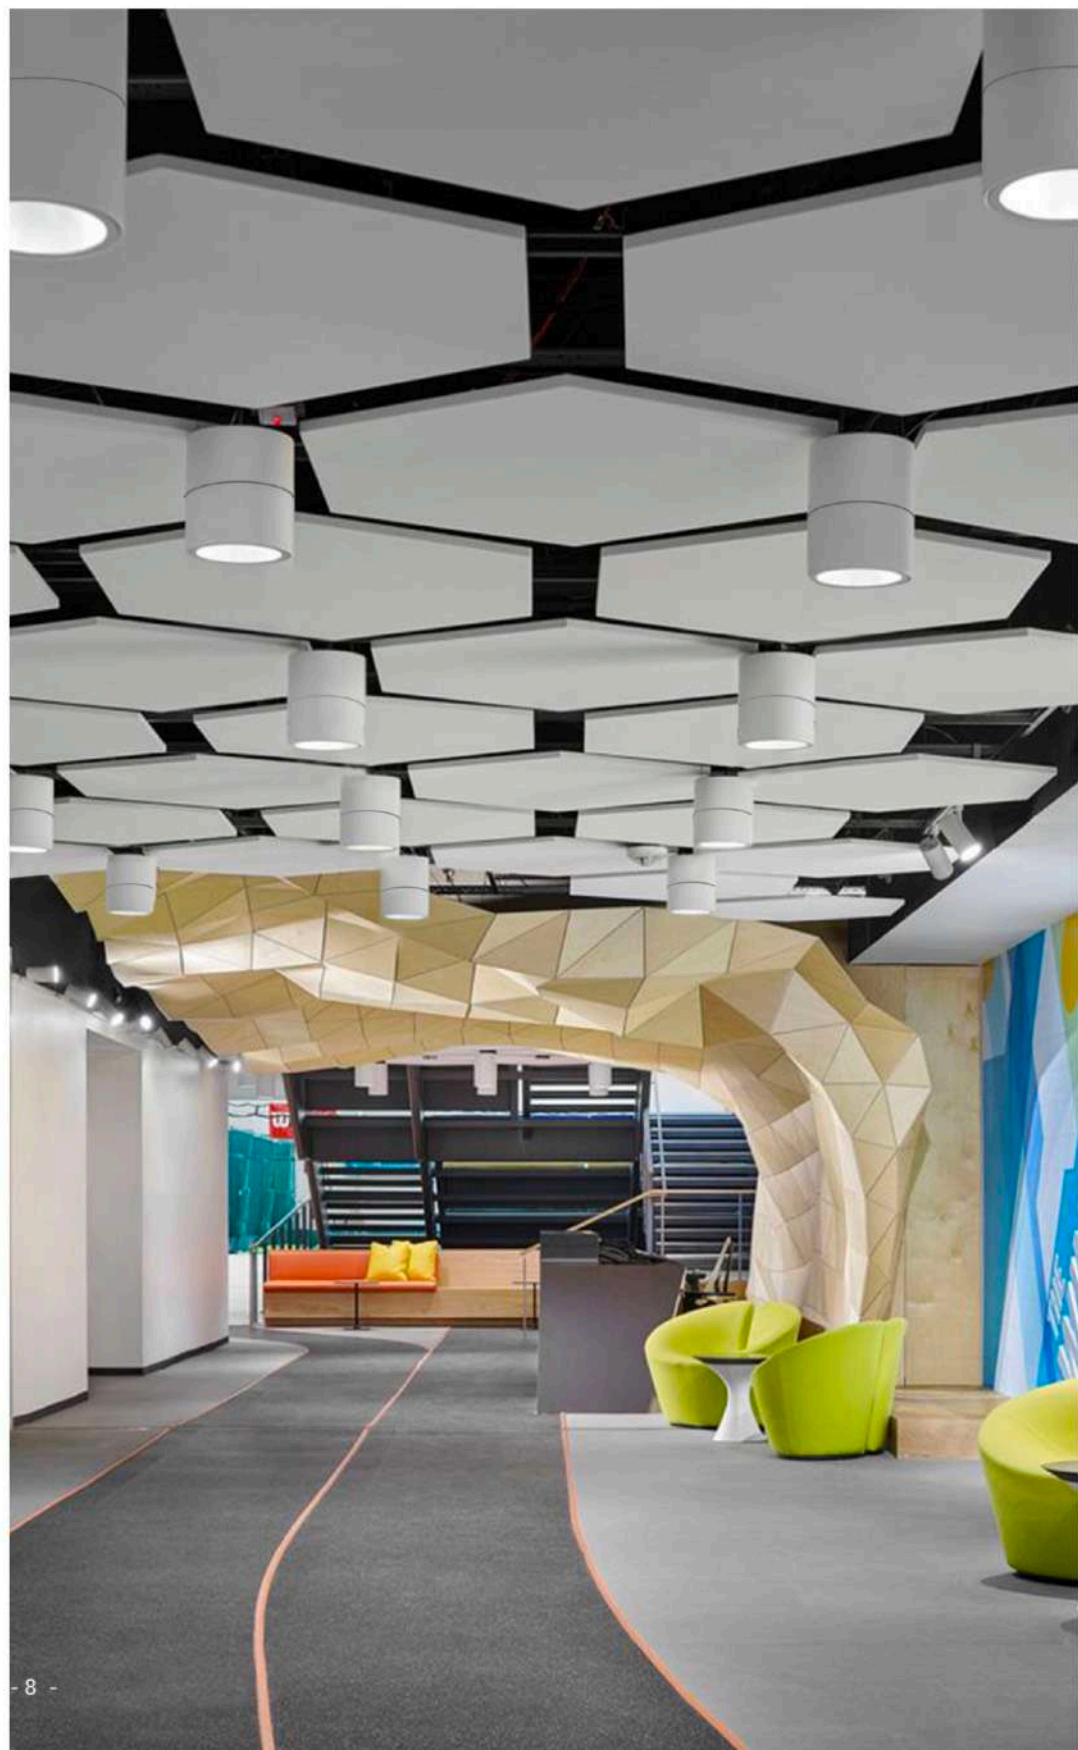

LED Engine

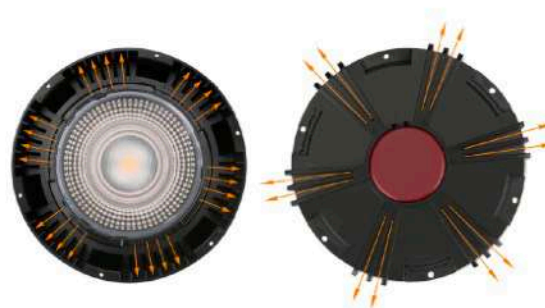

The engine adopts combination of external and internal heatsink which can effectively guarantee heat dissipation and reduce the height of the engine.

▼ Each size of the engine can meet more than one power requirement.



S

10W | 15W | 20W



M

15W | 20W | 25W | 30W



L

25W | 30W | 35W | 40W



Optics

Main Optics



15° | 24° | 36° | 60°



70°

Secondary Optics



Anti-glare Reflector

• Recessed Fixture



STRATA has multiple fixture options for installation with recessed mounted, surface mounted and Suspension mounted.

Fixture Options

• Surfaced|Suspension Mounted Fixture




• Decorative Surfaced|Suspension Mounted Fixture





RIM


Mechanical Technology

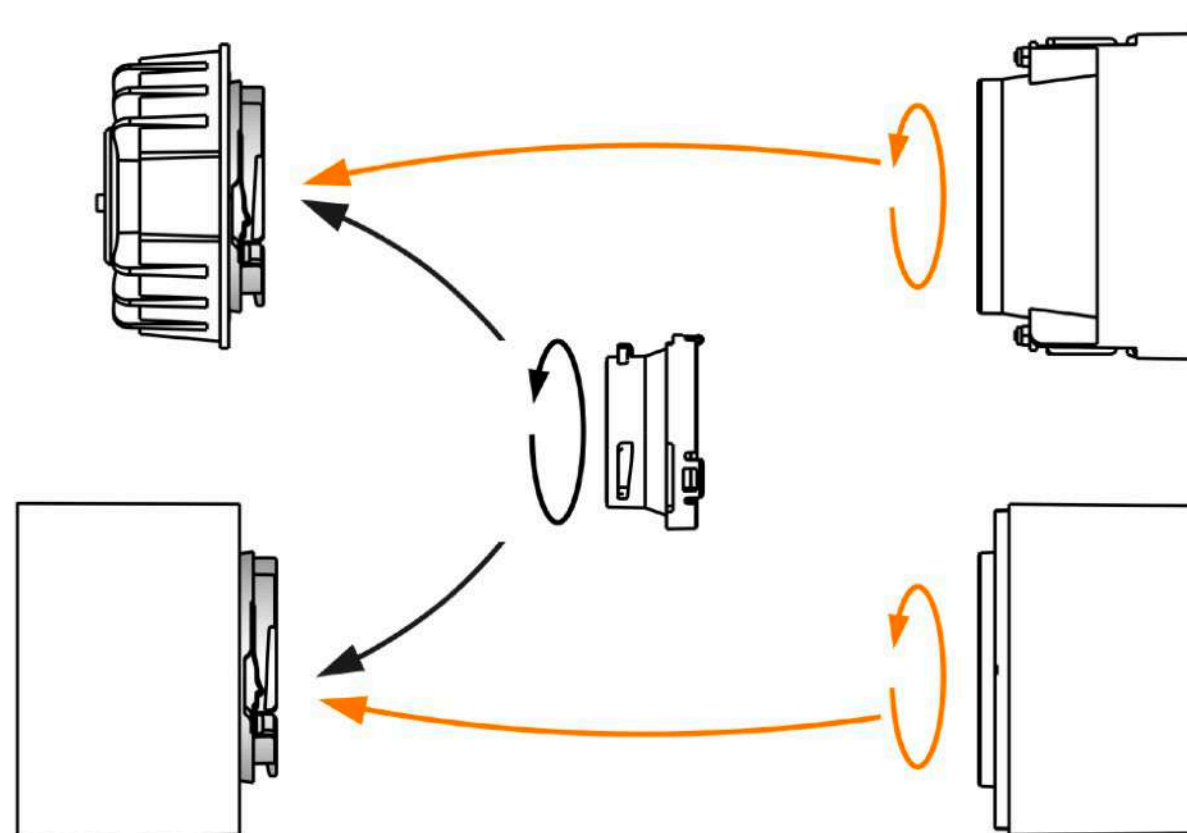

RIM is a patent design that is designed in the LED engine. It's a durable metal connecting part that makes users interchange fixtures and optics without any tools flexibly.




A simple interchangeable mounting part can make the luminaries suits more application.

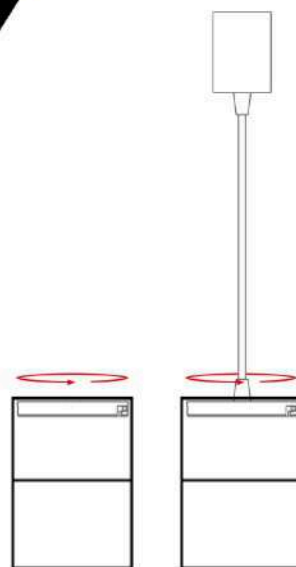



GYROMAG is a mechanical design for interchanging reflectors without any tools. it combines a simple twist and magnetic attachment. Users can feel not only convenience but also reliability.

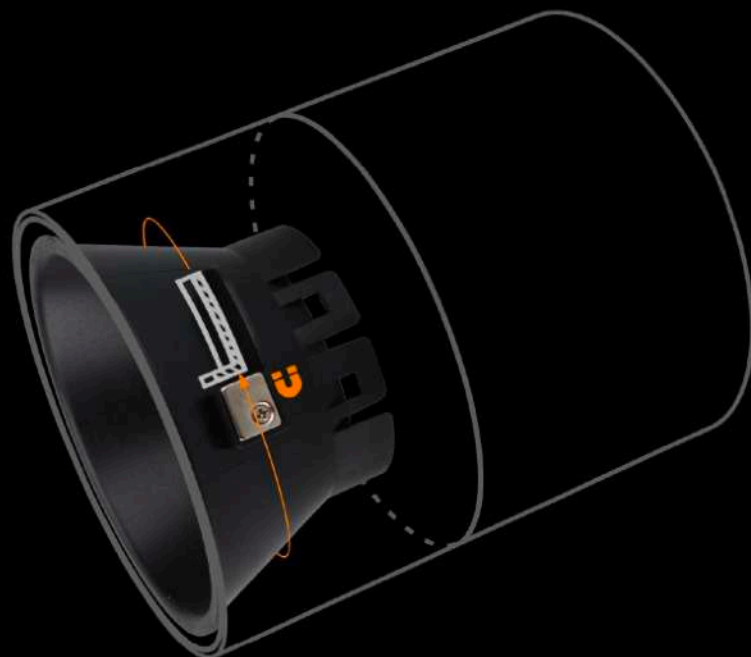

PRODUCT SHOW



Thanks to the modular concept of STRATA
each lamp becomes more unique and versatile
than ever to meet any challenging needs.






Parameter

*Reflector in black is not available in SMD version.



Finish ●○ Reflector ●○●●●
15W (PHILIPS Driver)
CRI 90+

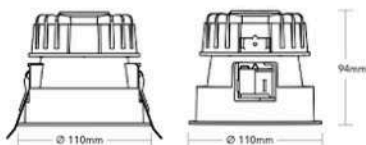


• **SMD**
2700K/3000K/4000K/5000K
70°
1086-1170lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
1248-1379lm



Finish ●○ Reflector ●○●●●
25W (PHILIPS Driver)
CRI 90+




• **SMD**
2700K/3000K/4000K/5000K
70°
2063-2287lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2050-2454lm



Finish ●○ Reflector ●○●●●
35W (PHILIPS Driver)
CRI 90+

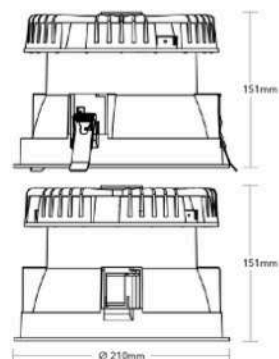


• **SMD**
2700K/3000K/4000K/5000K
70°
2912-3227lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2795-3308lm

Parameter



Finish ●○ Reflector ●○●●●
15W (AcTEC Driver)
CRI 90+



• **SMD**
2700K/3000K/4000K/5000K
60°
1112-1242lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
1116-1353lm



Finish ●○ Reflector ●○●●●
25W (AcTEC Driver)
CRI 90+




• **SMD**
2700K/3000K/4000K/5000K
70°
2101-2289lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2040-2423lm



Finish ●○ Reflector ●○●●●
35W (AcTEC Driver)
CRI 90+




• **SMD**
2700K/3000K/4000K/5000K
70°
3037-3305lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2377-3035lm

Parameter



Finish ●○ Fitting ●●●●●○
15W (AcTEC Driver)
CRI 90+




• **SMD**
2700K/3000K/4000K/5000K
85°
1450-1611lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
1260-1484lm



Finish ●○ Fitting ●●●●●○
25W (AcTEC Driver)
CRI 90+



• **SMD**
2700K/3000K/4000K/5000K
90°
2566-2825lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2063-2468lm



Finish ●○ Fitting ●●●●●○
35W (AcTEC Driver)
CRI 90+



• **SMD**
2700K/3000K/4000K/5000K
90°
3627-3868lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2596-3211lm

Parameter



Finish ●○ Reflector ●●●●●○
15W (AcTEC Driver)
CRI 90+




• **SMD**
2700K/3000K/4000K/5000K
60°
1112-1242lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
1116-1353lm



Finish ●○ Reflector ●●●●●○
25W (AcTEC Driver)
CRI 90+

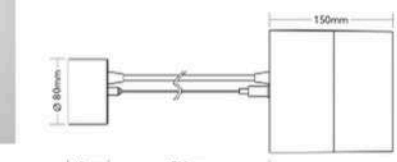


• **SMD**
2700K/3000K/4000K/5000K
70°
2101-2289lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2040-2423lm



Finish ●○ Reflector ●●●●●○
35W (AcTEC Driver)
CRI 90+

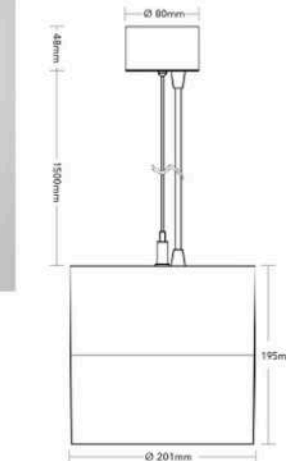


• **SMD**
2700K/3000K/4000K/5000K
70°
3037-3305lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2377-3035lm

Parameter



Finish ● ○ Fitting ● ● ● ● ●
15W (AcTEC Driver)
CRI 90+

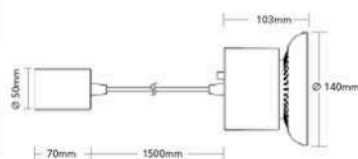


• **SMD**
2700K/3000K/4000K/5000K
85°
1450-1611lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
1260-1484lm



Finish ● ○ Fitting ● ● ● ● ●
25W (AcTEC Driver)
CRI 90+

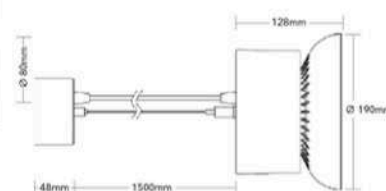


• **SMD**
2700K/3000K/4000K/5000K
90°
2566-2825lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2063-2468lm



Finish ● ○ Fitting ● ● ● ● ●
35W (AcTEC Driver)
CRI 90+

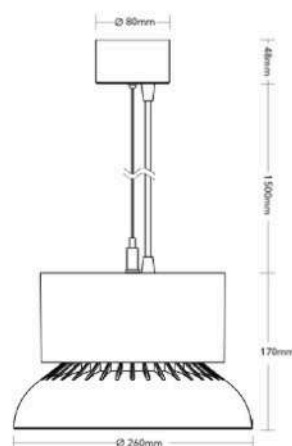

• **SMD**
2700K/3000K/4000K/5000K
90°
3627-3868lm

• **COB**
2700K/3000K/4000K
15° | 24° | 36° | 60°
2596-3199lm

ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS