

## FEATURES


- Made of die-casting.
- Powder coating finish from AkzoNobel.
- Interchangeable faceplate with magnetic design.
- 3-CCT changeable.
- Compatible with leading and trailing edge phase cut dimmers.
- 3-year guarantee.

## Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC9V/350mA
Power	5W
Rated Input Current	0.020A
THD	<25%
PF value	>0.85
Ingress Protection	IP54
Operating Temperature	-10—40°C
Dimmability	Triac dimmable with <b>DIMMATE</b> driver

## Optical Data

LED Brand	EVERCORE COB LED
CRI	Ra>90
Colour temperatures	3000K/4000K/5000K(3-CCT Changeable)
System luminous efficacy up to	52lm/W

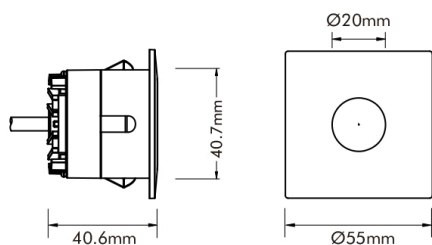

Cut-out: Ø45mm

## Packaging

Box Dimensions	L65 x W65 x H110mm
Box Net Weight	0.163Kg
Box Gross Weight	0.188Kg
Carton Dimensions	L340 x W340 x H240 mm/50 PCS
Carton Net Weight	8.175Kg
Carton Gross Weight	10.09Kg



## Specifications (White)

CCT		Beam Angle	Lumen	Efficacy
3000K	CRI 90+	15°	191lm	40lm/W
		24°	196lm	41lm/W
		36°	191lm	40lm/W
		50°	154lm	32lm/W
4000K		15°	233lm	51lm/W
		24°	230lm	52lm/W
		36°	222lm	50lm/W
		50°	180lm	41lm/W
5000K		15°	208lm	44lm/W
		24°	217lm	46lm/W
		36°	205lm	44lm/W
		50°	167lm	36lm/W

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS

Specifications (Black)

CCT		Beam Angle	Lumen	Efficacy
3000K	CRI 90+	15°	177lm	37lm/W
		24°	182lm	39lm/W
		36°	173lm	37lm/W
		50°	132lm	28lm/W
4000K		15°	206lm	47lm/W
		24°	214lm	48lm/W
		36°	201lm	45lm/W
		50°	152lm	34lm/W
5000K		15°	192lm	41lm/W
		24°	200lm	43lm/W
		36°	187lm	40lm/W
		50°	144lm	30lm/W

ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS