



Indoor Luminaire Photometric Data

Description Information

Luminary Name: DL43-05-XX-01 4000K RA90 24D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2020/06/23
Manufacture: Shenzhen Norming Lighting Co., Ltd		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.050m*0.050m*0.072m		Lum. Area (m2):0.006	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 249.320	Luminary Flux(lm): 249.317	Field Angle(10%Imax): 52.7(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 239.142lm 95.92%	
Rated Voltage(V):	Luminary EER(lm/W): 52.344	Up Lumens&Percent: 10.174lm 4.08%	
Tested Power(W): 4.763	Max. Candela(cd): 788.146	S/MH: C0_a180=0.459 C90_270=0.469	
Lamps' Inside: 1	Max Cand@Ang. (°): C=270.0 γ=1.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):240.3, 0.022, 0.865	Beam Angle(50%Imax): 28.0(°)	ErP ϕ use(90°): 220.465lm	
Lamp Size(W*L*H):0.050m*0.050m*0.072m	Left=-13.8°, Right=14.2°	IRF(%): 678.035	

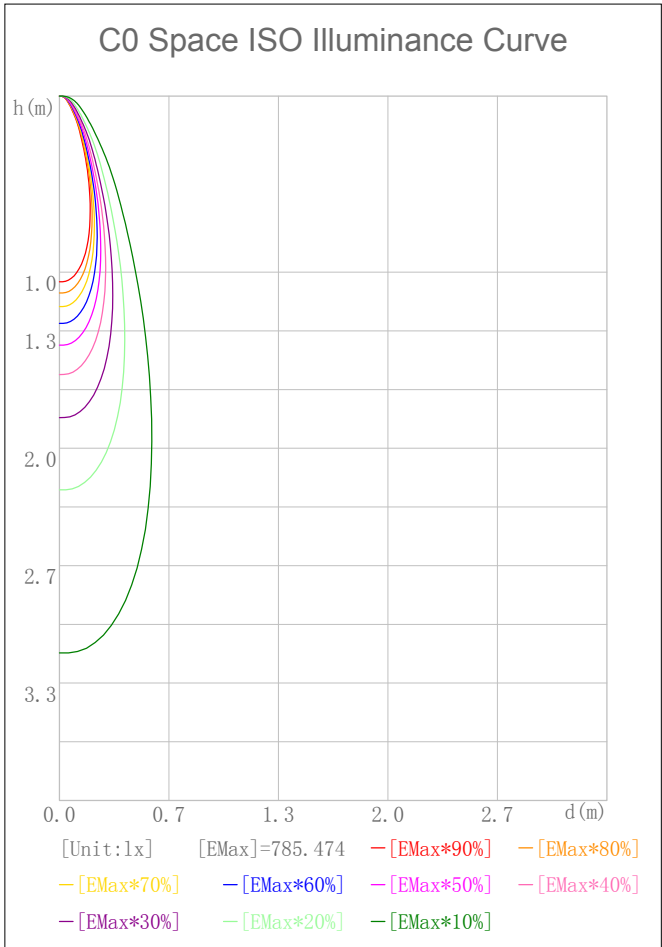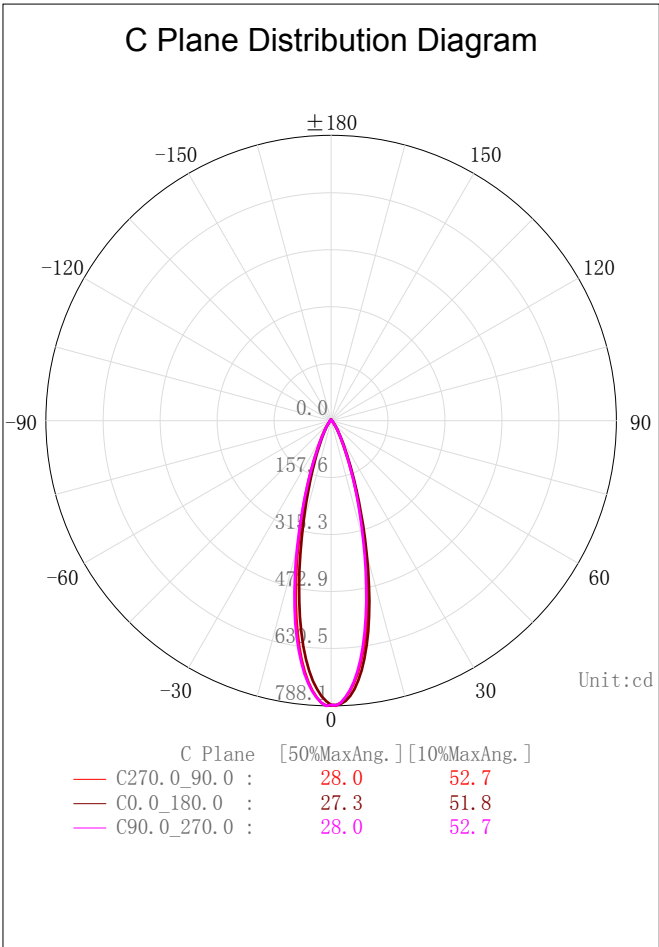

2D Plane Light Intensity Distribution Curve


Lum. Name: DL43-05-XX-01 4000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

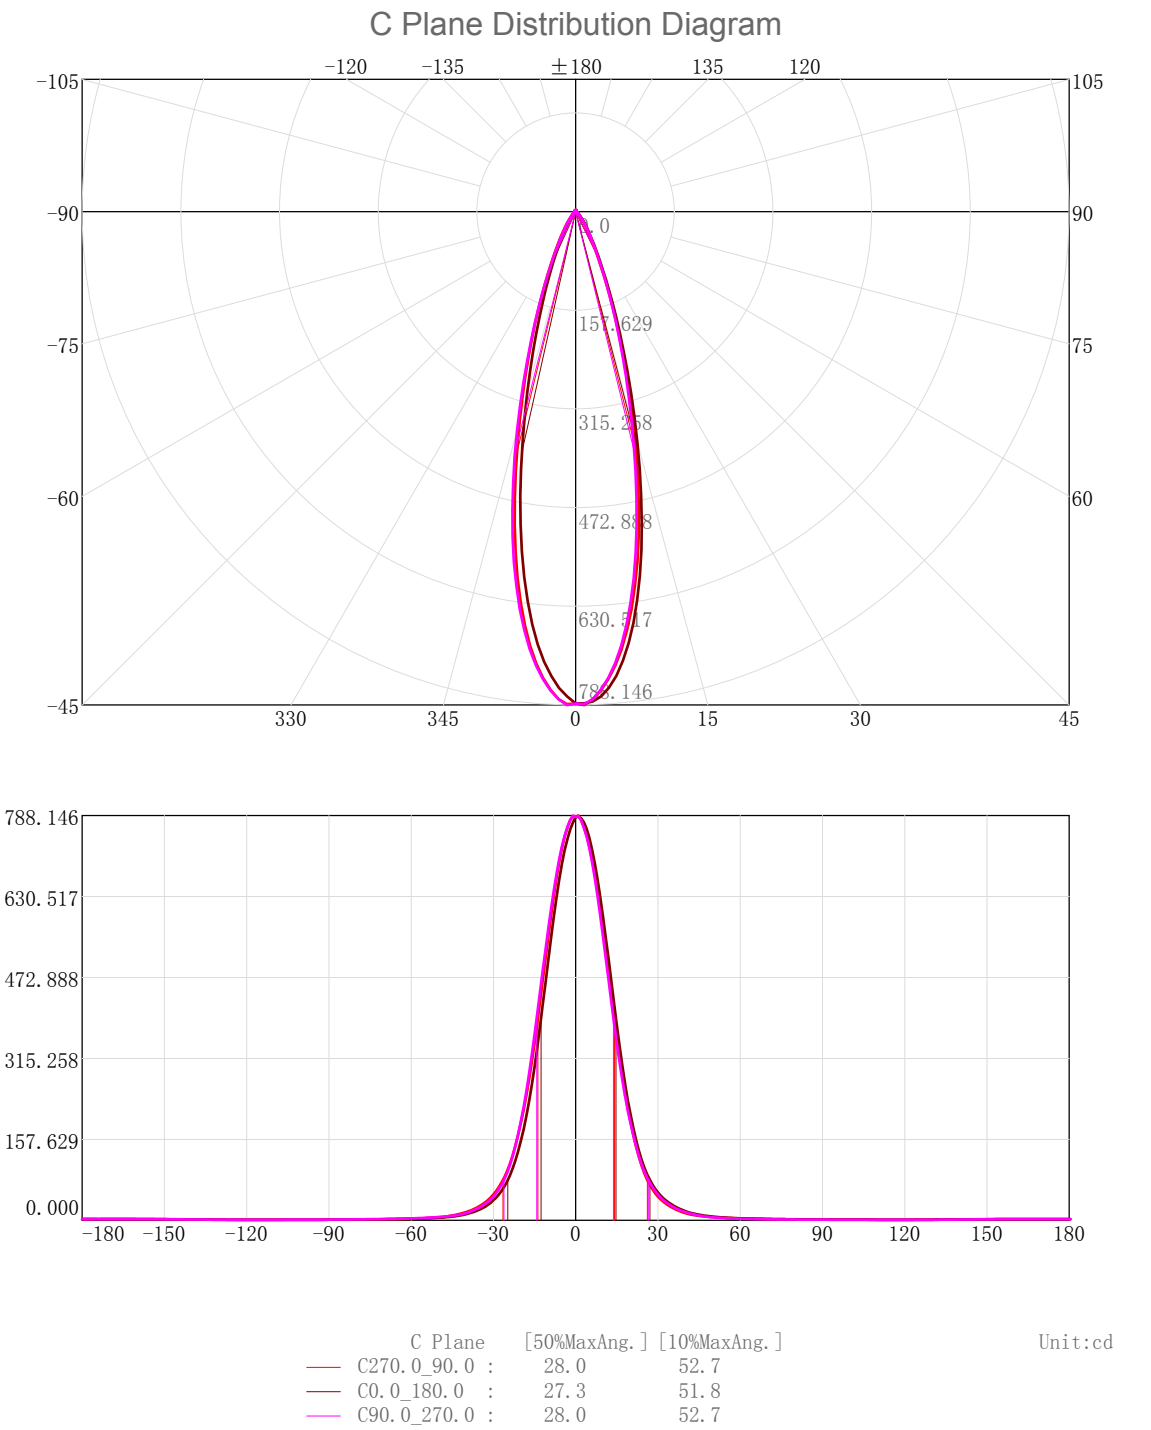

3D Light Intensity Distribution Modal

Lum. Name: DL43-05-XX-01 4000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

3D Light Intensity Distribution Modal

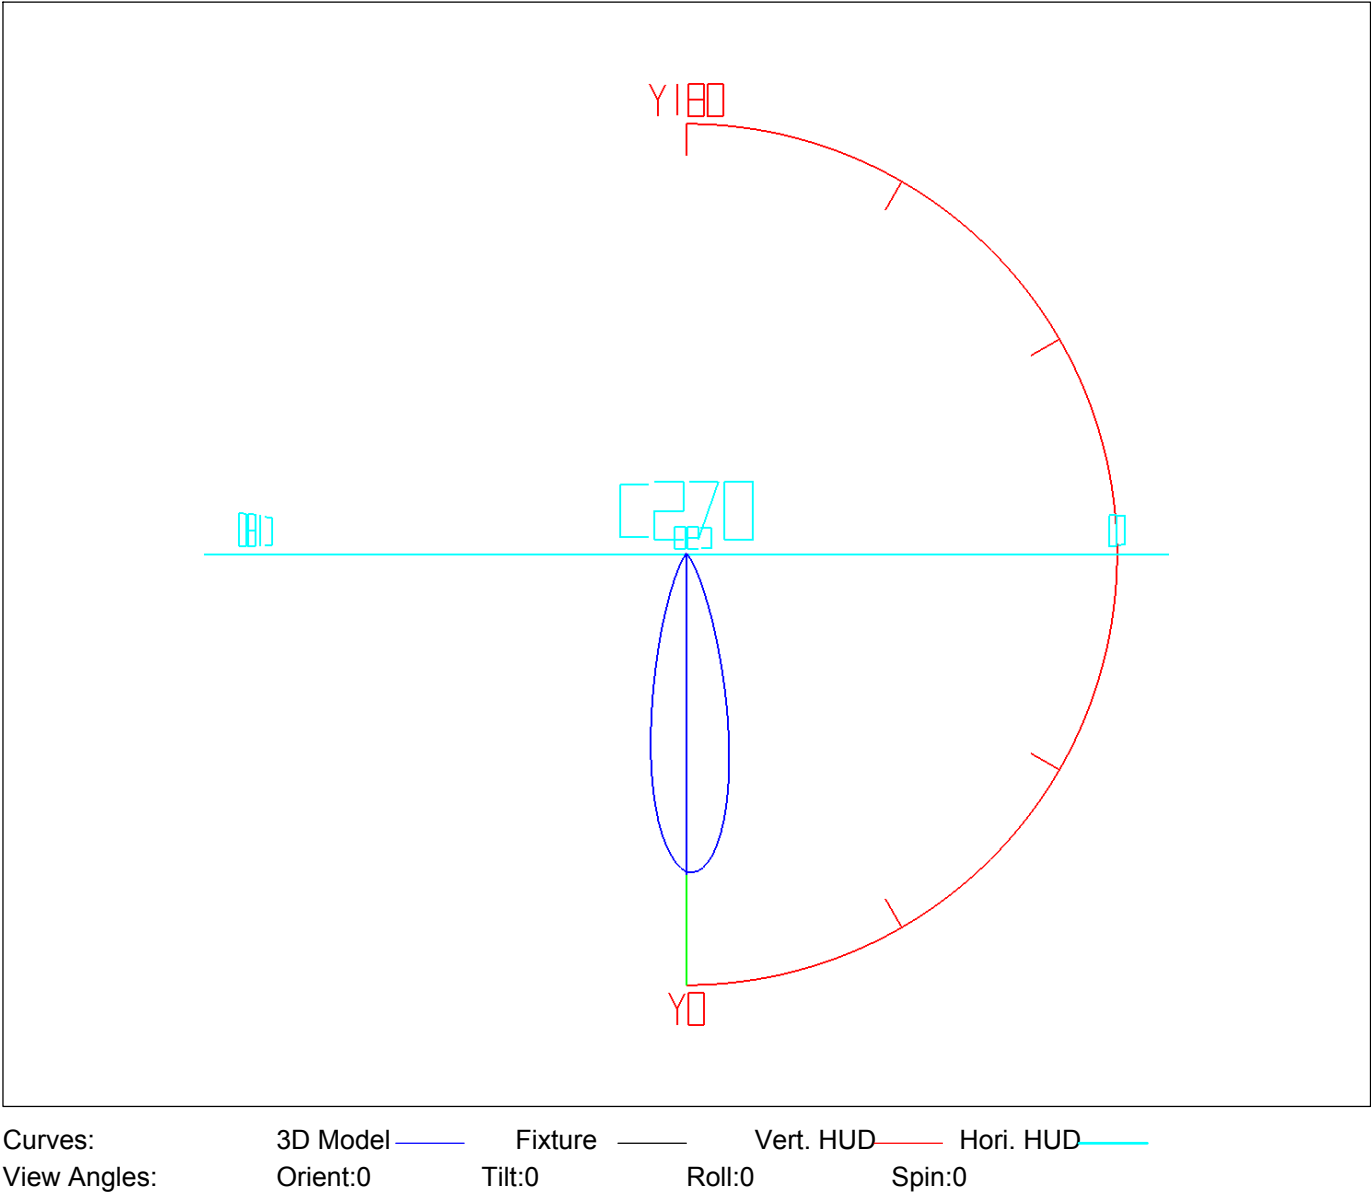

IES Indoor Report

Photometric Filename:DL43-05-XX-01 4000K RA90 24D.IES

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.75	0.75	0.30	0.30	47.0-48.0	0.61	226.56	0.25	90.87
1.0-2.0	2.24	2.99	0.90	1.20	48.0-49.0	0.58	227.13	0.23	91.10
2.0-3.0	3.68	6.67	1.48	2.67	49.0-50.0	0.55	227.68	0.22	91.32
3.0-4.0	5.04	11.71	2.02	4.70	50.0-51.0	0.52	228.20	0.21	91.53
4.0-5.0	6.31	18.02	2.53	7.23	51.0-52.0	0.49	228.69	0.20	91.73
5.0-6.0	7.45	25.47	2.99	10.22	52.0-53.0	0.47	229.16	0.19	91.91
6.0-7.0	8.45	33.92	3.39	13.61	53.0-54.0	0.45	229.61	0.18	92.09
7.0-8.0	9.28	43.20	3.72	17.33	54.0-55.0	0.43	230.03	0.17	92.26
8.0-9.0	9.93	53.13	3.98	21.31	55.0-56.0	0.41	230.44	0.16	92.43
9.0-10.0	10.39	63.52	4.17	25.48	56.0-57.0	0.39	230.84	0.16	92.59
10.0-11.0	10.66	74.18	4.28	29.75	57.0-58.0	0.38	231.22	0.15	92.74
11.0-12.0	10.75	84.93	4.31	34.06	58.0-59.0	0.37	231.58	0.15	92.88
12.0-13.0	10.66	95.58	4.27	38.34	59.0-60.0	0.35	231.93	0.14	93.03
13.0-14.0	10.42	106.00	4.18	42.52	60.0-61.0	0.34	232.28	0.14	93.16
14.0-15.0	10.05	116.05	4.03	46.55	61.0-62.0	0.33	232.61	0.13	93.30
15.0-16.0	9.59	125.65	3.85	50.40	62.0-63.0	0.32	232.93	0.13	93.42
16.0-17.0	9.06	134.71	3.64	54.03	63.0-64.0	0.31	233.24	0.13	93.55
17.0-18.0	8.49	143.20	3.40	57.44	64.0-65.0	0.30	233.54	0.12	93.67
18.0-19.0	7.88	151.08	3.16	60.60	65.0-66.0	0.29	233.84	0.12	93.79
19.0-20.0	7.27	158.34	2.91	63.51	66.0-67.0	0.29	234.12	0.12	93.90
20.0-21.0	6.66	165.01	2.67	66.18	67.0-68.0	0.28	234.40	0.11	94.02
21.0-22.0	6.08	171.08	2.44	68.62	68.0-69.0	0.27	234.67	0.11	94.13
22.0-23.0	5.52	176.60	2.21	70.83	69.0-70.0	0.27	234.94	0.11	94.23
23.0-24.0	4.99	181.59	2.00	72.83	70.0-71.0	0.26	235.20	0.10	94.34
24.0-25.0	4.51	186.09	1.81	74.64	71.0-72.0	0.25	235.45	0.10	94.44
25.0-26.0	4.07	190.16	1.63	76.27	72.0-73.0	0.25	235.70	0.10	94.54
26.0-27.0	3.68	193.84	1.48	77.75	73.0-74.0	0.24	235.94	0.10	94.63
27.0-28.0	3.33	197.17	1.34	79.08	74.0-75.0	0.23	236.17	0.09	94.73
28.0-29.0	3.02	200.19	1.21	80.29	75.0-76.0	0.23	236.40	0.09	94.82
29.0-30.0	2.75	202.94	1.10	81.40	76.0-77.0	0.22	236.62	0.09	94.91
30.0-31.0	2.50	205.44	1.00	82.40	77.0-78.0	0.22	236.84	0.09	94.99
31.0-32.0	2.28	207.71	0.91	83.31	78.0-79.0	0.21	237.06	0.09	95.08
32.0-33.0	2.08	209.80	0.83	84.15	79.0-80.0	0.21	237.26	0.08	95.16
33.0-34.0	1.90	211.70	0.76	84.91	80.0-81.0	0.21	237.47	0.08	95.25
34.0-35.0	1.74	213.44	0.70	85.61	81.0-82.0	0.20	237.67	0.08	95.33
35.0-36.0	1.60	215.04	0.64	86.25	82.0-83.0	0.20	237.87	0.08	95.41
36.0-37.0	1.46	216.50	0.59	86.84	83.0-84.0	0.19	238.06	0.08	95.48
37.0-38.0	1.34	217.84	0.54	87.37	84.0-85.0	0.19	238.25	0.08	95.56
38.0-39.0	1.22	219.06	0.49	87.86	85.0-86.0	0.18	238.43	0.07	95.63
39.0-40.0	1.12	220.19	0.45	88.31	86.0-87.0	0.18	238.62	0.07	95.71
40.0-41.0	1.03	221.22	0.41	88.73	87.0-88.0	0.18	238.79	0.07	95.78
41.0-42.0	0.95	222.16	0.38	89.11	88.0-89.0	0.18	238.97	0.07	95.85
42.0-43.0	0.87	223.03	0.35	89.46	89.0-90.0	0.17	239.14	0.07	95.92
43.0-44.0	0.81	223.84	0.32	89.78	90.0-91.0	0.17	239.31	0.07	95.99
44.0-45.0	0.75	224.59	0.30	90.08	91.0-92.0	0.17	239.48	0.07	96.05
45.0-46.0	0.70	225.29	0.28	90.36	92.0-93.0	0.17	239.65	0.07	96.12
46.0-47.0	0.65	225.94	0.26	90.62	93.0-94.0	0.16	239.81	0.07	96.19

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.16	239.97	0.06	96.25	141.0-142.0	0.13	246.15	0.05	98.73
95.0-96.0	0.16	240.13	0.06	96.31	142.0-143.0	0.13	246.28	0.05	98.78
96.0-97.0	0.16	240.29	0.06	96.38	143.0-144.0	0.13	246.41	0.05	98.83
97.0-98.0	0.15	240.44	0.06	96.44	144.0-145.0	0.13	246.54	0.05	98.89
98.0-99.0	0.15	240.59	0.06	96.50	145.0-146.0	0.13	246.67	0.05	98.94
99.0-100.0	0.15	240.75	0.06	96.56	146.0-147.0	0.13	246.80	0.05	98.99
100.0-101.0	0.15	240.89	0.06	96.62	147.0-148.0	0.13	246.93	0.05	99.04
101.0-102.0	0.15	241.04	0.06	96.68	148.0-149.0	0.13	247.06	0.05	99.09
102.0-103.0	0.15	241.19	0.06	96.74	149.0-150.0	0.13	247.19	0.05	99.14
103.0-104.0	0.14	241.33	0.06	96.80	150.0-151.0	0.13	247.31	0.05	99.19
104.0-105.0	0.14	241.47	0.06	96.85	151.0-152.0	0.12	247.44	0.05	99.24
105.0-106.0	0.14	241.62	0.06	96.91	152.0-153.0	0.12	247.56	0.05	99.29
106.0-107.0	0.14	241.76	0.06	96.97	153.0-154.0	0.12	247.68	0.05	99.34
107.0-108.0	0.14	241.89	0.06	97.02	154.0-155.0	0.12	247.79	0.05	99.39
108.0-109.0	0.14	242.03	0.05	97.08	155.0-156.0	0.11	247.91	0.05	99.43
109.0-110.0	0.14	242.17	0.05	97.13	156.0-157.0	0.11	248.02	0.04	99.48
110.0-111.0	0.13	242.30	0.05	97.18	157.0-158.0	0.11	248.12	0.04	99.52
111.0-112.0	0.13	242.43	0.05	97.24	158.0-159.0	0.10	248.23	0.04	99.56
112.0-113.0	0.13	242.56	0.05	97.29	159.0-160.0	0.10	248.32	0.04	99.60
113.0-114.0	0.13	242.69	0.05	97.34	160.0-161.0	0.09	248.42	0.04	99.64
114.0-115.0	0.13	242.82	0.05	97.39	161.0-162.0	0.09	248.51	0.04	99.68
115.0-116.0	0.13	242.95	0.05	97.44	162.0-163.0	0.09	248.60	0.03	99.71
116.0-117.0	0.13	243.07	0.05	97.49	163.0-164.0	0.08	248.68	0.03	99.74
117.0-118.0	0.12	243.20	0.05	97.54	164.0-165.0	0.08	248.75	0.03	99.77
118.0-119.0	0.12	243.32	0.05	97.59	165.0-166.0	0.07	248.83	0.03	99.80
119.0-120.0	0.12	243.44	0.05	97.64	166.0-167.0	0.07	248.89	0.03	99.83
120.0-121.0	0.12	243.57	0.05	97.69	167.0-168.0	0.06	248.96	0.03	99.85
121.0-122.0	0.12	243.69	0.05	97.74	168.0-169.0	0.06	249.01	0.02	99.88
122.0-123.0	0.12	243.81	0.05	97.79	169.0-170.0	0.05	249.07	0.02	99.90
123.0-124.0	0.12	243.93	0.05	97.84	170.0-171.0	0.05	249.11	0.02	99.92
124.0-125.0	0.12	244.05	0.05	97.89	171.0-172.0	0.04	249.16	0.02	99.93
125.0-126.0	0.12	244.17	0.05	97.93	172.0-173.0	0.04	249.19	0.02	99.95
126.0-127.0	0.12	244.29	0.05	97.98	173.0-174.0	0.03	249.23	0.01	99.96
127.0-128.0	0.12	244.41	0.05	98.03	174.0-175.0	0.03	249.25	0.01	99.97
128.0-129.0	0.12	244.52	0.05	98.08	175.0-176.0	0.02	249.28	0.01	99.98
129.0-130.0	0.12	244.64	0.05	98.12	176.0-177.0	0.02	249.29	0.01	99.99
130.0-131.0	0.12	244.77	0.05	98.17	177.0-178.0	0.01	249.31	0.01	99.99
131.0-132.0	0.12	244.89	0.05	98.22	178.0-179.0	0.01	249.31	0.00	100.00
132.0-133.0	0.12	245.01	0.05	98.27	179.0-180.0	0.00	249.32	0.00	100.00
133.0-134.0	0.12	245.13	0.05	98.32					
134.0-135.0	0.12	245.26	0.05	98.37					
135.0-136.0	0.12	245.38	0.05	98.42					
136.0-137.0	0.13	245.51	0.05	98.47					
137.0-138.0	0.13	245.63	0.05	98.52					
138.0-139.0	0.13	245.76	0.05	98.57					
139.0-140.0	0.13	245.89	0.05	98.62					
140.0-141.0	0.13	246.02	0.05	98.68					

Rectangle ISO Lighting Intensity Diagram


Lum. Name:DL43-05-XX-01 4000K RA90 24D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

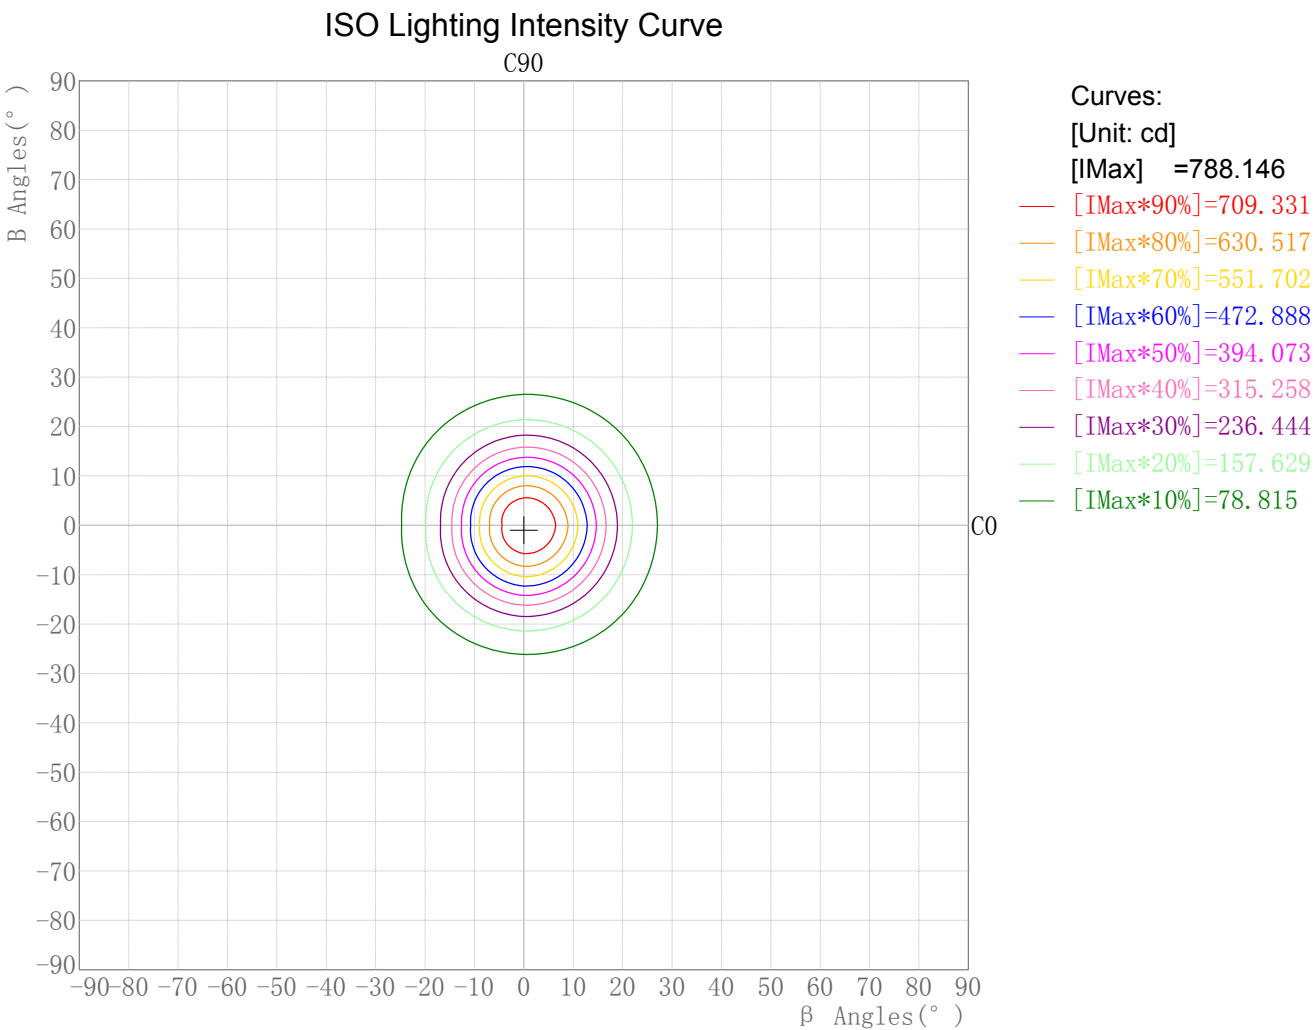

Plane ISO-Illuminance Diagram

Lum. Name:DL43-05-XX-01 4000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

Plane ISO-Illuminance Curve

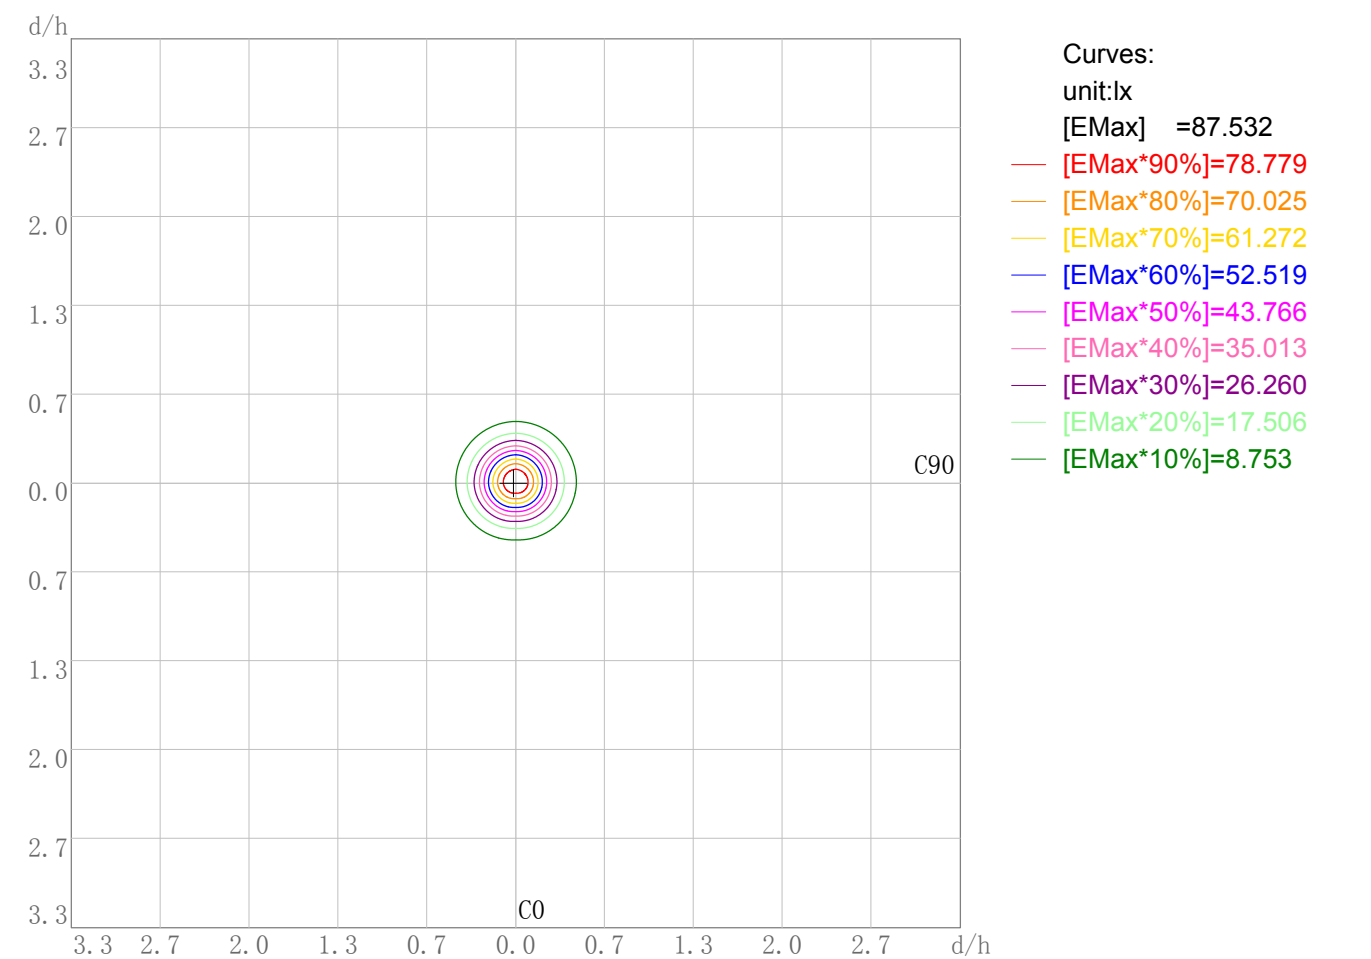

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 87.53

Working Plane Maximum Illuminance Position(d/h):H-0.0 V-0.0


## IES Indoor Report

Photometric Filename:DL43-05-XX-01 4000K RA90 24D.IES

### 3D Plane ISO Illuminance Diagram

Lum. Name: DL43-05-XX-01 4000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

### 3D Plane Illuminance Modal

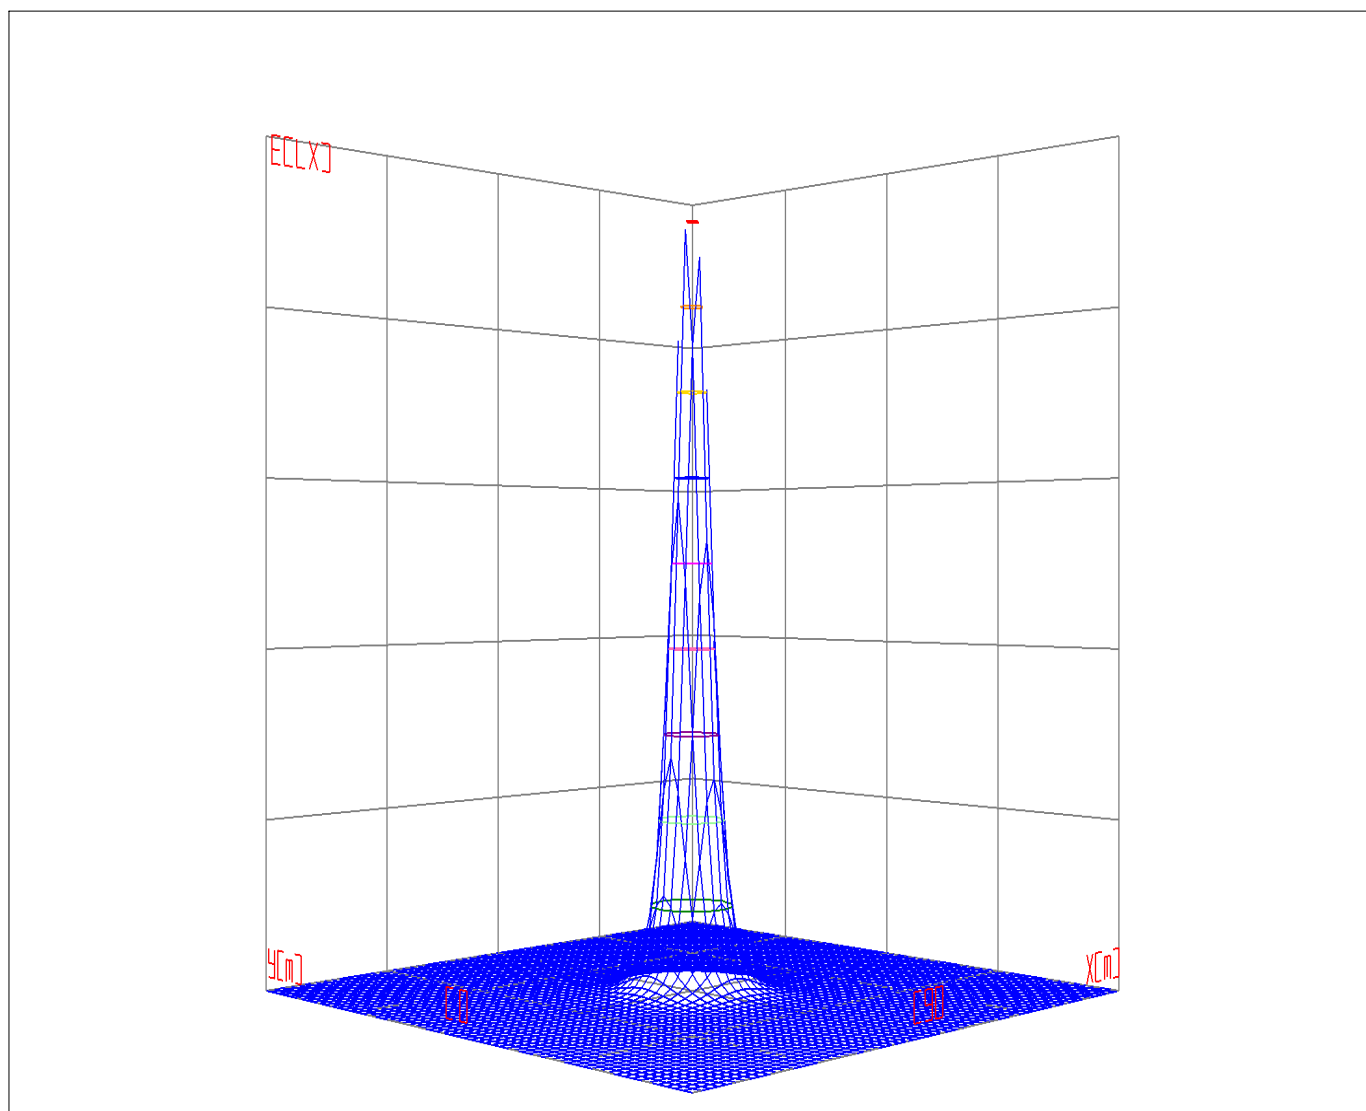


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —  
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0



Space ISO Illuminance Diagram

Lum. Name: DL43-05-XX-01 4000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23


Space ISO Illuminance Curve

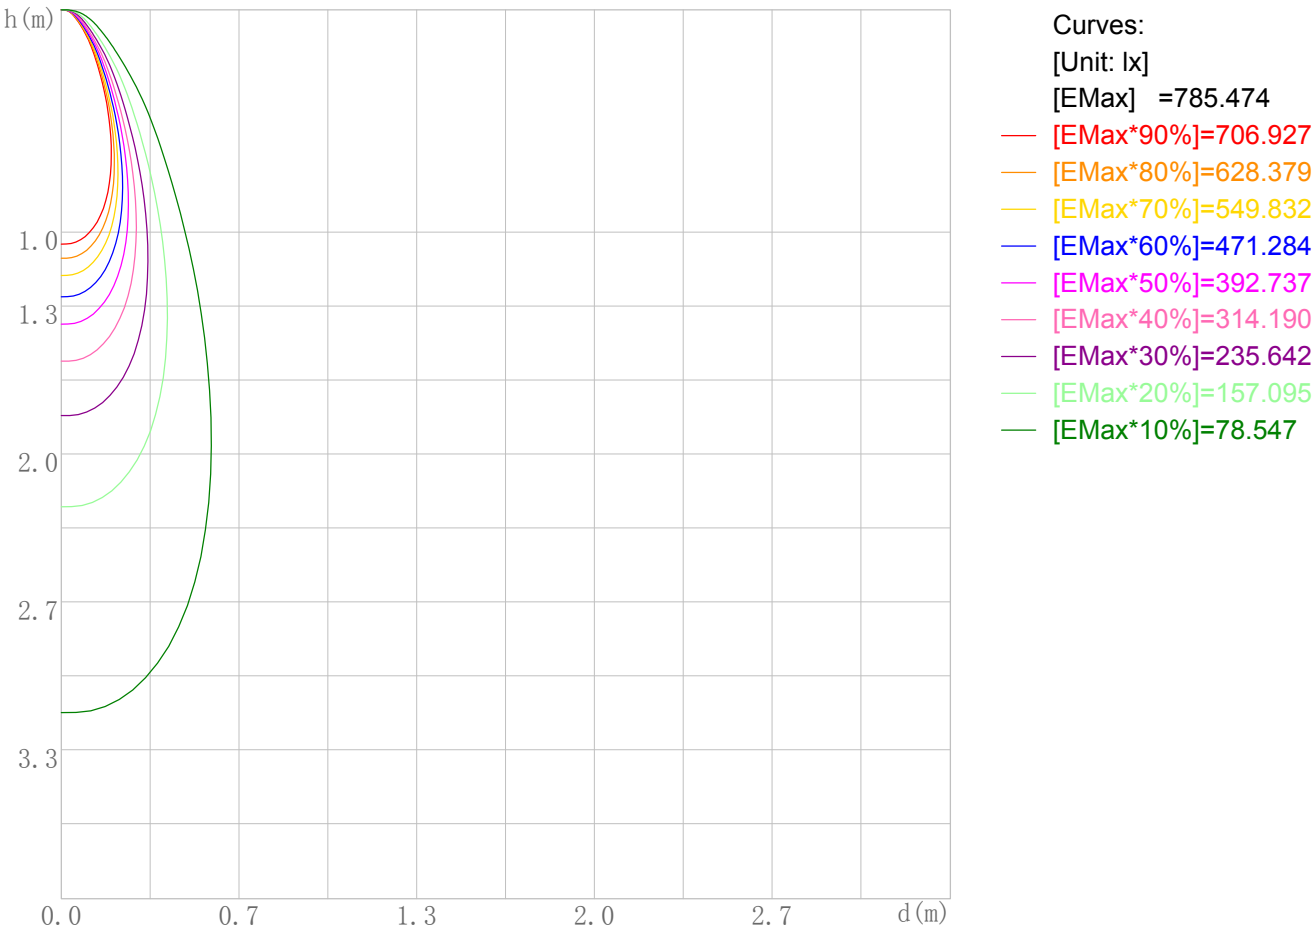

Space Plane Maximum Illuminance and @Angle:785.47lx,0.0deg  
Plane Maximum Lighting Intensity and @Angle:785.535cd,0deg

Illuminance-Distance Diagram

Lum. Name:DL43-05-XX-01 4000K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2020/06/23

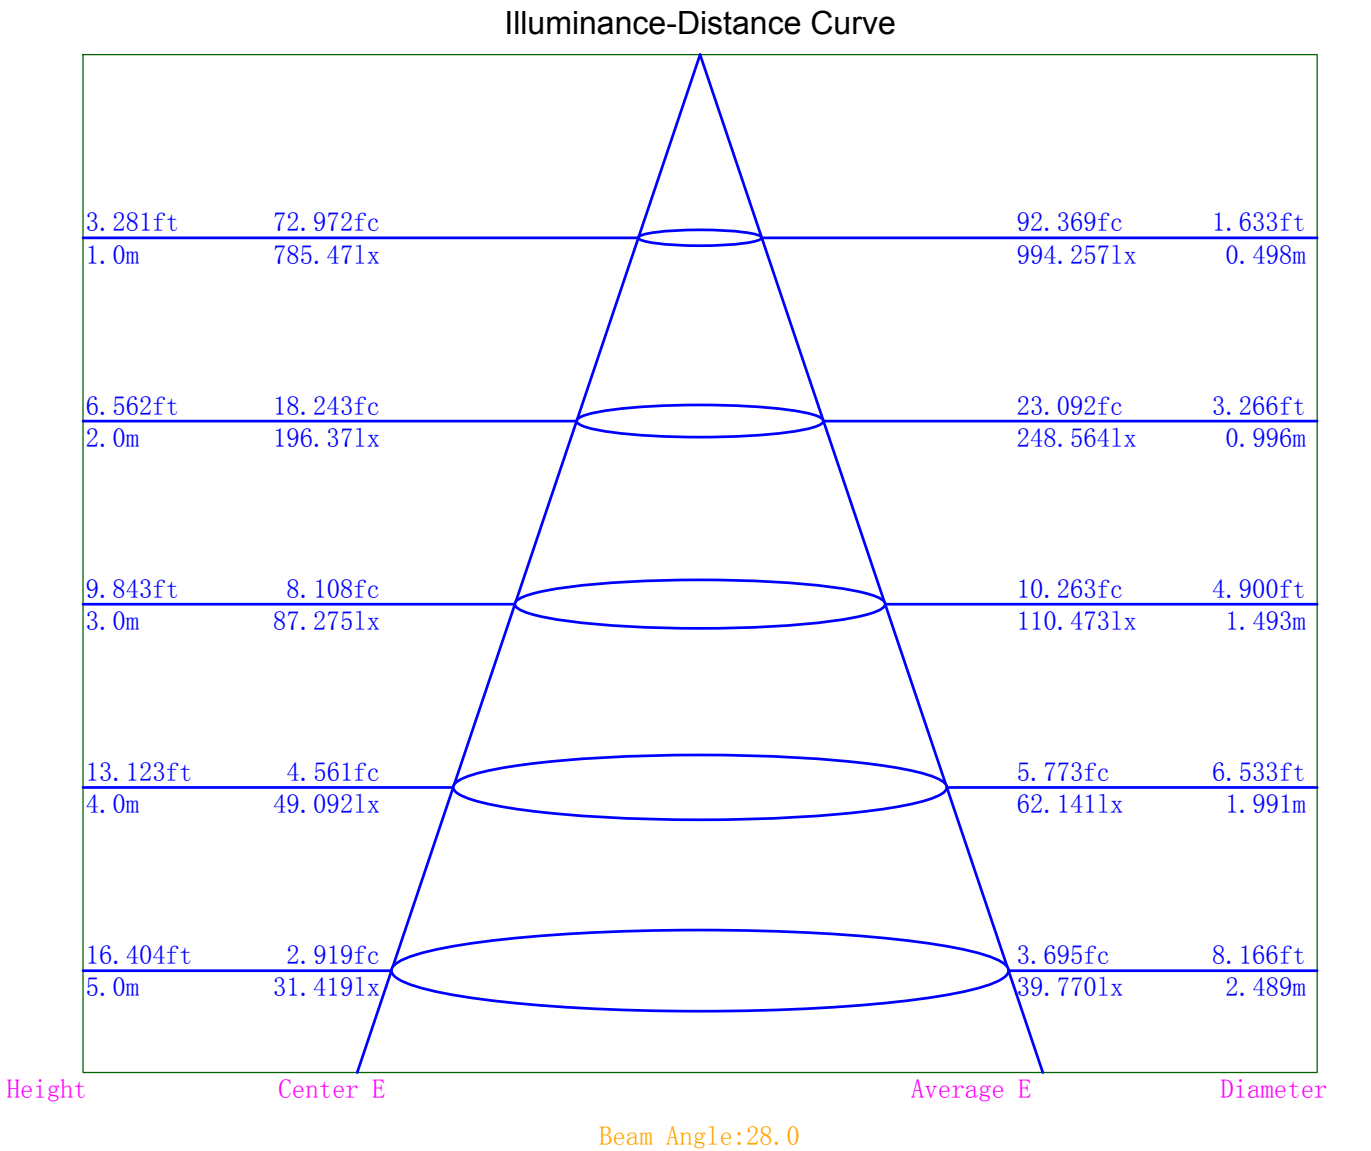

Indoor Luminance Limiting Curves

Lum. Name: DL43-05-XX-01 4000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	2566	1892	1524	1335	1285	1334	1516	1997	3546
C90	2210	1555	1231	1088	1045	1088	1231	1618	2902

Luminance Limiting Curve

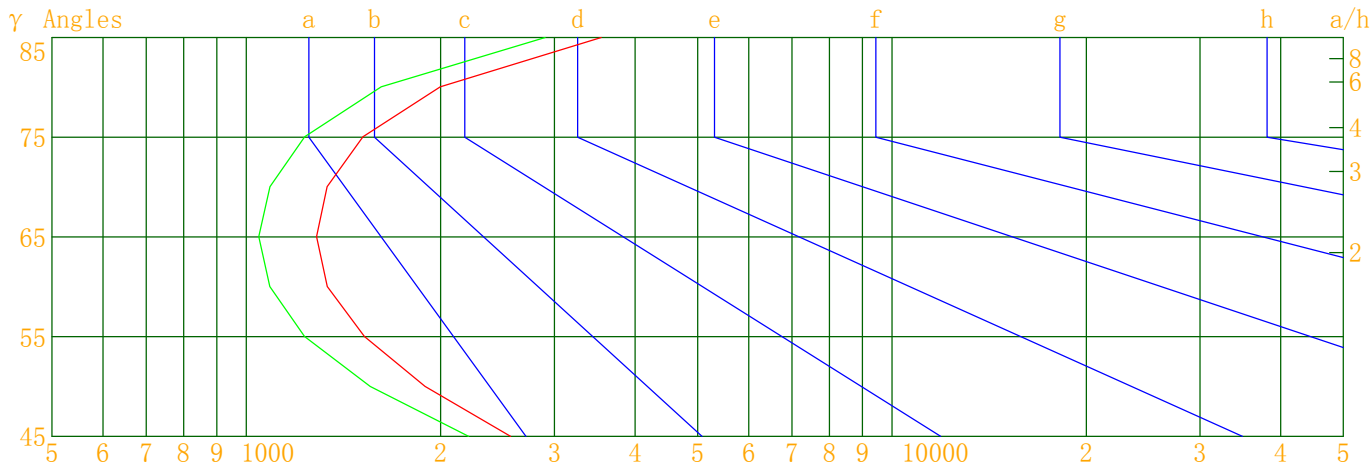


Luminous Size: Length(m)=0.050 Width(m)=0.050 Height(m)=0.072 Area(m^2)=0.006100

Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: DL43-05-XX-01 4000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

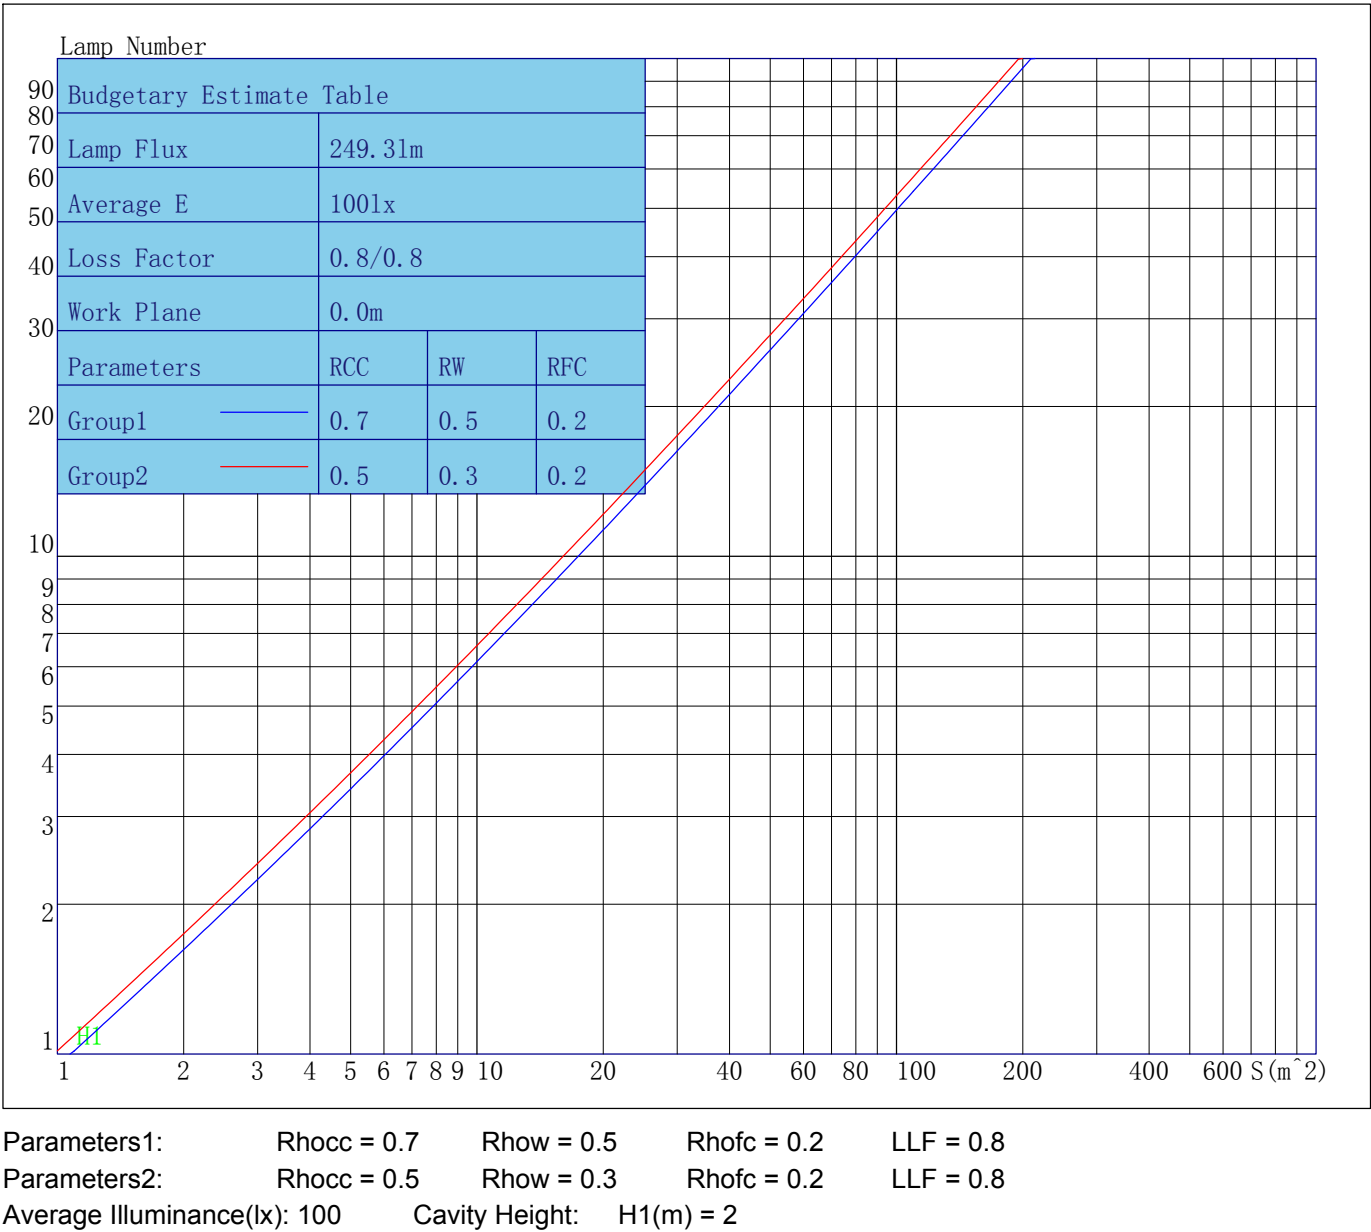

Indoor Coefficient of Utilization Table

Lum. Name: DL43-05-XX-01 4000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	118	118	118	118	115	115	115	115	109	109	109	103	103	103	98	98	98	96
1	113	110	108	106	110	108	105	104	103	101	100	98	97	96	94	93	92	90
2	108	103	100	97	105	101	98	95	98	95	92	94	92	90	91	89	87	86
3	103	98	93	90	101	96	92	89	93	90	87	90	87	85	87	85	83	82
4	99	93	88	84	97	91	87	83	89	85	82	86	83	81	84	81	79	78
5	95	88	83	79	94	87	82	79	85	81	78	83	80	77	81	78	76	74
6	92	84	79	76	90	83	79	75	82	77	74	80	76	74	78	75	73	71
7	89	81	76	72	87	80	75	72	78	74	71	77	73	71	76	72	70	69
8	85	78	73	69	84	77	72	69	76	71	68	74	71	68	73	70	67	66
9	83	75	70	66	81	74	69	66	73	69	66	72	68	65	71	67	65	64
10	80	72	67	64	79	71	67	64	70	66	63	69	66	63	69	65	63	62

Unified Glare Rating Table

Lum. Name:DL43-05-XX-01 4000K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2020/06/23

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H    Y=2H	9.1	10.1	9.5	10.5	10.9	8.3	9.3	8.7	9.7	10.1
	9.9	10.7	10.3	11.2	11.6	8.9	9.8	9.4	10.2	10.7
	10.4	11.2	10.9	11.7	12.2	9.4	10.2	9.9	10.7	11.2
	11.2	11.9	11.7	12.4	12.9	10.1	10.9	10.6	11.3	11.8
	11.6	12.4	12.2	12.8	13.3	10.5	11.3	11.1	11.7	12.2
	12.3	12.9	12.8	13.4	13.9	11.1	11.8	11.6	12.3	12.8
X=4H    Y=2H	9.2	10.0	9.7	10.5	11.0	8.4	9.2	8.9	9.7	10.2
	10.3	10.9	10.8	11.4	11.9	9.4	10.0	9.8	10.5	11.0
	11.0	11.6	11.5	12.1	12.7	10.0	10.7	10.6	11.2	11.7
	12.0	12.6	12.6	13.1	13.7	11.0	11.5	11.5	12.0	12.6
	12.7	13.2	13.2	13.7	14.3	11.6	12.1	12.1	12.6	13.2
	13.5	13.9	14.0	14.5	15.0	12.3	12.8	12.9	13.3	13.9
X=8H    Y=4H	11.3	11.8	11.8	12.3	12.9	10.4	10.9	10.9	11.4	12.0
	12.6	13.0	13.2	13.6	14.2	11.6	12.0	12.1	12.6	13.2
	13.4	13.8	14.0	14.4	15.0	12.4	12.7	13.0	13.3	13.9
	14.5	14.8	15.1	15.4	16.0	13.4	13.7	14.0	14.3	14.9
X=12H    Y=4H	11.3	11.8	11.9	12.3	12.9	10.4	10.9	11.0	11.4	12.0
	12.7	13.1	13.3	13.6	14.3	11.8	12.1	12.4	12.7	13.3
	13.7	14.0	14.3	14.6	15.2	12.7	13.0	13.3	13.6	14.2
Variations with the objerver position at spacings										
S=1.0H	0.0/−0.0					0.1/−0.1				
S=1.5H	0.1/−0.1					0.1/−0.2				
S=2.0H	0.1/−0.1					0.1/−0.1				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	3.5					3.4				

to the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:DL43-05-XX-01 4000K RA90 24D.IES

---

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	785.47	785.47	785.47	785.47
γ 1.0	785.53	786.85	774.57	788.15
γ 2.0	782.86	779.37	761.16	779.06
γ 3.0	775.33	764.76	742.73	765.90
γ 4.0	762.04	746.61	720.61	748.48
γ 5.0	744.37	724.03	693.85	727.59
γ 6.0	721.18	696.81	662.85	702.68
γ 7.0	694.32	665.57	627.67	673.07
γ 8.0	663.53	630.55	590.02	641.24
γ 9.0	628.32	592.61	549.22	605.31
γ 10.0	590.87	552.19	506.56	567.85
γ 11.0	550.11	510.17	462.98	527.29
γ 12.0	508.34	467.37	419.54	486.01
γ 13.0	465.05	424.87	376.72	443.71
γ 14.0	422.51	384.02	336.07	402.21
γ 15.0	380.32	344.56	298.22	361.41
γ 16.0	340.34	308.26	263.57	322.14
γ 17.0	302.46	274.58	231.79	285.25
γ 18.0	267.30	243.41	202.99	251.01
γ 19.0	234.92	214.75	177.05	220.10
γ 20.0	206.17	189.01	154.16	191.83
γ 21.0	180.32	165.67	133.99	166.86
γ 22.0	157.34	144.74	116.16	144.50
γ 23.0	136.91	126.31	100.80	124.72
γ 24.0	119.12	110.08	87.27	107.56
γ 25.0	103.70	96.11	75.87	92.84
γ 26.0	90.58	84.20	66.05	80.30
γ 27.0	79.29	73.78	57.67	69.59
γ 28.0	69.71	64.78	50.52	60.61
γ 29.0	61.48	57.11	44.35	53.08
γ 30.0	54.44	50.43	39.46	46.53
γ 31.0	48.32	44.67	34.34	41.11
γ 32.0	43.14	39.62	30.40	36.41
γ 33.0	38.56	35.25	26.91	32.30
γ 34.0	34.59	31.38	23.91	28.75
γ 35.0	31.03	28.02	21.28	25.58
γ 36.0	27.87	25.06	18.98	22.77
γ 37.0	25.03	22.40	16.93	20.27
γ 38.0	22.49	20.08	15.14	18.01
γ 39.0	20.20	18.02	13.58	16.02
γ 40.0	18.13	16.19	12.22	14.29
γ 41.0	16.33	14.54	11.02	12.84
γ 42.0	14.74	13.08	9.95	11.64
γ 43.0	13.36	11.77	9.04	10.61
γ 44.0	12.13	10.59	8.25	9.77
γ 45.0	11.07	9.53	7.58	9.05
γ 46.0	10.14	8.64	7.01	8.42

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	9.34	7.89	6.48	7.87
γ 48.0	8.61	7.22	6.02	7.35
γ 49.0	7.98	6.63	5.62	6.91
γ 50.0	7.42	6.10	5.28	6.51
γ 51.0	6.89	5.65	4.98	6.15
γ 52.0	6.43	5.26	4.68	5.81
γ 53.0	6.02	4.89	4.43	5.51
γ 54.0	5.65	4.57	4.22	5.24
γ 55.0	5.33	4.31	4.01	4.99
γ 56.0	5.03	4.05	3.84	4.74
γ 57.0	4.74	3.83	3.67	4.53
γ 58.0	4.49	3.64	3.52	4.33
γ 59.0	4.27	3.47	3.37	4.15
γ 60.0	4.07	3.32	3.25	3.98
γ 61.0	3.90	3.16	3.12	3.83
γ 62.0	3.73	3.04	3.02	3.67
γ 63.0	3.58	2.92	2.90	3.54
γ 64.0	3.44	2.81	2.81	3.42
γ 65.0	3.31	2.69	2.71	3.30
γ 66.0	3.19	2.60	2.62	3.20
γ 67.0	3.09	2.52	2.53	3.09
γ 68.0	2.98	2.43	2.44	2.98
γ 69.0	2.87	2.34	2.37	2.90
γ 70.0	2.78	2.27	2.30	2.81
γ 71.0	2.69	2.19	2.23	2.72
γ 72.0	2.62	2.12	2.17	2.64
γ 73.0	2.53	2.07	2.10	2.56
γ 74.0	2.45	2.01	2.04	2.48
γ 75.0	2.39	1.94	1.99	2.42
γ 76.0	2.34	1.89	1.93	2.36
γ 77.0	2.28	1.85	1.87	2.28
γ 78.0	2.21	1.81	1.83	2.23
γ 79.0	2.16	1.76	1.78	2.17
γ 80.0	2.12	1.71	1.73	2.12
γ 81.0	2.07	1.68	1.69	2.06
γ 82.0	2.02	1.65	1.65	2.01
γ 83.0	1.98	1.61	1.61	1.97
γ 84.0	1.94	1.57	1.58	1.92
γ 85.0	1.88	1.54	1.54	1.87
γ 86.0	1.84	1.51	1.51	1.82
γ 87.0	1.81	1.49	1.49	1.79
γ 88.0	1.77	1.47	1.46	1.75
γ 89.0	1.74	1.45	1.44	1.72
γ 90.0	1.72	1.44	1.42	1.69
γ 91.0	1.69	1.41	1.40	1.66
γ 92.0	1.67	1.40	1.38	1.64
γ 93.0	1.64	1.38	1.36	1.61



Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	1.62	1.37	1.35	1.59
γ 95.0	1.60	1.36	1.33	1.57
γ 96.0	1.59	1.35	1.32	1.55
γ 97.0	1.56	1.34	1.30	1.52
γ 98.0	1.54	1.32	1.30	1.51
γ 99.0	1.53	1.31	1.28	1.49
γ 100.0	1.51	1.29	1.28	1.47
γ 101.0	1.51	1.29	1.27	1.46
γ 102.0	1.48	1.28	1.26	1.44
γ 103.0	1.48	1.26	1.25	1.43
γ 104.0	1.46	1.26	1.24	1.42
γ 105.0	1.45	1.25	1.24	1.41
γ 106.0	1.44	1.25	1.24	1.41
γ 107.0	1.42	1.23	1.24	1.39
γ 108.0	1.41	1.24	1.24	1.39
γ 109.0	1.41	1.22	1.24	1.38
γ 110.0	1.40	1.22	1.24	1.37
γ 111.0	1.38	1.22	1.23	1.36
γ 112.0	1.38	1.20	1.23	1.36
γ 113.0	1.37	1.20	1.23	1.36
γ 114.0	1.36	1.20	1.24	1.36
γ 115.0	1.34	1.20	1.24	1.36
γ 116.0	1.34	1.20	1.24	1.36
γ 117.0	1.34	1.20	1.25	1.36
γ 118.0	1.33	1.19	1.25	1.36
γ 119.0	1.32	1.19	1.26	1.36
γ 120.0	1.31	1.19	1.27	1.36
γ 121.0	1.32	1.19	1.28	1.37
γ 122.0	1.32	1.21	1.29	1.38
γ 123.0	1.31	1.21	1.30	1.39
γ 124.0	1.32	1.23	1.33	1.40
γ 125.0	1.33	1.23	1.35	1.41
γ 126.0	1.33	1.24	1.37	1.43
γ 127.0	1.34	1.27	1.39	1.45
γ 128.0	1.37	1.29	1.41	1.47
γ 129.0	1.38	1.31	1.44	1.49
γ 130.0	1.39	1.33	1.47	1.52
γ 131.0	1.42	1.37	1.51	1.55
γ 132.0	1.44	1.40	1.55	1.58
γ 133.0	1.48	1.44	1.58	1.60
γ 134.0	1.50	1.47	1.63	1.64
γ 135.0	1.54	1.51	1.67	1.68
γ 136.0	1.57	1.55	1.73	1.73
γ 137.0	1.62	1.59	1.77	1.77
γ 138.0	1.66	1.64	1.81	1.82
γ 139.0	1.71	1.69	1.87	1.86
γ 140.0	1.75	1.74	1.92	1.91

---

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	1.80	1.79	1.98	1.96
γ 142.0	1.85	1.84	2.02	2.01
γ 143.0	1.91	1.89	2.07	2.06
γ 144.0	1.97	1.94	2.13	2.10
γ 145.0	2.00	1.98	2.18	2.15
γ 146.0	2.06	2.04	2.23	2.19
γ 147.0	2.10	2.08	2.28	2.23
γ 148.0	2.15	2.13	2.32	2.29
γ 149.0	2.20	2.17	2.37	2.32
γ 150.0	2.24	2.21	2.40	2.37
γ 151.0	2.29	2.25	2.44	2.40
γ 152.0	2.33	2.29	2.48	2.43
γ 153.0	2.36	2.33	2.50	2.47
γ 154.0	2.40	2.37	2.53	2.50
γ 155.0	2.44	2.39	2.56	2.53
γ 156.0	2.47	2.42	2.58	2.55
γ 157.0	2.50	2.44	2.61	2.56
γ 158.0	2.53	2.46	2.62	2.59
γ 159.0	2.55	2.49	2.64	2.60
γ 160.0	2.58	2.50	2.65	2.60
γ 161.0	2.59	2.52	2.67	2.62
γ 162.0	2.60	2.53	2.66	2.63
γ 163.0	2.61	2.55	2.67	2.64
γ 164.0	2.63	2.56	2.68	2.64
γ 165.0	2.63	2.56	2.67	2.64
γ 166.0	2.63	2.57	2.68	2.64
γ 167.0	2.64	2.58	2.66	2.65
γ 168.0	2.64	2.57	2.66	2.64
γ 169.0	2.63	2.57	2.66	2.63
γ 170.0	2.64	2.57	2.66	2.63
γ 171.0	2.64	2.57	2.65	2.63
γ 172.0	2.63	2.57	2.65	2.62
γ 173.0	2.63	2.57	2.65	2.62
γ 174.0	2.64	2.57	2.64	2.62
γ 175.0	2.63	2.58	2.65	2.63
γ 176.0	2.63	2.59	2.65	2.63
γ 177.0	2.64	2.59	2.65	2.63
γ 178.0	2.64	2.61	2.66	2.64
γ 179.0	2.64	2.61	2.65	2.64
γ 180.0	2.64	2.64	2.64	2.64