



Indoor Luminaire Photometric Data

Description Information

Luminary Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Date: 2020/06/22
Manufacture: Shenzhen Norming Lighting Co., Ltd	Shld.Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department	Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.050m*0.050m*0.072m	Lum. Area (m2):0.006	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25
		Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 219.890	Luminary Flux(lm): 219.886	Field Angle(10%Imax): 51.9(°)
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 210.410lm 95.69%
Rated Voltage(V):	Luminary EER(lm/W): 45.905	Up Lumens&Percent: 9.476lm 4.31%
Tested Power(W): 4.790	Max. Candela(cd): 691.928	S/MH: C0_a180=0.462 C90_270=0.462
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=1.0	CIE Type: Semi-Direct
Tested Electrics (V, A, pf):240.1, 0.023, 0.866	Beam Angle(50%Imax): 27.5(°)	ErP ϕ use(90°): 192.145lm
Lamp Size(W*L*H):0.050m*0.050m*0.072m	Left=-12.3°, Right=15.2°	IRF(%): 668.929

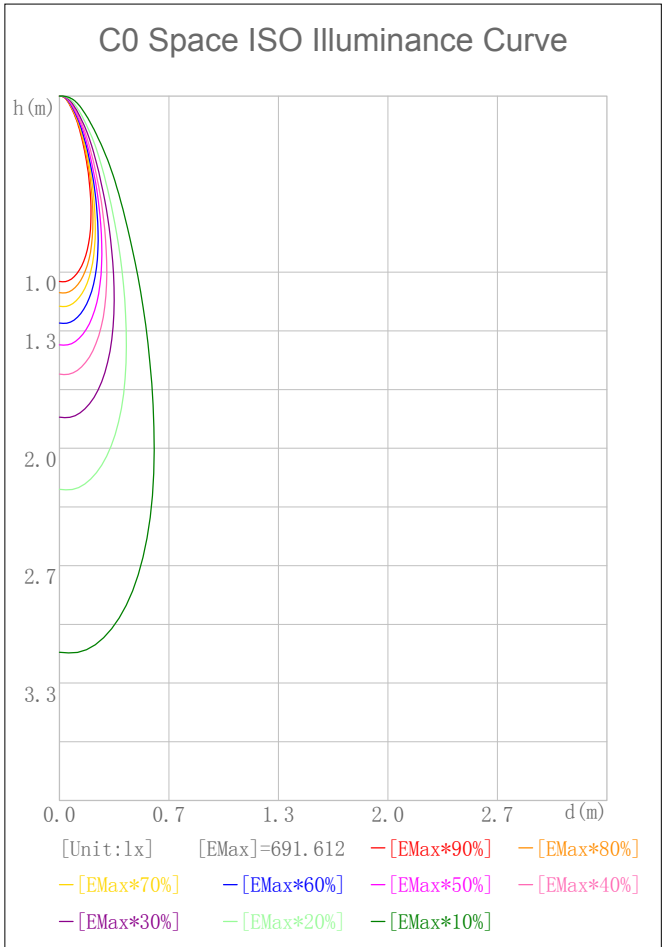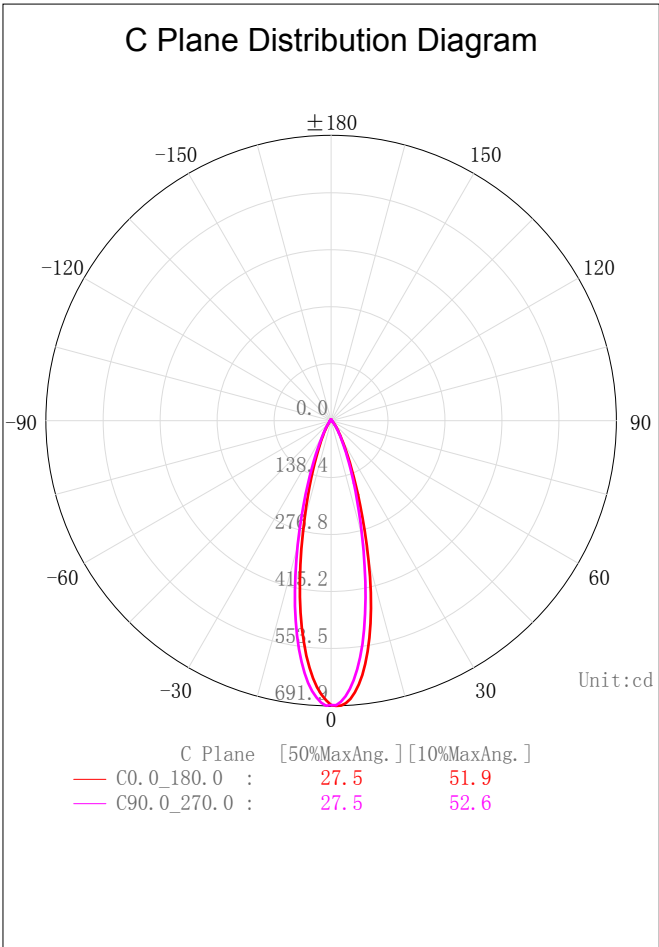

2D Plane Light Intensity Distribution Curve


Lum. Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22

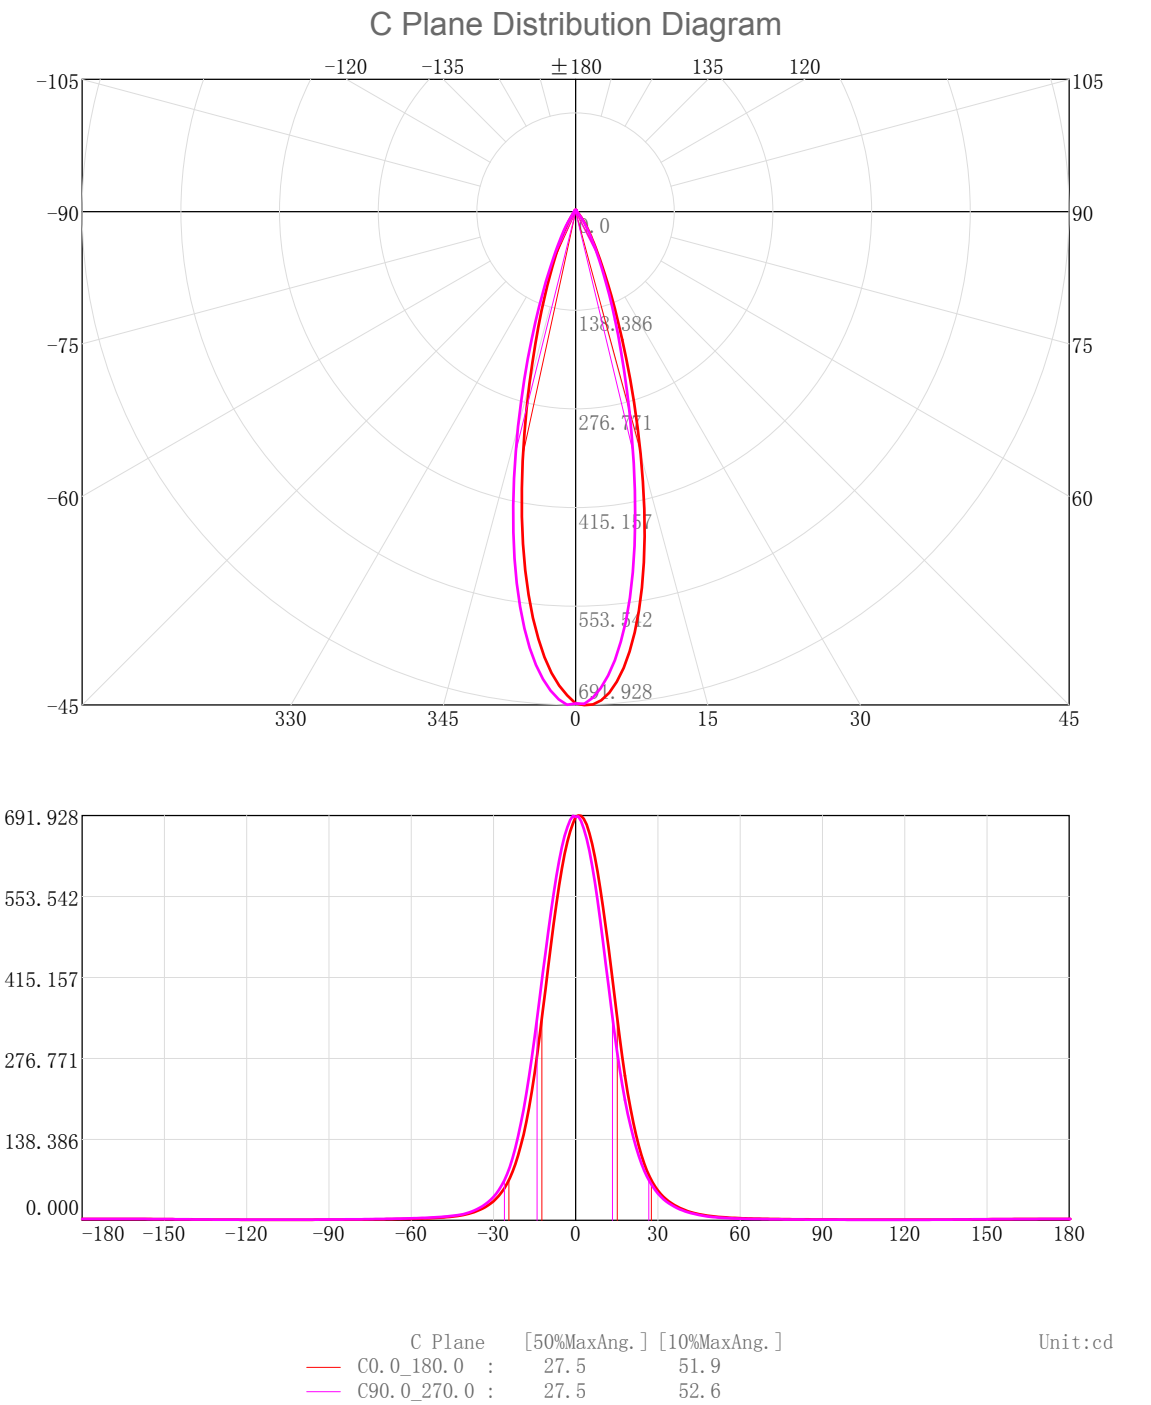

3D Light Intensity Distribution Modal

Lum. Name:DL43-05-XX-02 3000K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2020/06/22

3D Light Intensity Distribution Modal

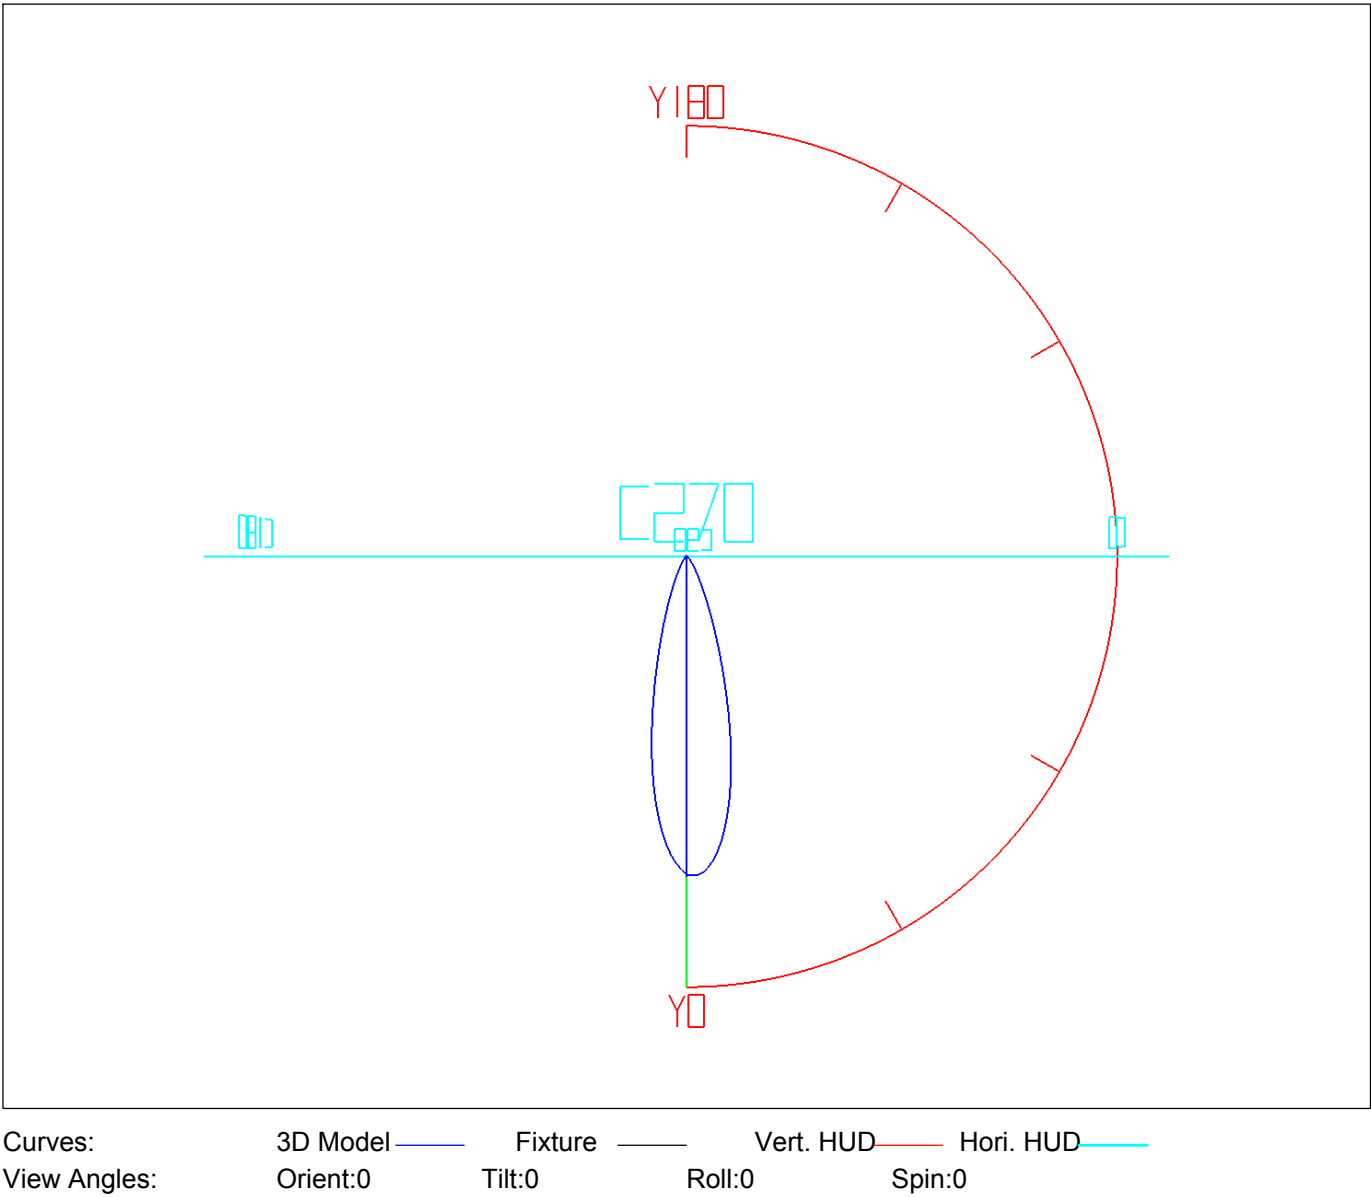

IES Indoor Report

Photometric Filename:DL43-05-XX-02 3000K RA90 24D.IES

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.66	0.66	0.30	0.30	47.0-48.0	0.57	198.81	0.26	90.41
1.0-2.0	1.96	2.62	0.89	1.19	48.0-49.0	0.53	199.35	0.24	90.66
2.0-3.0	3.23	5.85	1.47	2.66	49.0-50.0	0.50	199.85	0.23	90.89
3.0-4.0	4.42	10.28	2.01	4.67	50.0-51.0	0.48	200.33	0.22	91.10
4.0-5.0	5.53	15.81	2.52	7.19	51.0-52.0	0.45	200.78	0.21	91.31
5.0-6.0	6.53	22.34	2.97	10.16	52.0-53.0	0.43	201.21	0.20	91.51
6.0-7.0	7.40	29.74	3.36	13.52	53.0-54.0	0.41	201.62	0.19	91.69
7.0-8.0	8.12	37.86	3.69	17.22	54.0-55.0	0.39	202.01	0.18	91.87
8.0-9.0	8.69	46.55	3.95	21.17	55.0-56.0	0.38	202.39	0.17	92.04
9.0-10.0	9.09	55.64	4.13	25.30	56.0-57.0	0.36	202.75	0.16	92.21
10.0-11.0	9.32	64.96	4.24	29.54	57.0-58.0	0.35	203.10	0.16	92.36
11.0-12.0	9.39	74.35	4.27	33.81	58.0-59.0	0.33	203.43	0.15	92.51
12.0-13.0	9.31	83.66	4.23	38.04	59.0-60.0	0.32	203.75	0.15	92.66
13.0-14.0	9.09	92.74	4.13	42.18	60.0-61.0	0.31	204.06	0.14	92.80
14.0-15.0	8.76	101.51	3.98	46.16	61.0-62.0	0.30	204.37	0.14	92.94
15.0-16.0	8.35	109.86	3.80	49.96	62.0-63.0	0.29	204.66	0.13	93.07
16.0-17.0	7.88	117.74	3.58	53.54	63.0-64.0	0.29	204.95	0.13	93.20
17.0-18.0	7.38	125.11	3.35	56.90	64.0-65.0	0.28	205.22	0.13	93.33
18.0-19.0	6.85	131.96	3.12	60.01	65.0-66.0	0.27	205.49	0.12	93.45
19.0-20.0	6.32	138.29	2.88	62.89	66.0-67.0	0.26	205.76	0.12	93.57
20.0-21.0	5.81	144.09	2.64	65.53	67.0-68.0	0.26	206.01	0.12	93.69
21.0-22.0	5.31	149.40	2.41	67.94	68.0-69.0	0.25	206.26	0.11	93.80
22.0-23.0	4.83	154.23	2.20	70.14	69.0-70.0	0.24	206.51	0.11	93.91
23.0-24.0	4.38	158.61	1.99	72.13	70.0-71.0	0.24	206.74	0.11	94.02
24.0-25.0	3.97	162.58	1.80	73.94	71.0-72.0	0.23	206.98	0.11	94.13
25.0-26.0	3.59	166.17	1.63	75.57	72.0-73.0	0.23	207.20	0.10	94.23
26.0-27.0	3.26	169.43	1.48	77.05	73.0-74.0	0.22	207.42	0.10	94.33
27.0-28.0	2.95	172.38	1.34	78.39	74.0-75.0	0.22	207.64	0.10	94.43
28.0-29.0	2.68	175.06	1.22	79.61	75.0-76.0	0.21	207.85	0.10	94.53
29.0-30.0	2.44	177.51	1.11	80.73	76.0-77.0	0.21	208.06	0.09	94.62
30.0-31.0	2.23	179.74	1.01	81.74	77.0-78.0	0.20	208.26	0.09	94.71
31.0-32.0	2.04	181.77	0.93	82.67	78.0-79.0	0.20	208.46	0.09	94.80
32.0-33.0	1.86	183.64	0.85	83.51	79.0-80.0	0.19	208.66	0.09	94.89
33.0-34.0	1.71	185.34	0.78	84.29	80.0-81.0	0.19	208.85	0.09	94.98
34.0-35.0	1.56	186.91	0.71	85.00	81.0-82.0	0.19	209.03	0.09	95.06
35.0-36.0	1.43	188.34	0.65	85.65	82.0-83.0	0.18	209.22	0.08	95.15
36.0-37.0	1.31	189.66	0.60	86.25	83.0-84.0	0.18	209.40	0.08	95.23
37.0-38.0	1.21	190.86	0.55	86.80	84.0-85.0	0.18	209.57	0.08	95.31
38.0-39.0	1.11	191.97	0.50	87.30	85.0-86.0	0.17	209.75	0.08	95.39
39.0-40.0	1.01	192.98	0.46	87.76	86.0-87.0	0.17	209.92	0.08	95.46
40.0-41.0	0.93	193.92	0.42	88.19	87.0-88.0	0.17	210.08	0.08	95.54
41.0-42.0	0.86	194.78	0.39	88.58	88.0-89.0	0.16	210.25	0.07	95.62
42.0-43.0	0.80	195.57	0.36	88.94	89.0-90.0	0.16	210.41	0.07	95.69
43.0-44.0	0.74	196.31	0.34	89.28	90.0-91.0	0.16	210.57	0.07	95.76
44.0-45.0	0.69	197.00	0.31	89.59	91.0-92.0	0.16	210.73	0.07	95.83
45.0-46.0	0.64	197.65	0.29	89.88	92.0-93.0	0.16	210.88	0.07	95.90
46.0-47.0	0.60	198.25	0.27	90.16	93.0-94.0	0.15	211.04	0.07	95.97

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.15	211.19	0.07	96.04	141.0-142.0	0.12	217.00	0.05	98.68
95.0-96.0	0.15	211.34	0.07	96.11	142.0-143.0	0.12	217.12	0.05	98.74
96.0-97.0	0.15	211.48	0.07	96.18	143.0-144.0	0.12	217.24	0.05	98.79
97.0-98.0	0.15	211.63	0.07	96.24	144.0-145.0	0.12	217.36	0.05	98.85
98.0-99.0	0.14	211.77	0.07	96.31	145.0-146.0	0.12	217.48	0.05	98.90
99.0-100.0	0.14	211.92	0.06	96.37	146.0-147.0	0.12	217.60	0.05	98.96
100.0-101.0	0.14	212.06	0.06	96.44	147.0-148.0	0.12	217.72	0.05	99.01
101.0-102.0	0.14	212.20	0.06	96.50	148.0-149.0	0.12	217.83	0.05	99.06
102.0-103.0	0.14	212.33	0.06	96.56	149.0-150.0	0.12	217.95	0.05	99.12
103.0-104.0	0.14	212.47	0.06	96.63	150.0-151.0	0.11	218.06	0.05	99.17
104.0-105.0	0.13	212.60	0.06	96.69	151.0-152.0	0.11	218.18	0.05	99.22
105.0-106.0	0.13	212.74	0.06	96.75	152.0-153.0	0.11	218.29	0.05	99.27
106.0-107.0	0.13	212.87	0.06	96.81	153.0-154.0	0.11	218.40	0.05	99.32
107.0-108.0	0.13	213.00	0.06	96.87	154.0-155.0	0.11	218.50	0.05	99.37
108.0-109.0	0.13	213.13	0.06	96.93	155.0-156.0	0.10	218.60	0.05	99.42
109.0-110.0	0.13	213.26	0.06	96.98	156.0-157.0	0.10	218.70	0.05	99.46
110.0-111.0	0.13	213.38	0.06	97.04	157.0-158.0	0.10	218.80	0.04	99.50
111.0-112.0	0.13	213.51	0.06	97.10	158.0-159.0	0.09	218.89	0.04	99.55
112.0-113.0	0.12	213.63	0.06	97.16	159.0-160.0	0.09	218.98	0.04	99.59
113.0-114.0	0.12	213.76	0.06	97.21	160.0-161.0	0.09	219.07	0.04	99.63
114.0-115.0	0.12	213.88	0.06	97.27	161.0-162.0	0.08	219.15	0.04	99.66
115.0-116.0	0.12	214.00	0.05	97.32	162.0-163.0	0.08	219.23	0.04	99.70
116.0-117.0	0.12	214.12	0.05	97.38	163.0-164.0	0.07	219.31	0.03	99.73
117.0-118.0	0.12	214.24	0.05	97.43	164.0-165.0	0.07	219.38	0.03	99.77
118.0-119.0	0.12	214.35	0.05	97.48	165.0-166.0	0.07	219.44	0.03	99.80
119.0-120.0	0.12	214.47	0.05	97.54	166.0-167.0	0.06	219.50	0.03	99.82
120.0-121.0	0.12	214.59	0.05	97.59	167.0-168.0	0.06	219.56	0.03	99.85
121.0-122.0	0.11	214.70	0.05	97.64	168.0-169.0	0.05	219.61	0.02	99.87
122.0-123.0	0.11	214.81	0.05	97.69	169.0-170.0	0.05	219.66	0.02	99.89
123.0-124.0	0.11	214.93	0.05	97.74	170.0-171.0	0.04	219.70	0.02	99.91
124.0-125.0	0.11	215.04	0.05	97.79	171.0-172.0	0.04	219.74	0.02	99.93
125.0-126.0	0.11	215.15	0.05	97.85	172.0-173.0	0.03	219.77	0.02	99.95
126.0-127.0	0.11	215.26	0.05	97.90	173.0-174.0	0.03	219.80	0.01	99.96
127.0-128.0	0.11	215.38	0.05	97.95	174.0-175.0	0.03	219.83	0.01	99.97
128.0-129.0	0.11	215.49	0.05	98.00	175.0-176.0	0.02	219.85	0.01	99.98
129.0-130.0	0.11	215.60	0.05	98.05	176.0-177.0	0.02	219.86	0.01	99.99
130.0-131.0	0.11	215.72	0.05	98.10	177.0-178.0	0.01	219.88	0.01	99.99
131.0-132.0	0.11	215.83	0.05	98.15	178.0-179.0	0.01	219.88	0.00	100.00
132.0-133.0	0.11	215.94	0.05	98.21	179.0-180.0	0.00	219.89	0.00	100.00
133.0-134.0	0.11	216.06	0.05	98.26					
134.0-135.0	0.12	216.17	0.05	98.31					
135.0-136.0	0.12	216.29	0.05	98.36					
136.0-137.0	0.12	216.41	0.05	98.42					
137.0-138.0	0.12	216.52	0.05	98.47					
138.0-139.0	0.12	216.64	0.05	98.52					
139.0-140.0	0.12	216.76	0.05	98.58					
140.0-141.0	0.12	216.88	0.05	98.63					

Rectangle ISO Lighting Intensity Diagram


Lum. Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22

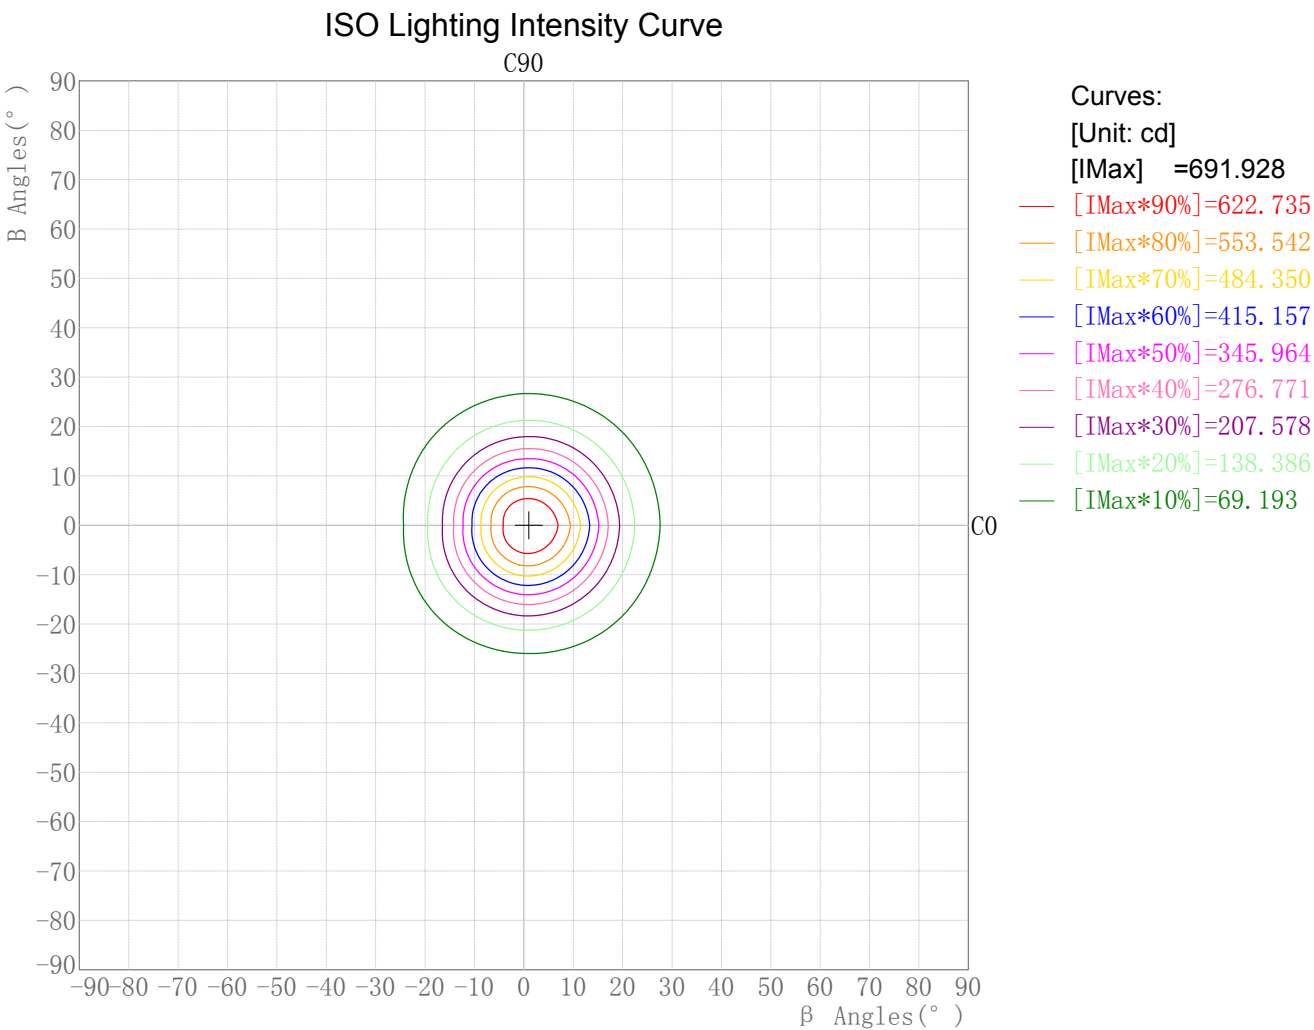

Plane ISO-Illuminance Diagram

Lum. Name:DL43-05-XX-02 3000K RA90 24D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22

Plane ISO-Illuminance Curve

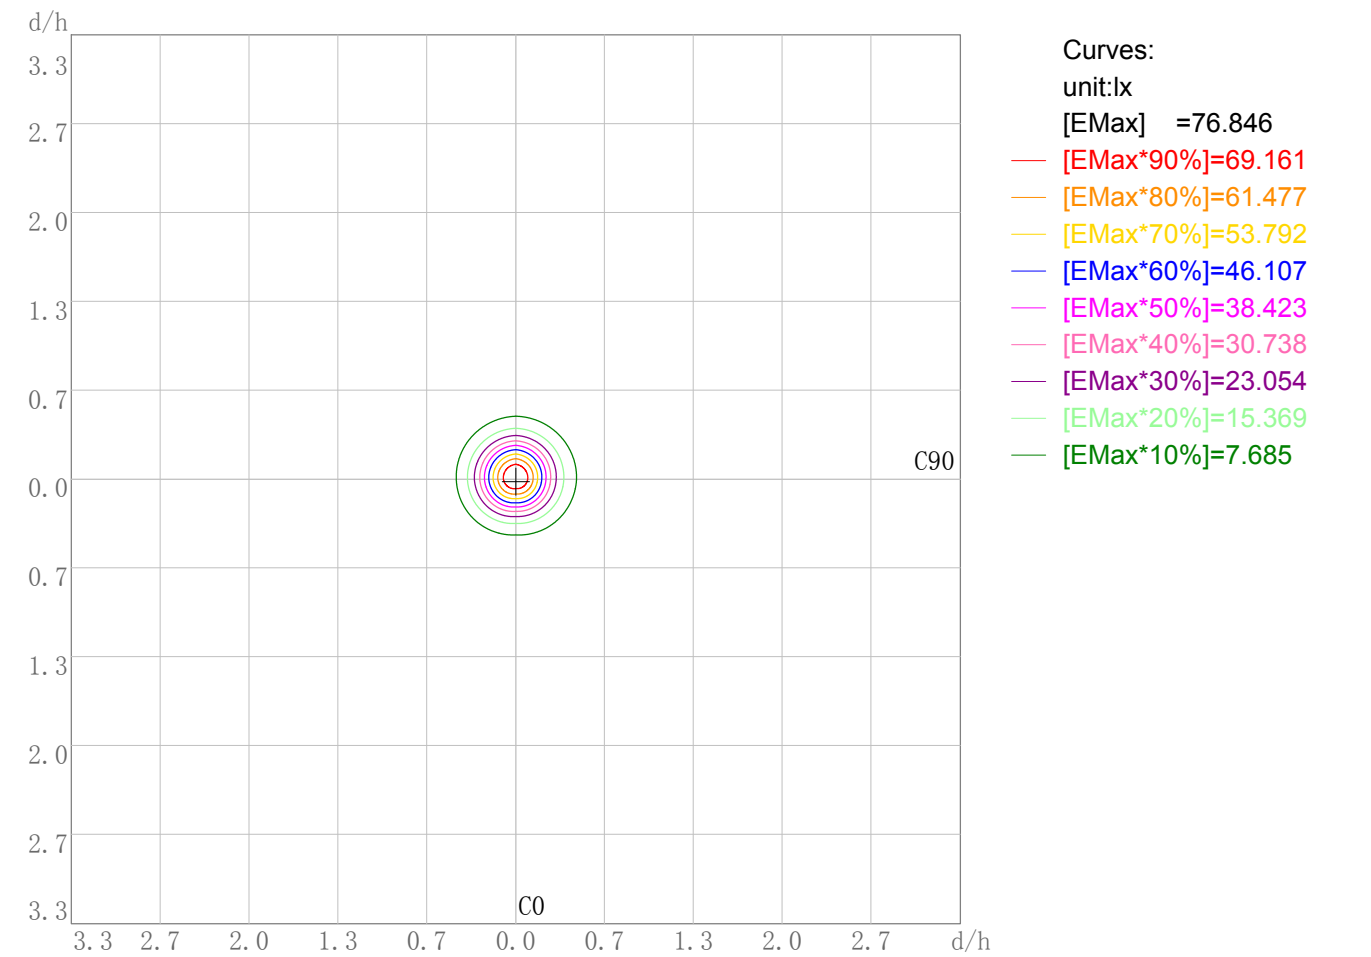

Working Plane Luminaire Mounting Height(m): 3.00  
Working Plane Maximum Illuminance(lx): 76.85  
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0


# IES Indoor Report

Photometric Filename:DL43-05-XX-02 3000K RA90 24D.IES

## 3D Plane ISO Illuminance Diagram

Lum. Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22

## 3D Plane Illuminance Modal

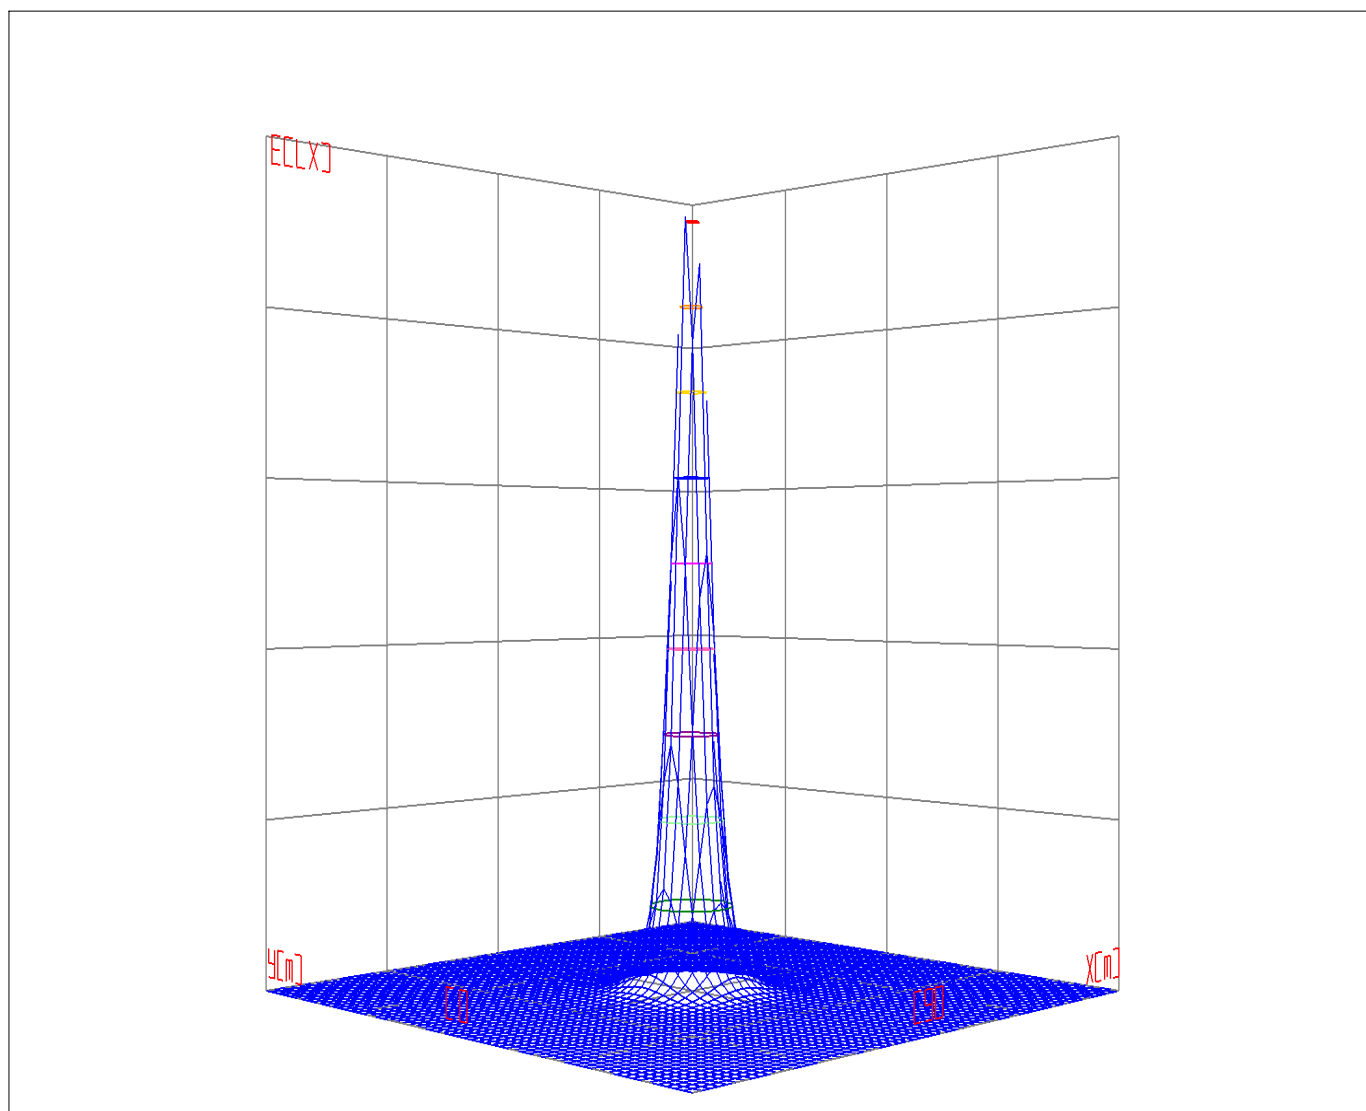


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —  
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0



Space ISO Illuminance Diagram

Lum. Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22


Space ISO Illuminance Curve

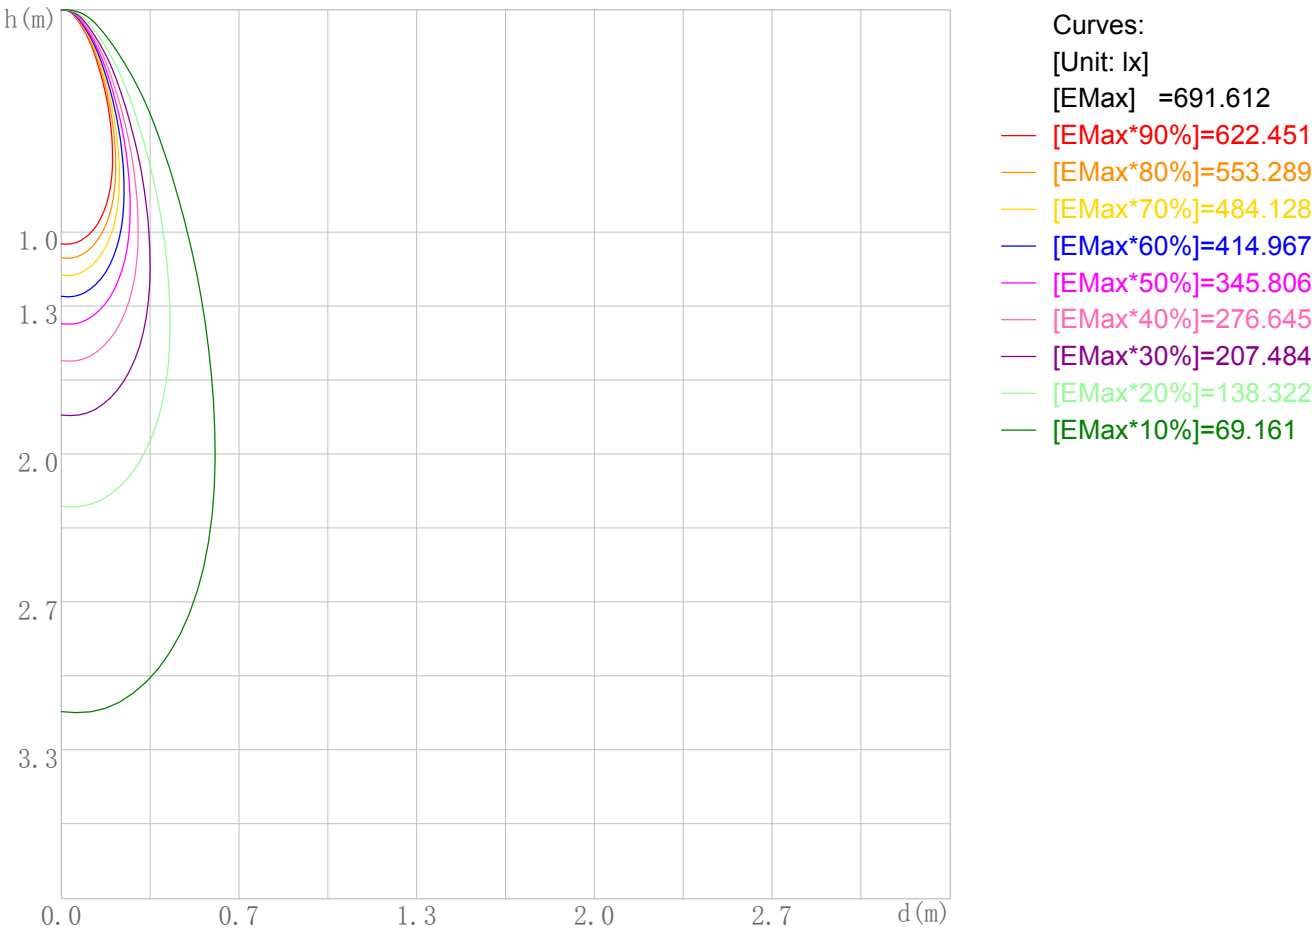

Space Plane Maximum Illuminance and @Angle:691.61lx,1.0deg  
Plane Maximum Lighting Intensity and @Angle:691.928cd,0eg

Illuminance-Distance Diagram

Lum. Name:DL43-05-XX-02 3000K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2020/06/22

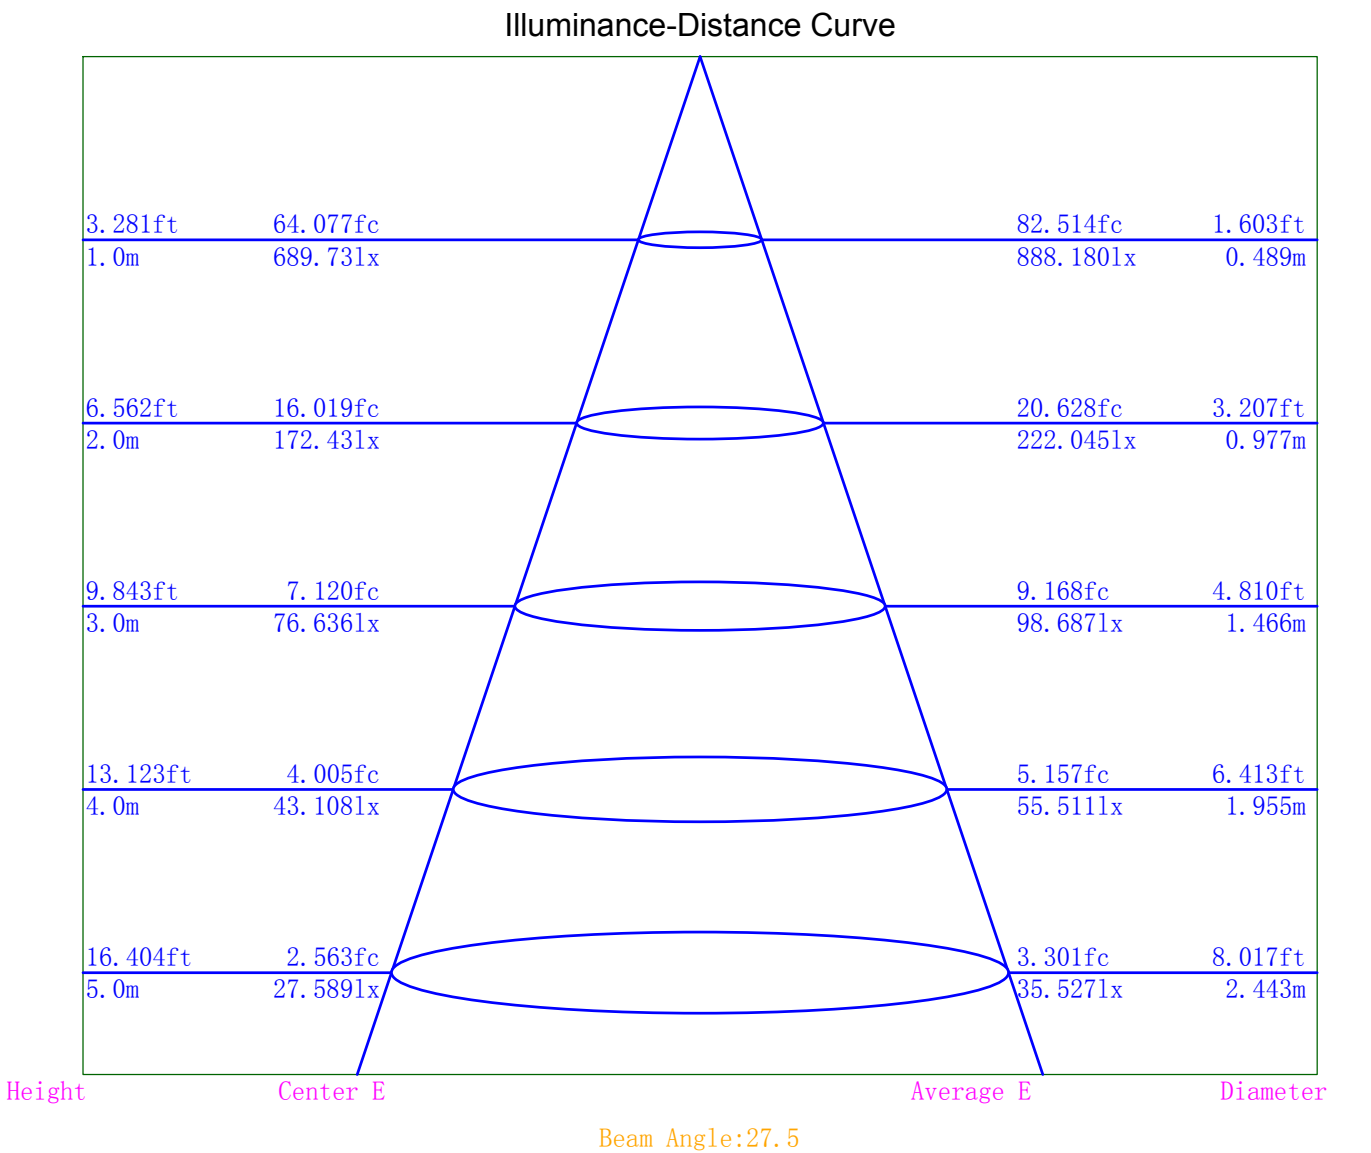

Indoor Luminance Limiting Curves

Lum. Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	2466	1808	1448	1256	1216	1258	1435	1880	3361
C90	2154	1495	1162	1010	971	1008	1153	1516	2741

Luminance Limiting Curve

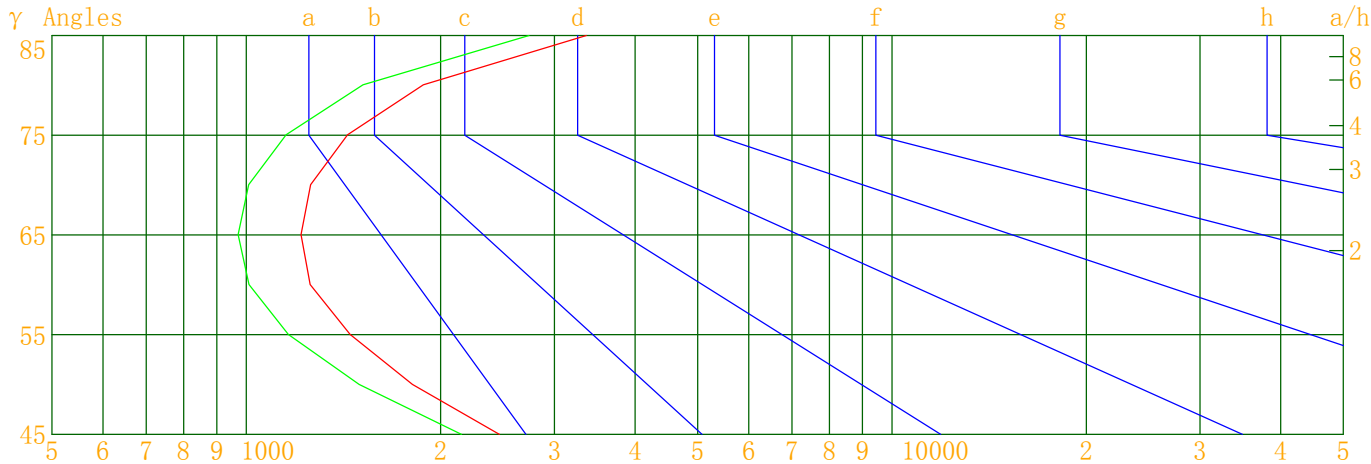

Luminous Size:

Length(m)=0.050

Width(m)=0.050

Height(m)=0.072

Area(m^2)=0.006100

Luminous Type:

Without Luminous Side


Luminous Curves:

C0-C180 Color: —

C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22

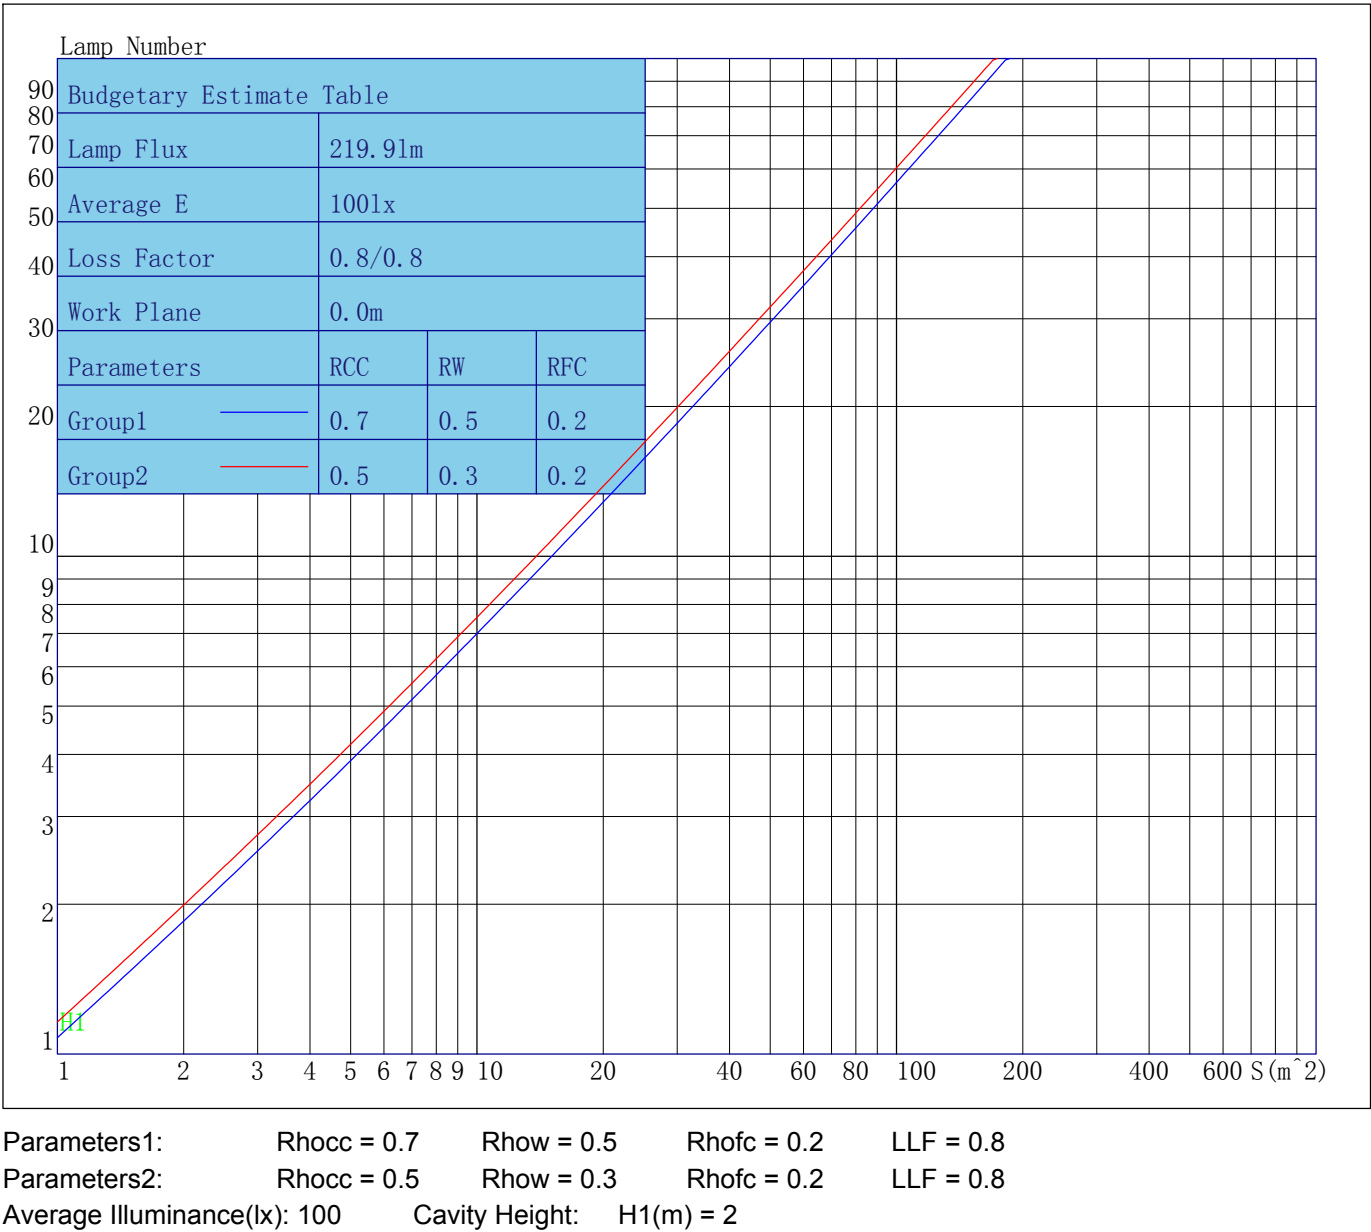

Indoor Coefficient of Utilization Table

Lum. Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	118	118	118	118	115	115	115	115	109	109	109	103	103	103	98	98	98	96
1	113	110	108	105	110	107	105	103	103	101	99	98	97	96	94	93	92	90
2	108	103	99	96	105	101	98	95	97	95	92	94	92	90	90	89	87	85
3	103	97	93	89	101	96	92	88	93	89	86	90	87	85	87	85	83	81
4	99	92	87	84	97	91	87	83	88	85	82	86	83	80	84	81	79	77
5	95	88	83	79	93	87	82	79	85	81	78	83	79	76	81	78	75	74
6	92	84	79	75	90	83	78	75	81	77	74	79	76	73	78	75	72	71
7	88	80	75	72	87	80	75	71	78	74	71	77	73	70	75	72	69	68
8	85	77	72	69	84	76	72	68	75	71	68	74	70	67	73	69	67	66
9	82	74	69	66	81	74	69	66	72	68	65	71	68	65	70	67	65	63
10	80	72	67	64	79	71	66	63	70	66	63	69	65	63	68	65	62	61

Unified Glare Rating Table

Lum. Name: DL43-05-XX-02 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/22

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H    Y=2H	9.1	10.1	9.5	10.5	10.9	8.2	9.2	8.7	9.6	10.0
	9.9	10.7	10.3	11.2	11.6	8.9	9.8	9.3	10.2	10.7
	10.4	11.2	10.9	11.7	12.2	9.4	10.2	9.8	10.6	11.1
	11.2	11.9	11.7	12.4	12.9	10.0	10.8	10.5	11.3	11.8
	11.6	12.4	12.2	12.8	13.4	10.5	11.2	11.0	11.7	12.2
	12.3	13.0	12.8	13.4	14.0	11.1	11.8	11.6	12.2	12.8
X=4H    Y=2H	9.2	10.0	9.7	10.5	11.0	8.3	9.2	8.8	9.6	10.1
	10.2	10.9	10.7	11.4	11.9	9.3	10.0	9.8	10.5	11.0
	11.0	11.6	11.5	12.1	12.7	10.0	10.6	10.5	11.1	11.6
	12.0	12.6	12.6	13.1	13.7	10.9	11.5	11.4	12.0	12.6
	12.7	13.2	13.2	13.7	14.3	11.5	12.0	12.1	12.5	13.1
	13.5	13.9	14.0	14.5	15.1	12.3	12.7	12.8	13.3	13.9
X=8H    Y=4H	11.3	11.8	11.8	12.3	12.9	10.3	10.8	10.8	11.3	11.9
	12.6	13.0	13.1	13.6	14.2	11.5	11.9	12.1	12.5	13.1
	13.4	13.8	14.0	14.4	15.0	12.3	12.7	12.9	13.3	13.9
	14.5	14.8	15.1	15.4	16.0	13.3	13.7	13.9	14.2	14.9
X=12H    Y=4H	11.3	11.8	11.9	12.3	12.9	10.3	10.8	10.9	11.4	11.9
	12.7	13.1	13.3	13.6	14.3	11.7	12.1	12.3	12.6	13.2
	13.7	14.0	14.3	14.6	15.3	12.6	12.9	13.2	13.5	14.2
Variations with the objerver position at spacings										
S=1.0H	0.0/-0.0					0.1/-0.1				
S=1.5H	0.1/-0.1					0.1/-0.2				
S=2.0H	0.1/-0.1					0.1/-0.1				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	3.5					3.4				

to the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	689.73	689.73	689.73	689.73
γ 1.0	691.93	690.22	678.37	691.48
γ 2.0	691.47	682.25	664.89	684.29
γ 3.0	686.24	669.33	647.77	672.50
γ 4.0	676.32	652.07	626.18	657.14
γ 5.0	661.63	631.59	601.10	638.10
γ 6.0	643.39	606.36	572.83	615.21
γ 7.0	621.39	578.53	541.33	588.82
γ 8.0	595.83	546.80	507.77	559.40
γ 9.0	566.78	512.25	471.57	527.43
γ 10.0	535.30	475.89	434.27	493.52
γ 11.0	501.23	437.93	395.39	457.91
γ 12.0	465.59	399.74	357.18	421.37
γ 13.0	428.02	362.05	319.36	384.01
γ 14.0	389.89	325.69	283.65	347.42
γ 15.0	352.09	291.84	250.32	311.91
γ 16.0	314.96	260.52	220.08	277.74
γ 17.0	279.81	231.87	192.93	246.30
γ 18.0	247.35	205.83	168.38	216.85
γ 19.0	217.96	182.39	146.72	189.65
γ 20.0	191.13	161.38	127.58	165.20
γ 21.0	167.52	142.56	110.81	143.20
γ 22.0	146.63	125.61	96.09	123.64
γ 23.0	128.06	110.57	83.40	106.62
γ 24.0	111.64	97.20	72.48	91.73
γ 25.0	97.35	85.41	63.04	79.31
γ 26.0	85.08	75.12	54.90	68.67
γ 27.0	74.51	66.25	48.04	59.65
γ 28.0	65.50	58.57	42.14	51.99
γ 29.0	57.79	51.87	37.09	45.52
γ 30.0	51.13	45.99	32.65	39.97
γ 31.0	45.49	40.90	28.86	35.26
γ 32.0	40.53	36.50	25.58	31.16
γ 33.0	36.29	32.60	22.73	27.61
γ 34.0	32.57	29.16	20.23	24.47
γ 35.0	29.27	26.15	18.03	21.68
γ 36.0	26.37	23.47	16.07	19.20
γ 37.0	23.76	21.09	14.35	16.97
γ 38.0	21.42	18.98	12.84	15.01
γ 39.0	19.30	17.10	11.53	13.32
γ 40.0	17.38	15.40	10.39	11.92
γ 41.0	15.67	13.91	9.39	10.77
γ 42.0	14.16	12.56	8.51	9.80
γ 43.0	12.83	11.36	7.76	9.03
γ 44.0	11.65	10.27	7.11	8.39
γ 45.0	10.64	9.29	6.56	7.82
γ 46.0	9.73	8.39	6.08	7.32

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	8.95	7.60	5.65	6.86
γ 48.0	8.26	6.95	5.27	6.44
γ 49.0	7.63	6.36	4.93	6.07
γ 50.0	7.09	5.86	4.63	5.73
γ 51.0	6.59	5.42	4.35	5.43
γ 52.0	6.14	5.03	4.11	5.17
γ 53.0	5.74	4.67	3.89	4.91
γ 54.0	5.39	4.36	3.69	4.66
γ 55.0	5.07	4.07	3.50	4.45
γ 56.0	4.77	3.82	3.35	4.24
γ 57.0	4.49	3.59	3.20	4.05
γ 58.0	4.25	3.41	3.07	3.88
γ 59.0	4.03	3.22	2.95	3.72
γ 60.0	3.83	3.08	2.84	3.58
γ 61.0	3.67	2.94	2.73	3.44
γ 62.0	3.51	2.82	2.64	3.33
γ 63.0	3.37	2.70	2.56	3.21
γ 64.0	3.25	2.59	2.47	3.11
γ 65.0	3.13	2.50	2.38	3.01
γ 66.0	3.01	2.41	2.31	2.91
γ 67.0	2.91	2.33	2.24	2.81
γ 68.0	2.81	2.25	2.16	2.72
γ 69.0	2.72	2.17	2.10	2.64
γ 70.0	2.62	2.10	2.05	2.56
γ 71.0	2.55	2.04	1.99	2.48
γ 72.0	2.47	1.98	1.92	2.41
γ 73.0	2.40	1.93	1.88	2.35
γ 74.0	2.33	1.87	1.83	2.28
γ 75.0	2.27	1.82	1.78	2.22
γ 76.0	2.21	1.77	1.73	2.17
γ 77.0	2.15	1.73	1.69	2.11
γ 78.0	2.09	1.68	1.65	2.05
γ 79.0	2.04	1.64	1.61	2.01
γ 80.0	1.99	1.61	1.58	1.95
γ 81.0	1.94	1.58	1.55	1.92
γ 82.0	1.91	1.54	1.51	1.87
γ 83.0	1.86	1.51	1.48	1.82
γ 84.0	1.82	1.48	1.44	1.78
γ 85.0	1.79	1.46	1.41	1.74
γ 86.0	1.75	1.42	1.38	1.70
γ 87.0	1.71	1.39	1.37	1.67
γ 88.0	1.68	1.37	1.35	1.64
γ 89.0	1.65	1.36	1.33	1.62
γ 90.0	1.62	1.34	1.31	1.60
γ 91.0	1.60	1.32	1.29	1.57
γ 92.0	1.58	1.30	1.28	1.54
γ 93.0	1.56	1.29	1.28	1.53

---



Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	1.54	1.28	1.26	1.50
γ 95.0	1.52	1.27	1.24	1.49
γ 96.0	1.50	1.25	1.22	1.46
γ 97.0	1.48	1.24	1.22	1.45
γ 98.0	1.47	1.24	1.21	1.42
γ 99.0	1.46	1.22	1.20	1.41
γ 100.0	1.44	1.22	1.20	1.39
γ 101.0	1.43	1.21	1.18	1.38
γ 102.0	1.42	1.20	1.17	1.36
γ 103.0	1.40	1.19	1.17	1.35
γ 104.0	1.39	1.19	1.17	1.34
γ 105.0	1.38	1.18	1.17	1.33
γ 106.0	1.37	1.17	1.16	1.34
γ 107.0	1.37	1.16	1.16	1.32
γ 108.0	1.35	1.16	1.16	1.32
γ 109.0	1.34	1.16	1.15	1.31
γ 110.0	1.33	1.15	1.16	1.31
γ 111.0	1.32	1.14	1.16	1.30
γ 112.0	1.31	1.14	1.17	1.30
γ 113.0	1.30	1.14	1.16	1.30
γ 114.0	1.30	1.13	1.16	1.29
γ 115.0	1.29	1.12	1.17	1.30
γ 116.0	1.27	1.13	1.18	1.29
γ 117.0	1.27	1.12	1.18	1.29
γ 118.0	1.26	1.12	1.18	1.29
γ 119.0	1.26	1.13	1.18	1.29
γ 120.0	1.26	1.12	1.20	1.30
γ 121.0	1.26	1.11	1.21	1.31
γ 122.0	1.25	1.12	1.22	1.31
γ 123.0	1.25	1.14	1.23	1.32
γ 124.0	1.26	1.15	1.24	1.33
γ 125.0	1.26	1.15	1.27	1.35
γ 126.0	1.26	1.16	1.29	1.36
γ 127.0	1.27	1.18	1.30	1.37
γ 128.0	1.29	1.20	1.33	1.38
γ 129.0	1.30	1.22	1.36	1.41
γ 130.0	1.32	1.24	1.39	1.42
γ 131.0	1.33	1.27	1.42	1.45
γ 132.0	1.36	1.30	1.45	1.48
γ 133.0	1.38	1.33	1.49	1.51
γ 134.0	1.41	1.36	1.52	1.54
γ 135.0	1.44	1.40	1.56	1.57
γ 136.0	1.46	1.43	1.60	1.60
γ 137.0	1.50	1.47	1.64	1.64
γ 138.0	1.53	1.51	1.68	1.68
γ 139.0	1.58	1.56	1.73	1.71
γ 140.0	1.61	1.59	1.78	1.75

---

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	1.65	1.64	1.83	1.80
γ 142.0	1.70	1.69	1.87	1.85
γ 143.0	1.75	1.73	1.92	1.89
γ 144.0	1.79	1.77	1.97	1.94
γ 145.0	1.82	1.81	2.00	1.98
γ 146.0	1.87	1.86	2.05	2.02
γ 147.0	1.91	1.90	2.09	2.05
γ 148.0	1.96	1.94	2.12	2.09
γ 149.0	2.01	1.97	2.17	2.13
γ 150.0	2.03	2.02	2.19	2.16
γ 151.0	2.07	2.04	2.23	2.19
γ 152.0	2.12	2.08	2.27	2.22
γ 153.0	2.15	2.11	2.29	2.26
γ 154.0	2.18	2.13	2.31	2.28
γ 155.0	2.21	2.17	2.33	2.30
γ 156.0	2.24	2.19	2.36	2.32
γ 157.0	2.27	2.22	2.38	2.34
γ 158.0	2.30	2.24	2.40	2.35
γ 159.0	2.32	2.25	2.40	2.37
γ 160.0	2.34	2.27	2.41	2.38
γ 161.0	2.35	2.28	2.41	2.38
γ 162.0	2.36	2.29	2.42	2.39
γ 163.0	2.38	2.31	2.42	2.40
γ 164.0	2.39	2.31	2.42	2.40
γ 165.0	2.39	2.32	2.43	2.40
γ 166.0	2.40	2.32	2.42	2.41
γ 167.0	2.40	2.32	2.42	2.40
γ 168.0	2.40	2.32	2.41	2.40
γ 169.0	2.40	2.33	2.40	2.40
γ 170.0	2.40	2.34	2.41	2.39
γ 171.0	2.40	2.34	2.40	2.39
γ 172.0	2.40	2.33	2.39	2.39
γ 173.0	2.39	2.34	2.40	2.38
γ 174.0	2.40	2.34	2.40	2.38
γ 175.0	2.39	2.34	2.41	2.39
γ 176.0	2.40	2.34	2.40	2.39
γ 177.0	2.40	2.35	2.40	2.40
γ 178.0	2.40	2.34	2.42	2.39
γ 179.0	2.40	2.36	2.42	2.39
γ 180.0	2.40	2.40	2.40	2.40