



Indoor Luminaire Photometric Data

Description Information

Luminary Name: DL43-05-XX-03 3000K RA90		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2020/06/24
Manufacture: Shenzhen Norming Lighting Co., Ltd		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.050m*0.050m*0.072m		Lum. Area (m2):0.006	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 124.540	Luminary Flux(lm): 124.544	Field Angle(10%Imax): 66.5(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 117.639lm 94.46%	
Rated Voltage(V):	Luminary EER(lm/W): 26.028	Up Lumens&Percent: 6.905lm 5.54%	
Tested Power(W): 4.785	Max. Candela(cd): 157.384	S/MH: C0_a180=0.837 C90_270=0.892	
Lamps' Inside: 1	Max Cand@Ang. (°): C=90.0 γ=15.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):240.0, 0.023, 0.866	Beam Angle(50%Imax): 51.2(°)	ErP ϕ use(90°): 115.105lm	
Lamp Size(W*L*H):0.050m*0.050m*0.072m	Left=-10.4°, Right=40.8°	IRF(%): 223.911	

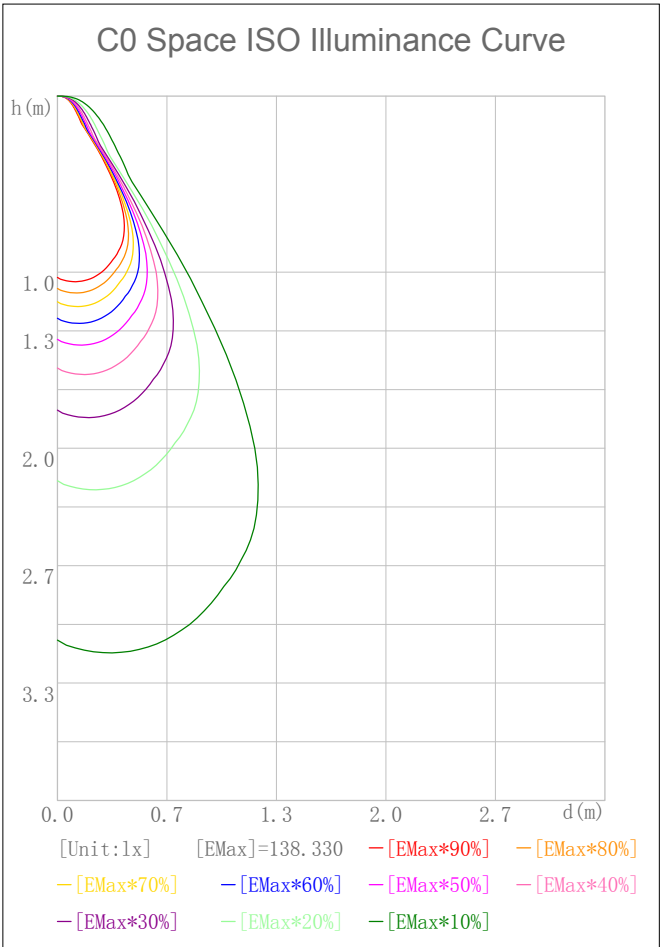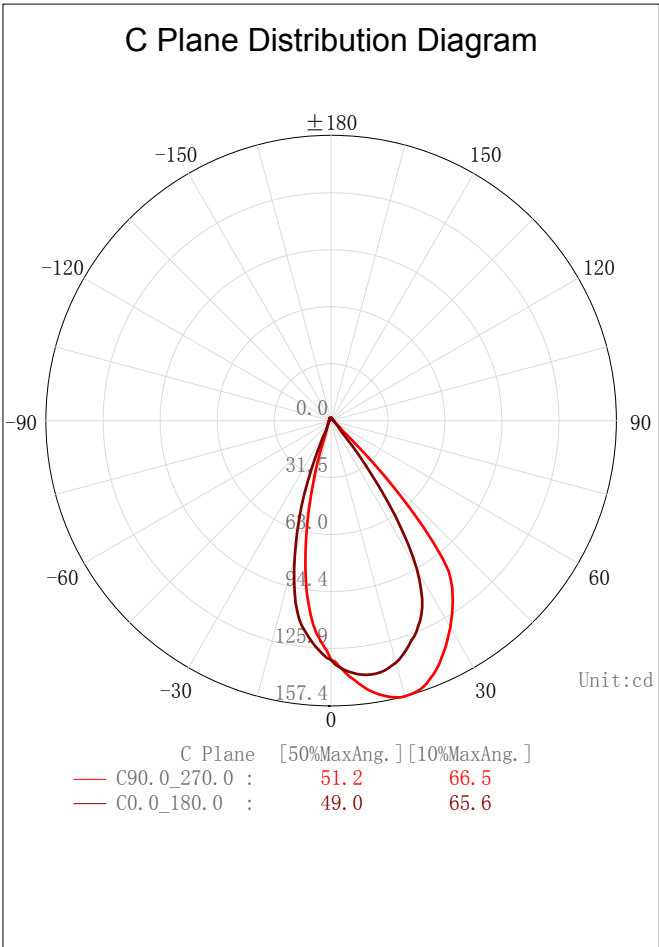

2D Plane Light Intensity Distribution Curve


Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24

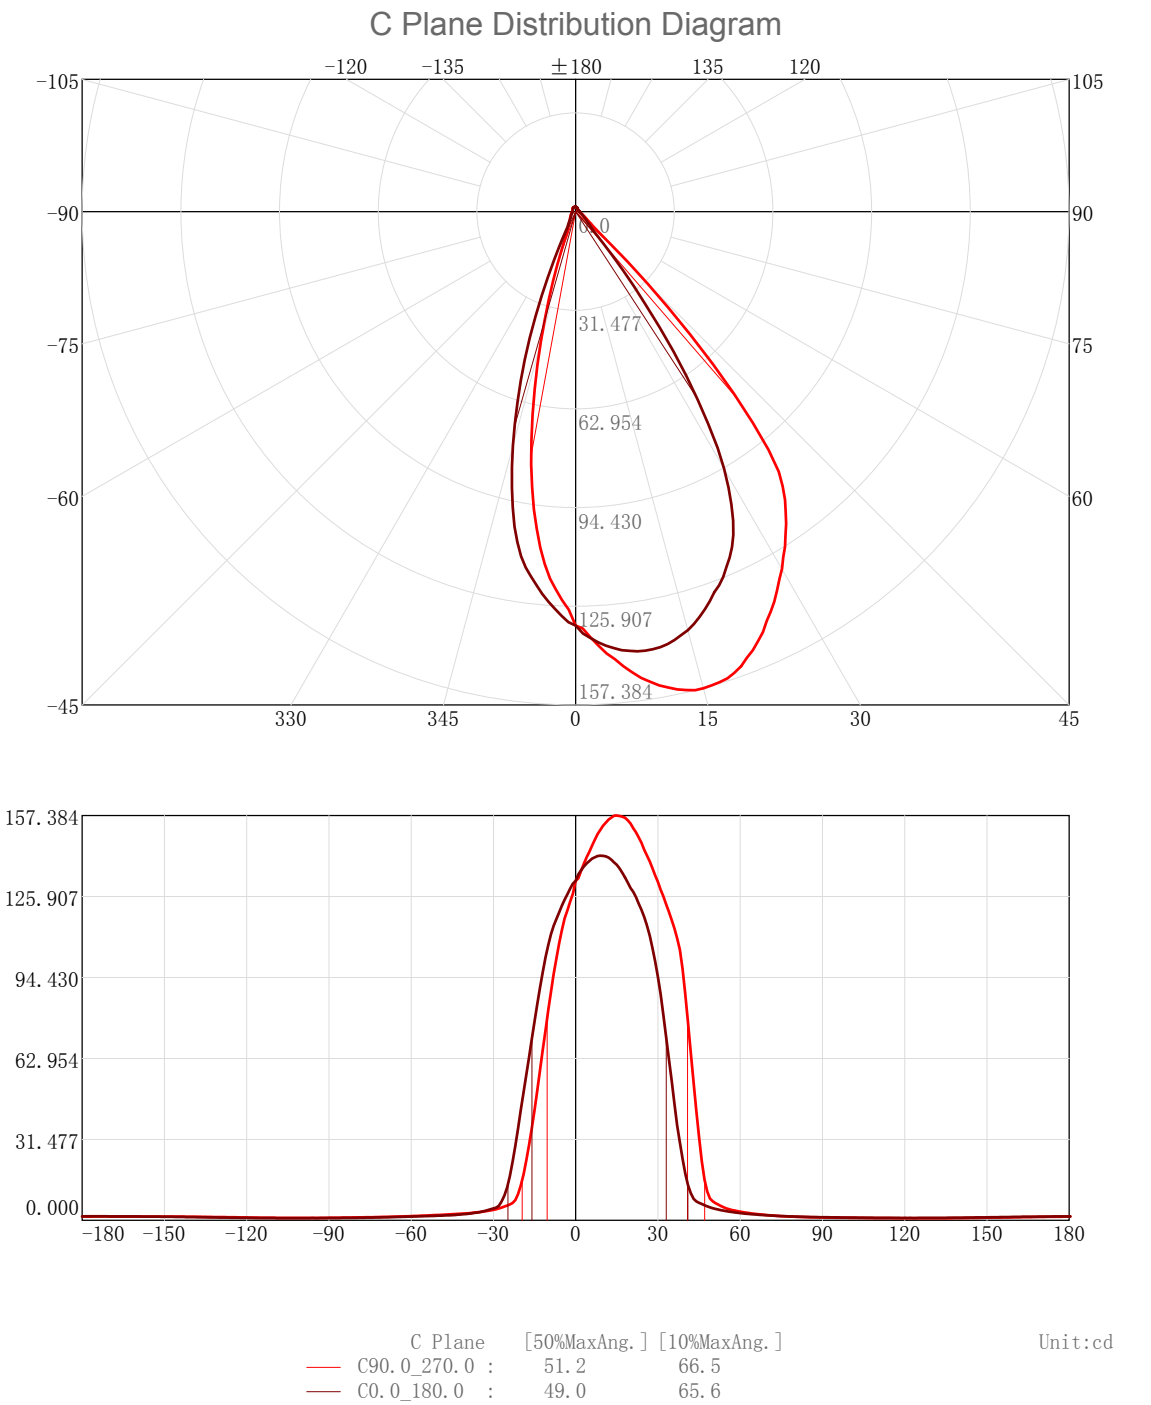

3D Light Intensity Distribution Modal

Lum. Name:DL43-05-XX-03 3000K RA90	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2020/06/24

3D Light Intensity Distribution Modal

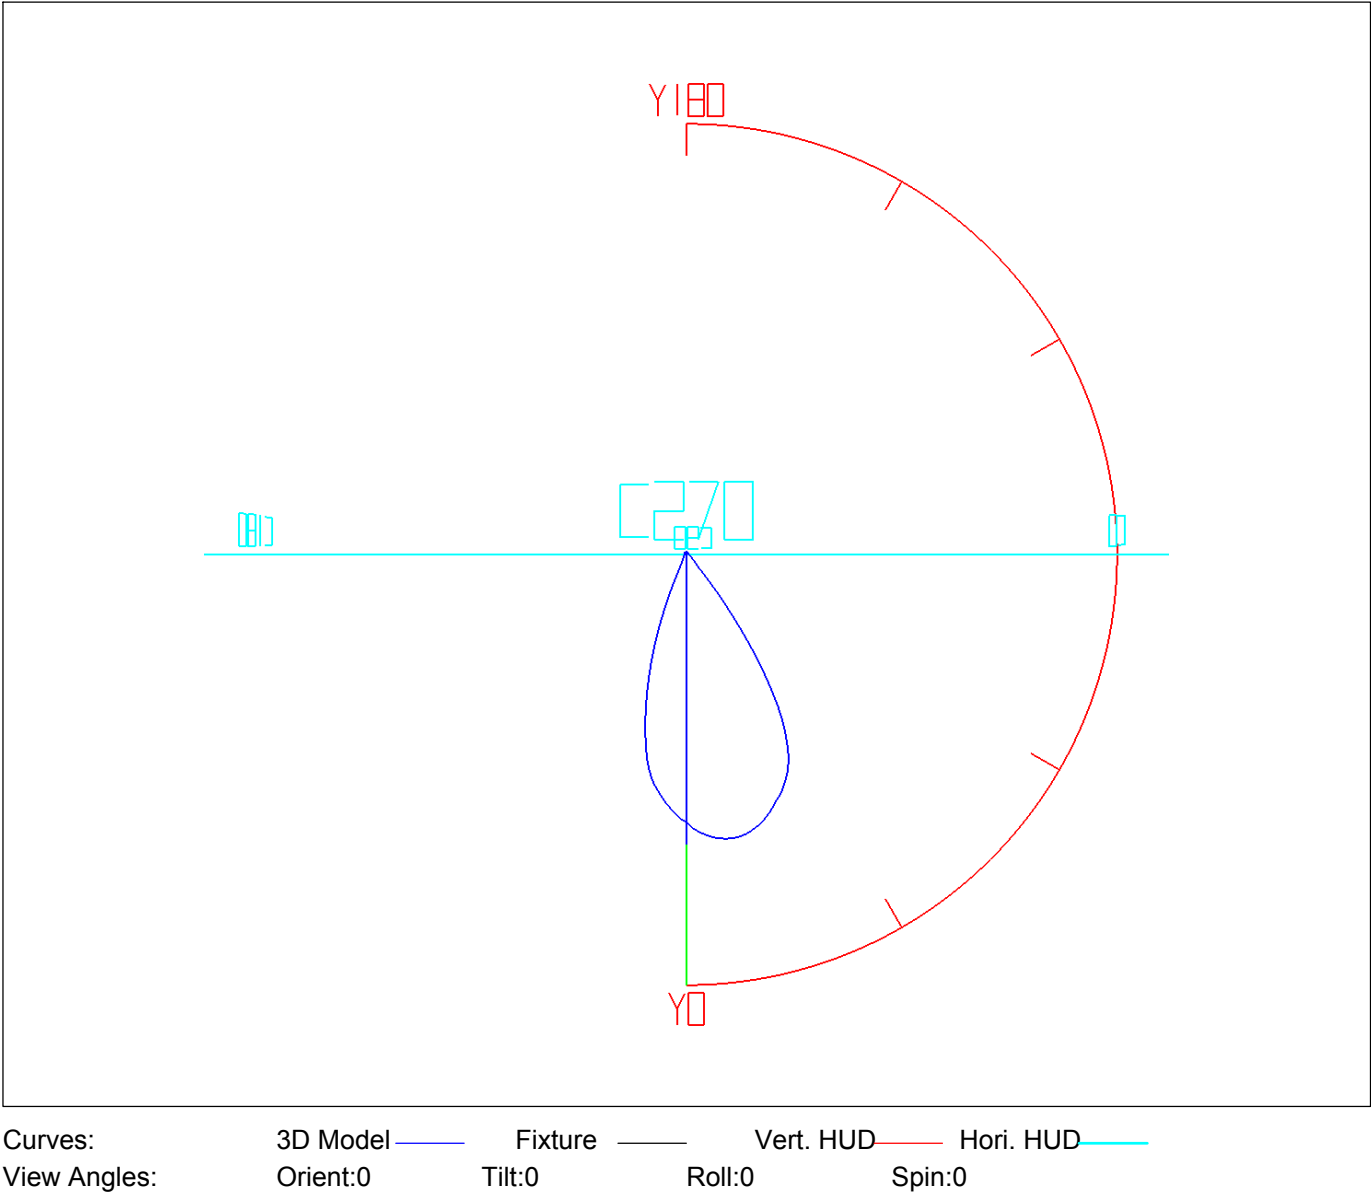

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.13	0.13	0.10	0.10	47.0-48.0	0.47	109.39	0.38	87.84
1.0-2.0	0.38	0.50	0.30	0.40	48.0-49.0	0.40	109.79	0.32	88.16
2.0-3.0	0.63	1.13	0.50	0.91	49.0-50.0	0.35	110.14	0.28	88.44
3.0-4.0	0.88	2.00	0.70	1.61	50.0-51.0	0.33	110.47	0.26	88.70
4.0-5.0	1.12	3.12	0.90	2.51	51.0-52.0	0.31	110.79	0.25	88.96
5.0-6.0	1.36	4.48	1.09	3.60	52.0-53.0	0.30	111.08	0.24	89.20
6.0-7.0	1.59	6.07	1.27	4.87	53.0-54.0	0.28	111.37	0.23	89.42
7.0-8.0	1.81	7.87	1.45	6.32	54.0-55.0	0.27	111.64	0.22	89.64
8.0-9.0	2.02	9.89	1.62	7.94	55.0-56.0	0.26	111.90	0.21	89.85
9.0-10.0	2.21	12.10	1.78	9.72	56.0-57.0	0.25	112.15	0.20	90.05
10.0-11.0	2.39	14.49	1.92	11.64	57.0-58.0	0.24	112.40	0.20	90.25
11.0-12.0	2.55	17.04	2.04	13.68	58.0-59.0	0.24	112.63	0.19	90.44
12.0-13.0	2.68	19.72	2.16	15.84	59.0-60.0	0.23	112.86	0.18	90.62
13.0-14.0	2.80	22.53	2.25	18.09	60.0-61.0	0.22	113.08	0.18	90.80
14.0-15.0	2.91	25.43	2.33	20.42	61.0-62.0	0.22	113.30	0.17	90.97
15.0-16.0	2.99	28.42	2.40	22.82	62.0-63.0	0.21	113.51	0.17	91.14
16.0-17.0	3.06	31.48	2.45	25.28	63.0-64.0	0.20	113.71	0.16	91.30
17.0-18.0	3.11	34.59	2.50	27.77	64.0-65.0	0.20	113.91	0.16	91.46
18.0-19.0	3.15	37.74	2.53	30.31	65.0-66.0	0.19	114.10	0.15	91.62
19.0-20.0	3.18	40.92	2.55	32.86	66.0-67.0	0.19	114.29	0.15	91.77
20.0-21.0	3.20	44.12	2.57	35.43	67.0-68.0	0.18	114.47	0.15	91.91
21.0-22.0	3.21	47.33	2.58	38.00	68.0-69.0	0.18	114.65	0.14	92.06
22.0-23.0	3.23	50.56	2.59	40.59	69.0-70.0	0.17	114.82	0.14	92.20
23.0-24.0	3.24	53.80	2.60	43.20	70.0-71.0	0.17	114.99	0.14	92.33
24.0-25.0	3.25	57.05	2.61	45.80	71.0-72.0	0.17	115.15	0.13	92.46
25.0-26.0	3.26	60.31	2.62	48.42	72.0-73.0	0.16	115.32	0.13	92.59
26.0-27.0	3.27	63.57	2.62	51.05	73.0-74.0	0.16	115.47	0.13	92.72
27.0-28.0	3.26	66.84	2.62	53.67	74.0-75.0	0.15	115.63	0.12	92.84
28.0-29.0	3.25	70.09	2.61	56.28	75.0-76.0	0.15	115.78	0.12	92.97
29.0-30.0	3.23	73.32	2.60	58.87	76.0-77.0	0.15	115.93	0.12	93.08
30.0-31.0	3.20	76.52	2.57	61.44	77.0-78.0	0.14	116.07	0.12	93.20
31.0-32.0	3.14	79.66	2.52	63.96	78.0-79.0	0.14	116.22	0.11	93.32
32.0-33.0	3.06	82.71	2.46	66.41	79.0-80.0	0.14	116.35	0.11	93.43
33.0-34.0	2.96	85.68	2.38	68.79	80.0-81.0	0.14	116.49	0.11	93.54
34.0-35.0	2.85	88.53	2.29	71.08	81.0-82.0	0.13	116.63	0.11	93.65
35.0-36.0	2.73	91.26	2.19	73.28	82.0-83.0	0.13	116.76	0.11	93.75
36.0-37.0	2.59	93.85	2.08	75.36	83.0-84.0	0.13	116.89	0.11	93.86
37.0-38.0	2.45	96.30	1.97	77.32	84.0-85.0	0.13	117.02	0.10	93.96
38.0-39.0	2.29	98.59	1.84	79.16	85.0-86.0	0.13	117.15	0.10	94.06
39.0-40.0	2.08	100.67	1.67	80.83	86.0-87.0	0.13	117.27	0.10	94.16
40.0-41.0	1.84	102.51	1.48	82.31	87.0-88.0	0.12	117.40	0.10	94.26
41.0-42.0	1.60	104.11	1.29	83.60	88.0-89.0	0.12	117.52	0.10	94.36
42.0-43.0	1.37	105.48	1.10	84.70	89.0-90.0	0.12	117.64	0.10	94.46
43.0-44.0	1.14	106.62	0.92	85.61	90.0-91.0	0.12	117.76	0.10	94.55
44.0-45.0	0.94	107.57	0.76	86.37	91.0-92.0	0.12	117.88	0.09	94.65
45.0-46.0	0.76	108.32	0.61	86.98	92.0-93.0	0.12	117.99	0.09	94.74
46.0-47.0	0.60	108.92	0.48	87.46	93.0-94.0	0.12	118.11	0.09	94.84

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.11	118.22	0.09	94.93	141.0-142.0	0.08	122.75	0.07	98.56
95.0-96.0	0.11	118.34	0.09	95.02	142.0-143.0	0.08	122.83	0.07	98.63
96.0-97.0	0.11	118.45	0.09	95.11	143.0-144.0	0.08	122.91	0.06	98.69
97.0-98.0	0.11	118.56	0.09	95.20	144.0-145.0	0.08	122.99	0.06	98.75
98.0-99.0	0.11	118.67	0.09	95.28	145.0-146.0	0.08	123.07	0.06	98.82
99.0-100.0	0.11	118.78	0.09	95.37	146.0-147.0	0.08	123.14	0.06	98.88
100.0-101.0	0.11	118.88	0.09	95.46	147.0-148.0	0.08	123.22	0.06	98.94
101.0-102.0	0.11	118.99	0.09	95.54	148.0-149.0	0.07	123.29	0.06	99.00
102.0-103.0	0.11	119.10	0.08	95.63	149.0-150.0	0.07	123.36	0.06	99.06
103.0-104.0	0.10	119.20	0.08	95.71	150.0-151.0	0.07	123.43	0.06	99.11
104.0-105.0	0.10	119.31	0.08	95.80	151.0-152.0	0.07	123.50	0.06	99.17
105.0-106.0	0.10	119.41	0.08	95.88	152.0-153.0	0.07	123.57	0.05	99.22
106.0-107.0	0.10	119.51	0.08	95.96	153.0-154.0	0.07	123.64	0.05	99.27
107.0-108.0	0.10	119.61	0.08	96.04	154.0-155.0	0.06	123.70	0.05	99.33
108.0-109.0	0.10	119.71	0.08	96.13	155.0-156.0	0.06	123.76	0.05	99.37
109.0-110.0	0.10	119.81	0.08	96.21	156.0-157.0	0.06	123.82	0.05	99.42
110.0-111.0	0.10	119.91	0.08	96.29	157.0-158.0	0.06	123.88	0.05	99.47
111.0-112.0	0.10	120.01	0.08	96.37	158.0-159.0	0.06	123.93	0.04	99.51
112.0-113.0	0.10	120.11	0.08	96.44	159.0-160.0	0.05	123.99	0.04	99.56
113.0-114.0	0.10	120.21	0.08	96.52	160.0-161.0	0.05	124.04	0.04	99.60
114.0-115.0	0.10	120.31	0.08	96.60	161.0-162.0	0.05	124.09	0.04	99.64
115.0-116.0	0.10	120.40	0.08	96.68	162.0-163.0	0.05	124.14	0.04	99.68
116.0-117.0	0.10	120.50	0.08	96.76	163.0-164.0	0.04	124.18	0.04	99.71
117.0-118.0	0.10	120.60	0.08	96.83	164.0-165.0	0.04	124.22	0.03	99.75
118.0-119.0	0.10	120.69	0.08	96.91	165.0-166.0	0.04	124.26	0.03	99.78
119.0-120.0	0.09	120.79	0.08	96.99	166.0-167.0	0.04	124.30	0.03	99.81
120.0-121.0	0.09	120.88	0.08	97.06	167.0-168.0	0.03	124.34	0.03	99.84
121.0-122.0	0.09	120.98	0.08	97.14	168.0-169.0	0.03	124.37	0.03	99.86
122.0-123.0	0.09	121.07	0.08	97.21	169.0-170.0	0.03	124.40	0.02	99.89
123.0-124.0	0.09	121.16	0.07	97.29	170.0-171.0	0.03	124.43	0.02	99.91
124.0-125.0	0.09	121.25	0.07	97.36	171.0-172.0	0.02	124.45	0.02	99.93
125.0-126.0	0.09	121.35	0.07	97.44	172.0-173.0	0.02	124.47	0.02	99.95
126.0-127.0	0.09	121.44	0.07	97.51	173.0-174.0	0.02	124.49	0.02	99.96
127.0-128.0	0.09	121.53	0.07	97.58	174.0-175.0	0.02	124.51	0.01	99.97
128.0-129.0	0.09	121.62	0.07	97.66	175.0-176.0	0.01	124.52	0.01	99.98
129.0-130.0	0.09	121.71	0.07	97.73	176.0-177.0	0.01	124.53	0.01	99.99
130.0-131.0	0.09	121.80	0.07	97.80	177.0-178.0	0.01	124.54	0.01	100.00
131.0-132.0	0.09	121.89	0.07	97.87	178.0-179.0	0.00	124.54	0.00	100.00
132.0-133.0	0.09	121.98	0.07	97.94	179.0-180.0	0.00	124.54	0.00	100.00
133.0-134.0	0.09	122.07	0.07	98.01					
134.0-135.0	0.09	122.15	0.07	98.08					
135.0-136.0	0.09	122.24	0.07	98.15					
136.0-137.0	0.09	122.33	0.07	98.22					
137.0-138.0	0.09	122.41	0.07	98.29					
138.0-139.0	0.08	122.50	0.07	98.36					
139.0-140.0	0.08	122.58	0.07	98.43					
140.0-141.0	0.08	122.67	0.07	98.50					

Rectangle ISO Lighting Intensity Diagram


Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24

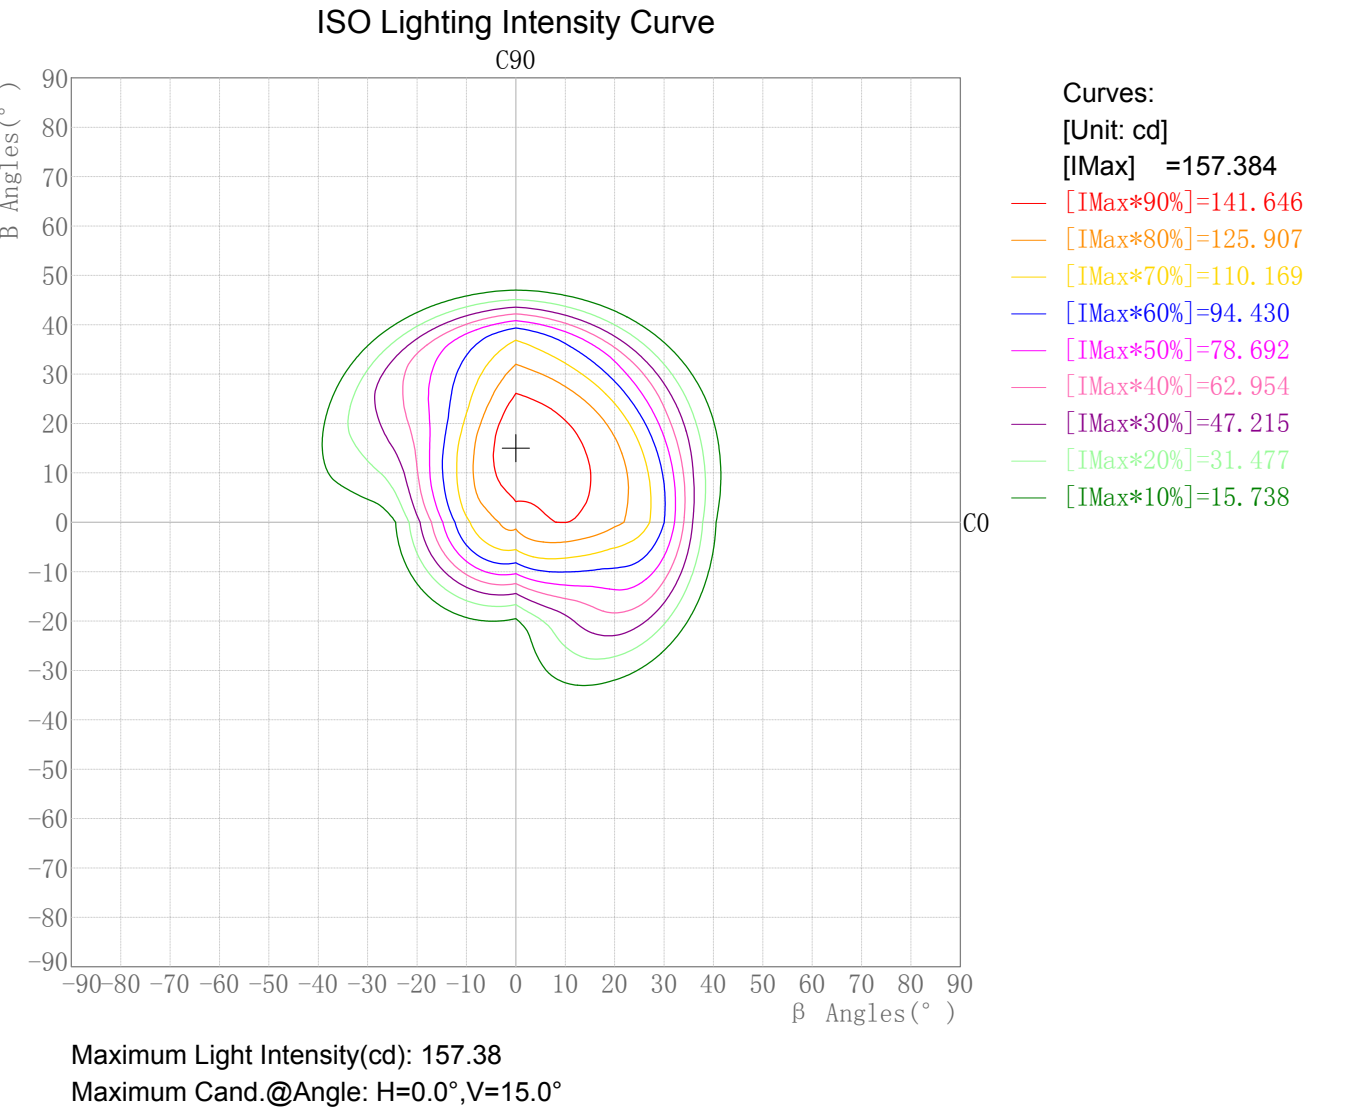

Plane ISO-Illuminance Diagram

Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24

Plane ISO-Illuminance Curve

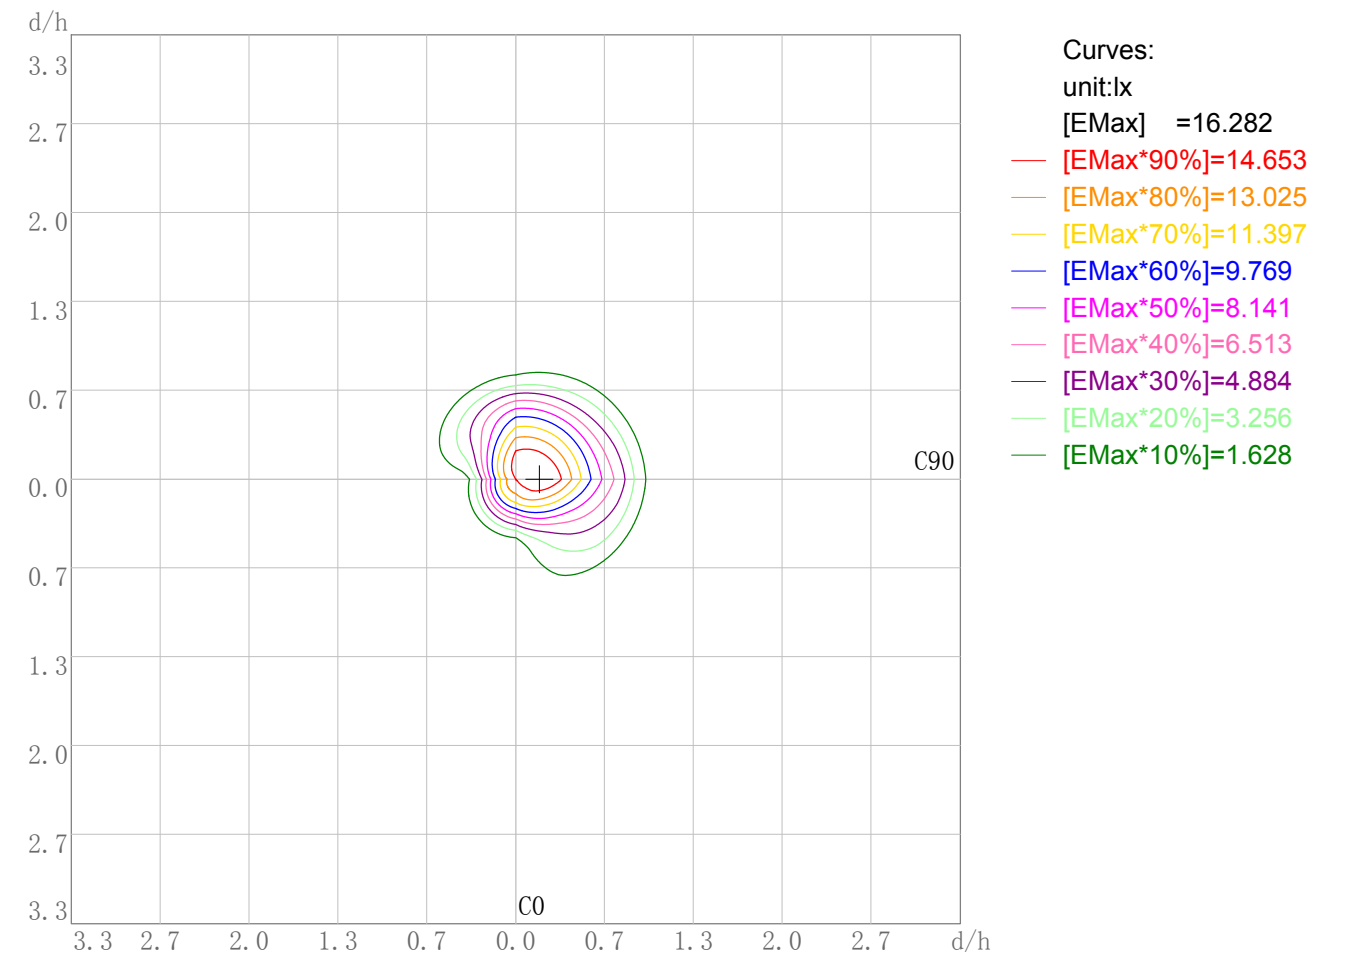


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 16.28
Working Plane Maximum Illuminance Position(d/h):H0.2 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24


3D Plane Illuminance Modal

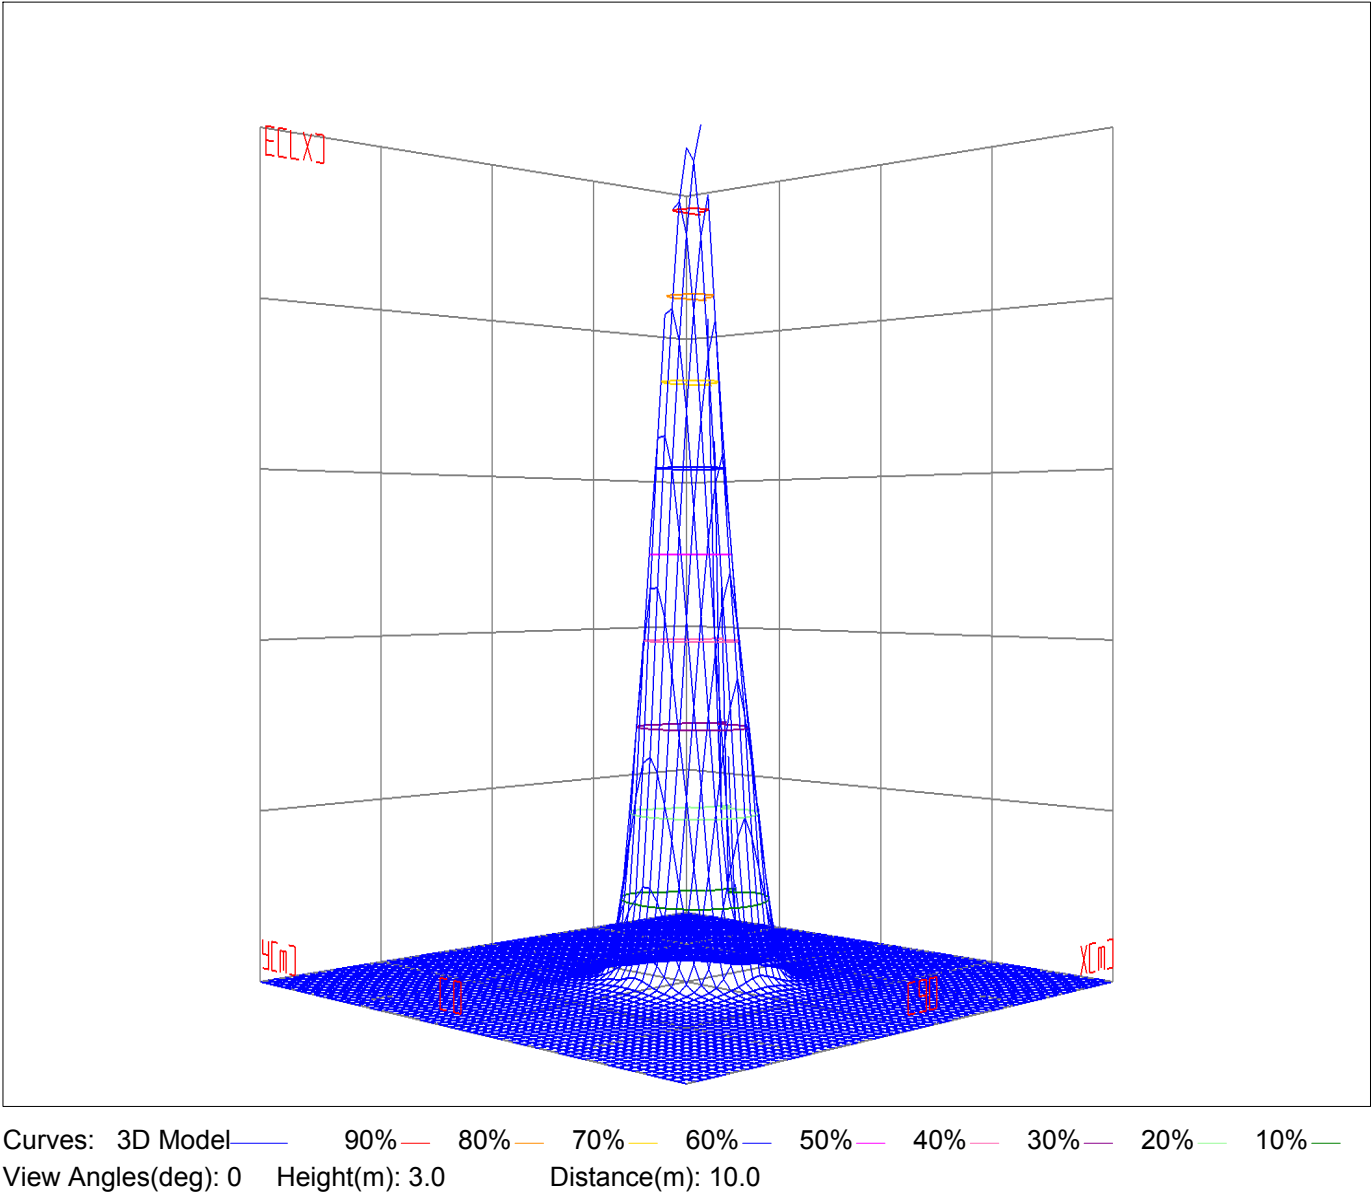

Space ISO Illuminance Diagram

Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24


Space ISO Illuminance Curve

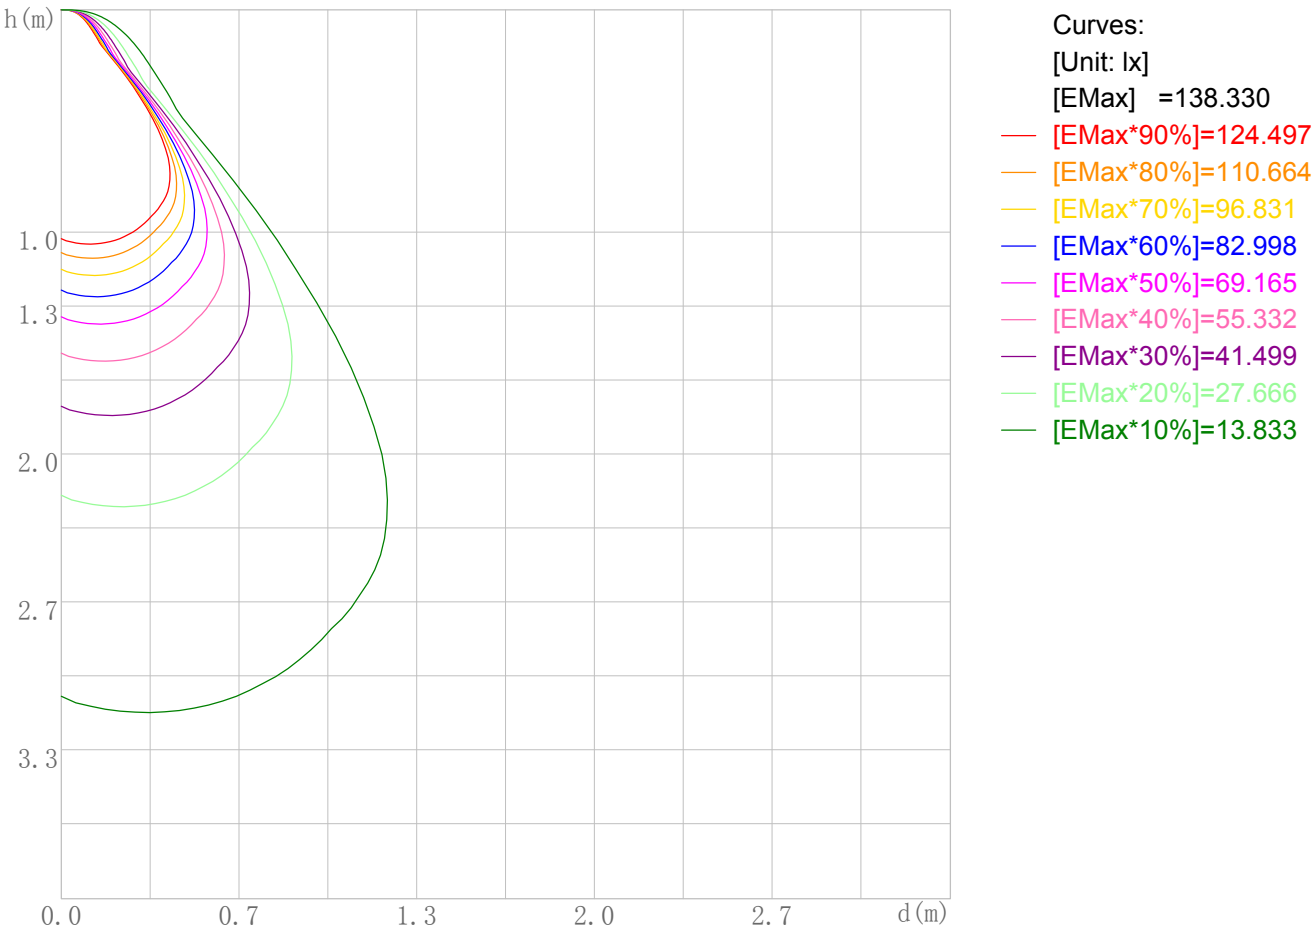

Space Plane Maximum Illuminance and @Angle:138.33lx,6.0deg
Plane Maximum Lighting Intensity and @Angle:141.772cd,0deg

Illuminance-Distance Diagram

Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24

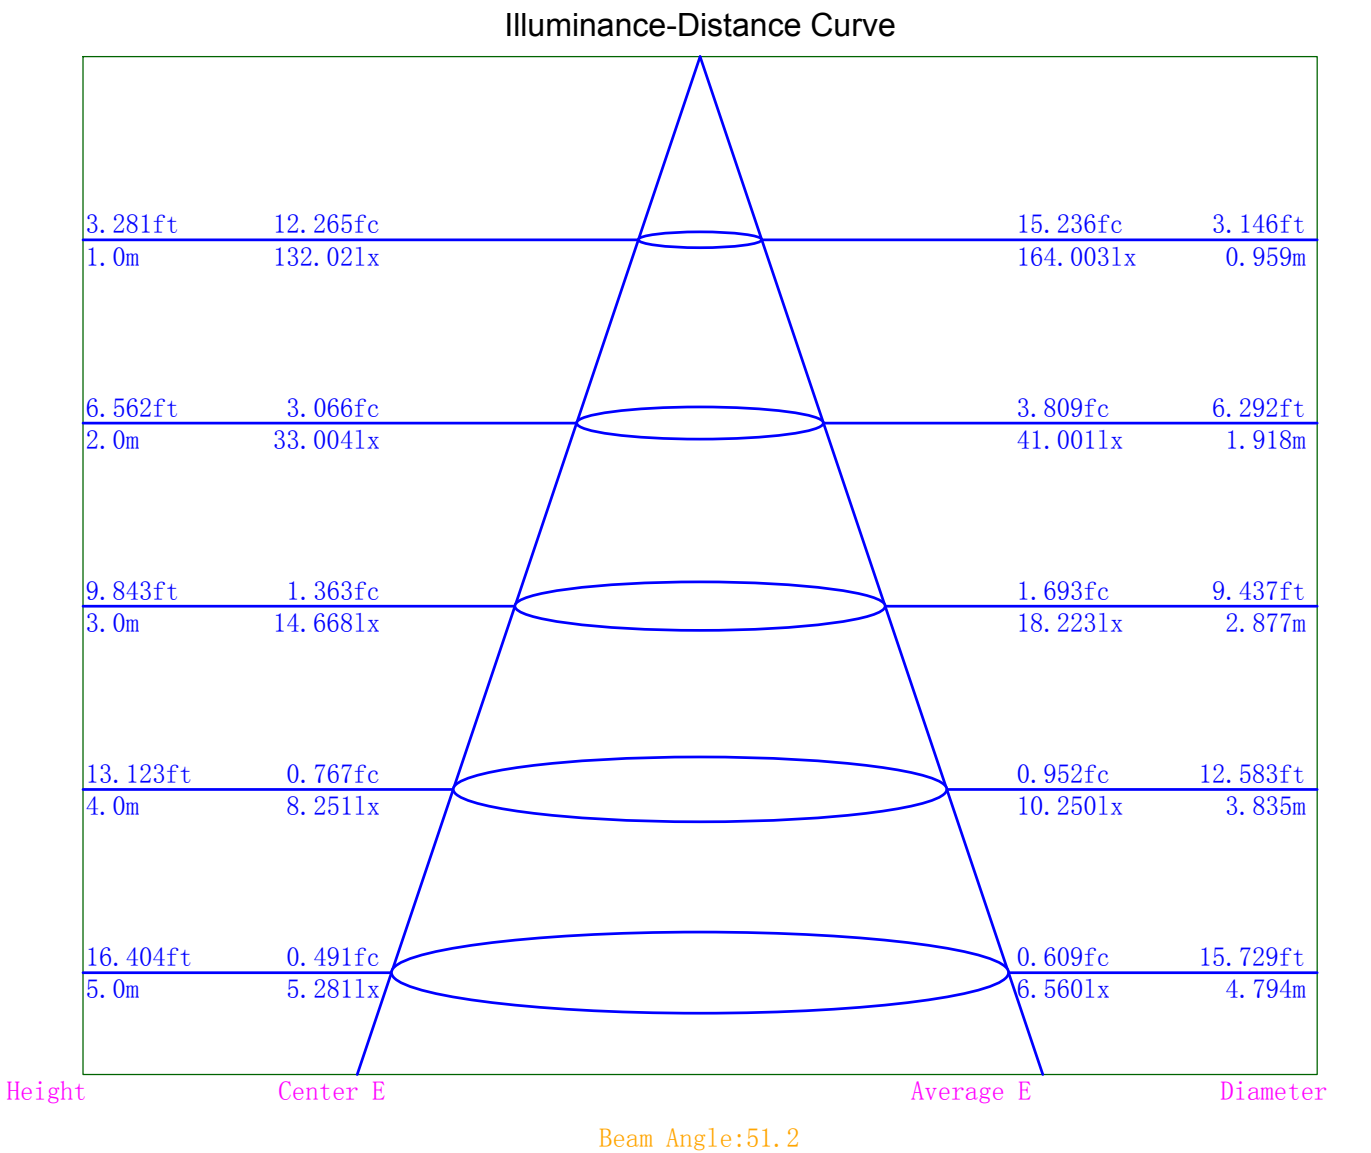

Indoor Luminance Limiting Curves

Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	1590	1212	1029	943	914	949	1081	1415	2549
C90	7506	1884	1336	1117	1017	996	1069	1342	2381

Luminance Limiting Curve

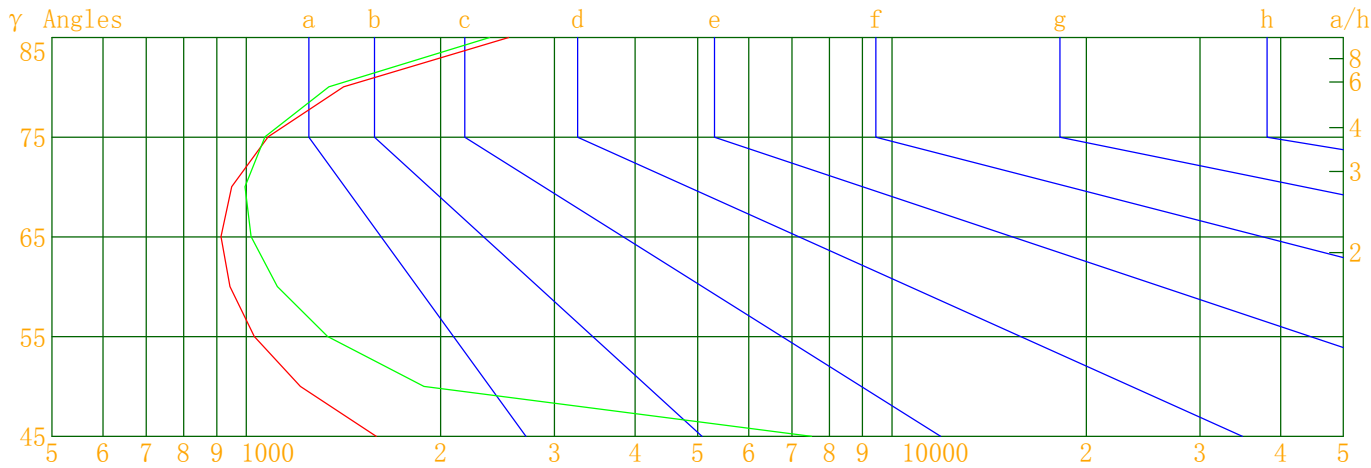


Luminous Size: Length(m)=0.050 Width(m)=0.050 Height(m)=0.072 Area(m^2)=0.006100

Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24

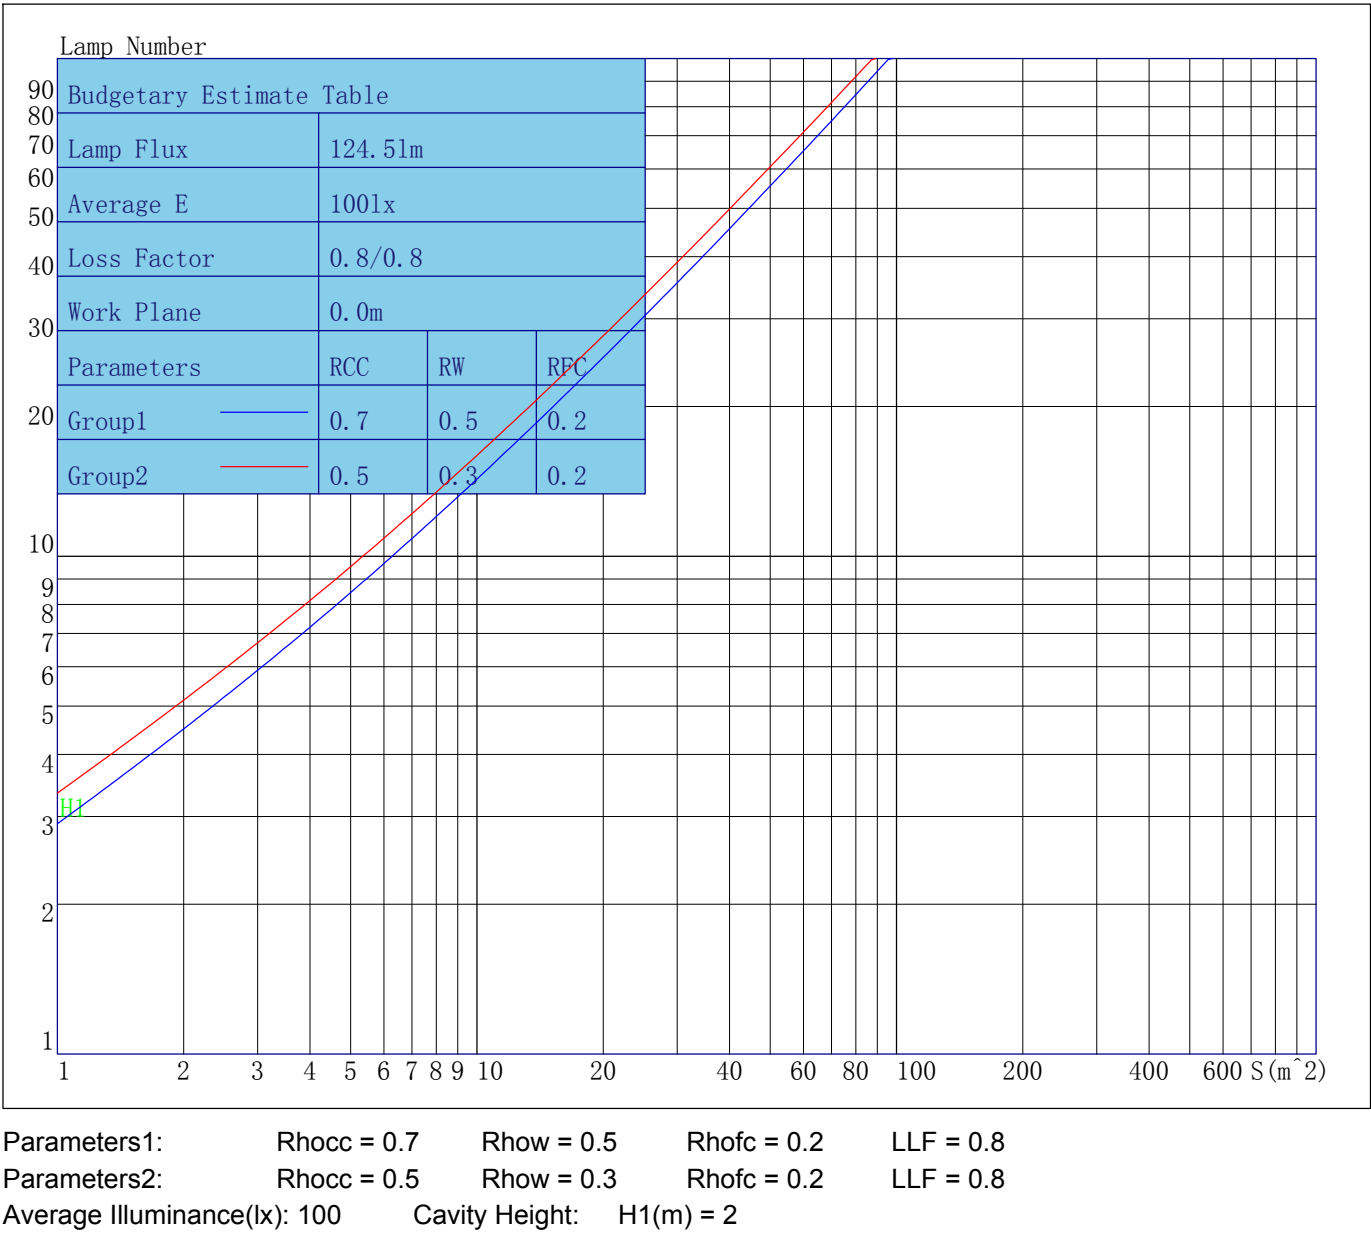

Indoor Coefficient of Utilization Table

Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	118	118	118	118	114	114	114	114	108	108	108	102	102	102	97	97	97	94
1	111	108	105	102	108	105	103	100	100	98	96	95	94	92	91	90	89	86
2	105	99	95	91	102	97	93	89	93	89	87	89	86	84	85	83	81	79
3	99	92	86	82	96	90	85	81	86	82	79	83	80	77	80	77	75	73
4	93	85	79	74	91	83	78	73	80	76	72	78	74	71	75	72	69	67
5	88	79	73	68	86	78	72	67	75	70	66	73	69	65	71	67	64	62
6	83	74	67	63	81	73	66	62	70	65	61	68	64	60	67	63	60	58
7	79	69	62	58	77	68	62	58	66	61	57	64	60	56	63	59	55	54
8	75	65	58	54	73	64	58	54	62	57	53	61	56	52	59	55	52	50
9	71	61	54	50	70	60	54	50	59	53	49	57	52	49	56	52	49	47
10	68	57	51	47	66	57	51	47	55	50	46	54	49	46	53	49	46	44

Unified Glare Rating Table

Lum. Name: DL43-05-XX-03 3000K RA90	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/24

Unified Glare Rating Table

Ceiling	RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall	RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor	RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	13.6	14.5	14.0	14.9	15.3	17.6	18.5	18.1	18.9	19.4
	Y=3H	13.7	14.4	14.2	14.9	15.4	17.5	18.3	18.0	18.7	19.3
	Y=4H	13.8	14.5	14.3	15.0	15.5	17.5	18.2	18.0	18.7	19.2
	Y=6H	14.1	14.7	14.6	15.2	15.7	17.5	18.2	18.0	18.6	19.2
	Y=8H	14.2	14.8	14.8	15.4	15.9	17.5	18.1	18.1	18.6	19.2
	Y=12H	14.5	15.1	15.1	15.6	16.2	17.6	18.2	18.1	18.7	19.2
X=4H	Y=2H	13.4	14.1	13.9	14.6	15.1	17.4	18.1	17.9	18.5	19.1
	Y=3H	13.6	14.2	14.2	14.7	15.3	17.3	17.9	17.8	18.4	18.9
	Y=4H	13.9	14.4	14.4	14.9	15.5	17.3	17.8	17.9	18.3	18.9
	Y=6H	14.3	14.7	14.9	15.3	15.9	17.4	17.8	18.0	18.4	19.0
	Y=8H	14.7	15.0	15.2	15.6	16.2	17.5	17.9	18.1	18.4	19.0
	Y=12H	15.1	15.4	15.7	16.0	16.6	17.7	18.0	18.2	18.5	19.2
X=8H	Y=4H	13.9	14.3	14.5	14.8	15.4	17.2	17.6	17.8	18.1	18.8
	Y=6H	14.5	14.8	15.2	15.4	16.0	17.4	17.7	18.0	18.3	18.9
	Y=8H	15.0	15.3	15.7	15.9	16.5	17.6	17.8	18.2	18.4	19.0
	Y=12H	15.8	15.9	16.4	16.5	17.2	17.9	18.0	18.5	18.6	19.3
X=12H	Y=4H	13.9	14.2	14.5	14.8	15.4	17.2	17.5	17.8	18.1	18.7
	Y=6H	14.6	14.8	15.2	15.4	16.1	17.4	17.6	18.0	18.2	18.9
	Y=8H	15.2	15.4	15.8	16.0	16.7	17.6	17.8	18.2	18.4	19.1
Variations with the objerver position at spacings											
S=1.0H		0.0/-0.0					0.1/-0.1				
S=1.5H		0.1/-0.1					0.2/-0.2				
S=2.0H		0.1/-0.1					0.2/-0.2				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		1.8					0.7				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	132.02	132.02	132.02	132.02
γ 1.0	134.57	132.99	130.96	127.00
γ 2.0	136.10	135.90	128.99	123.98
γ 3.0	137.56	138.59	126.81	120.63
γ 4.0	138.78	141.24	124.69	117.36
γ 5.0	139.73	143.30	122.36	112.83
γ 6.0	140.63	145.75	119.77	107.73
γ 7.0	141.15	148.01	117.17	101.90
γ 8.0	141.62	150.18	114.57	95.90
γ 9.0	141.77	151.77	111.29	88.92
γ 10.0	141.74	153.42	107.03	81.80
γ 11.0	141.51	154.60	102.32	73.95
γ 12.0	141.01	155.81	96.38	66.14
γ 13.0	140.19	156.59	90.40	58.20
γ 14.0	139.17	157.32	83.97	50.41
γ 15.0	138.21	157.38	77.25	42.82
γ 16.0	136.82	157.21	70.45	35.83
γ 17.0	135.16	156.94	63.47	29.36
γ 18.0	133.38	156.53	56.71	23.43
γ 19.0	131.40	155.57	49.92	18.00
γ 20.0	129.21	154.26	42.87	13.56
γ 21.0	127.69	152.41	35.63	10.19
γ 22.0	125.64	150.88	28.90	7.88
γ 23.0	123.10	148.88	22.77	6.79
γ 24.0	120.77	146.79	17.22	6.24
γ 25.0	118.00	144.15	12.79	5.79
γ 26.0	114.70	141.90	9.68	5.41
γ 27.0	110.64	139.54	7.34	5.00
γ 28.0	105.82	136.84	5.69	4.64
γ 29.0	100.60	134.04	5.00	4.34
γ 30.0	94.64	131.57	4.65	4.11
γ 31.0	87.91	128.55	4.33	3.91
γ 32.0	79.80	125.98	4.02	3.73
γ 33.0	71.43	122.92	3.71	3.55
γ 34.0	63.02	120.05	3.46	3.40
γ 35.0	54.31	116.79	3.24	3.27
γ 36.0	45.42	113.56	3.05	3.15
γ 37.0	36.93	109.65	2.90	3.03
γ 38.0	30.37	105.25	2.75	2.92
γ 39.0	23.95	97.73	2.61	2.83
γ 40.0	18.15	87.82	2.50	2.75
γ 41.0	13.72	76.85	2.40	2.66
γ 42.0	10.63	65.39	2.31	2.59
γ 43.0	8.41	53.51	2.22	2.52
γ 44.0	7.40	42.49	2.14	2.46
γ 45.0	6.86	32.37	2.08	2.40
γ 46.0	6.39	23.03	2.02	2.35

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	5.93	15.86	1.97	2.30
γ 48.0	5.49	11.29	1.92	2.24
γ 49.0	5.09	8.50	1.88	2.19
γ 50.0	4.75	7.39	1.84	2.14
γ 51.0	4.47	6.70	1.81	2.09
γ 52.0	4.22	6.14	1.76	2.04
γ 53.0	3.99	5.59	1.74	1.99
γ 54.0	3.80	5.10	1.70	1.94
γ 55.0	3.60	4.68	1.67	1.89
γ 56.0	3.43	4.36	1.64	1.84
γ 57.0	3.28	4.06	1.61	1.80
γ 58.0	3.13	3.83	1.58	1.75
γ 59.0	3.00	3.60	1.54	1.71
γ 60.0	2.88	3.41	1.52	1.68
γ 61.0	2.76	3.23	1.48	1.65
γ 62.0	2.64	3.07	1.45	1.60
γ 63.0	2.55	2.91	1.42	1.57
γ 64.0	2.44	2.76	1.38	1.54
γ 65.0	2.36	2.62	1.36	1.50
γ 66.0	2.27	2.50	1.33	1.48
γ 67.0	2.19	2.38	1.29	1.44
γ 68.0	2.12	2.28	1.27	1.41
γ 69.0	2.05	2.17	1.25	1.39
γ 70.0	1.98	2.08	1.22	1.36
γ 71.0	1.92	1.99	1.20	1.34
γ 72.0	1.86	1.91	1.18	1.32
γ 73.0	1.80	1.83	1.16	1.30
γ 74.0	1.76	1.76	1.14	1.27
γ 75.0	1.71	1.69	1.12	1.26
γ 76.0	1.65	1.63	1.10	1.24
γ 77.0	1.62	1.57	1.08	1.22
γ 78.0	1.58	1.52	1.06	1.19
γ 79.0	1.55	1.48	1.05	1.17
γ 80.0	1.50	1.42	1.02	1.16
γ 81.0	1.47	1.39	1.01	1.15
γ 82.0	1.44	1.36	1.00	1.14
γ 83.0	1.41	1.32	1.00	1.12
γ 84.0	1.38	1.29	0.99	1.11
γ 85.0	1.36	1.27	0.98	1.10
γ 86.0	1.33	1.24	0.96	1.09
γ 87.0	1.31	1.22	0.95	1.07
γ 88.0	1.29	1.20	0.94	1.06
γ 89.0	1.27	1.19	0.93	1.04
γ 90.0	1.25	1.16	0.93	1.03
γ 91.0	1.23	1.15	0.93	1.02
γ 92.0	1.22	1.13	0.92	1.01
γ 93.0	1.21	1.11	0.91	1.01

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	1.19	1.10	0.90	1.00
γ 95.0	1.17	1.09	0.90	0.99
γ 96.0	1.16	1.08	0.91	1.00
γ 97.0	1.15	1.06	0.89	0.99
γ 98.0	1.13	1.04	0.89	0.99
γ 99.0	1.12	1.04	0.89	0.99
γ 100.0	1.11	1.02	0.89	0.99
γ 101.0	1.10	1.02	0.89	0.99
γ 102.0	1.09	1.00	0.88	0.99
γ 103.0	1.08	0.99	0.88	0.99
γ 104.0	1.06	0.98	0.88	1.00
γ 105.0	1.05	0.98	0.88	0.99
γ 106.0	1.04	0.96	0.89	1.01
γ 107.0	1.03	0.96	0.88	1.01
γ 108.0	1.03	0.95	0.89	1.02
γ 109.0	1.02	0.95	0.90	1.02
γ 110.0	1.01	0.94	0.91	1.04
γ 111.0	1.01	0.93	0.91	1.03
γ 112.0	1.00	0.92	0.92	1.05
γ 113.0	1.00	0.91	0.93	1.06
γ 114.0	0.99	0.91	0.93	1.07
γ 115.0	0.98	0.91	0.94	1.09
γ 116.0	0.97	0.90	0.96	1.10
γ 117.0	0.97	0.89	0.96	1.11
γ 118.0	0.98	0.89	0.98	1.12
γ 119.0	0.96	0.88	0.97	1.13
γ 120.0	0.96	0.87	0.99	1.16
γ 121.0	0.96	0.87	1.00	1.17
γ 122.0	0.96	0.87	1.02	1.18
γ 123.0	0.96	0.87	1.03	1.20
γ 124.0	0.96	0.86	1.05	1.22
γ 125.0	0.97	0.87	1.07	1.23
γ 126.0	0.97	0.86	1.08	1.25
γ 127.0	0.97	0.86	1.09	1.26
γ 128.0	0.97	0.86	1.11	1.28
γ 129.0	0.98	0.86	1.12	1.28
γ 130.0	0.99	0.87	1.13	1.30
γ 131.0	0.99	0.86	1.16	1.32
γ 132.0	1.00	0.87	1.17	1.32
γ 133.0	1.00	0.87	1.18	1.35
γ 134.0	1.01	0.88	1.21	1.36
γ 135.0	1.02	0.89	1.22	1.38
γ 136.0	1.04	0.89	1.25	1.39
γ 137.0	1.04	0.90	1.25	1.40
γ 138.0	1.05	0.91	1.27	1.42
γ 139.0	1.06	0.91	1.29	1.43
γ 140.0	1.07	0.92	1.30	1.44

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	1.08	0.94	1.32	1.44
γ 142.0	1.10	0.95	1.34	1.46
γ 143.0	1.12	0.96	1.35	1.47
γ 144.0	1.13	0.98	1.37	1.47
γ 145.0	1.14	0.99	1.38	1.48
γ 146.0	1.16	1.00	1.39	1.48
γ 147.0	1.17	1.01	1.41	1.49
γ 148.0	1.18	1.03	1.41	1.49
γ 149.0	1.19	1.04	1.43	1.49
γ 150.0	1.21	1.06	1.45	1.49
γ 151.0	1.23	1.08	1.46	1.50
γ 152.0	1.25	1.09	1.47	1.49
γ 153.0	1.26	1.11	1.47	1.49
γ 154.0	1.27	1.12	1.48	1.50
γ 155.0	1.28	1.14	1.49	1.50
γ 156.0	1.30	1.15	1.50	1.51
γ 157.0	1.32	1.17	1.50	1.50
γ 158.0	1.33	1.19	1.52	1.51
γ 159.0	1.35	1.21	1.53	1.51
γ 160.0	1.36	1.23	1.53	1.51
γ 161.0	1.38	1.25	1.54	1.51
γ 162.0	1.39	1.26	1.55	1.51
γ 163.0	1.41	1.28	1.55	1.52
γ 164.0	1.42	1.30	1.56	1.51
γ 165.0	1.43	1.31	1.56	1.52
γ 166.0	1.44	1.33	1.56	1.51
γ 167.0	1.45	1.35	1.57	1.52
γ 168.0	1.46	1.35	1.57	1.52
γ 169.0	1.47	1.37	1.58	1.52
γ 170.0	1.49	1.38	1.58	1.52
γ 171.0	1.49	1.39	1.60	1.53
γ 172.0	1.50	1.41	1.59	1.53
γ 173.0	1.52	1.41	1.60	1.53
γ 174.0	1.53	1.42	1.59	1.53
γ 175.0	1.53	1.44	1.60	1.53
γ 176.0	1.54	1.45	1.60	1.53
γ 177.0	1.55	1.46	1.60	1.52
γ 178.0	1.56	1.47	1.60	1.52
γ 179.0	1.56	1.48	1.59	1.51
γ 180.0	1.55	1.55	1.55	1.55