


Black
White

FEATURES

- Compatible with leading and trailing edge phase cut dimmers.
- 3-year guarantee.

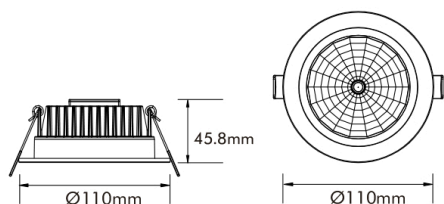

Cut-out: Ø90mm-100mm

Technical Data

| | |
|------------------------|---|
| Input Voltage/Hz | AC200-240V 50/60Hz |
| Output Voltage/Current | DC36V/230mA |
| Power | 10W |
| Rated Input Current | 0.05A |
| PF value | >0.9 |
| Ingress Protection | IP54 |
| Operating Temperature | -10—40°C |
| Dimmability | Triac dimmable with DIMMATE driver |

Optical Data

| | |
|--------------------------------|-------------------|
| LED Brand | Bridgelux COB LED |
| CRI | Ra > 80 |
| Colour temperature | 3000K/4000K/5000K |
| System luminous efficacy up to | 98lm/W |

Packaging

| | |
|---------------------|------------------------------|
| Box Dimensions | L115 x W115 x H95mm |
| Box Net Weight | 0.291Kg |
| Box Gross Weight | 0.341Kg |
| Carton Dimensions | L480 x W365 x H310 mm/36 PCS |
| Carton Net Weight | 10.48Kg |
| Carton Gross Weight | 13.08Kg |



RoHS CE



| Model | CCT | | Beam Angle | Lumen | Efficacy |
|---------------|-------|------------|------------|-------|----------|
| DL44-10-XX-11 | 3000K | CRI 80+ | 100° | 922lm | 90lm/W |
| DL44-10-XX-11 | 4000K | | 100° | 974lm | 96lm/W |
| DL44-10-XX-11 | 5000K | | 100° | 961lm | 98lm/W |

ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS