



Indoor Luminaire Photometric Data

Description Information

Luminary Name: DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Date: 2022/08/11
Manufacture: Shenzhen Norming Lighting	Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department	Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.055m*0.055m*0.000m	Lum. Area (m2):0.003	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=5.0	Temp. (°C): 25
		Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 1379.450	Luminary Flux(lm): 1379.449	Field Angle(10%Imax): 54.8(°)
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 1359.157lm 98.53%
Rated Voltage(V):	Luminary EER(lm/W): 98.042	Up Lumens&Percent: 20.292lm 1.47%
Tested Power(W): 14.070	Max. Candela(cd): 4204.349	S/MH: C0_a180=0.476 C90_270=0.473
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=0.0	CIE Type: Semi-Direct
Tested Electrics (V, A, pf):239.9, 0.060, 0.971	Beam Angle(50%Imax): 28.4(°)	ErP Φ use(90°): 1291.563lm
Lamp Size (W*L*H):0.055m*0.055m*0.000m	Left=-15.0°, Right=13.4°	IRF(%): 683.691

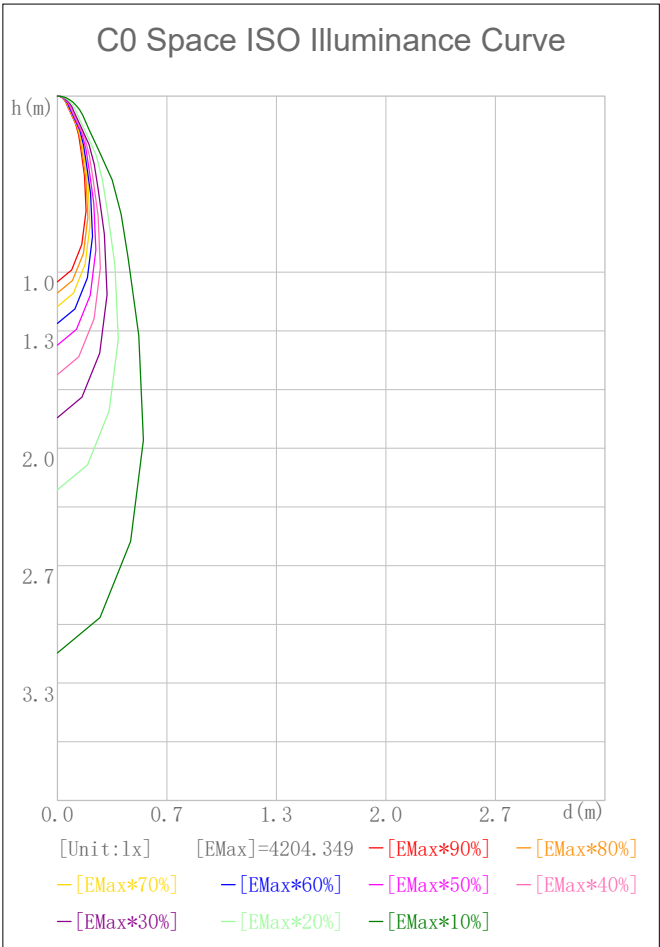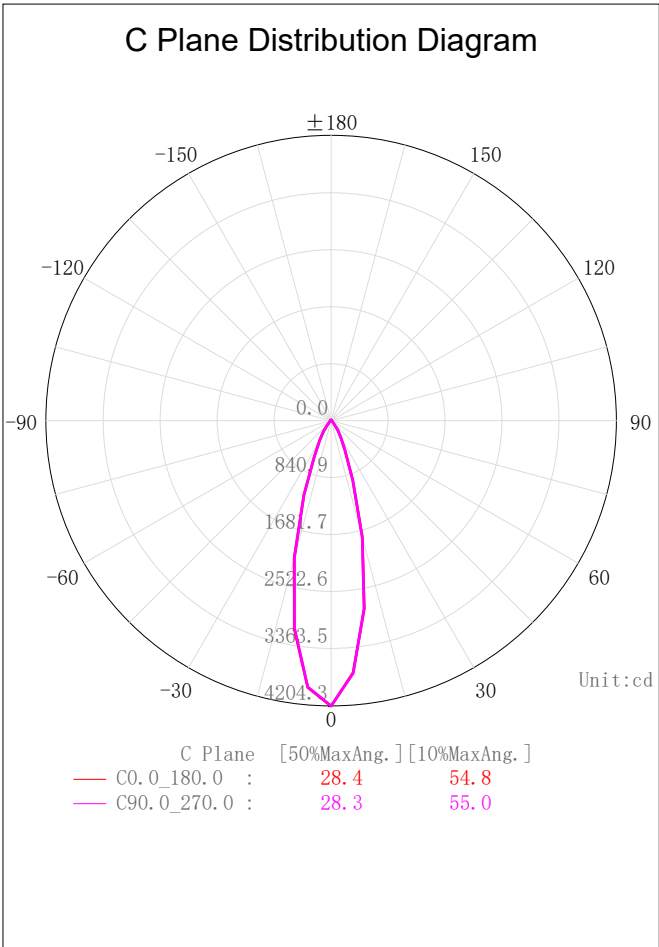

2D Plane Light Intensity Distribution Curve


Lum. Name:DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/11

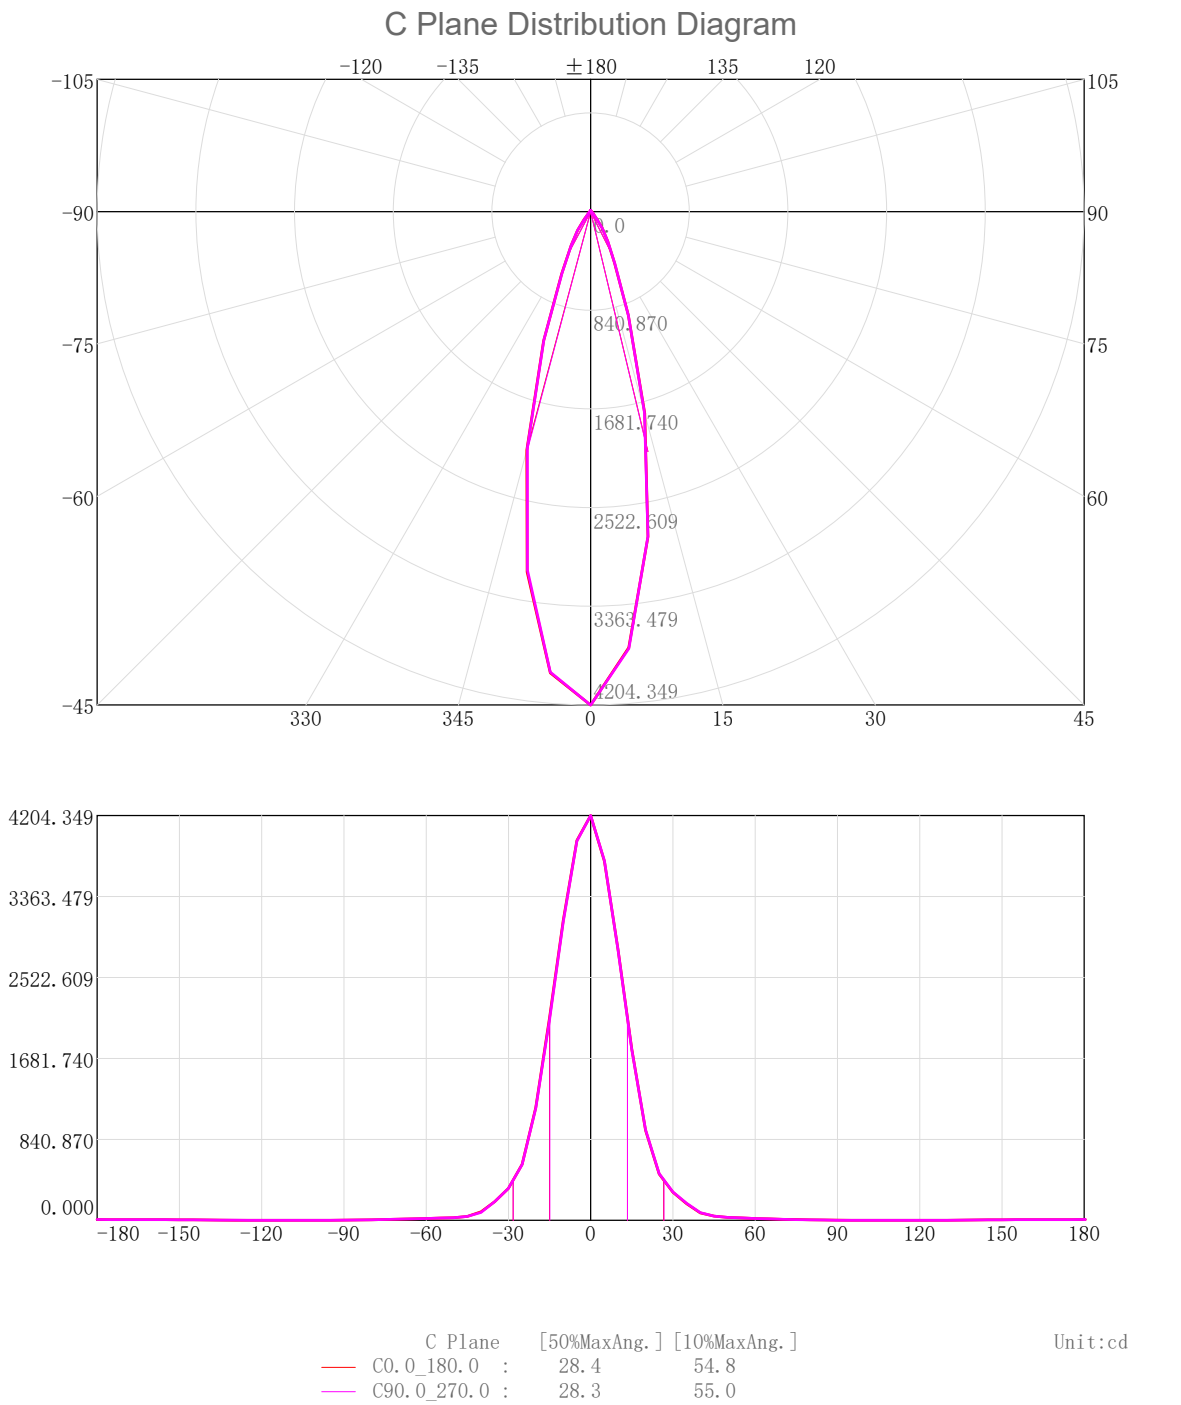

3D Light Intensity Distribution Modal

Lum. Name:DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/11

3D Light Intensity Distribution Modal

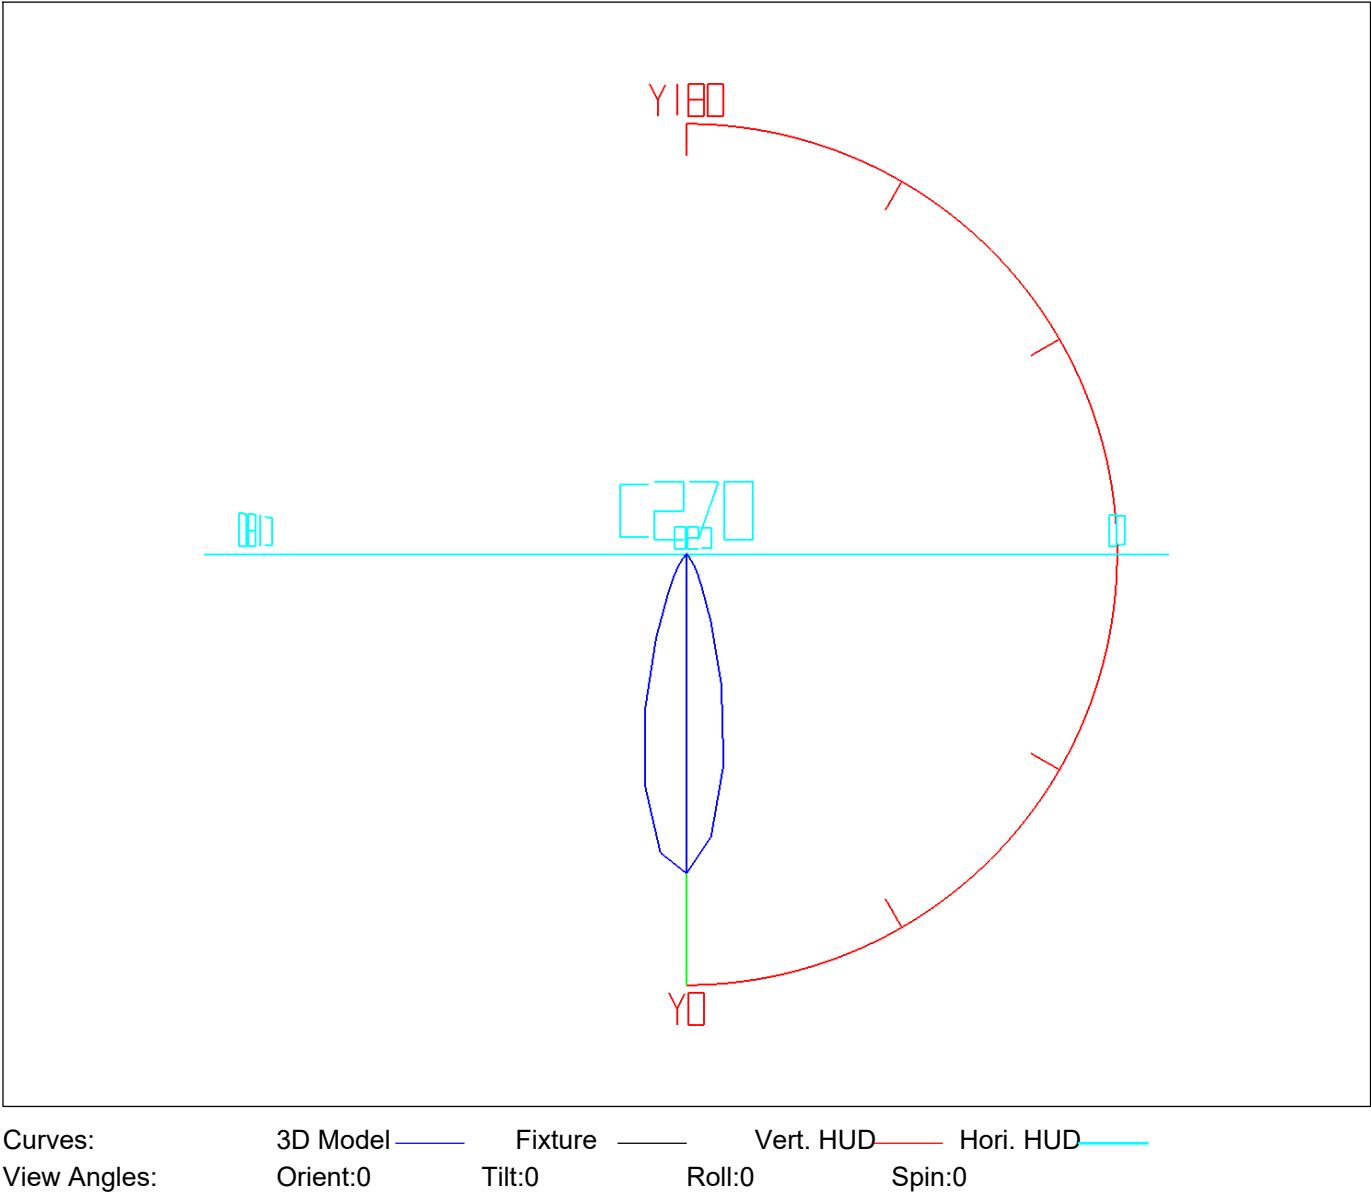


Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-5.0	96.14	96.14	6.97	6.97
5.0-10.0	243.16	339.30	17.63	24.60
10.0-15.0	290.30	629.60	21.04	45.64
15.0-20.0	246.20	875.79	17.85	63.49
20.0-25.0	166.36	1042.15	12.06	75.55
25.0-30.0	107.04	1149.20	7.76	83.31
30.0-35.0	73.30	1222.50	5.31	88.62
35.0-40.0	44.61	1267.11	3.23	91.86
40.0-45.0	23.26	1290.37	1.69	93.54
45.0-50.0	14.83	1305.20	1.07	94.62
50.0-55.0	12.16	1317.35	0.88	95.50
55.0-60.0	10.63	1327.98	0.77	96.27
60.0-65.0	8.95	1336.93	0.65	96.92
65.0-70.0	7.27	1344.20	0.53	97.44
70.0-75.0	5.73	1349.94	0.42	97.86
75.0-80.0	4.32	1354.25	0.31	98.17
80.0-85.0	3.01	1357.26	0.22	98.39
85.0-90.0	1.90	1359.16	0.14	98.53
90.0-95.0	1.29	1360.45	0.09	98.62
95.0-100.0	1.05	1361.50	0.08	98.70
100.0-105.0	0.82	1362.32	0.06	98.76
105.0-110.0	0.69	1363.01	0.05	98.81
110.0-115.0	0.68	1363.69	0.05	98.86
115.0-120.0	0.71	1364.40	0.05	98.91
120.0-125.0	0.76	1365.16	0.05	98.96
125.0-130.0	0.90	1366.06	0.07	99.03
130.0-135.0	1.15	1367.21	0.08	99.11
135.0-140.0	1.47	1368.68	0.11	99.22
140.0-145.0	1.76	1370.44	0.13	99.35
145.0-150.0	1.93	1372.37	0.14	99.49
150.0-155.0	1.95	1374.32	0.14	99.63
155.0-160.0	1.77	1376.09	0.13	99.76
160.0-165.0	1.45	1377.53	0.10	99.86
165.0-170.0	1.06	1378.59	0.08	99.94
170.0-175.0	0.64	1379.23	0.05	99.98
175.0-180.0	0.22	1379.45	0.02	100.00

Rectangle ISO Lighting Intensity Diagram

Lum. Name: DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/11

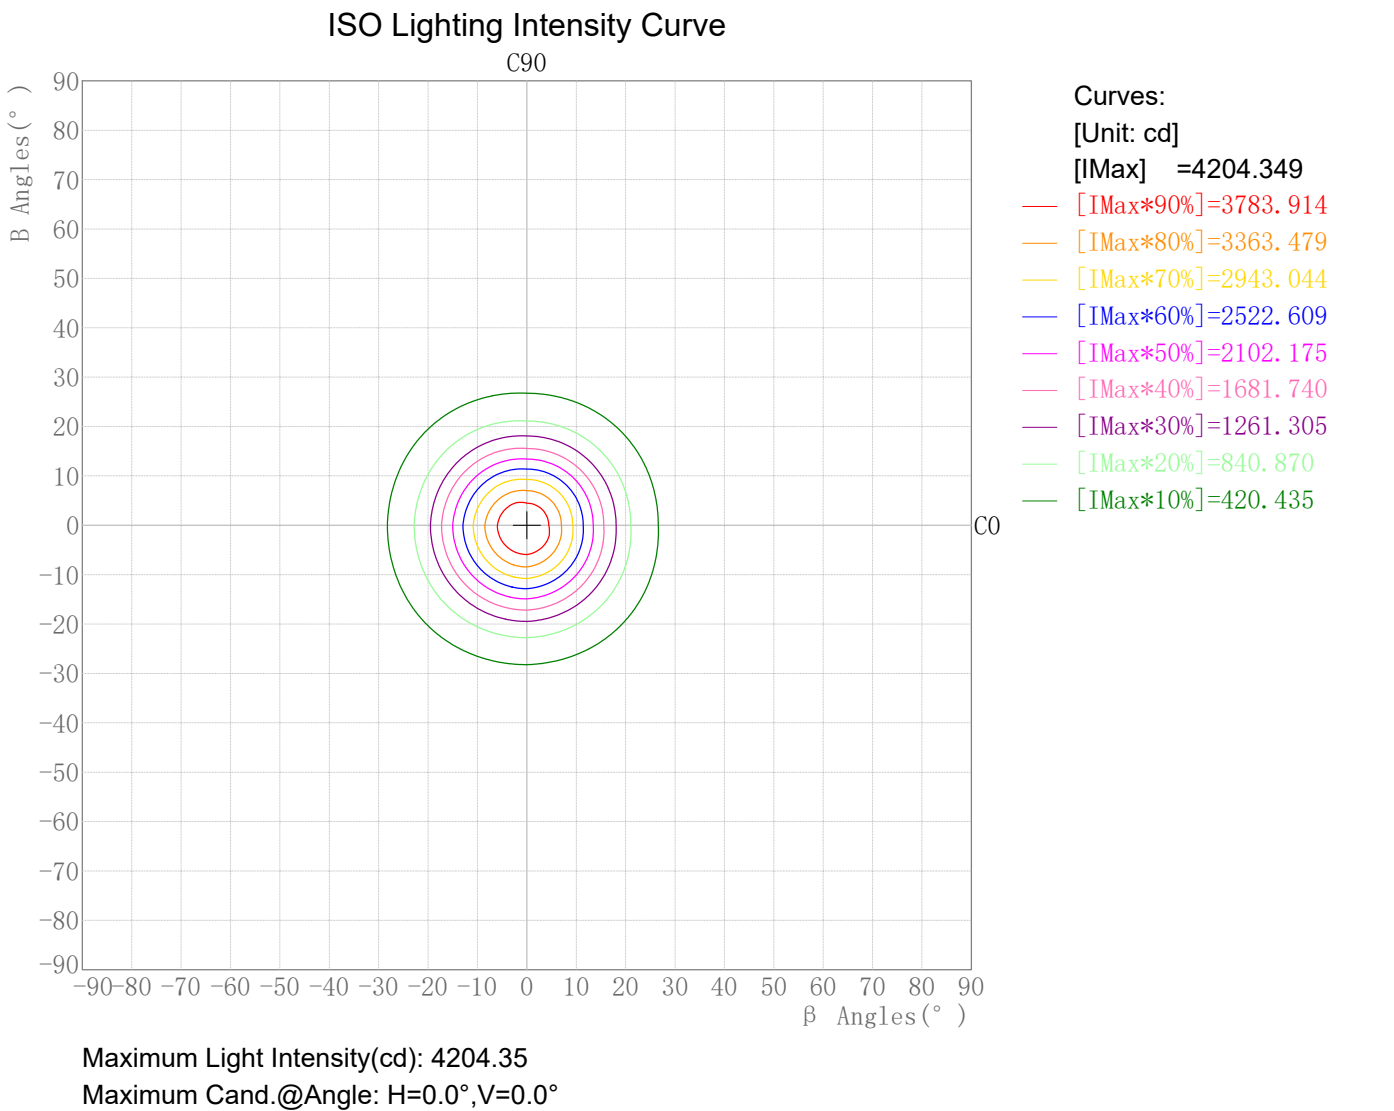


Photometric Filename:DL51-15-XX-01 4000K RA90 24D 白色.IES

Plane ISO-Illuminance Diagram

Lum. Name: DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/11

Plane ISO-Illuminance Curve

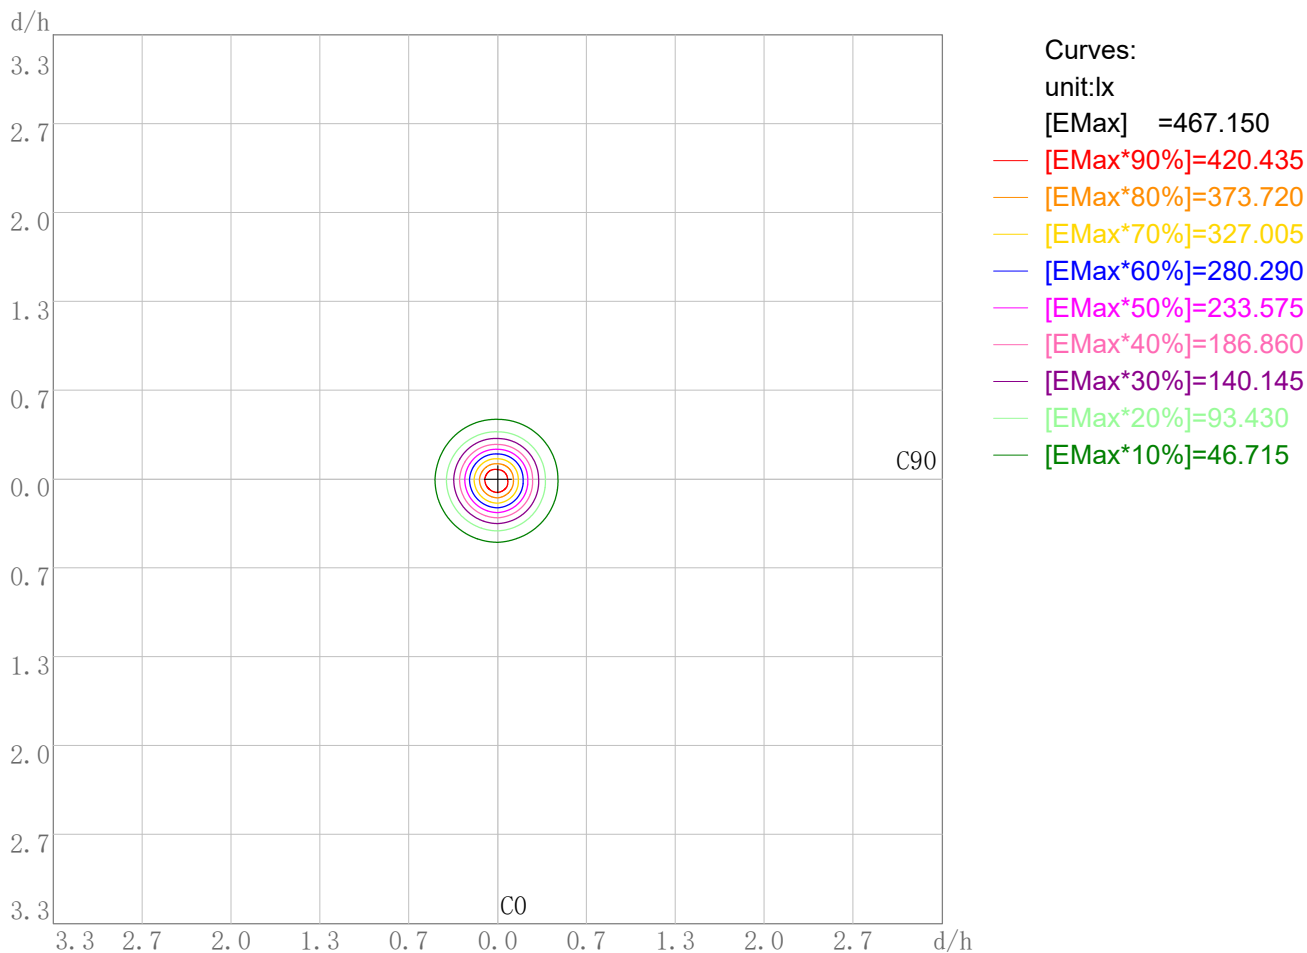


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 467.15
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name: DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/11


3D Plane Illuminance Modal

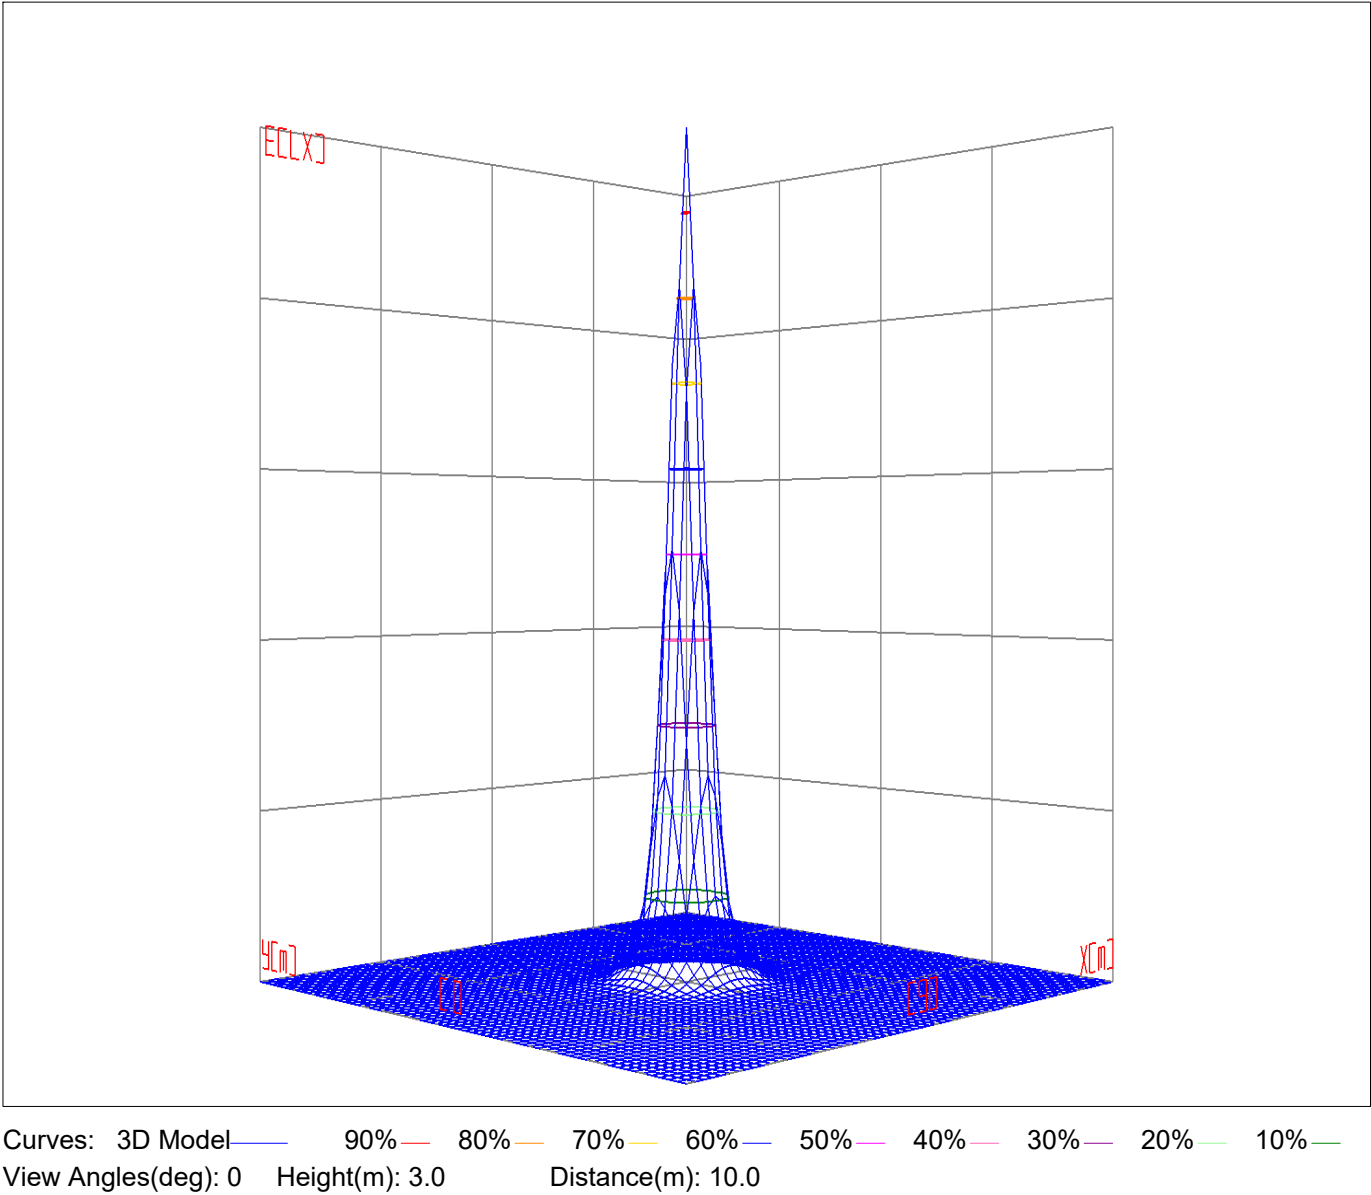

Space ISO Illuminance Diagram

Lum. Name:DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/11


Space ISO Illuminance Curve

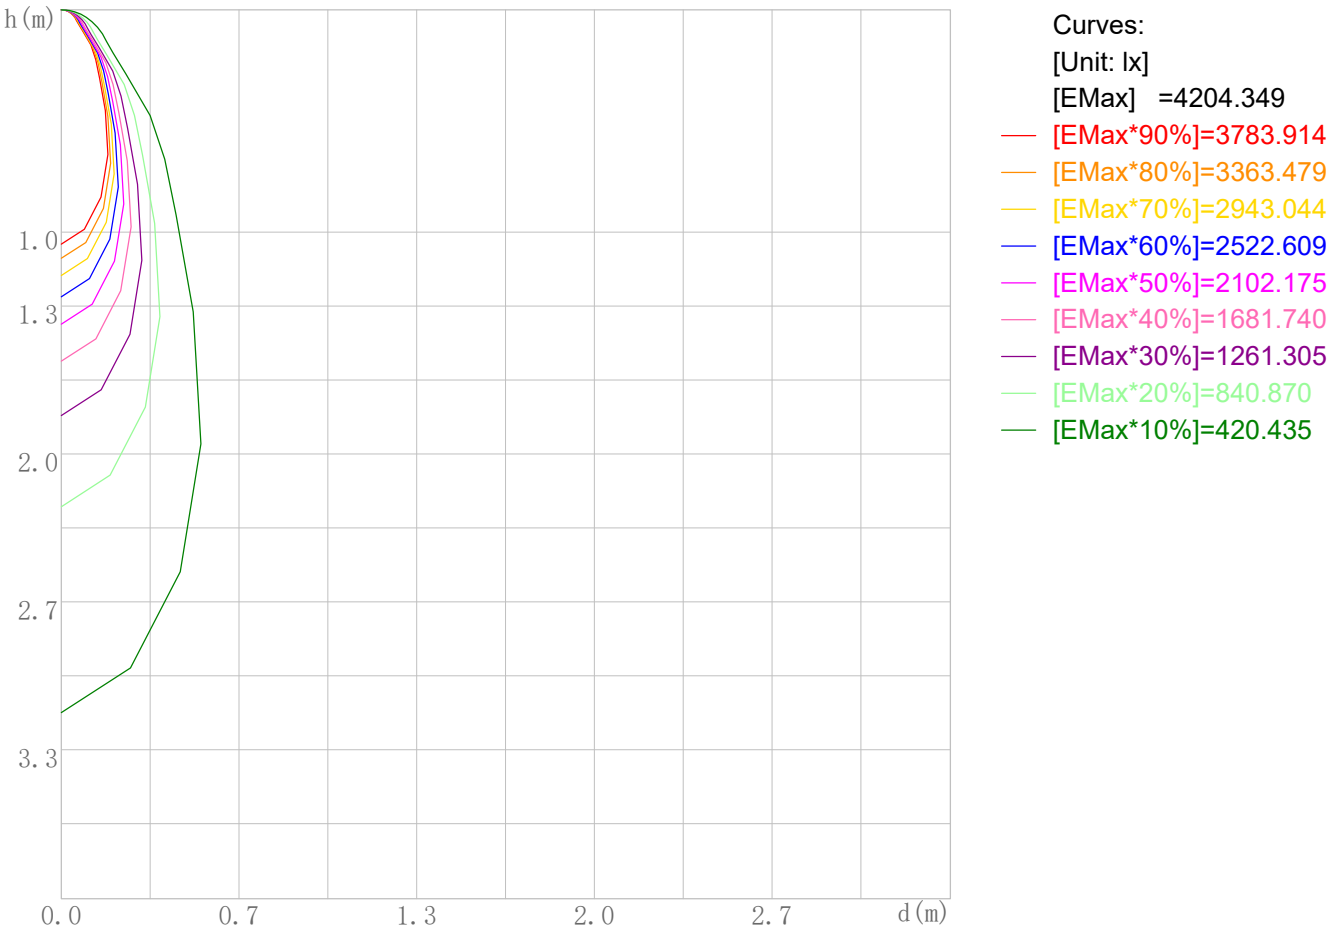

Space Plane Maximum Illuminance and @Angle:4204.35lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:4204.349cd,0deg

Illuminance-Distance Diagram

Lum. Name:DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/11

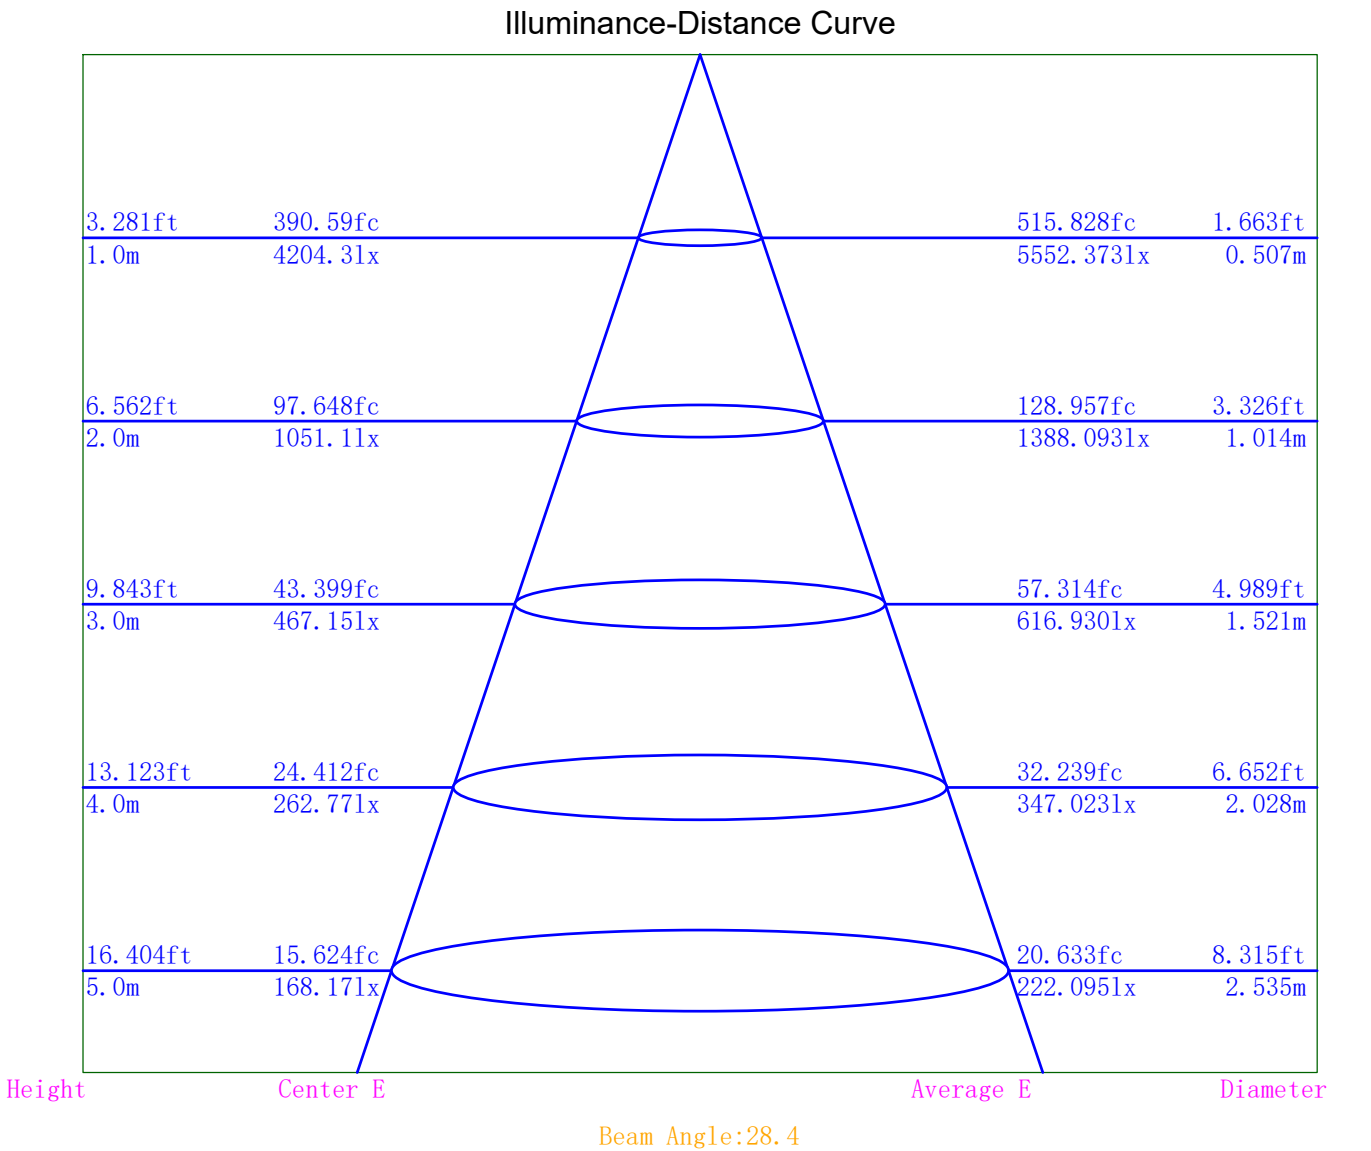

Indoor Luminance Limiting Curves

Lum. Name:DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/11


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	20848	16440	14930	13627	12414	11799	11927	12448	16708
C90	20874	16660	15058	13677	12562	11879	11156	12134	16473

Luminance Limiting Curve

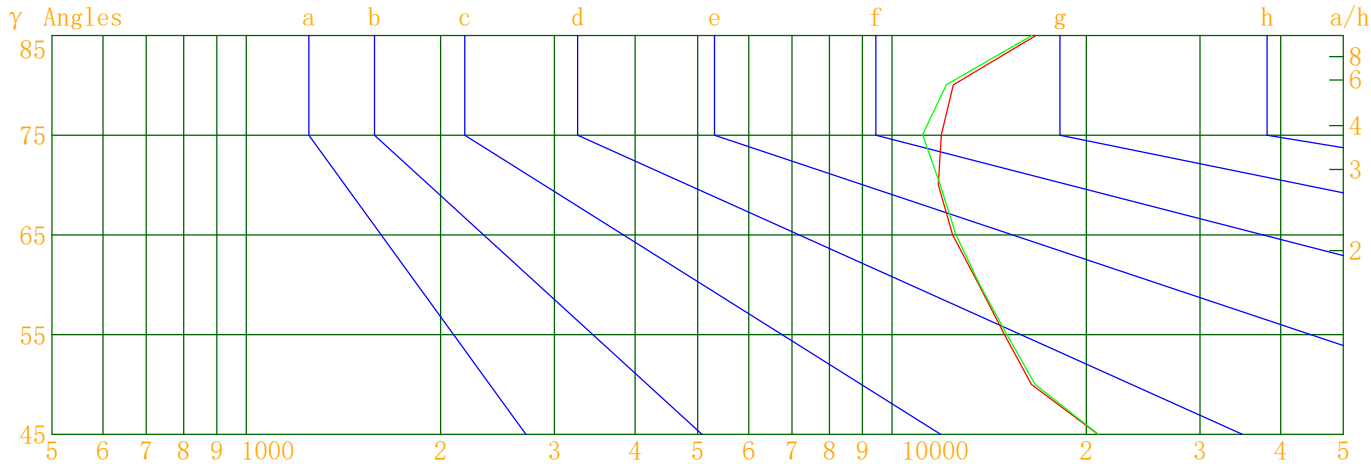

Luminous Size:

Length(m)=0.055

Width(m)=0.055

Height(m)=0.000

Area(m^2)=0.003025

Luminous Type:

Without Luminous Side


Luminous Curves:

C0-C180 Color: —

C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name:DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/11

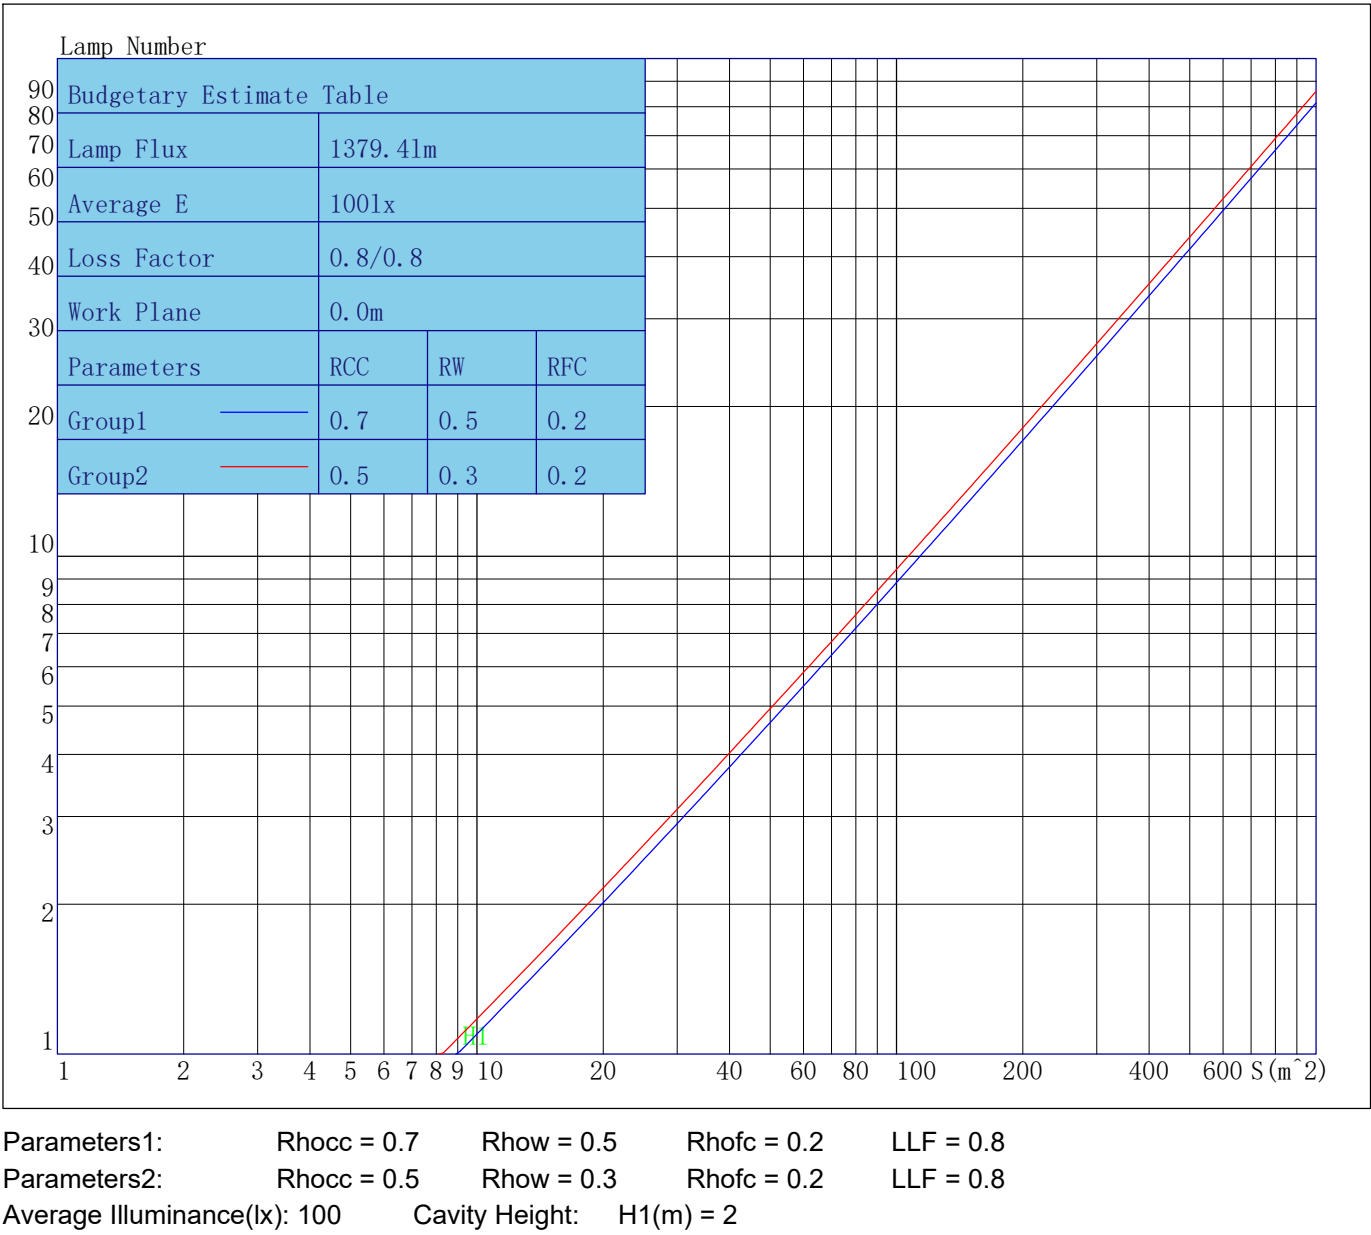

Indoor Coefficient of Utilization Table

Lum. Name:DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/11

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	114	111	109	107	111	109	107	105	104	103	101	101	99	98	97	96	95	93
2	109	104	101	98	107	103	99	97	99	97	94	96	94	92	93	91	90	88
3	104	99	94	91	102	97	93	90	94	91	88	92	89	87	90	87	85	84
4	100	94	89	85	98	92	88	85	90	86	84	88	85	82	86	84	81	80
5	96	89	84	81	95	88	84	80	86	82	79	85	81	78	83	80	78	76
6	93	85	80	77	91	84	80	76	83	79	76	81	78	75	80	77	74	73
7	89	82	77	73	88	81	76	73	80	75	72	78	75	72	77	74	71	70
8	86	78	73	70	85	78	73	70	77	72	69	76	72	69	75	71	69	67
9	83	75	70	67	82	75	70	67	74	70	67	73	69	66	72	69	66	65
10	81	73	68	65	80	72	68	64	71	67	64	70	67	64	70	66	64	63

Unified Glare Rating Table

Lum. Name:DL51-15-XX-01 4000K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/11

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	17.2	18.2	17.6	18.5	18.9	17.3	18.3	17.7	18.6	19.0
	17.8	18.7	18.2	19.0	19.4	17.9	18.7	18.3	19.1	19.5
	18.1	18.9	18.6	19.3	19.7	18.2	19.0	18.6	19.3	19.8
	18.5	19.2	18.9	19.6	20.0	18.5	19.2	18.9	19.6	20.0
	18.6	19.3	19.1	19.7	20.2	18.6	19.3	19.1	19.7	20.2
	18.8	19.4	19.3	19.9	20.3	18.8	19.4	19.2	19.8	20.3
X=4H Y=2H	17.3	18.1	17.8	18.5	18.9	17.4	18.2	17.8	18.6	19.0
	18.1	18.8	18.6	19.2	19.7	18.2	18.8	18.6	19.3	19.7
	18.6	19.2	19.1	19.6	20.1	18.6	19.2	19.1	19.6	20.1
	19.1	19.6	19.6	20.1	20.6	19.1	19.6	19.6	20.0	20.5
	19.3	19.8	19.8	20.3	20.8	19.3	19.7	19.8	20.2	20.7
	19.6	20.0	20.1	20.5	21.0	19.5	19.9	20.1	20.5	21.0
X=8H Y=4H	18.7	19.2	19.2	19.7	20.2	18.7	19.2	19.2	19.7	20.2
	19.4	19.7	19.9	20.3	20.8	19.4	19.7	19.9	20.2	20.8
	19.7	20.1	20.3	20.6	21.1	19.7	20.0	20.3	20.6	21.1
	20.2	20.4	20.7	21.0	21.6	20.1	20.4	20.7	20.9	21.5
X=12H Y=4H	18.7	19.1	19.2	19.6	20.2	18.7	19.1	19.2	19.6	20.2
	19.4	19.8	20.0	20.3	20.8	19.4	19.7	20.0	20.2	20.8
	19.9	20.1	20.4	20.7	21.3	19.8	20.1	20.4	20.6	21.2
Variations with the objverver position at spacings										
S=1.0H	0.3/-0.2					0.3/-0.3				
S=1.5H	0.5/-0.5					0.5/-0.5				
S=2.0H	0.6/-0.7					0.7/-0.7				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	2.1					2.1				

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	4204.35	4204.35	4204.35	4204.35
γ 5.0	3729.32	3735.40	3945.88	3938.66
γ 10.0	2813.88	2808.73	3116.78	3100.67
γ 15.0	1779.11	1772.39	2103.28	2080.43
γ 20.0	935.95	942.80	1172.08	1163.16
γ 25.0	481.10	486.95	583.53	579.21
γ 30.0	292.22	295.56	331.69	333.11
γ 35.0	173.28	177.05	194.27	194.00
γ 40.0	77.74	80.93	89.00	83.33
γ 45.0	44.59	44.65	41.40	40.80
γ 50.0	31.97	32.39	28.92	28.76
γ 55.0	25.90	26.13	24.76	24.80
γ 60.0	20.61	20.69	20.61	20.42
γ 65.0	15.87	16.06	16.47	16.50
γ 70.0	12.21	12.29	12.61	12.90
γ 75.0	9.34	8.73	9.84	9.84
γ 80.0	6.54	6.37	7.05	6.82
γ 85.0	4.41	4.34	4.34	4.40
γ 90.0	2.57	2.44	2.54	2.66
γ 95.0	2.33	2.08	2.10	2.18
γ 100.0	1.61	1.75	1.77	1.67
γ 105.0	1.25	1.50	1.34	1.31
γ 110.0	1.35	1.26	1.35	1.19
γ 115.0	1.34	1.11	1.72	1.50
γ 120.0	1.47	1.29	2.00	1.32
γ 125.0	1.58	1.92	1.77	1.74
γ 130.0	2.14	2.24	2.44	2.72
γ 135.0	3.09	3.04	3.64	3.41
γ 140.0	4.79	4.43	4.45	4.92
γ 145.0	5.83	5.98	5.93	5.99
γ 150.0	7.17	6.85	7.40	7.17
γ 155.0	8.22	8.18	8.28	8.31
γ 160.0	8.85	8.50	8.75	8.52
γ 165.0	8.80	8.55	9.13	9.04
γ 170.0	8.89	8.92	8.93	8.98
γ 175.0	9.01	8.72	9.13	9.07
γ 180.0	9.14	9.14	9.14	9.14