



Indoor Luminaire Photometric Data

Description Information

Luminary Name: DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Date: 2022/08/05
Manufacture: Shenzhen Norming Lighting	Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department	Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.110m*0.110m*0.000m	Lum. Area (m2):0.010	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=5.0	Temp. (°C): 25
		Humidity(%):


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 2795.080	Luminary Flux(lm): 2795.075	Field Angle(10%Imax): 39.6(°)
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 2738.998lm 97.99%
Rated Voltage(V):	Luminary EER(lm/W): 83.038	Up Lumens&Percent: 56.078lm 2.01%
Tested Power(W): 33.660	Max. Candela(cd): 12364.513	S/MH: C0_a180=0.413 C90_270=0.411
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=0.0	CIE Type: Semi-Direct
Tested Electrics (V, A, pf):240.0, 0.146	Beam Angle(50%Imax): 24.1(°)	ErP Φ use(90°): 2673.911lm
Lamp Size (W*L*H):0.110m*0.110m*0.000m	Left=-12.3°, Right=11.9°	IRF(%): 977.031

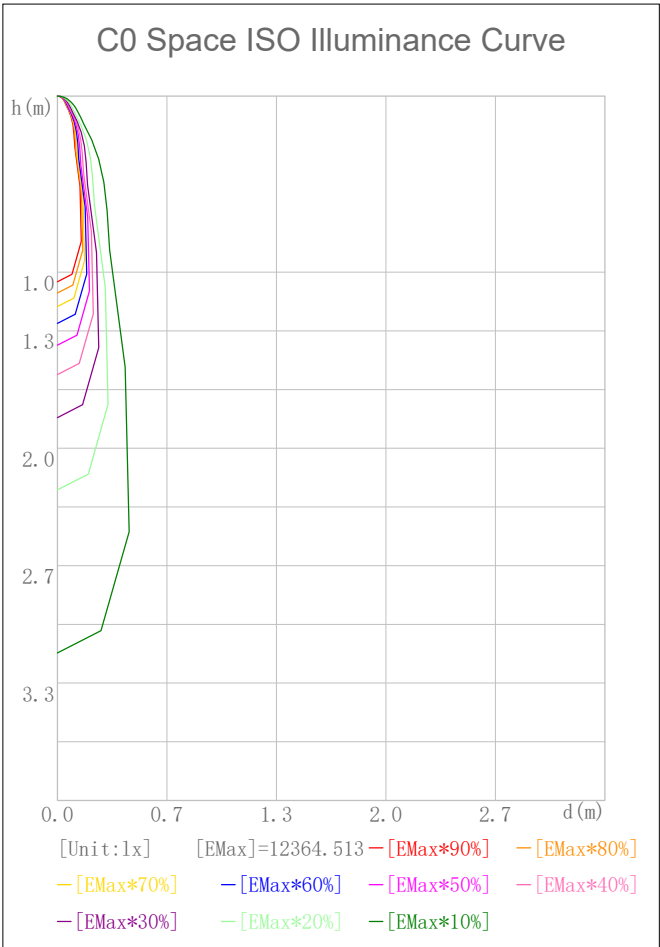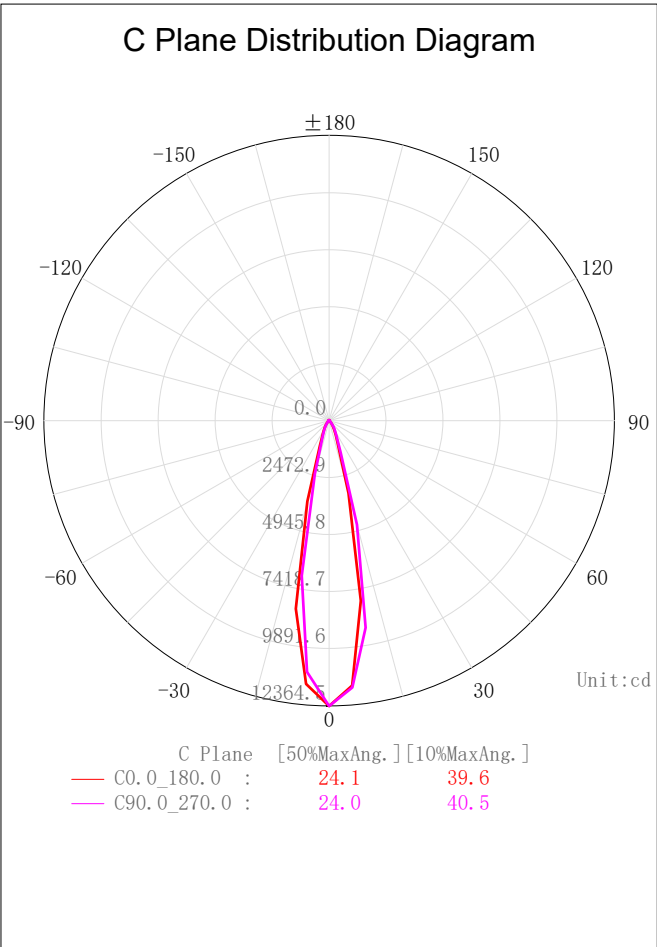

2D Plane Light Intensity Distribution Curve


Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05

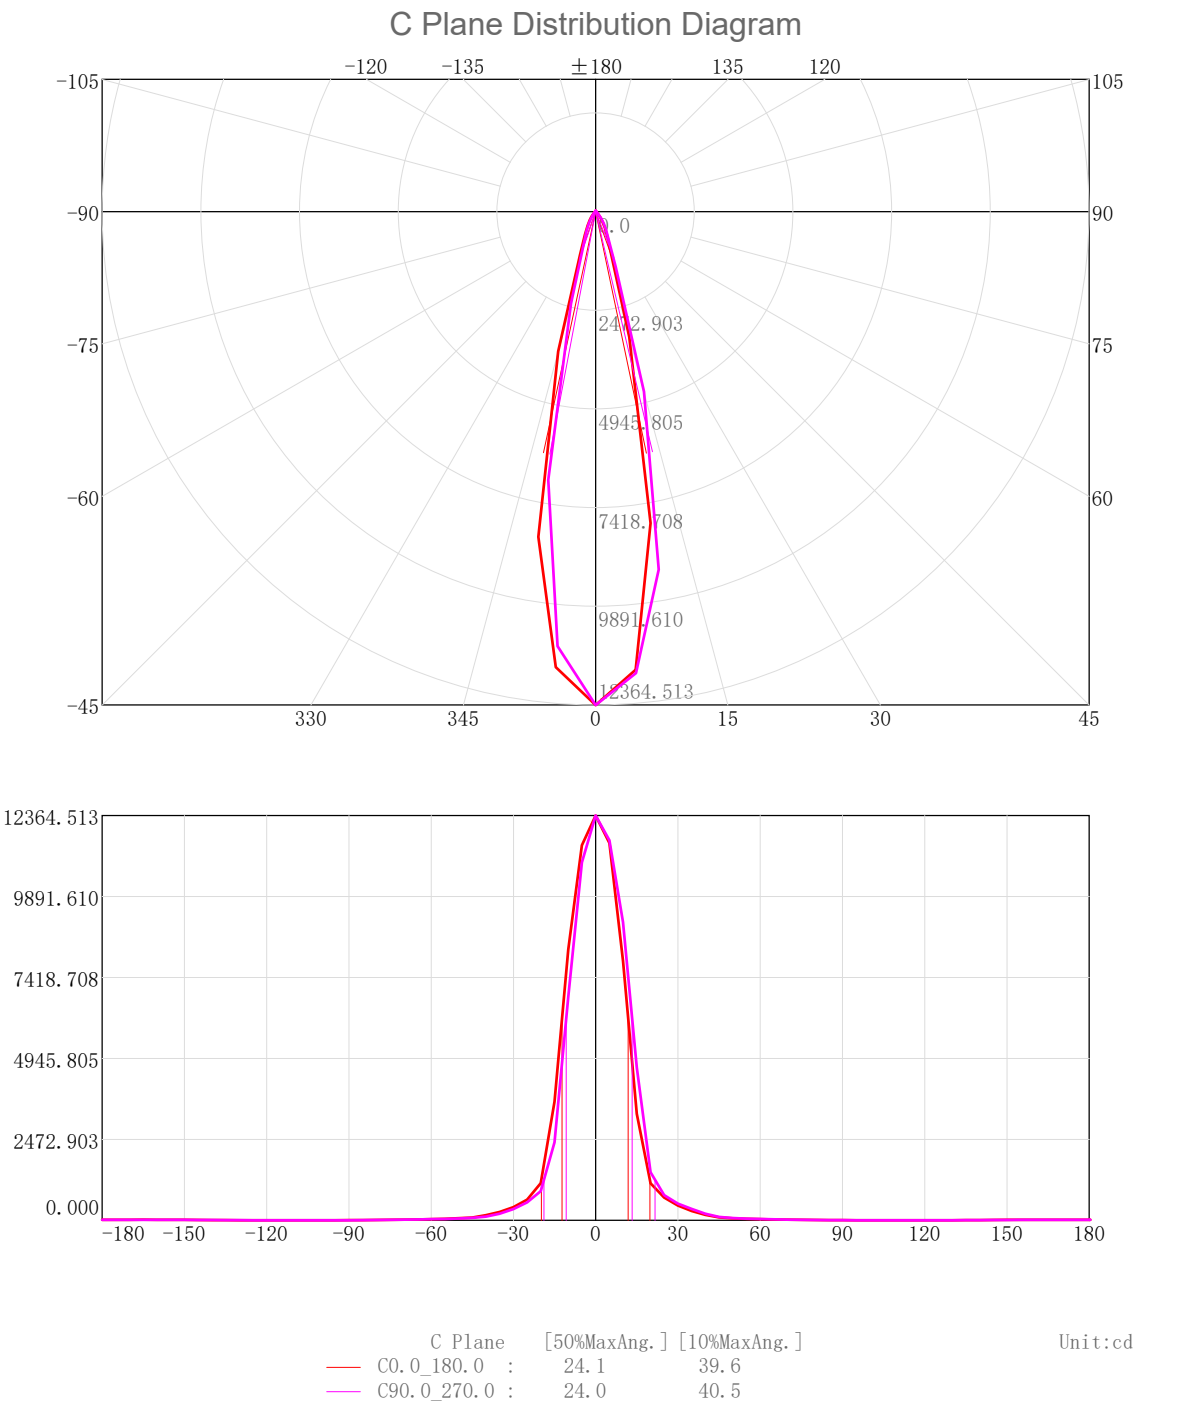

3D Light Intensity Distribution Modal

Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05

3D Light Intensity Distribution Modal

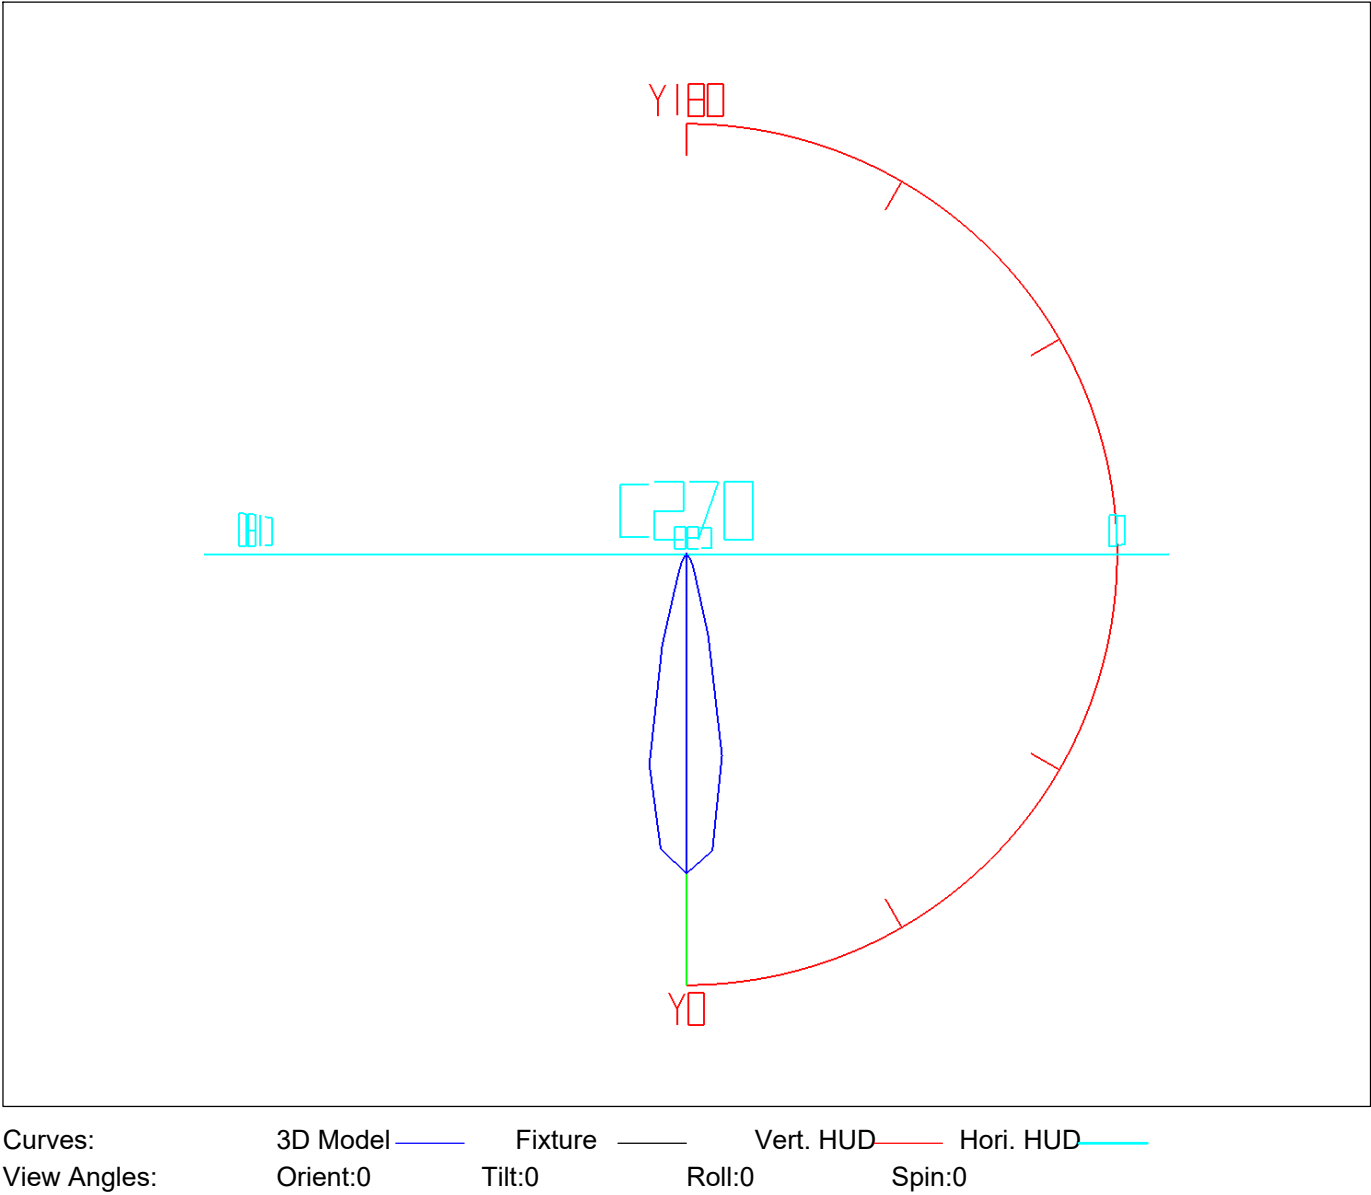


Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-5.0	283.86	283.86	10.16	10.16
5.0-10.0	694.46	978.31	24.85	35.00
10.0-15.0	683.15	1661.46	24.44	59.44
15.0-20.0	382.66	2044.12	13.69	73.13
20.0-25.0	191.29	2235.41	6.84	79.98
25.0-30.0	138.60	2374.01	4.96	84.94
30.0-35.0	104.23	2478.24	3.73	88.66
35.0-40.0	73.43	2551.67	2.63	91.29
40.0-45.0	47.15	2598.82	1.69	92.98
45.0-50.0	31.66	2630.48	1.13	94.11
50.0-55.0	24.73	2655.21	0.88	95.00
55.0-60.0	20.18	2675.38	0.72	95.72
60.0-65.0	17.11	2692.50	0.61	96.33
65.0-70.0	14.12	2706.62	0.51	96.84
70.0-75.0	11.38	2717.99	0.41	97.24
75.0-80.0	8.97	2726.96	0.32	97.56
80.0-85.0	6.91	2733.87	0.25	97.81
85.0-90.0	5.13	2739.00	0.18	97.99
90.0-95.0	3.96	2742.95	0.14	98.14
95.0-100.0	3.43	2746.39	0.12	98.26
100.0-105.0	3.08	2749.47	0.11	98.37
105.0-110.0	2.80	2752.27	0.10	98.47
110.0-115.0	2.58	2754.84	0.09	98.56
115.0-120.0	2.43	2757.27	0.09	98.65
120.0-125.0	2.42	2759.69	0.09	98.73
125.0-130.0	2.56	2762.25	0.09	98.83
130.0-135.0	3.01	2765.26	0.11	98.93
135.0-140.0	3.72	2768.98	0.13	99.07
140.0-145.0	4.39	2773.37	0.16	99.22
145.0-150.0	4.80	2778.17	0.17	99.40
150.0-155.0	4.75	2782.93	0.17	99.57
155.0-160.0	4.26	2787.18	0.15	99.72
160.0-165.0	3.47	2790.66	0.12	99.84
165.0-170.0	2.49	2793.14	0.09	99.93
170.0-175.0	1.45	2794.60	0.05	99.98
175.0-180.0	0.48	2795.08	0.02	100.00

Rectangle ISO Lighting Intensity Diagram

Lum. Name: DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/05

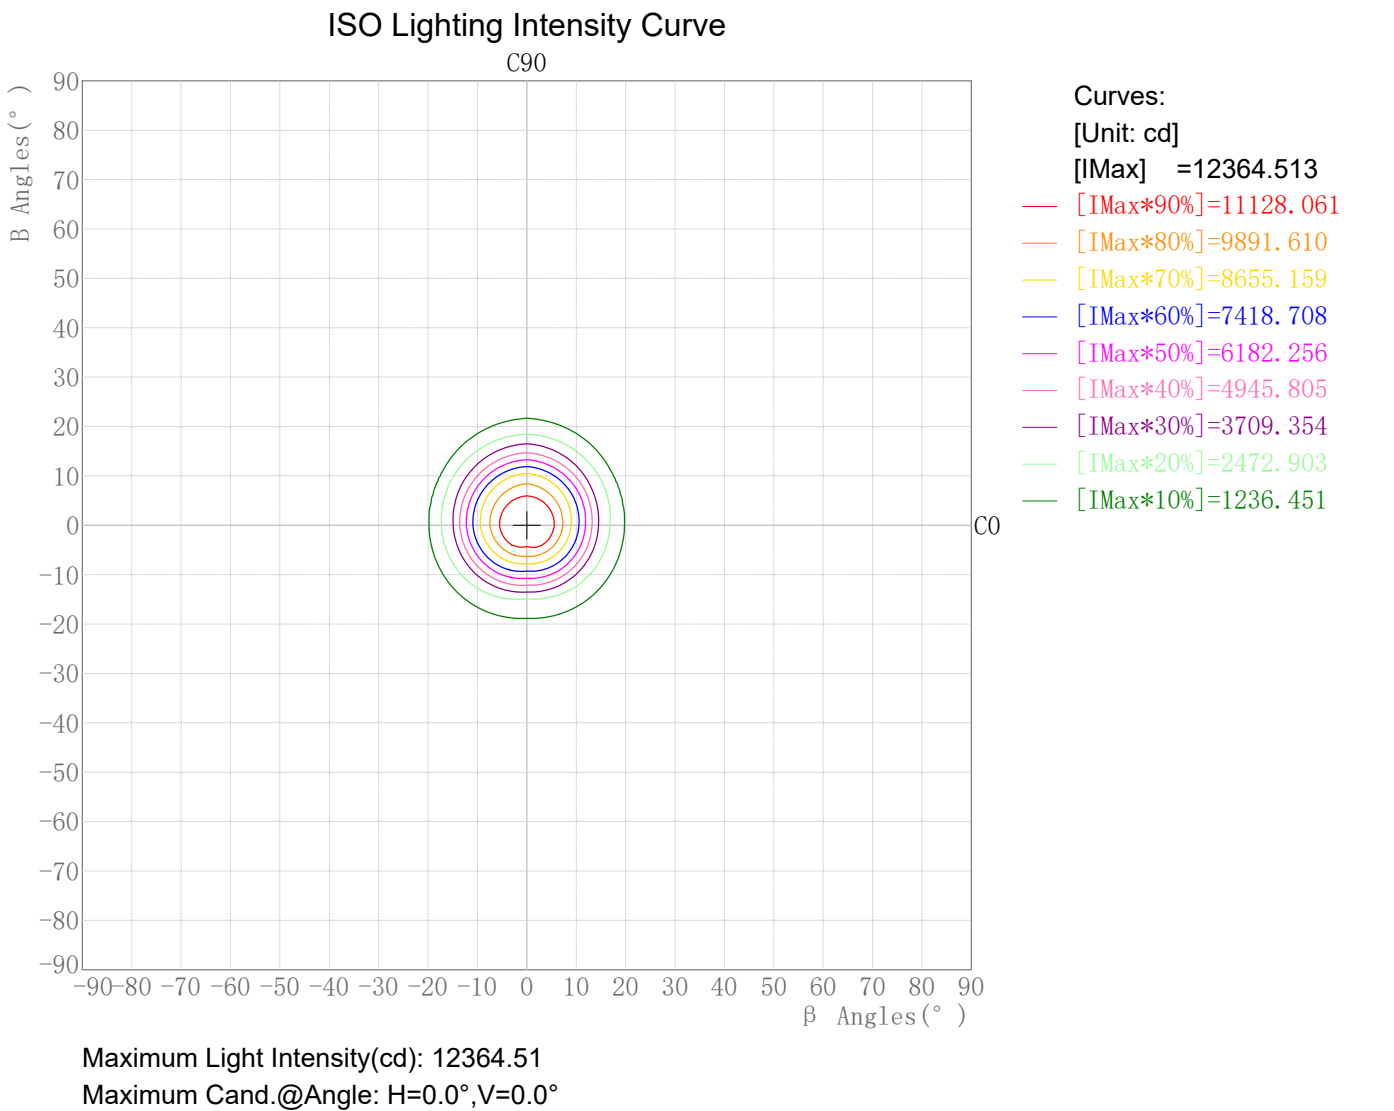


Photometric Filename:DL51-35-XX-01 2700K RA90 24D 白色.IES

Plane ISO-Illuminance Diagram

Lum. Name: DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/05

Plane ISO-Illuminance Curve

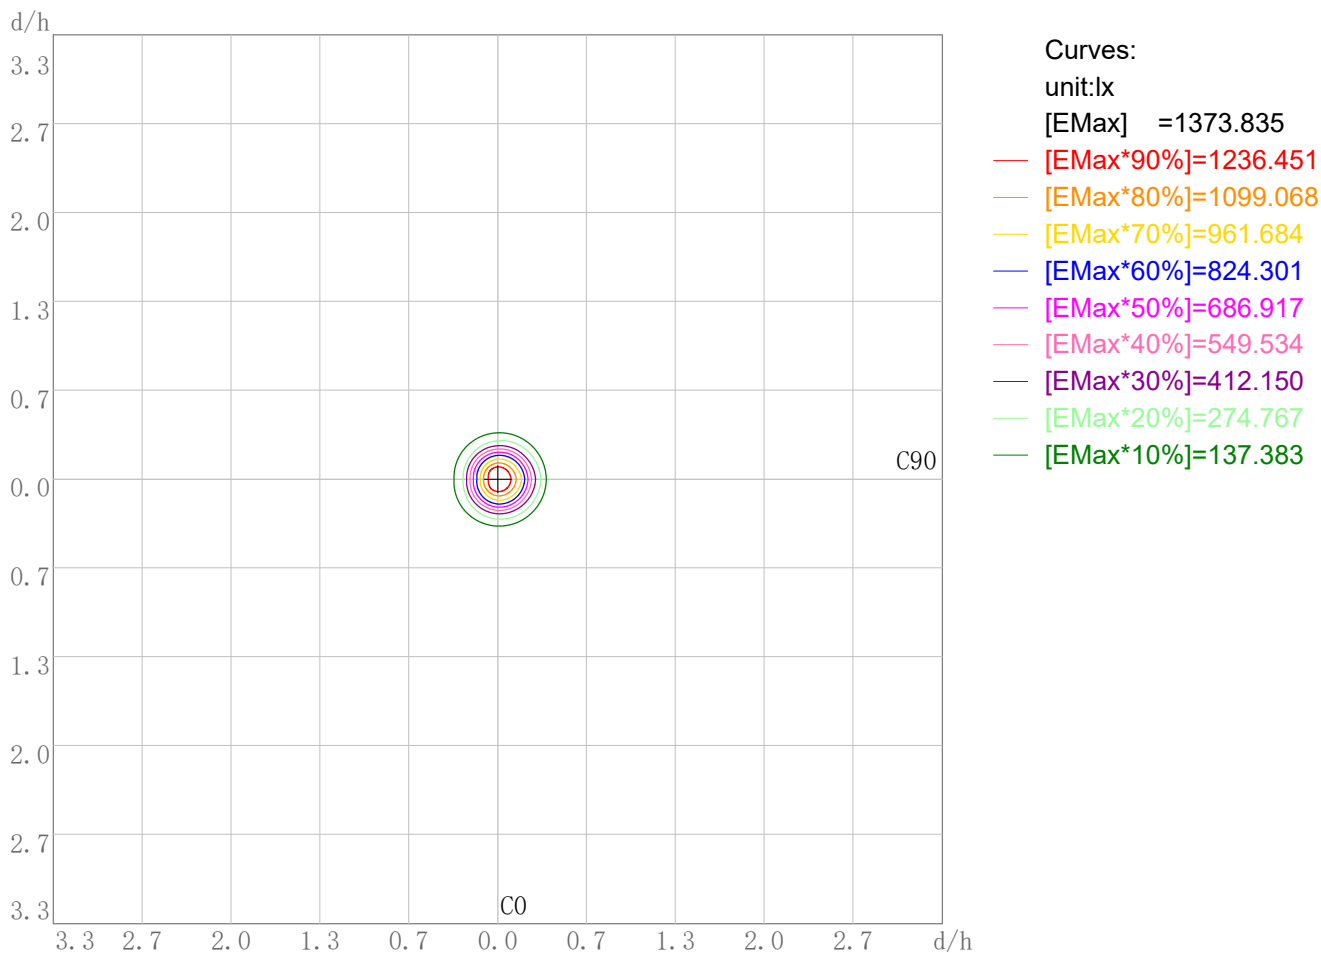


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 1373.83
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05


3D Plane Illuminance Modal

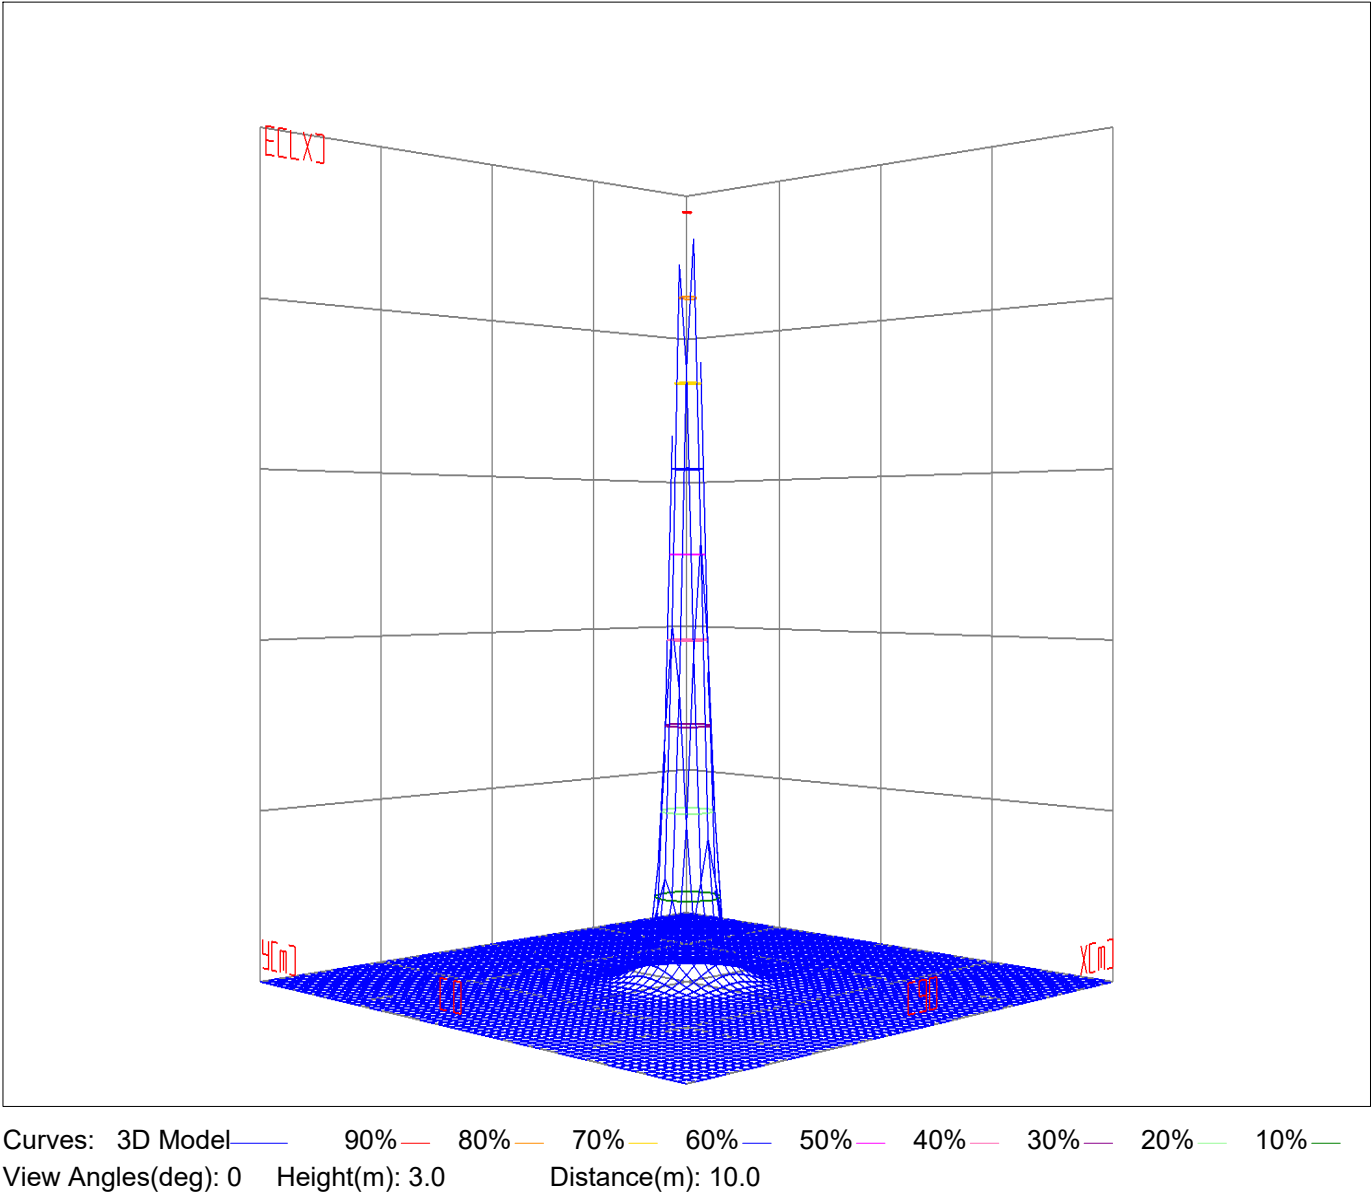

Space ISO Illuminance Diagram

Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05


Space ISO Illuminance Curve

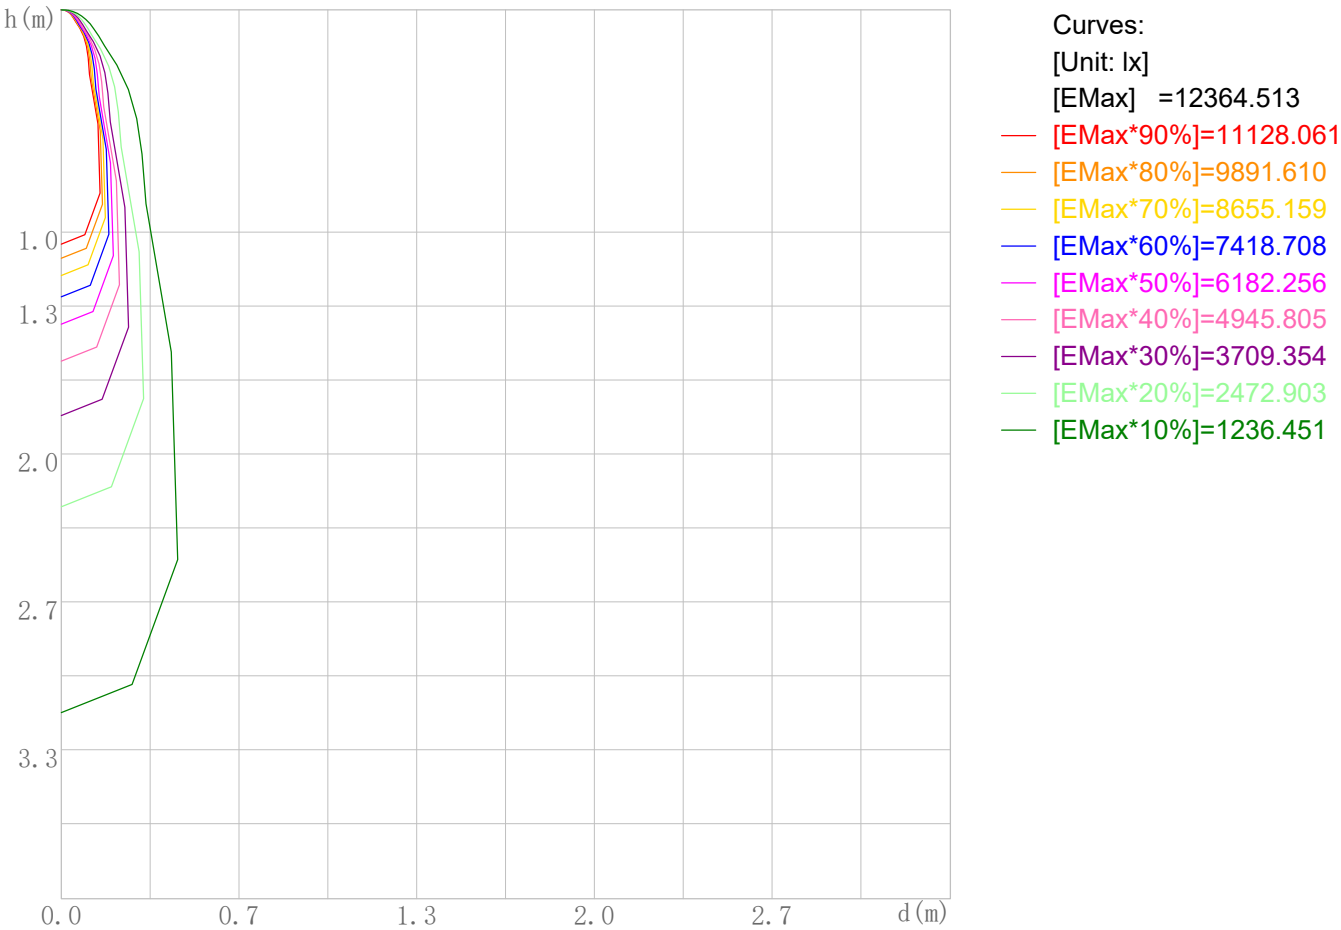

Space Plane Maximum Illuminance and @Angle:12364.51lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:12364.513cd,0deg

Illuminance-Distance Diagram

Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05

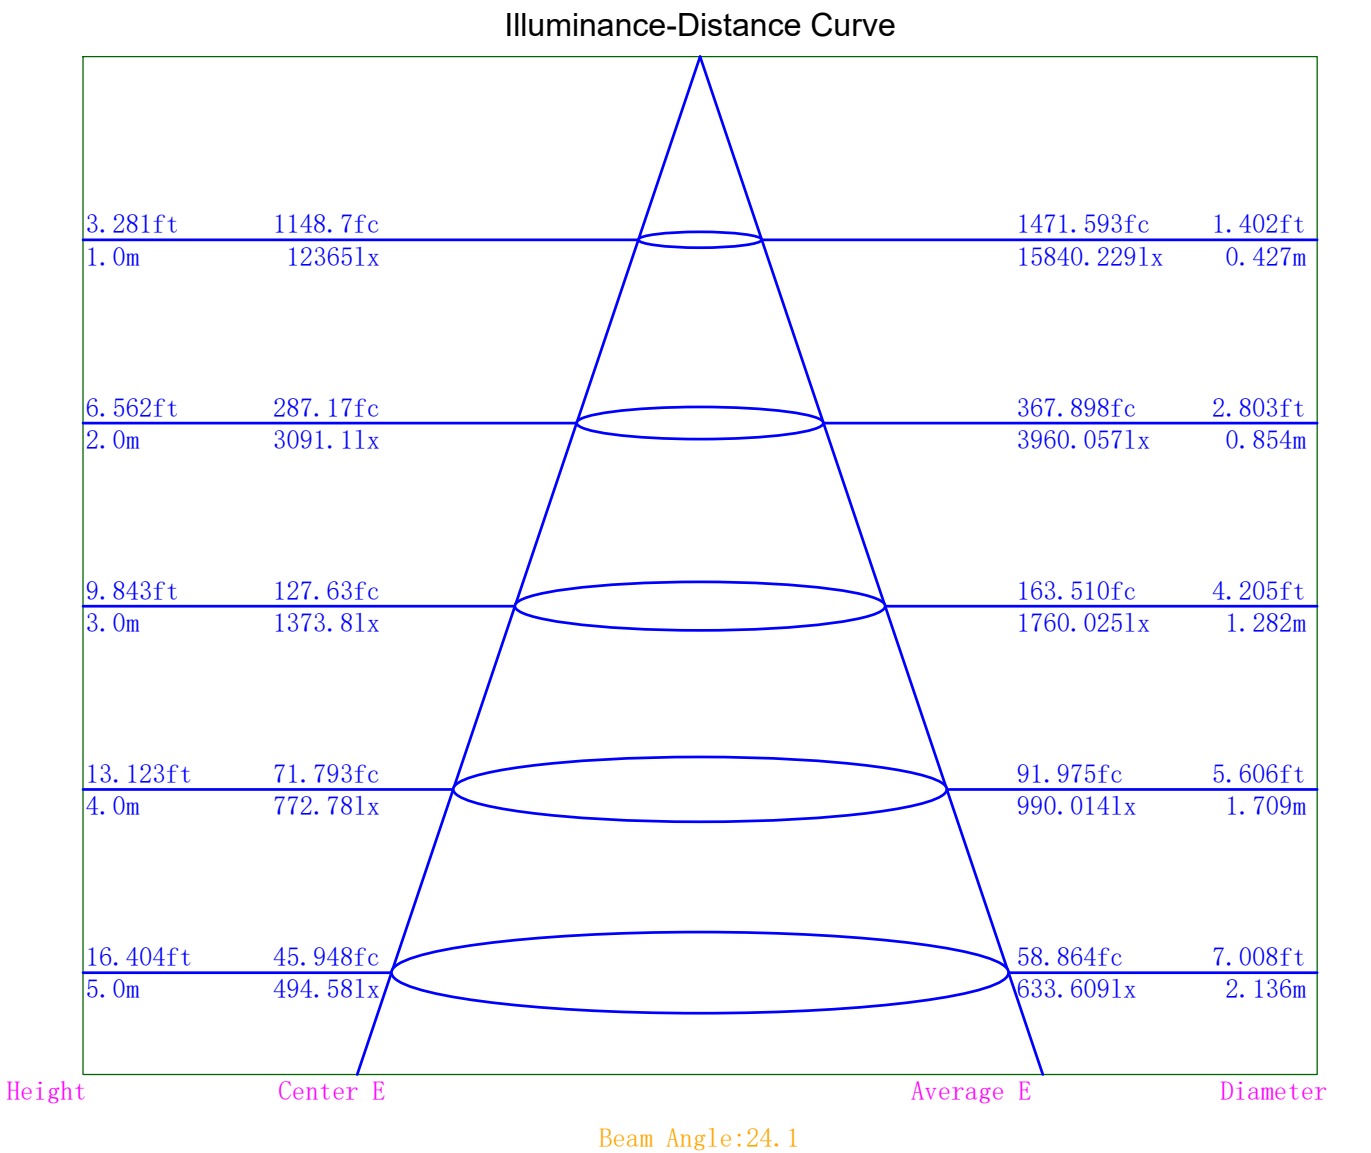

Indoor Luminance Limiting Curves

Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	13683	10605	8760	8105	7510	7339	7508	8578	12609
C90	16092	12289	9467	8777	8295	7985	8349	9467	14527

Luminance Limiting Curve

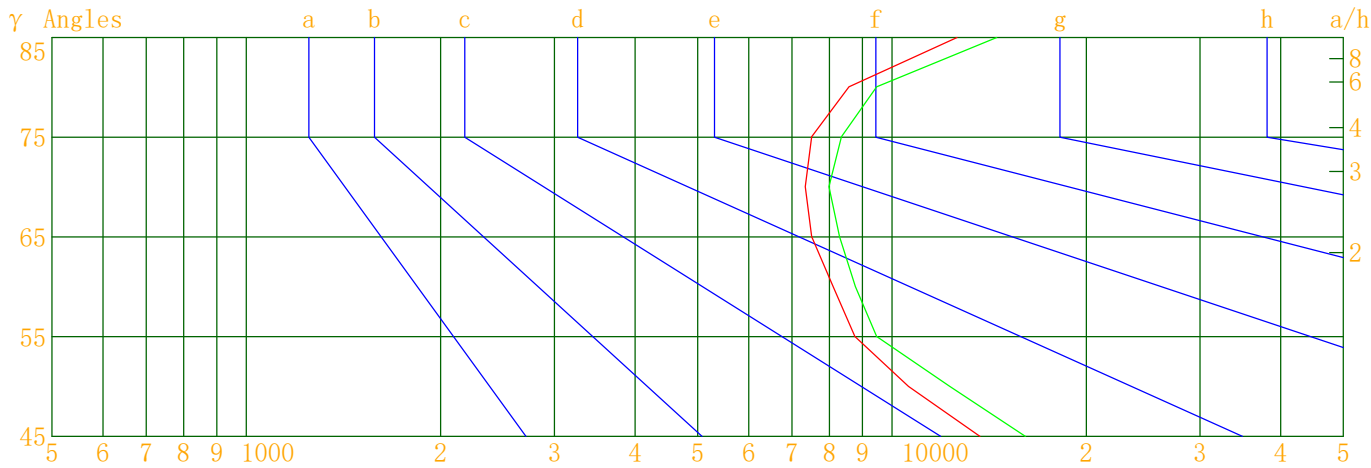


Luminous Size:Length(m)=-0.110Width(m)=-0.110Height(m)=0.000Area(m^2)=0.009503

Luminous Type:Without Luminous Side

Luminous Curves:C0-C180 Color:—C90-C270 Color:—

Indoor Budgetary Estimate Table

Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05

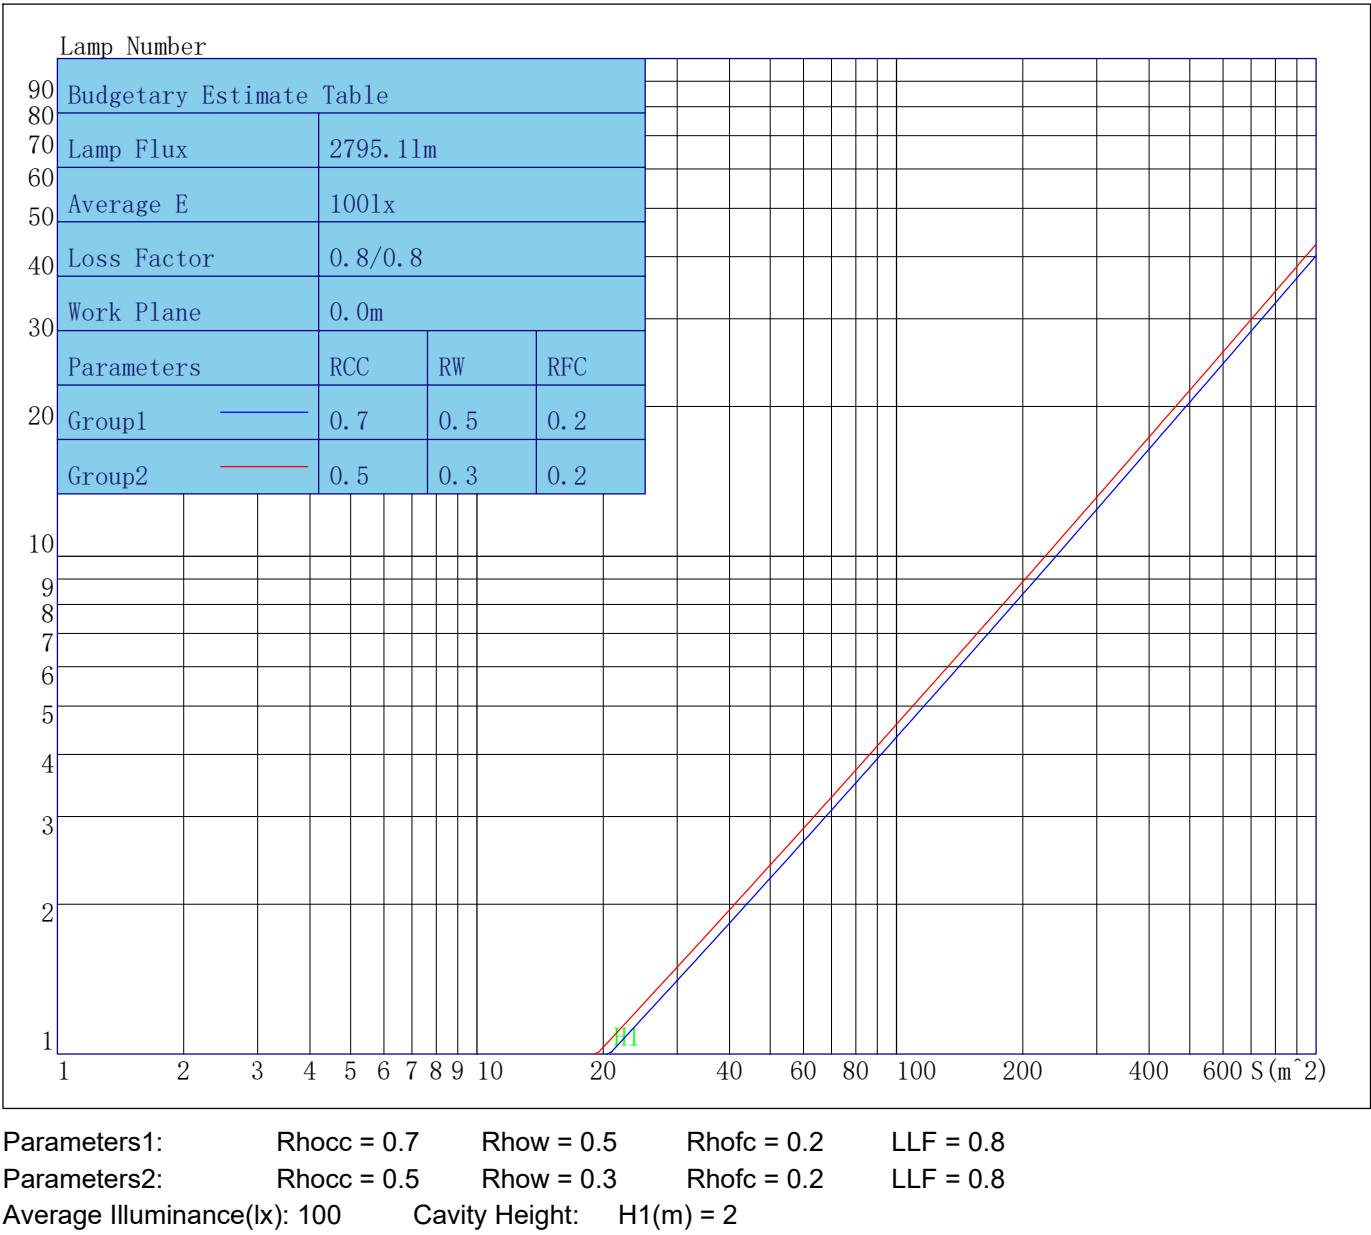

Indoor Coefficient of Utilization Table

Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	114	111	109	107	111	109	107	105	105	103	102	101	100	98	97	96	95	93
2	109	105	102	99	107	104	100	98	100	98	95	97	95	93	94	92	91	89
3	105	100	96	93	103	99	95	92	96	93	90	93	91	89	91	89	87	86
4	102	96	91	88	100	94	90	87	92	89	86	90	87	85	88	86	84	82
5	98	92	87	84	97	91	87	83	89	85	82	87	84	82	86	83	81	79
6	95	88	84	80	94	87	83	80	86	82	79	84	81	79	83	80	78	77
7	92	85	81	77	91	84	80	77	83	79	77	82	79	76	81	78	76	74
8	90	82	78	75	88	82	77	74	81	77	74	80	76	74	79	76	73	72
9	87	80	75	72	86	79	75	72	78	74	72	77	74	72	77	73	71	70
10	85	77	73	70	84	77	73	70	76	72	70	75	72	70	75	72	69	68

Unified Glare Rating Table

Lum. Name:DL51-35-XX-01 2700K RA90 24D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/05

Unified Glare Rating Table

Ceiling	RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall	RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor	RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	15.0	15.9	15.4	16.3	16.6	15.8	16.7	16.2	17.0	17.4
	Y=3H	15.7	16.5	16.1	16.8	17.3	16.4	17.2	16.8	17.6	18.0
	Y=4H	16.1	16.8	16.5	17.2	17.6	16.8	17.5	17.2	17.9	18.3
	Y=6H	16.5	17.2	17.0	17.6	18.0	17.2	17.9	17.6	18.3	18.7
	Y=8H	16.7	17.4	17.2	17.8	18.2	17.4	18.1	17.9	18.5	18.9
	Y=12H	17.0	17.6	17.5	18.0	18.5	17.7	18.3	18.2	18.7	19.2
X=4H	Y=2H	15.2	15.9	15.6	16.3	16.7	15.9	16.6	16.3	17.0	17.4
	Y=3H	16.1	16.6	16.5	17.1	17.6	16.7	17.3	17.2	17.7	18.2
	Y=4H	16.6	17.1	17.1	17.6	18.1	17.2	17.8	17.7	18.2	18.7
	Y=6H	17.2	17.7	17.7	18.2	18.7	17.9	18.3	18.4	18.8	19.3
	Y=8H	17.6	18.0	18.1	18.5	19.0	18.2	18.6	18.7	19.1	19.6
	Y=12H	18.0	18.3	18.5	18.8	19.4	18.6	19.0	19.2	19.5	20.0
X=8H	Y=4H	16.8	17.2	17.3	17.7	18.2	17.4	17.8	17.9	18.3	18.8
	Y=6H	17.6	17.9	18.2	18.5	19.0	18.2	18.5	18.8	19.1	19.6
	Y=8H	18.1	18.4	18.7	18.9	19.5	18.7	19.0	19.3	19.5	20.1
	Y=12H	18.7	18.9	19.3	19.4	20.1	19.3	19.6	19.9	20.1	20.7
X=12H	Y=4H	16.8	17.1	17.3	17.7	18.2	17.4	17.7	17.9	18.3	18.8
	Y=6H	17.7	18.0	18.3	18.5	19.1	18.3	18.5	18.9	19.1	19.7
	Y=8H	18.3	18.5	18.8	19.0	19.7	18.9	19.1	19.4	19.6	20.3
Variations with the objerver position at spacings											
S=1.0H		0.2/-0.2					0.2/-0.2				
S=1.5H		0.4/-0.4					0.4/-0.4				
S=2.0H		0.5/-0.5					0.4/-0.4				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		2.6					2.5				

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	12364.5	12364.5	12364.5	12364.5
γ 5.0	11523.5	11608.5	11455.7	10931.1
γ 10.0	7923.6	9106.7	8276.3	6825.6
γ 15.0	3252.6	4673.1	3624.2	2383.5
γ 20.0	1135.8	1469.7	1140.5	893.4
γ 25.0	698.7	772.3	635.0	550.0
γ 30.0	456.8	514.8	404.9	348.3
γ 35.0	289.7	351.8	258.7	206.1
γ 40.0	169.5	204.5	160.8	119.4
γ 45.0	91.9	108.1	86.5	77.7
γ 50.0	64.8	75.1	66.1	56.5
γ 55.0	47.8	51.6	48.0	45.2
γ 60.0	38.5	41.7	39.6	36.8
γ 65.0	30.2	33.3	31.7	29.8
γ 70.0	23.9	26.0	25.0	23.2
γ 75.0	18.5	20.5	19.2	17.8
γ 80.0	14.2	15.6	14.7	13.6
γ 85.0	10.4	12.0	11.2	9.9
γ 90.0	7.7	8.6	7.9	7.2
γ 95.0	6.9	7.1	6.4	6.1
γ 100.0	6.4	6.4	5.7	5.5
γ 105.0	5.9	6.0	5.0	5.1
γ 110.0	5.4	5.6	4.6	5.2
γ 115.0	5.0	5.2	4.6	5.1
γ 120.0	4.6	5.1	4.9	5.4
γ 125.0	5.0	4.9	5.4	6.6
γ 130.0	5.9	5.5	6.3	7.6
γ 135.0	8.2	7.6	8.4	10.0
γ 140.0	11.1	10.0	11.7	13.4
γ 145.0	14.4	13.2	14.9	16.6
γ 150.0	17.5	16.3	18.3	19.2
γ 155.0	20.0	18.9	20.0	20.1
γ 160.0	21.1	20.2	21.3	20.8
γ 165.0	21.2	20.8	22.0	21.1
γ 170.0	20.7	20.9	20.7	20.1
γ 175.0	20.1	19.9	20.1	20.0
γ 180.0	20.0	20.0	20.0	20.0