



Indoor Luminaire Photometric Data

Description Information

Luminary Name: DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Date: 2022/08/10
Manufacture: Shenzhen Norming Lighting	Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department	Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H): 0.110m*0.110m*0.000m	Lum. Area (m2): 0.012	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=5.0	Temp. (°C): 25
		Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 3059.360	Luminary Flux(lm): 3059.355	Field Angle(10%Imax): 54.1(°)
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 3005.494lm 98.24%
Rated Voltage(V):	Luminary EER(lm/W): 90.836	Up Lumens&Percent: 53.861lm 1.76%
Tested Power(W): 33.680	Max. Candela(cd): 7882.070	S/MH: C0_a180=0.590 C90_270=0.596
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=0.0	CIE Type: Semi-Direct
Tested Electrics (V, A, pf): 240.0, 0.146, 0.959	Beam Angle(50%Imax): 34.8(°)	ErP Φ use(90°): 2940.053lm
Lamp Size (W*L*H): 0.110m*0.110m*0.000m	Left=-18.4°, Right=16.5°	IRF(%): 586.896

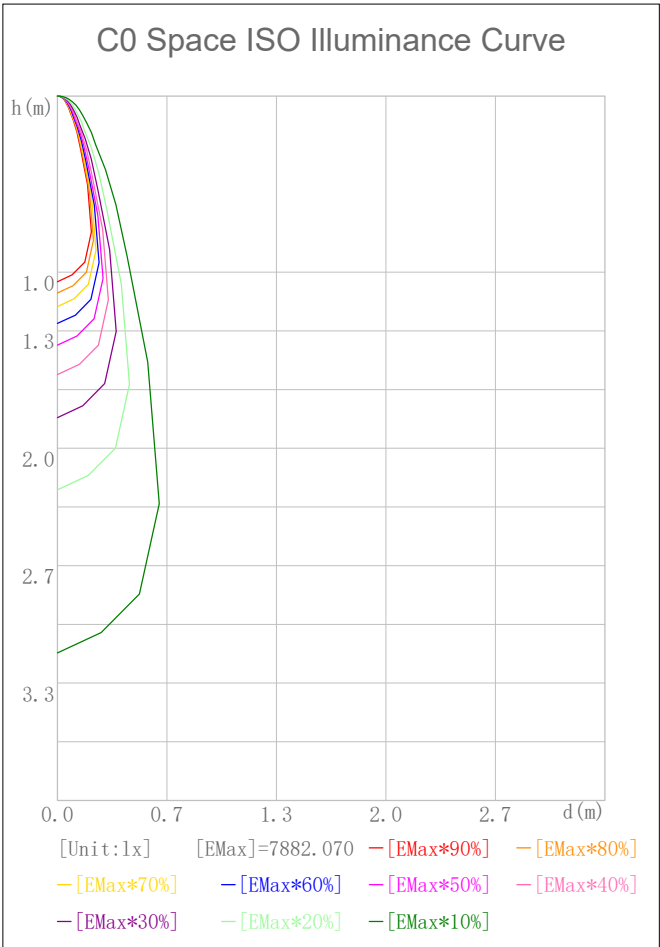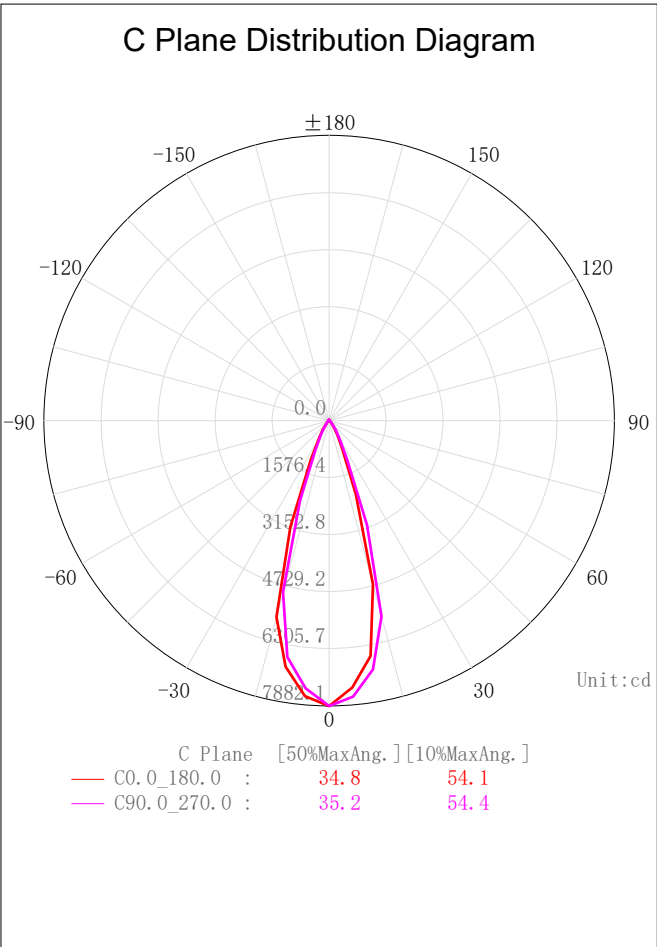

2D Plane Light Intensity Distribution Curve


Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/10

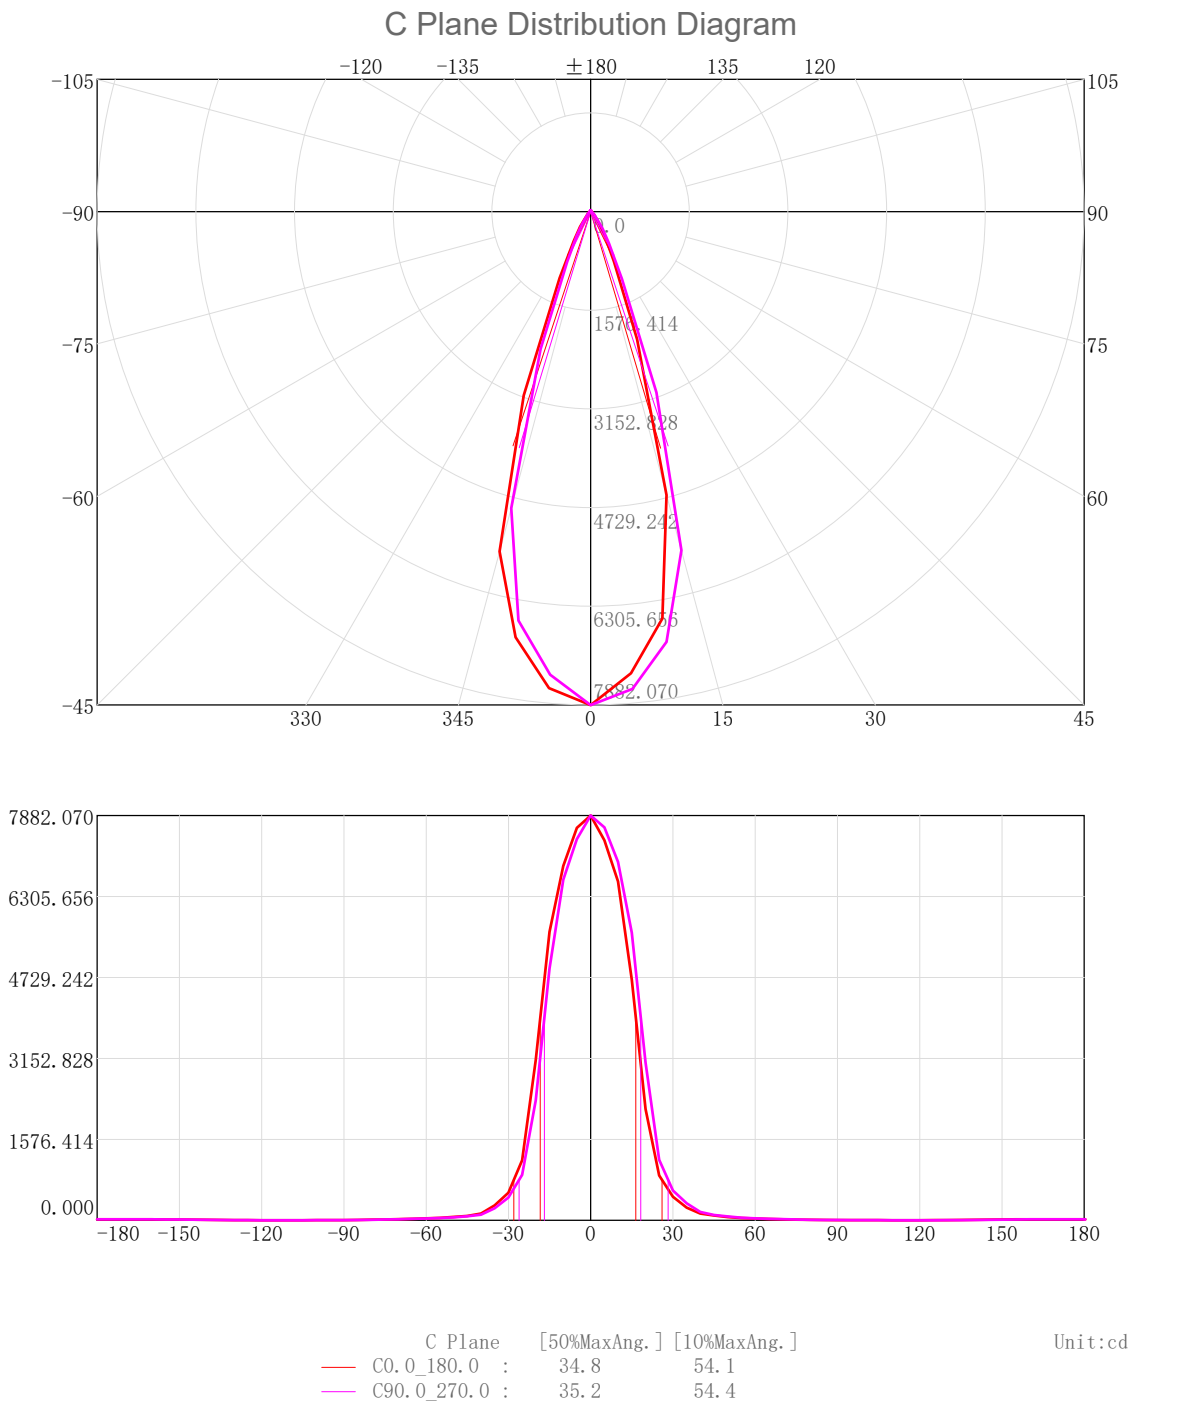

3D Light Intensity Distribution Modal

Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/10

3D Light Intensity Distribution Modal

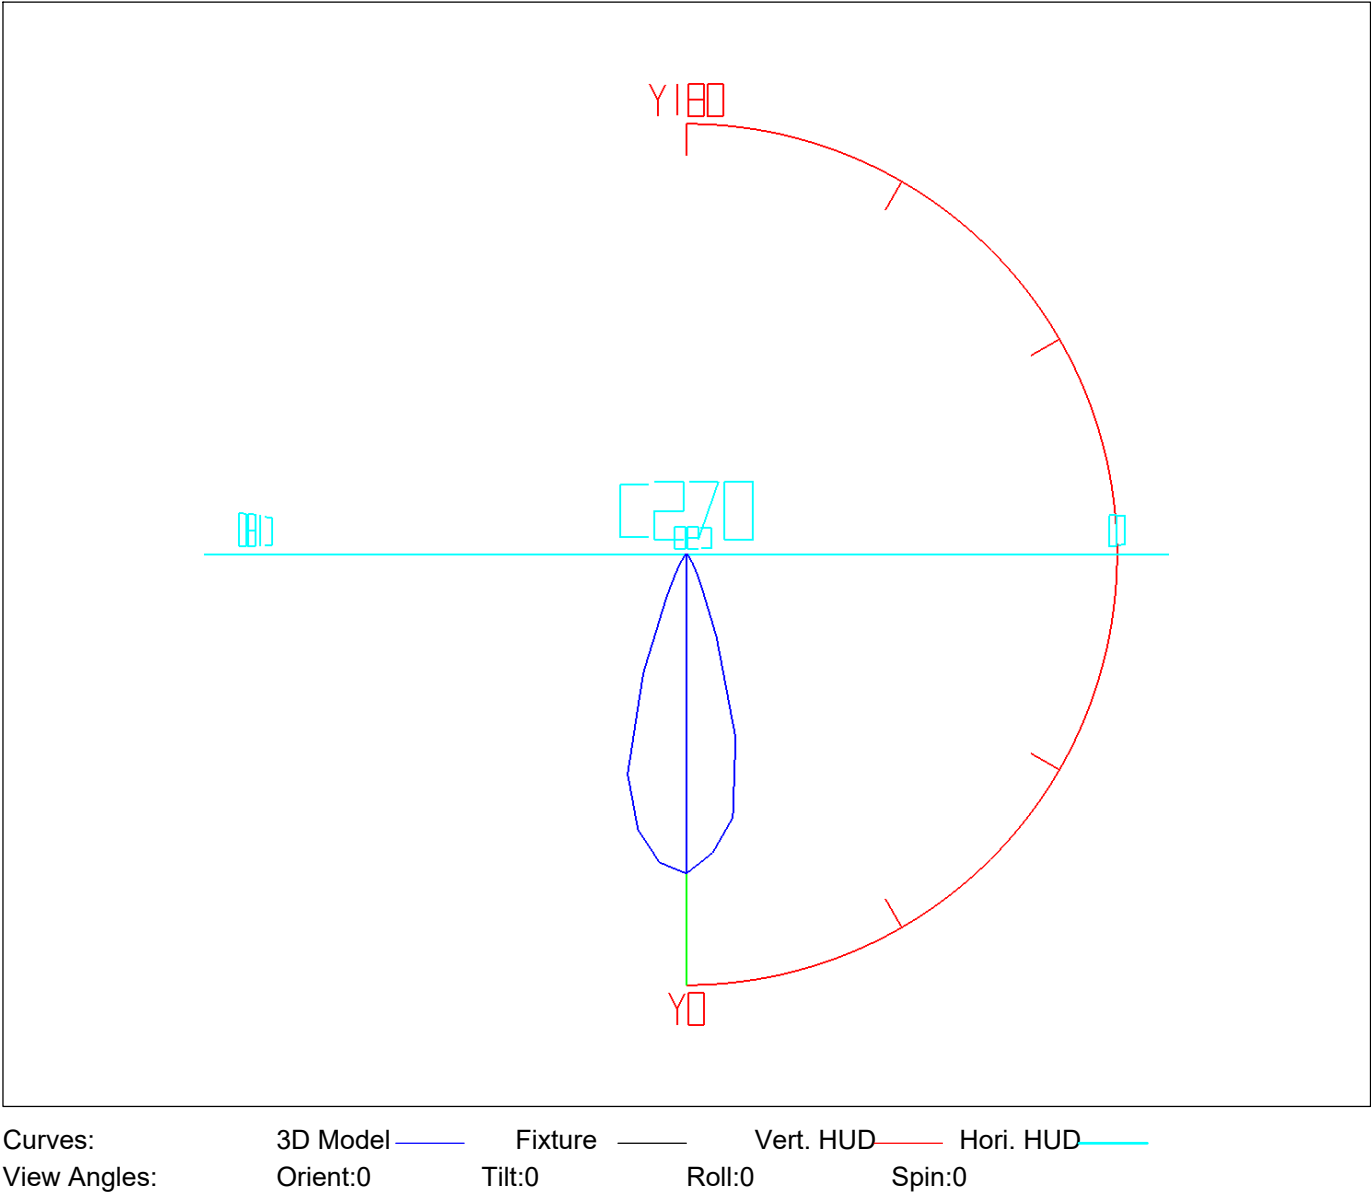


Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-5.0	184.24	184.24	6.02	6.02
5.0-10.0	511.81	696.05	16.73	22.75
10.0-15.0	710.64	1406.69	23.23	45.98
15.0-20.0	649.20	2055.89	21.22	67.20
20.0-25.0	388.46	2444.35	12.70	79.90
25.0-30.0	194.25	2638.60	6.35	86.25
30.0-35.0	115.46	2754.06	3.77	90.02
35.0-40.0	69.25	2823.31	2.26	92.28
40.0-45.0	42.40	2865.71	1.39	93.67
45.0-50.0	32.35	2898.06	1.06	94.73
50.0-55.0	25.52	2923.59	0.83	95.56
55.0-60.0	20.35	2943.94	0.67	96.23
60.0-65.0	16.95	2960.89	0.55	96.78
65.0-70.0	13.84	2974.73	0.45	97.23
70.0-75.0	11.02	2985.76	0.36	97.59
75.0-80.0	8.56	2994.31	0.28	97.87
80.0-85.0	6.42	3000.73	0.21	98.08
85.0-90.0	4.76	3005.49	0.16	98.24
90.0-95.0	3.71	3009.21	0.12	98.36
95.0-100.0	3.09	3012.30	0.10	98.46
100.0-105.0	2.68	3014.98	0.09	98.55
105.0-110.0	2.36	3017.34	0.08	98.63
110.0-115.0	2.16	3019.50	0.07	98.70
115.0-120.0	2.10	3021.59	0.07	98.77
120.0-125.0	2.19	3023.78	0.07	98.84
125.0-130.0	2.52	3026.30	0.08	98.92
130.0-135.0	3.09	3029.39	0.10	99.02
135.0-140.0	3.78	3033.17	0.12	99.14
140.0-145.0	4.34	3037.51	0.14	99.29
145.0-150.0	4.70	3042.21	0.15	99.44
150.0-155.0	4.72	3046.92	0.15	99.59
155.0-160.0	4.30	3051.22	0.14	99.73
160.0-165.0	3.52	3054.74	0.12	99.85
165.0-170.0	2.55	3057.30	0.08	99.93
170.0-175.0	1.54	3058.83	0.05	99.98
175.0-180.0	0.52	3059.36	0.02	100.00

Rectangle ISO Lighting Intensity Diagram


Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/10

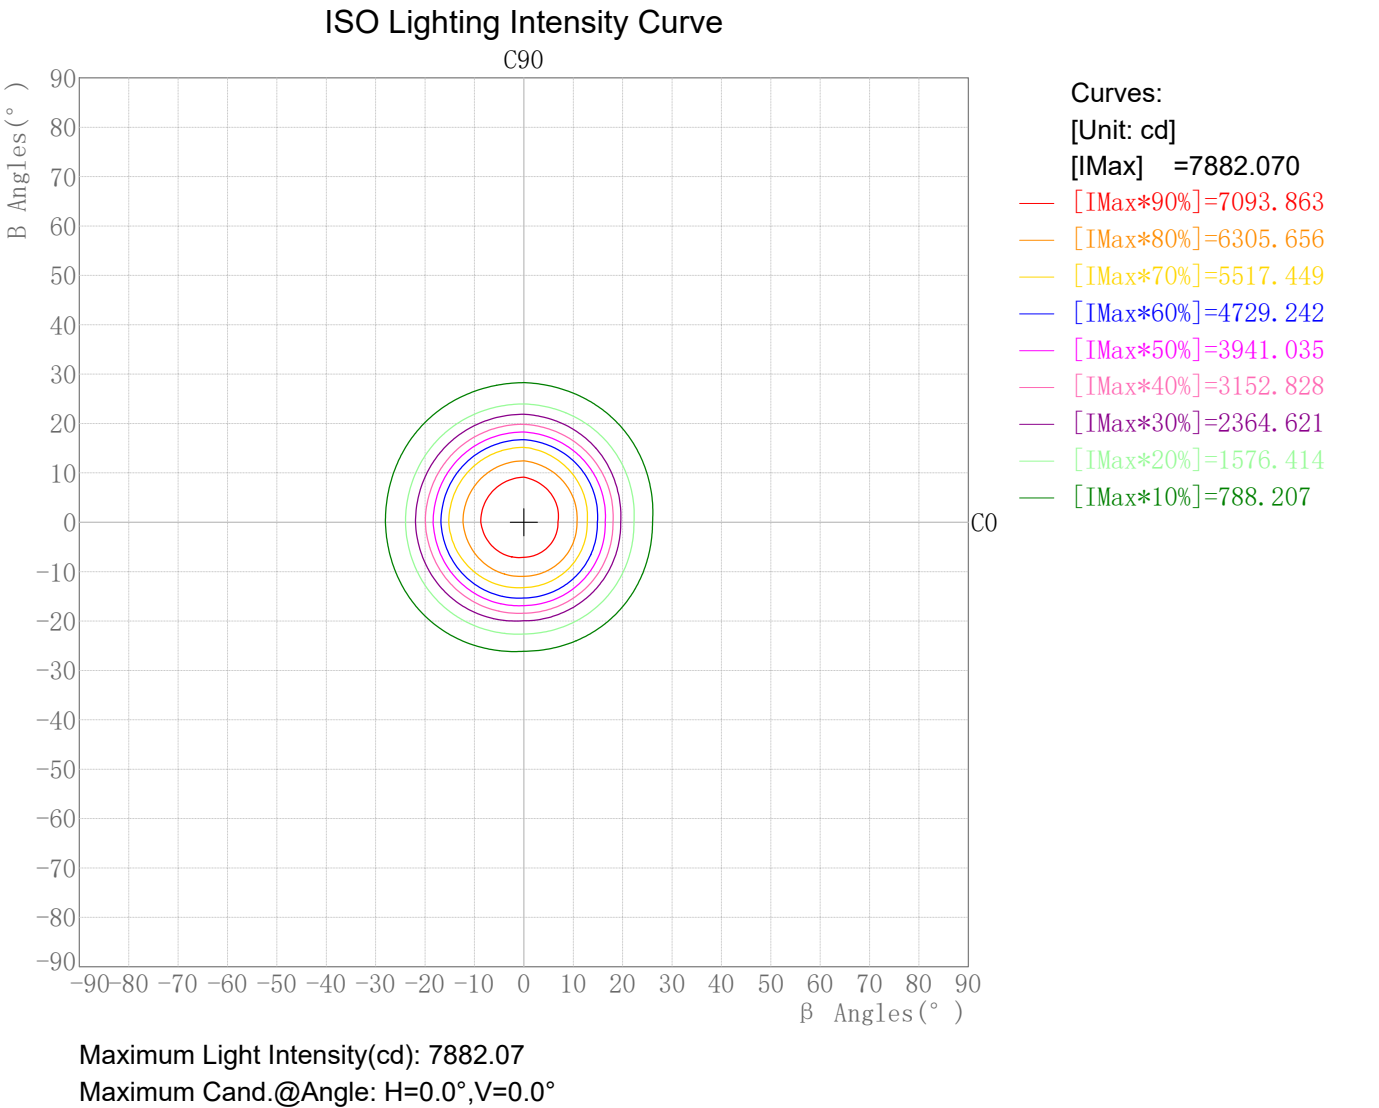

## Plane ISO-Illuminance Diagram

Lum. Name: DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/10

### Plane ISO-Illuminance Curve

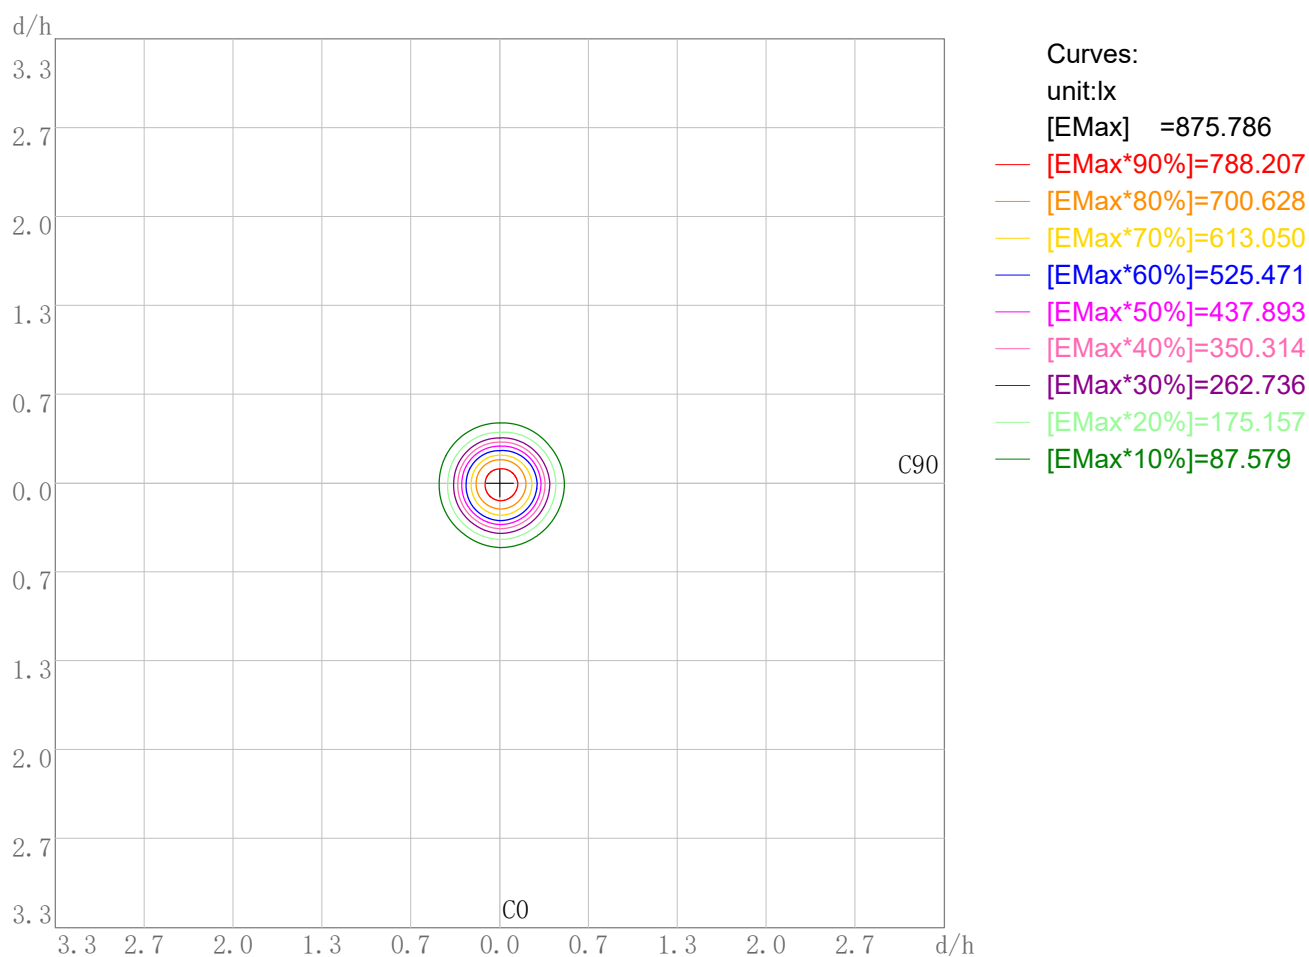


Working Plane Luminaire Mounting Height(m): 3.00  
Working Plane Maximum Illuminance(lx): 875.79  
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name: DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/10


3D Plane Illuminance Modal

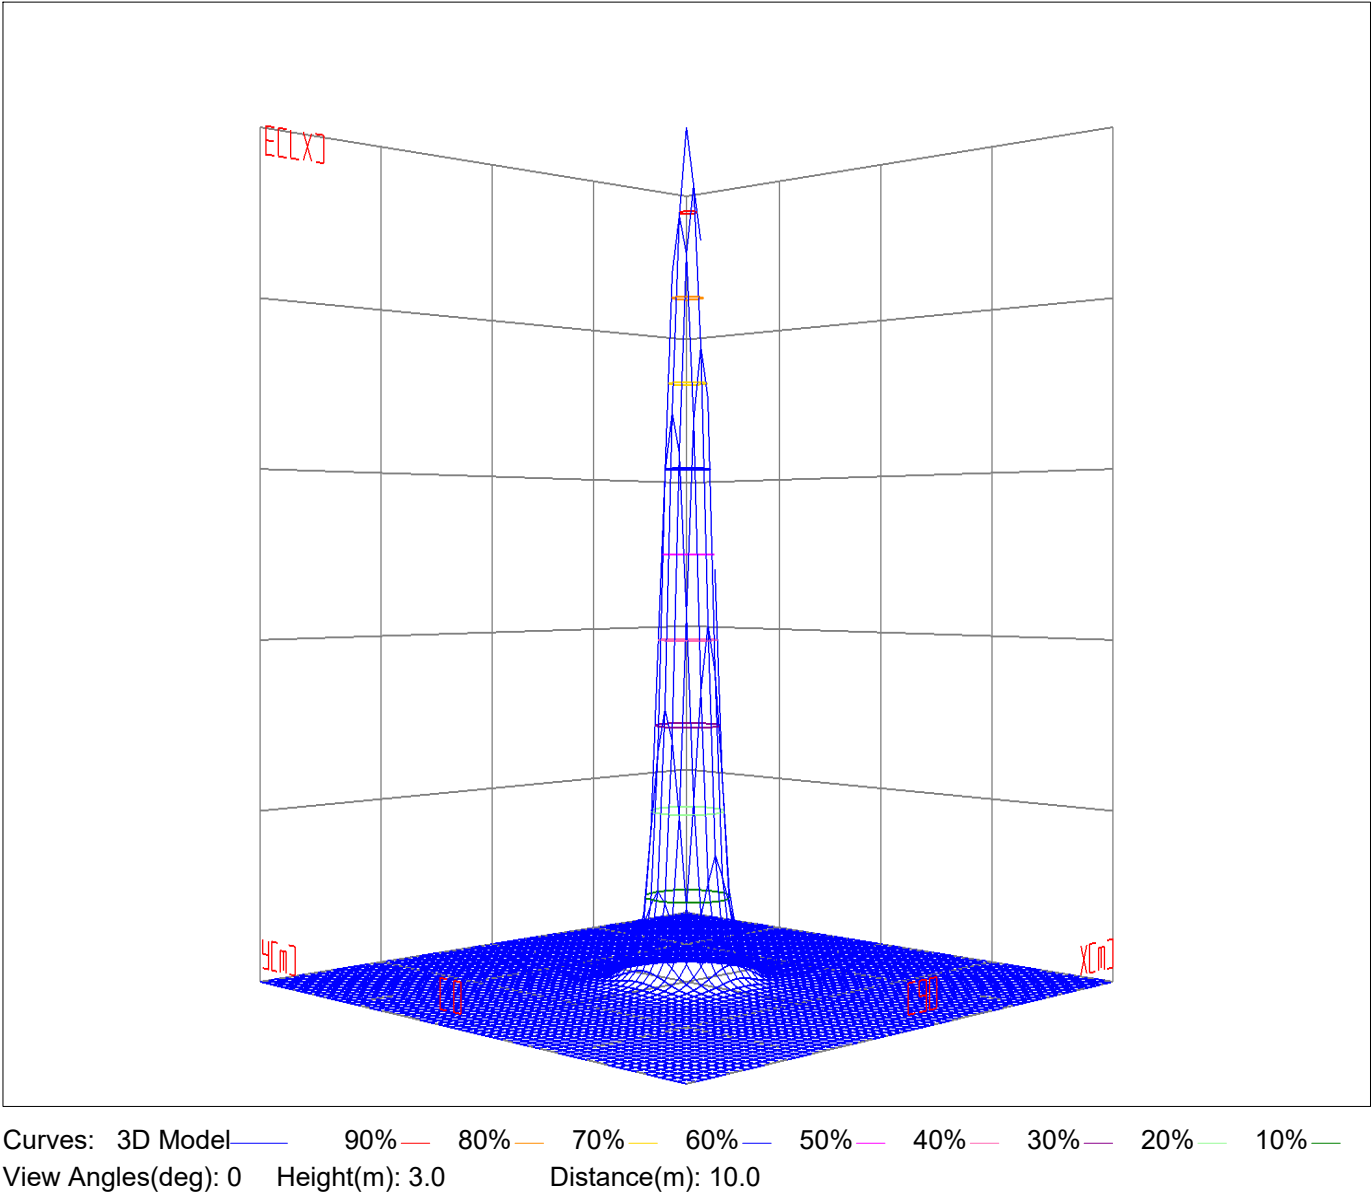

Space ISO Illuminance Diagram

Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/10

Space ISO Illuminance Curve

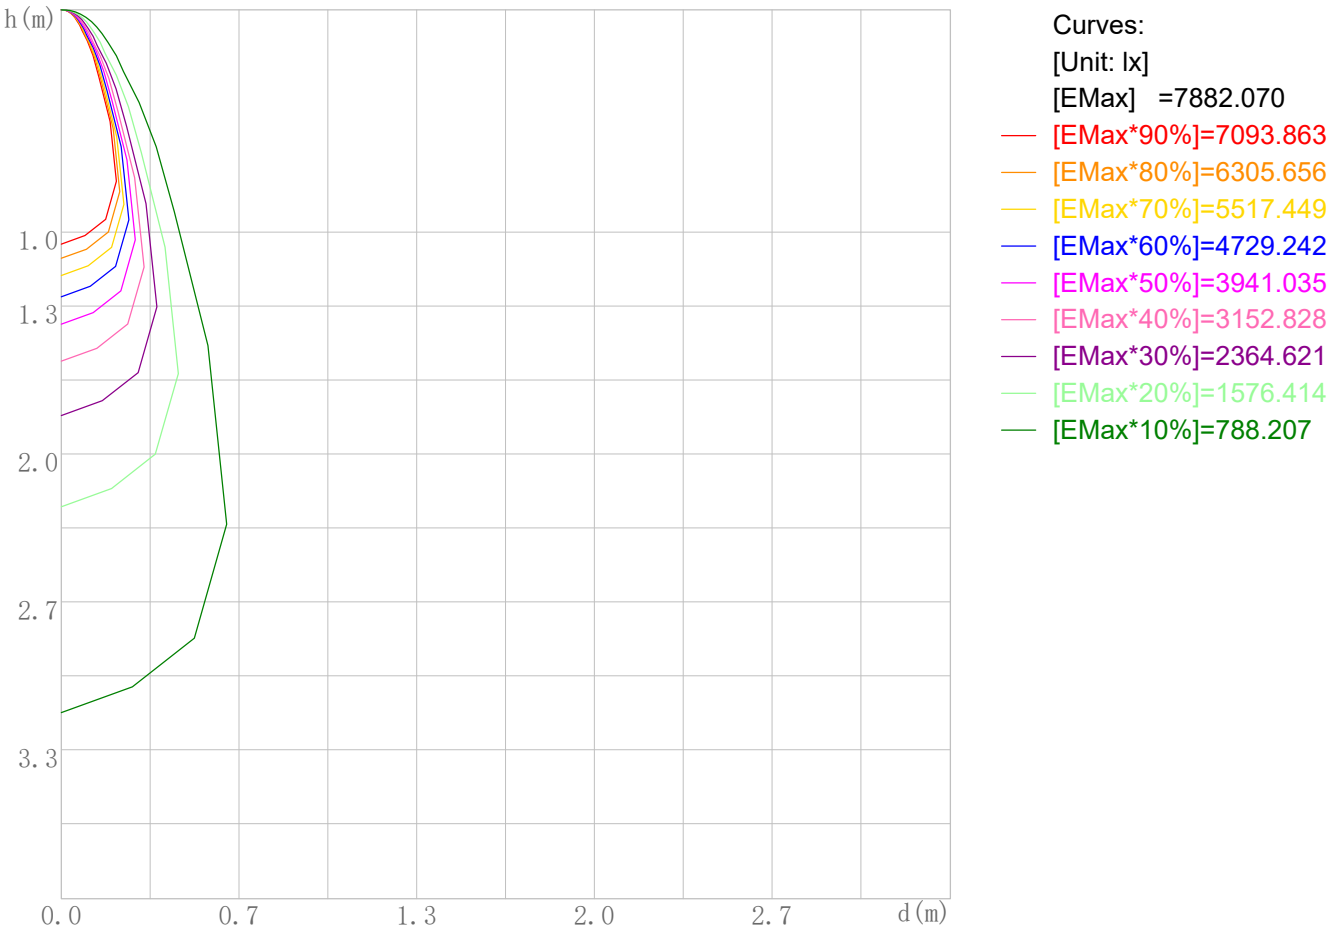


Space Plane Maximum Illuminance and @Angle:7882.07lx,0.0deg  
Plane Maximum Lighting Intensity and @Angle:7882.070cd,0deg



Illuminance-Distance Diagram

Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/10

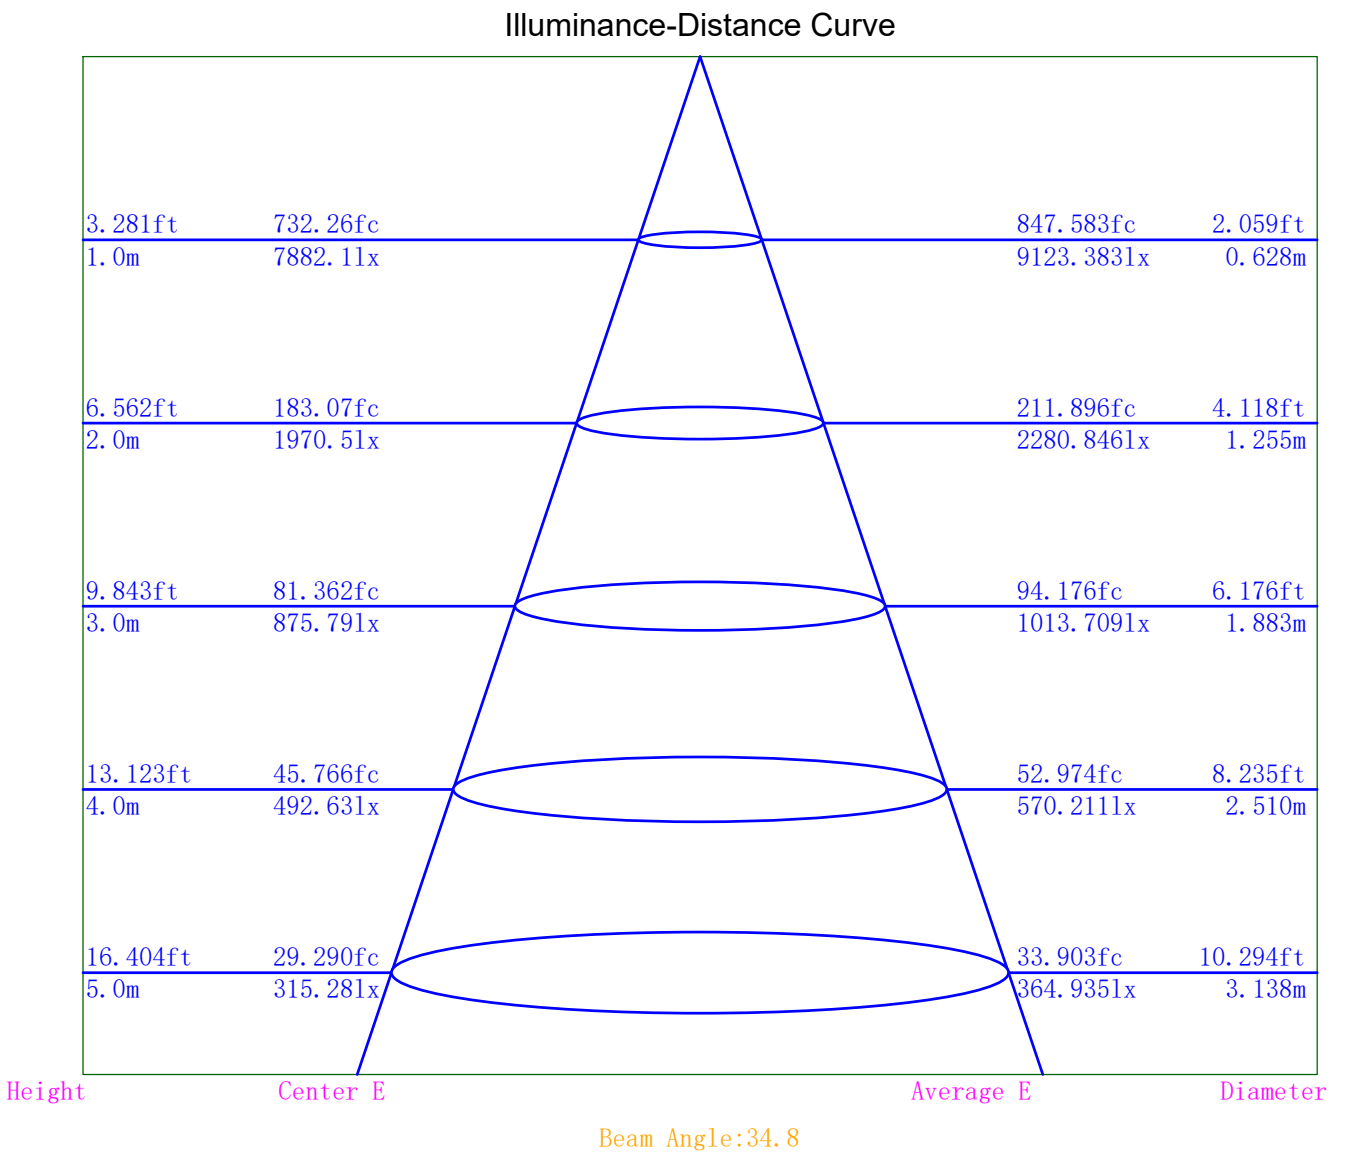

Indoor Luminance Limiting Curves

Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/10


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	11116	8275	6834	6132	5725	5390	5368	6185	8931
C90	12336	10136	7582	6703	6179	5896	5890	6585	9776

Luminance Limiting Curve

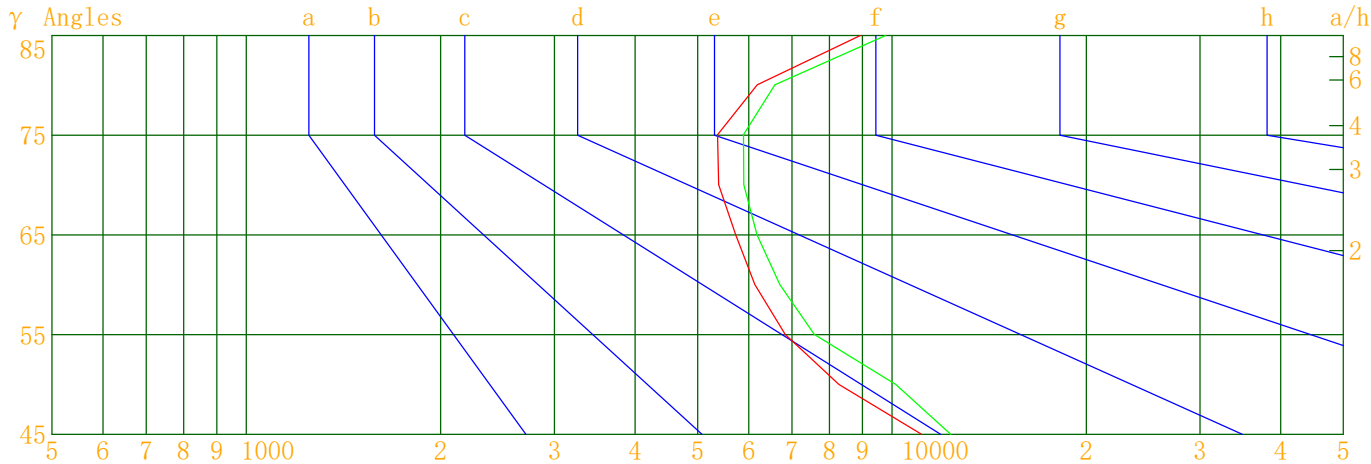


Luminous Size:Length(m)=0.110Width(m)=0.110Height(m)=0.000Area(m^2)=0.012100

Luminous Type:Without Luminous Side

Luminous Curves:C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/10

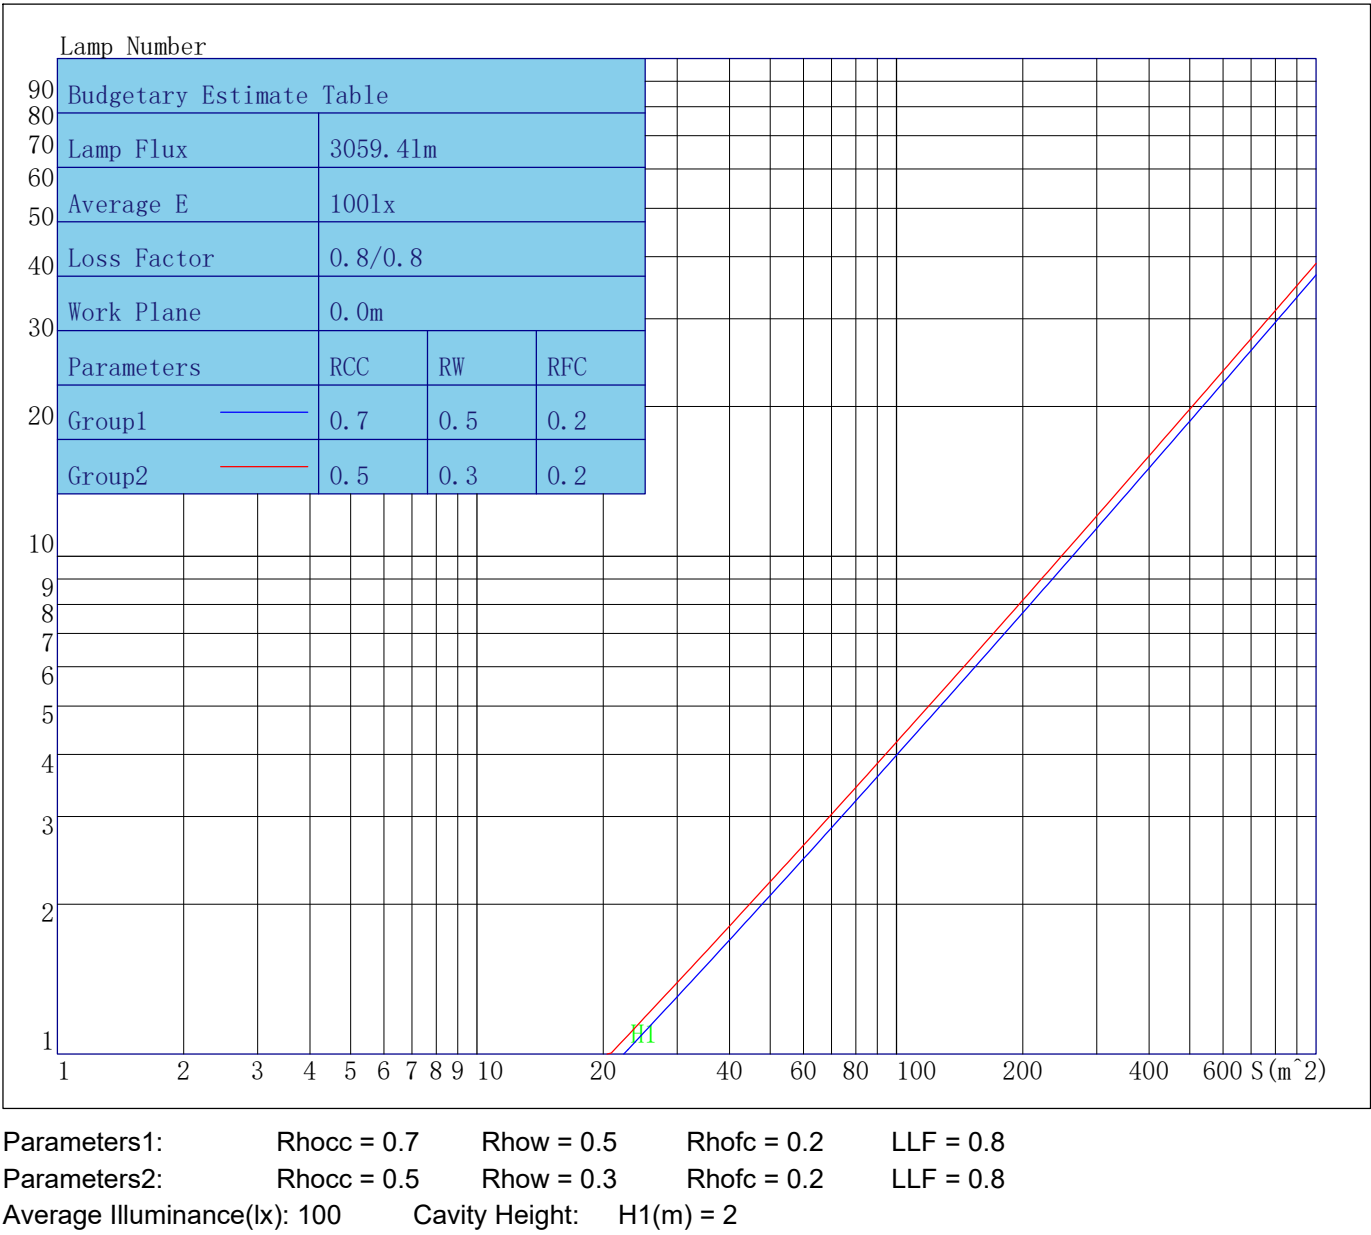

Indoor Coefficient of Utilization Table

Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/10

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	114	111	109	107	111	109	107	105	104	103	101	100	99	98	97	96	95	93
2	109	105	101	98	107	103	100	97	99	97	95	96	94	92	93	92	90	88
3	105	99	95	91	103	98	94	91	95	92	89	92	90	87	90	88	86	84
4	101	94	89	86	99	93	89	85	91	87	84	89	85	83	87	84	82	80
5	97	90	85	81	95	89	84	81	87	83	80	85	82	79	83	81	78	77
6	93	86	81	77	92	85	80	77	83	79	76	82	78	76	81	77	75	74
7	90	82	77	74	89	82	77	74	80	76	73	79	75	73	78	75	72	71
8	87	79	74	71	86	78	74	71	77	73	70	76	72	70	75	72	69	68
9	84	76	71	68	83	76	71	68	75	70	67	74	70	67	73	69	67	66
10	81	73	69	65	80	73	68	65	72	68	65	71	67	65	70	67	65	63

Unified Glare Rating Table

Lum. Name:DL51-35-XX-01 3000K RA90 36D 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/10

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H    Y=2H	13.6	14.5	14.0	14.8	15.2	14.5	15.4	14.9	15.8	16.1	
	Y=3H	14.2	15.0	14.6	15.4	15.8	15.1	15.9	15.5	16.2	16.7
	Y=4H	14.6	15.3	15.0	15.7	16.1	15.4	16.1	15.9	16.5	17.0
	Y=6H	15.0	15.6	15.4	16.0	16.5	15.8	16.4	16.2	16.8	17.3
	Y=8H	15.2	15.8	15.7	16.2	16.7	16.0	16.6	16.4	17.0	17.5
	Y=12H	15.4	16.0	15.9	16.5	16.9	16.2	16.8	16.7	17.2	17.7
X=4H    Y=2H	13.7	14.5	14.2	14.8	15.3	14.6	15.3	15.1	15.7	16.2	
	Y=3H	14.6	15.2	15.1	15.6	16.1	15.4	16.0	15.8	16.4	16.9
	Y=4H	15.1	15.6	15.6	16.1	16.6	15.9	16.4	16.3	16.8	17.3
	Y=6H	15.7	16.1	16.2	16.6	17.1	16.4	16.8	16.9	17.3	17.8
	Y=8H	16.0	16.4	16.5	16.9	17.4	16.7	17.1	17.2	17.6	18.1
	Y=12H	16.4	16.7	16.9	17.2	17.7	17.0	17.4	17.5	17.9	18.4
X=8H    Y=4H	15.3	15.7	15.8	16.2	16.7	16.0	16.4	16.5	16.9	17.4	
	Y=6H	16.1	16.4	16.6	16.9	17.4	16.7	17.0	17.2	17.5	18.1
	Y=8H	16.5	16.8	17.1	17.3	17.9	17.1	17.4	17.7	17.9	18.5
	Y=12H	17.1	17.3	17.6	17.8	18.4	17.7	17.9	18.2	18.4	19.0
X=12H    Y=4H	15.3	15.6	15.8	16.2	16.7	16.0	16.3	16.5	16.8	17.4	
	Y=6H	16.1	16.4	16.7	16.9	17.5	16.8	17.0	17.3	17.5	18.1
	Y=8H	16.7	16.9	17.2	17.4	18.1	17.3	17.5	17.8	18.0	18.7
Variations with the objerver position at spacings											
S=1.0H	0.2/-0.2					0.2/-0.2					
S=1.5H	0.4/-0.4					0.4/-0.4					
S=2.0H	0.5/-0.6					0.5/-0.6					
Reduced UGR Table:											
Nordic Standard Table:	BK0					BK0					
Correction Value	2.5					2.3					

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	7882.07	7882.07	7882.07	7882.07
γ 5.0	7400.70	7651.77	7641.40	7423.51
γ 10.0	6598.89	6977.09	6901.88	6632.89
γ 15.0	4686.28	5600.43	5618.32	4904.03
γ 20.0	2168.47	3073.32	3122.20	2336.21
γ 25.0	875.22	1180.96	1172.06	886.80
γ 30.0	461.17	581.69	537.62	444.19
γ 35.0	249.34	333.34	293.17	235.81
γ 40.0	135.11	166.60	133.48	113.40
γ 45.0	95.11	105.54	85.75	80.92
γ 50.0	64.36	78.83	70.06	59.91
γ 55.0	47.43	52.62	49.95	46.39
γ 60.0	37.10	40.55	40.48	37.68
γ 65.0	29.28	31.59	32.61	29.67
γ 70.0	22.31	24.40	25.84	22.95
γ 75.0	16.81	18.44	19.83	18.09
γ 80.0	13.00	13.84	14.90	13.00
γ 85.0	9.42	10.31	10.63	9.40
γ 90.0	6.95	7.94	7.75	7.19
γ 95.0	5.99	6.46	5.75	6.20
γ 100.0	5.23	5.62	5.26	4.97
γ 105.0	4.97	4.91	4.61	4.46
γ 110.0	4.46	4.37	4.05	4.31
γ 115.0	4.33	4.14	4.09	4.33
γ 120.0	4.21	4.22	4.56	4.63
γ 125.0	5.03	4.51	5.09	5.60
γ 130.0	6.56	5.78	6.47	7.25
γ 135.0	9.08	7.62	8.65	9.79
γ 140.0	12.01	10.68	11.36	12.44
γ 145.0	14.57	13.34	14.53	15.20
γ 150.0	17.59	16.61	17.55	18.19
γ 155.0	20.40	18.79	19.88	20.08
γ 160.0	21.55	20.38	21.57	21.25
γ 165.0	21.50	21.31	22.23	21.19
γ 170.0	21.68	20.99	22.10	21.07
γ 175.0	21.71	21.41	21.81	21.28
γ 180.0	21.99	21.99	21.99	21.99