



Indoor Luminaire Photometric Data

Description Information

Luminary Name: DL52-06-DW-02 1800-3000K RA90 15D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2022/08/18
Manufacture: Shenzhen Norming Lighting		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.039m*0.039m*0.000m		Lum. Area (m2):0.001	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=5.0	Temp. (°C): 25	Humidity(%):


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 397.020	Luminary Flux(lm): 397.024	Field Angle(10%Imax): 43.4(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 396.322lm 99.82%	
Rated Voltage(V):	Luminary EER(lm/W): 68.464	Up Lumens&Percent: 0.702lm 0.18%	
Tested Power(W): 5.799	Max. Candela(cd): 1830.863	S/MH: C0_a180=0.383 C90_270=0.427	
Lamps' Inside: 1	Max Cand@Ang. (°): C=270.0 γ=5.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):239.8, 0.029	Beam Angle(50%Imax): 23.0(°)	ErP Φ use(90°): 366.415lm	
Lamp Size (W*L*H):0.039m*0.039m*0.000m	Left=-6.7°, Right=16.3°	IRF(%): 1112.621	

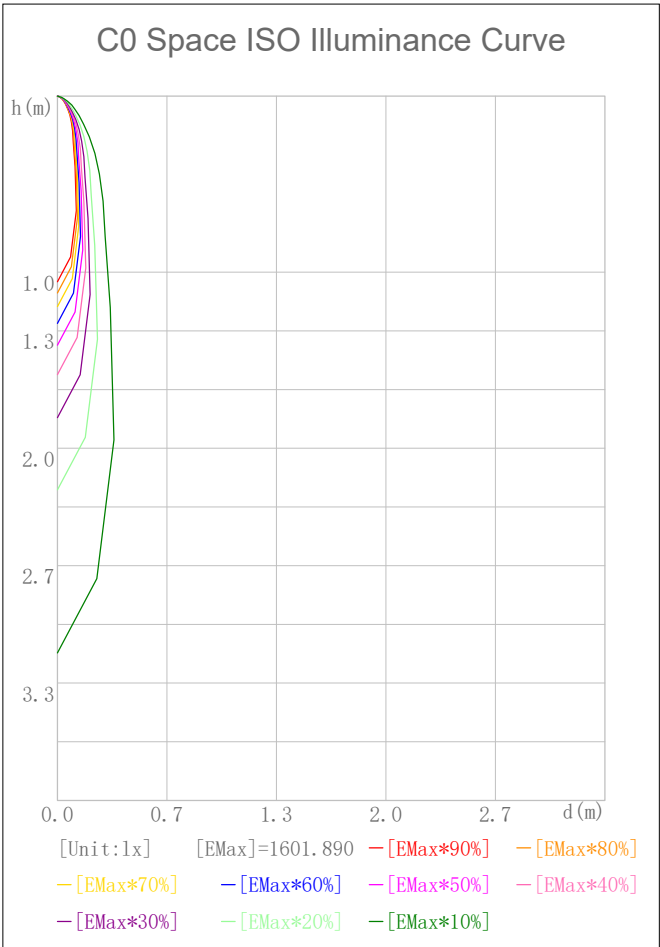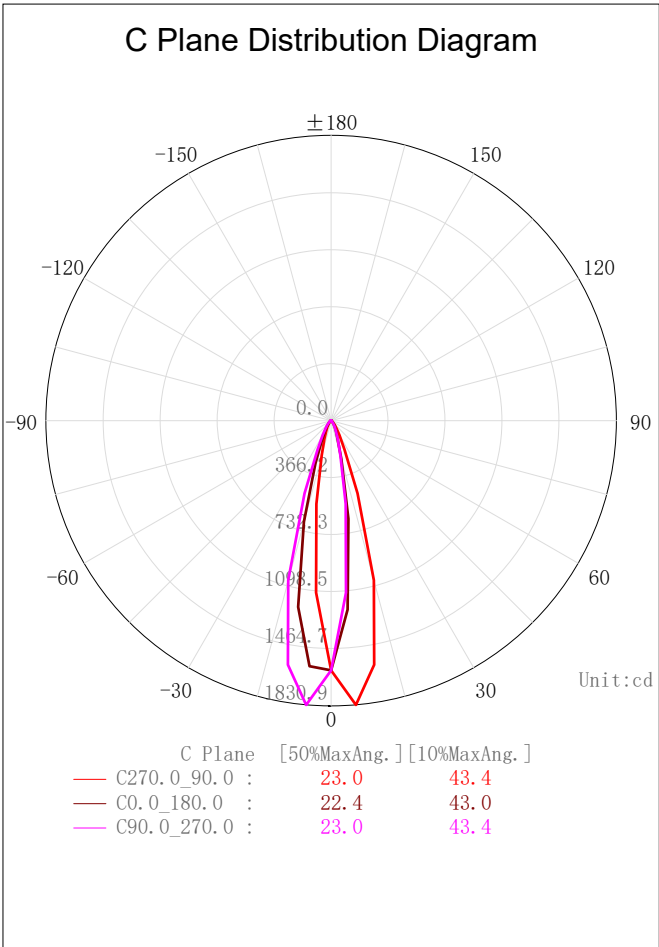

2D Plane Light Intensity Distribution Curve


Lum. Name:DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/18

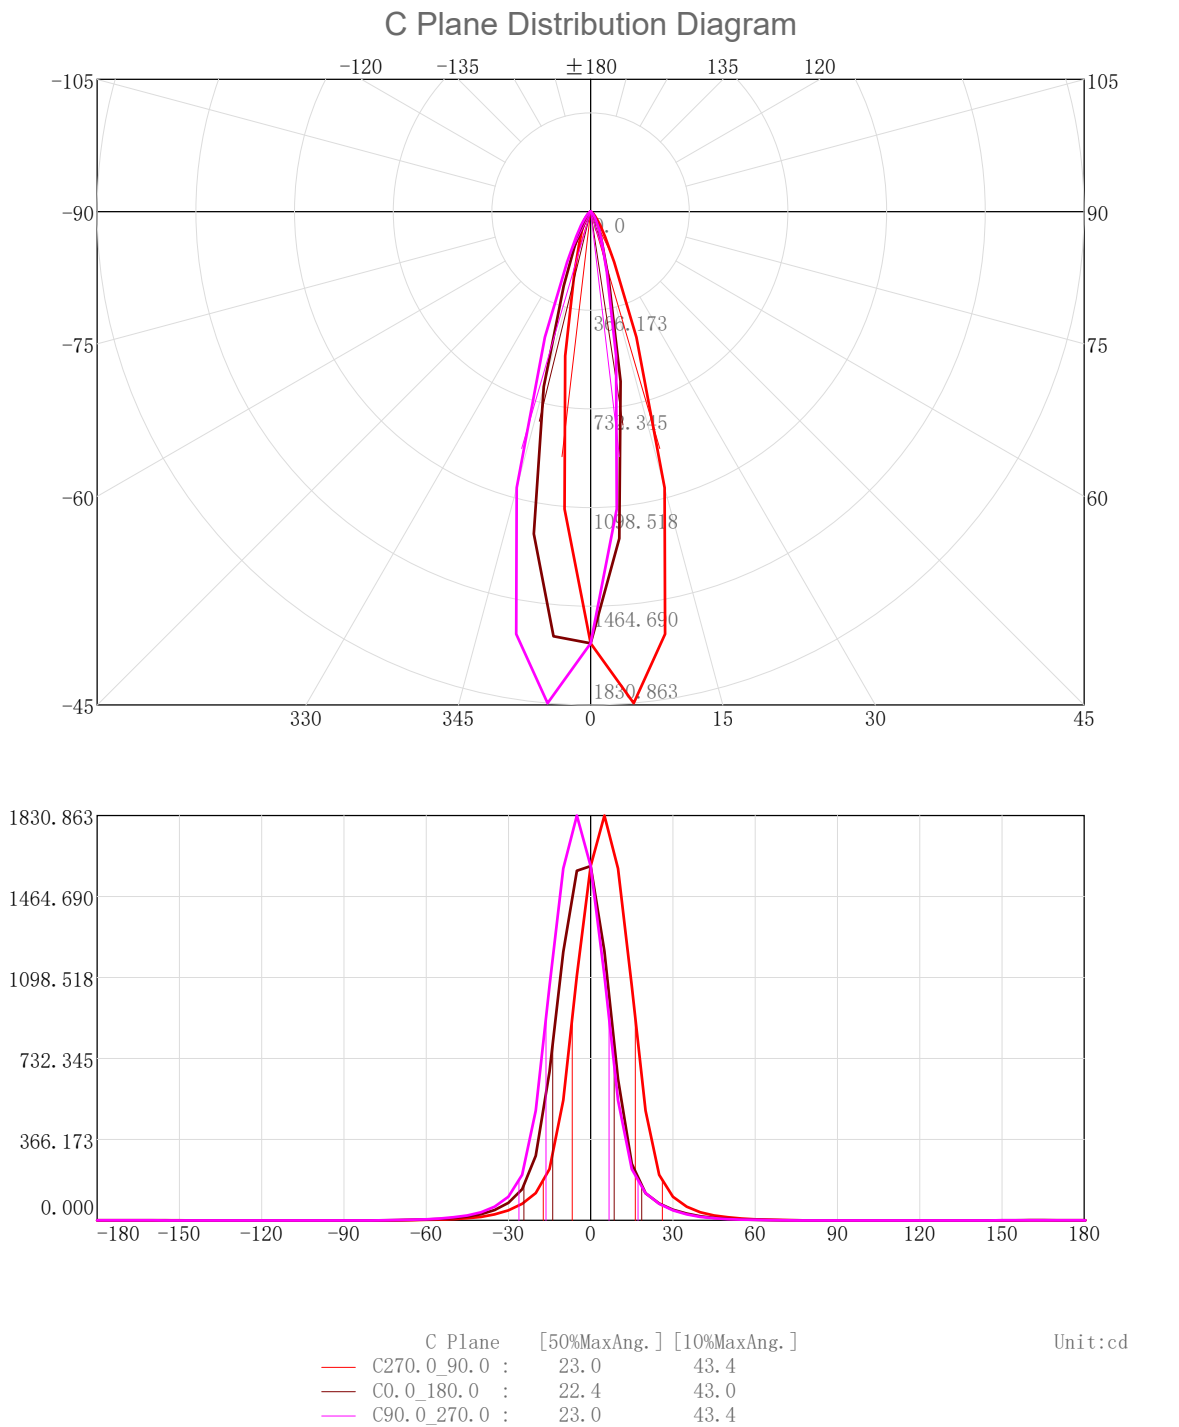

3D Light Intensity Distribution Modal

Lum. Name:DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/18

3D Light Intensity Distribution Modal

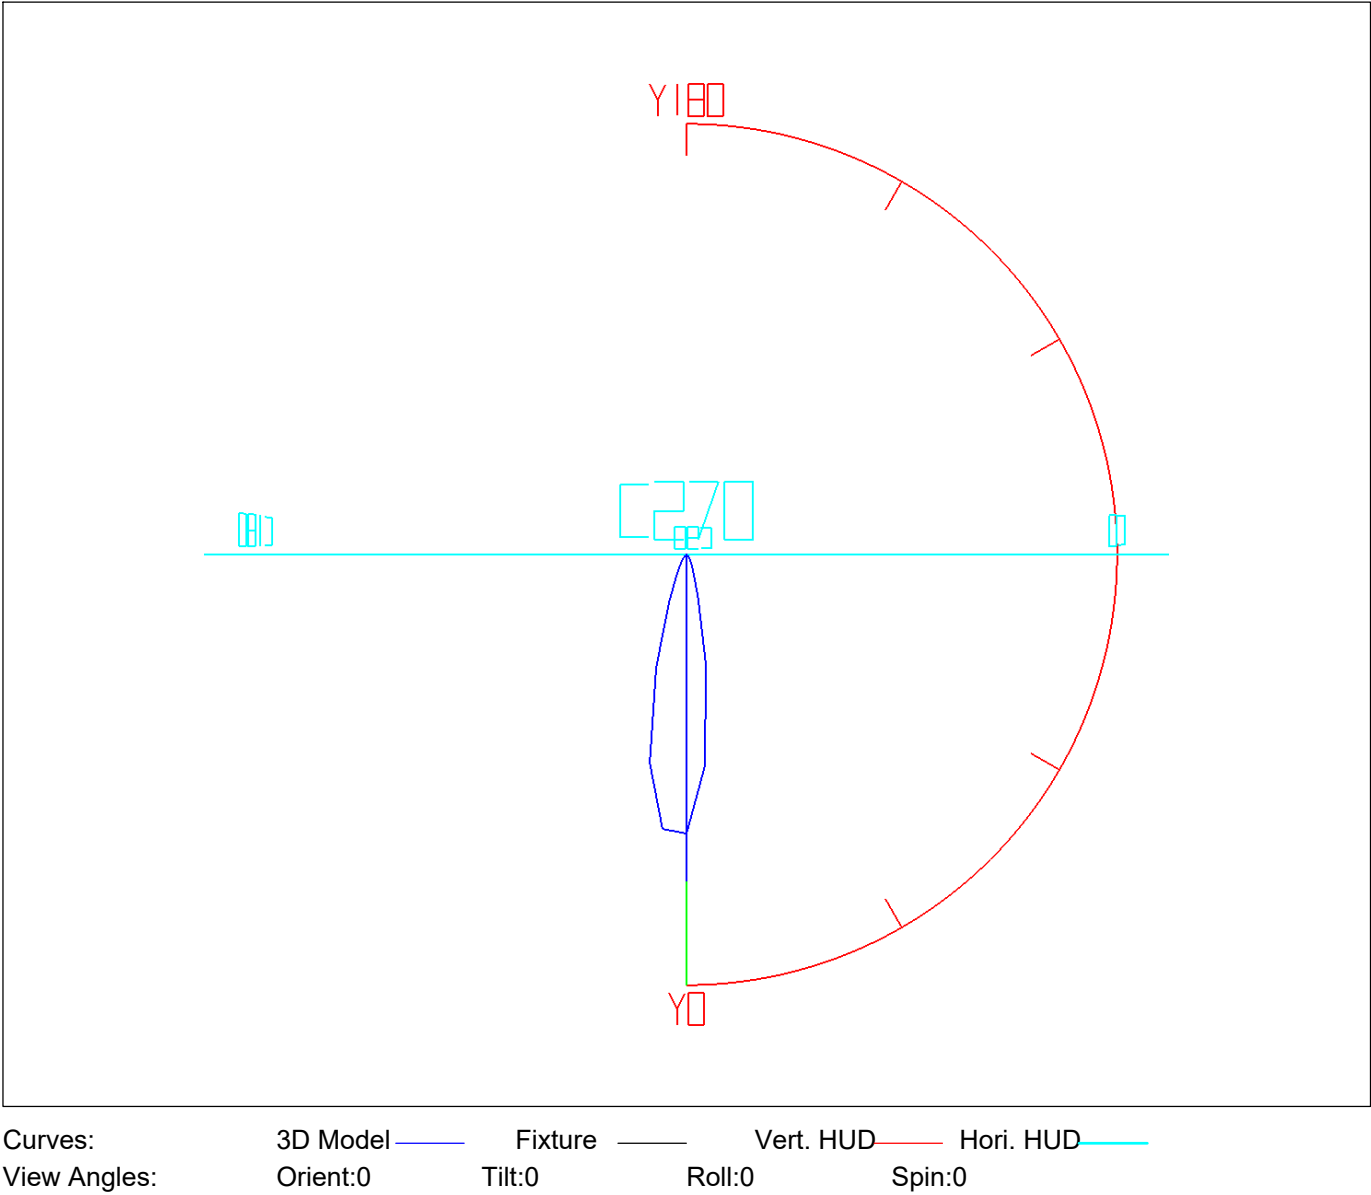


Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0. 0-5. 0	36. 29	36. 29	9. 14	9. 14
5. 0-10. 0	86. 96	123. 26	21. 90	31. 05
10. 0-15. 0	92. 07	215. 33	23. 19	54. 24
15. 0-20. 0	67. 10	282. 42	16. 90	71. 14
20. 0-25. 0	40. 23	322. 66	10. 13	81. 27
25. 0-30. 0	24. 65	347. 31	6. 21	87. 48
30. 0-35. 0	16. 49	363. 81	4. 15	91. 63
35. 0-40. 0	11. 19	375. 00	2. 82	94. 45
40. 0-45. 0	7. 50	382. 50	1. 89	96. 34
45. 0-50. 0	5. 02	387. 52	1. 26	97. 61
50. 0-55. 0	3. 36	390. 89	0. 85	98. 45
55. 0-60. 0	2. 29	393. 18	0. 58	99. 03
60. 0-65. 0	1. 54	394. 71	0. 39	99. 42
65. 0-70. 0	0. 95	395. 66	0. 24	99. 66
70. 0-75. 0	0. 49	396. 15	0. 12	99. 78
75. 0-80. 0	0. 15	396. 30	0. 04	99. 82
80. 0-85. 0	0. 02	396. 32	0. 00	99. 82
85. 0-90. 0	0. 00	396. 32	0. 00	99. 82
90. 0-95. 0	0. 00	396. 32	0. 00	99. 82
95. 0-100. 0	0. 00	396. 32	0. 00	99. 82
100. 0-105. 0	0. 00	396. 32	0. 00	99. 82
105. 0-110. 0	0. 00	396. 32	0. 00	99. 82
110. 0-115. 0	0. 00	396. 32	0. 00	99. 82
115. 0-120. 0	0. 00	396. 32	0. 00	99. 82
120. 0-125. 0	0. 00	396. 32	0. 00	99. 82
125. 0-130. 0	0. 00	396. 32	0. 00	99. 82
130. 0-135. 0	0. 00	396. 32	0. 00	99. 82
135. 0-140. 0	0. 00	396. 32	0. 00	99. 82
140. 0-145. 0	0. 03	396. 35	0. 01	99. 83
145. 0-150. 0	0. 09	396. 44	0. 02	99. 85
150. 0-155. 0	0. 14	396. 58	0. 04	99. 89
155. 0-160. 0	0. 15	396. 73	0. 04	99. 93
160. 0-165. 0	0. 13	396. 86	0. 03	99. 96
165. 0-170. 0	0. 10	396. 96	0. 02	99. 98
170. 0-175. 0	0. 05	397. 01	0. 01	100. 00
175. 0-180. 0	0. 01	397. 02	0. 00	100. 00

Rectangle ISO Lighting Intensity Diagram


Lum. Name:DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/18

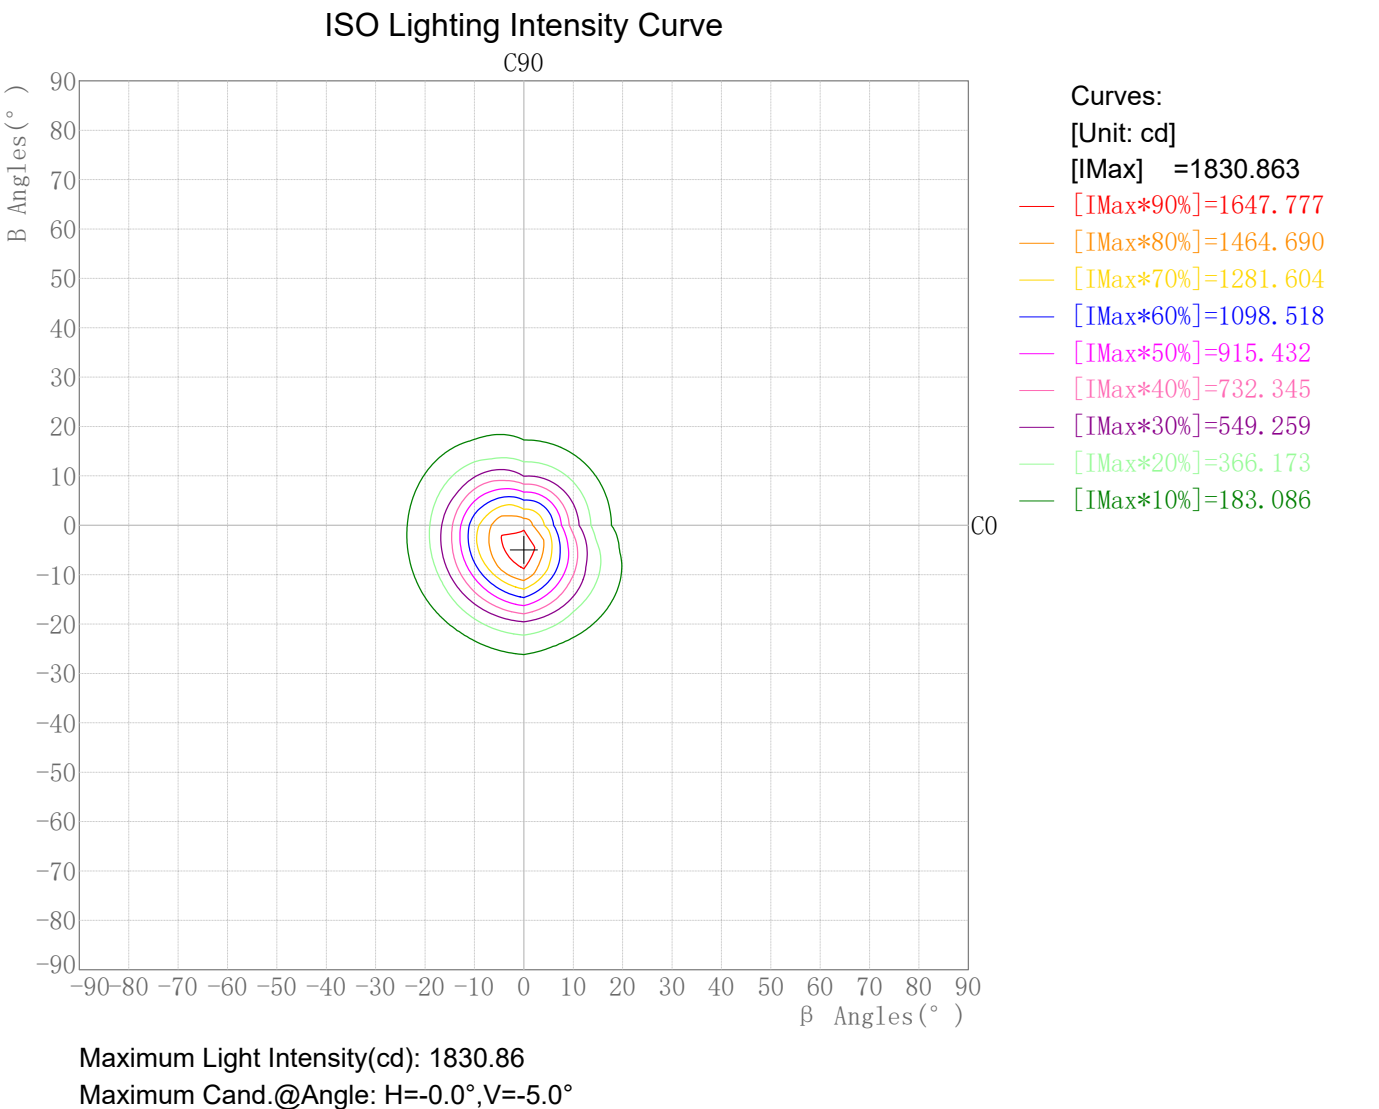

Plane ISO-Illuminance Diagram

Lum. Name:DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/18

Plane ISO-Illuminance Curve

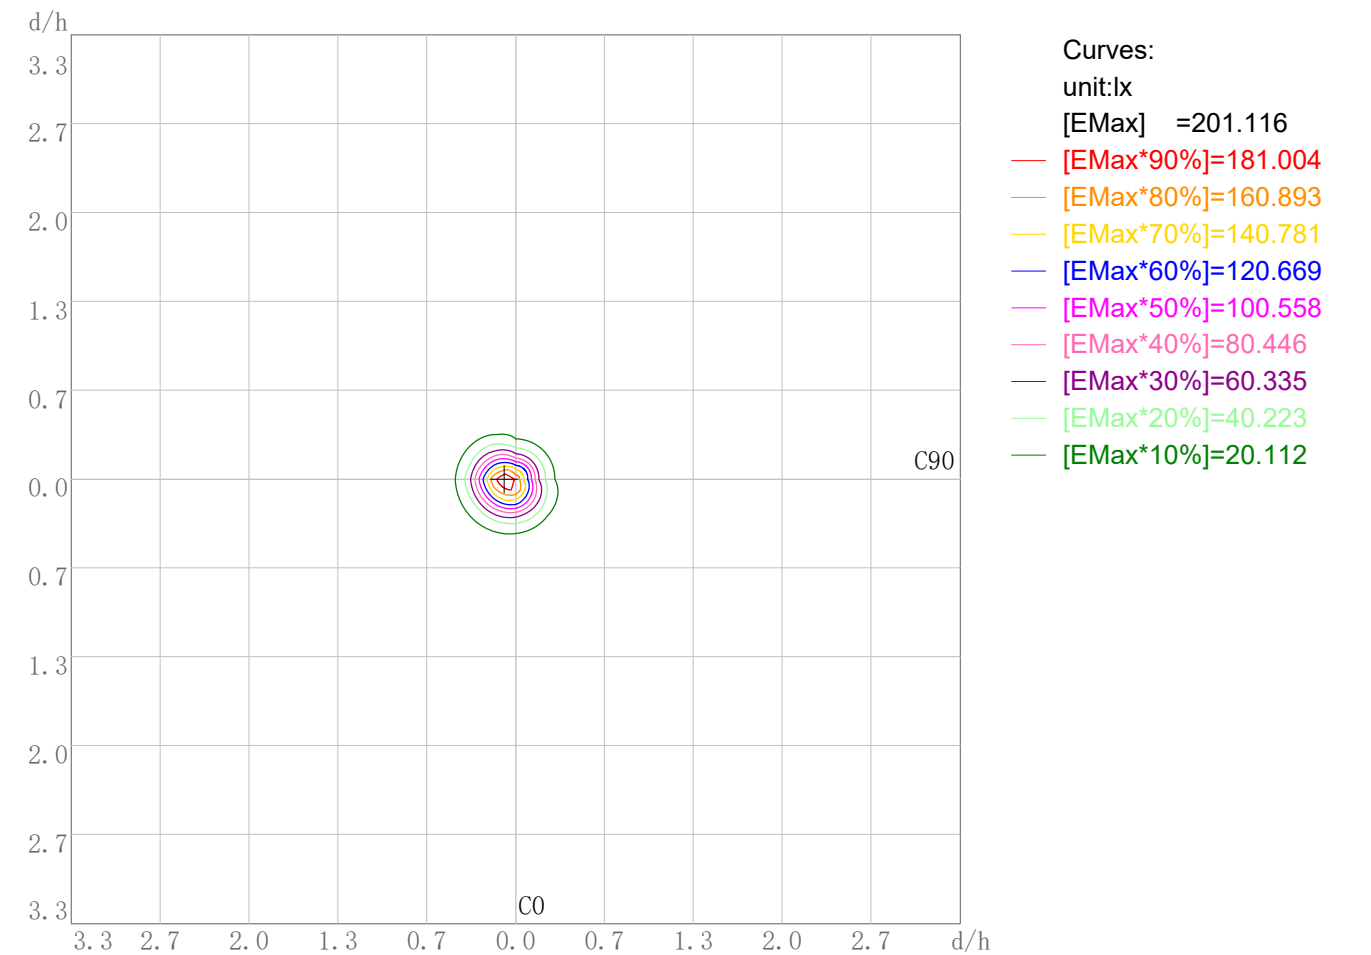


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 201.12
Working Plane Maximum Illuminance Position(d/h):H-0.1 V-0.0

Photometric Filename:DL52-06-DW-02 1800-3000K RA90 15D.IES

3D Plane ISO Illuminance Diagram

Lum. Name: DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/18


3D Plane Illuminance Modal

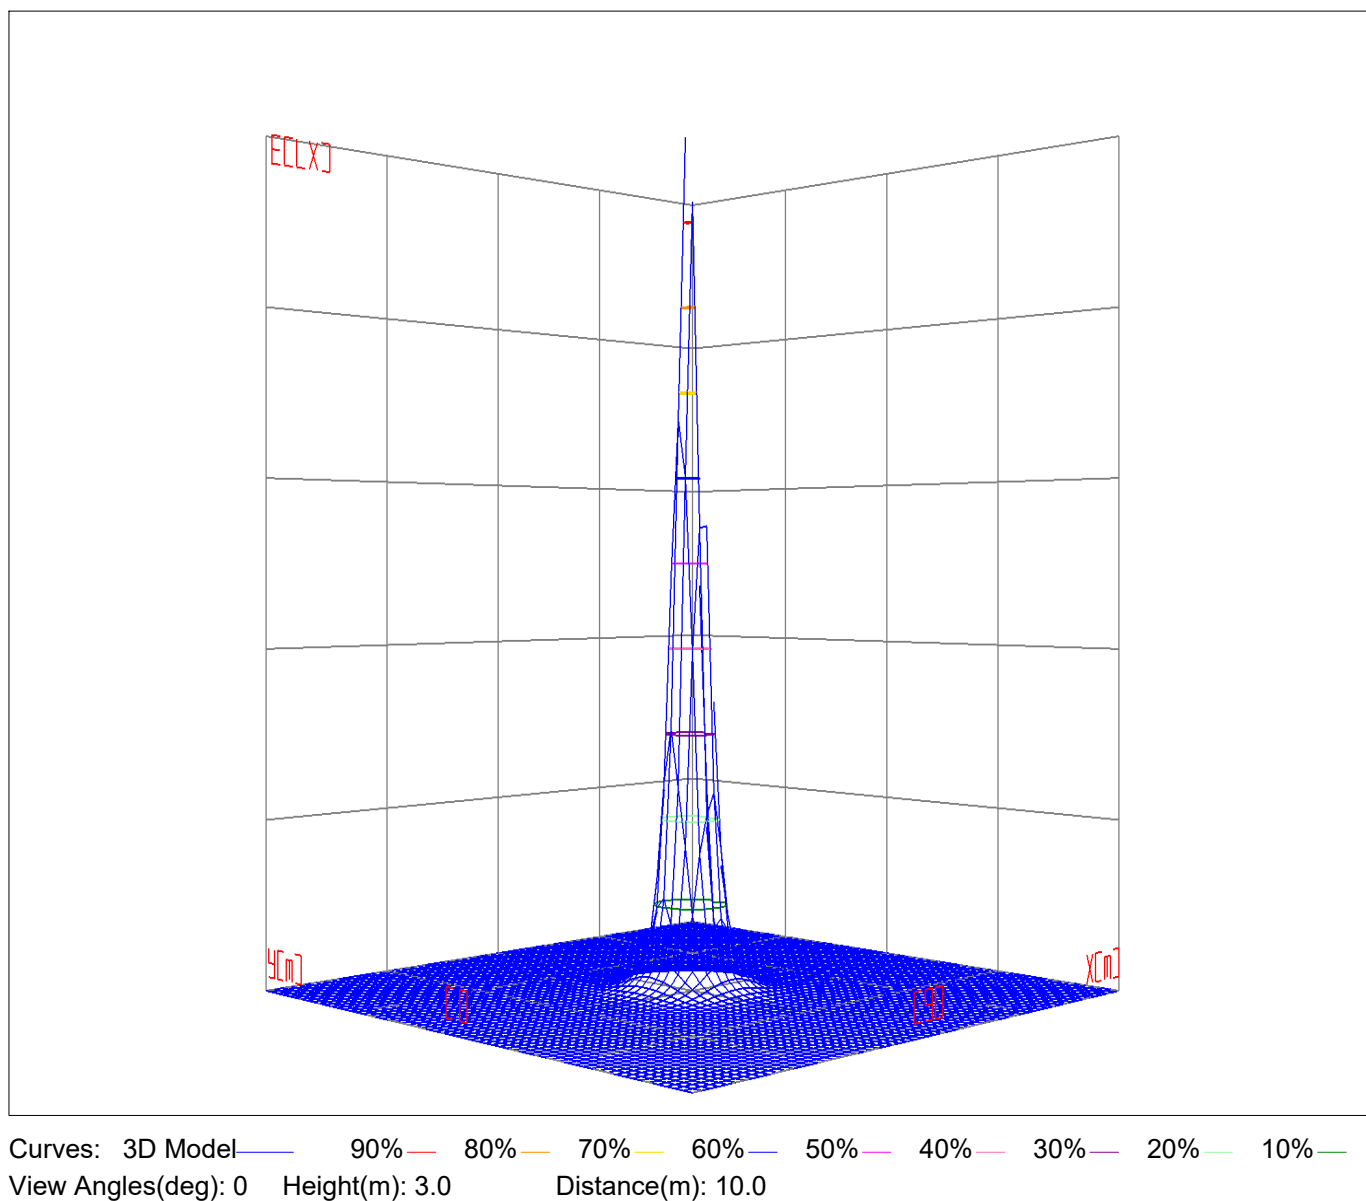

Space ISO Illuminance Diagram

Lum. Name: DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/18


Space ISO Illuminance Curve

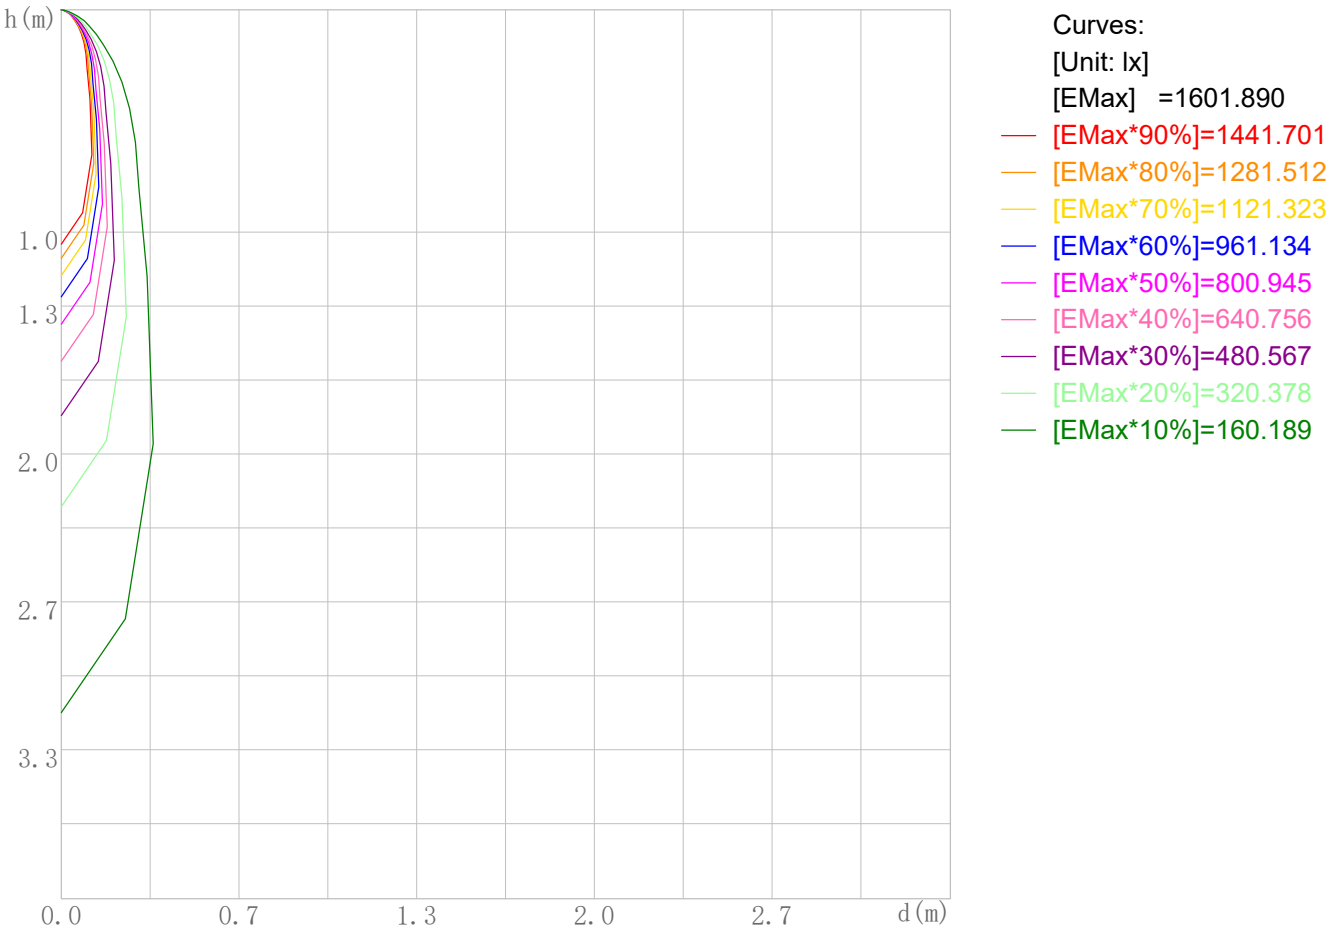

Space Plane Maximum Illuminance and @Angle:1601.89lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:1601.890cd,0deg

Illuminance-Distance Diagram

Lum. Name:DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/18

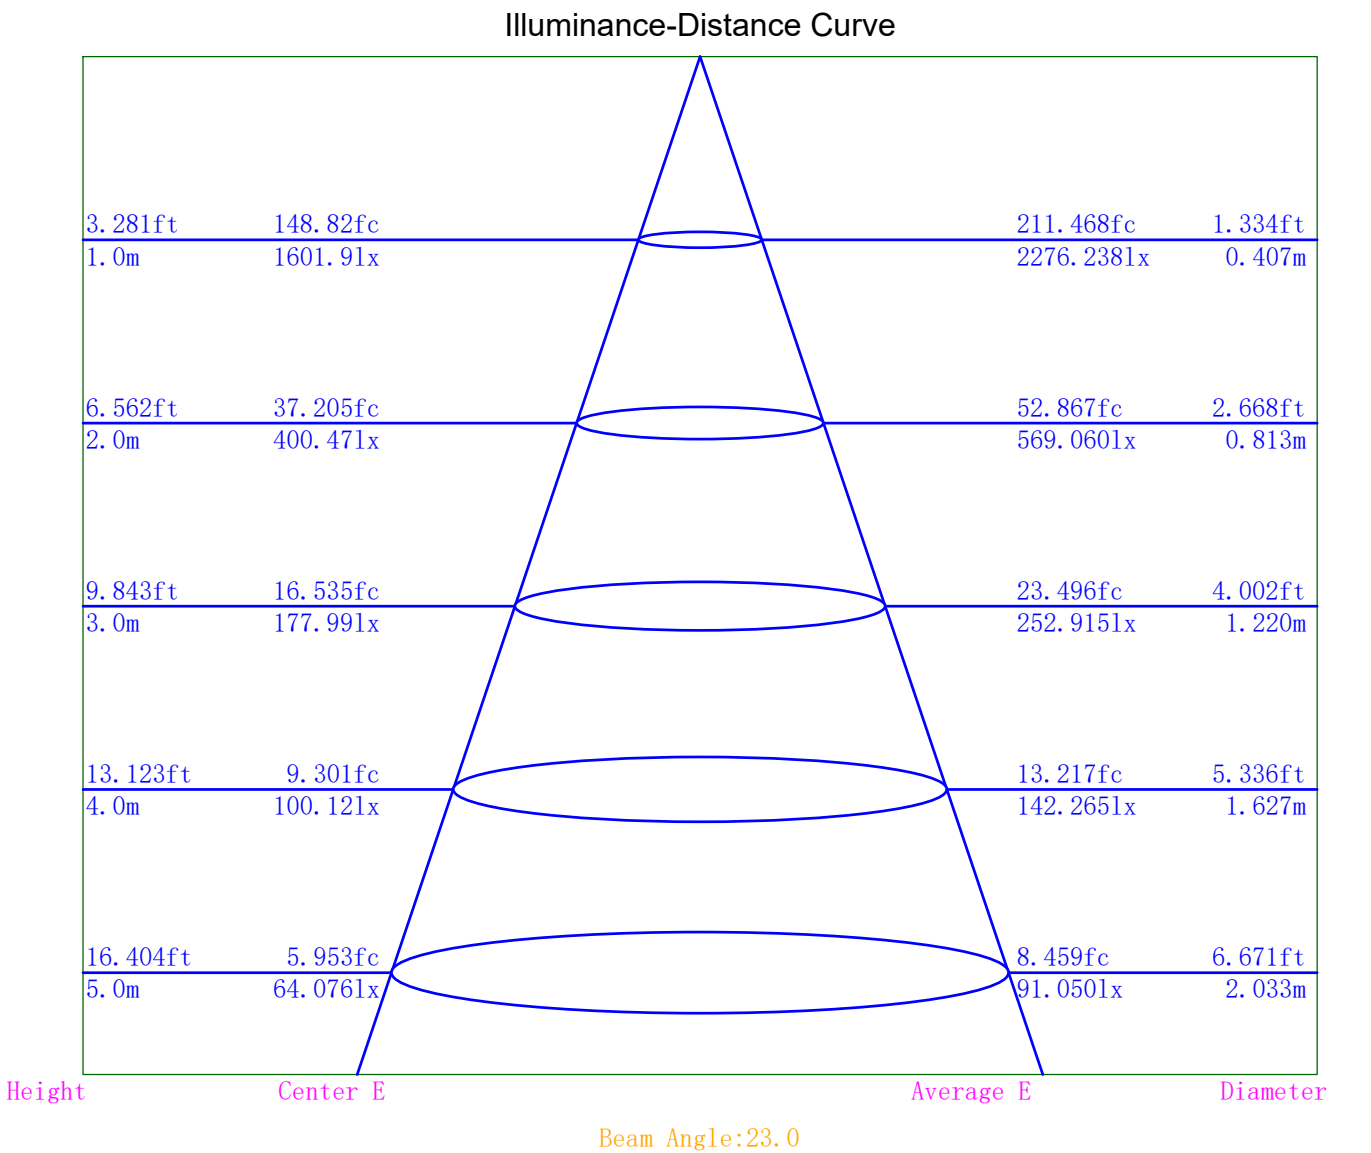

Indoor Luminance Limiting Curves

Lum. Name: DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/18


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	13499	9515	6786	5331	3488	2002	1404	0	0
C90	11798	7251	5333	4400	3050	1160	0	0	0

Luminance Limiting Curve

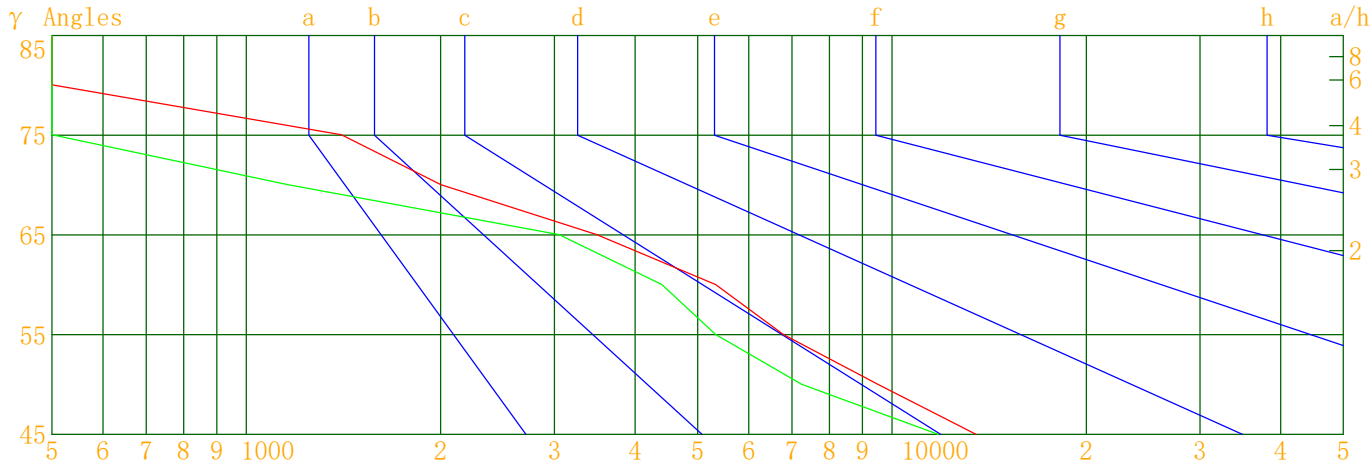


Luminous Size: Length(m)=-0.039 Width(m)=-0.039 Height(m)=0.000 Area(m^2)=0.001195

Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name:DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/18

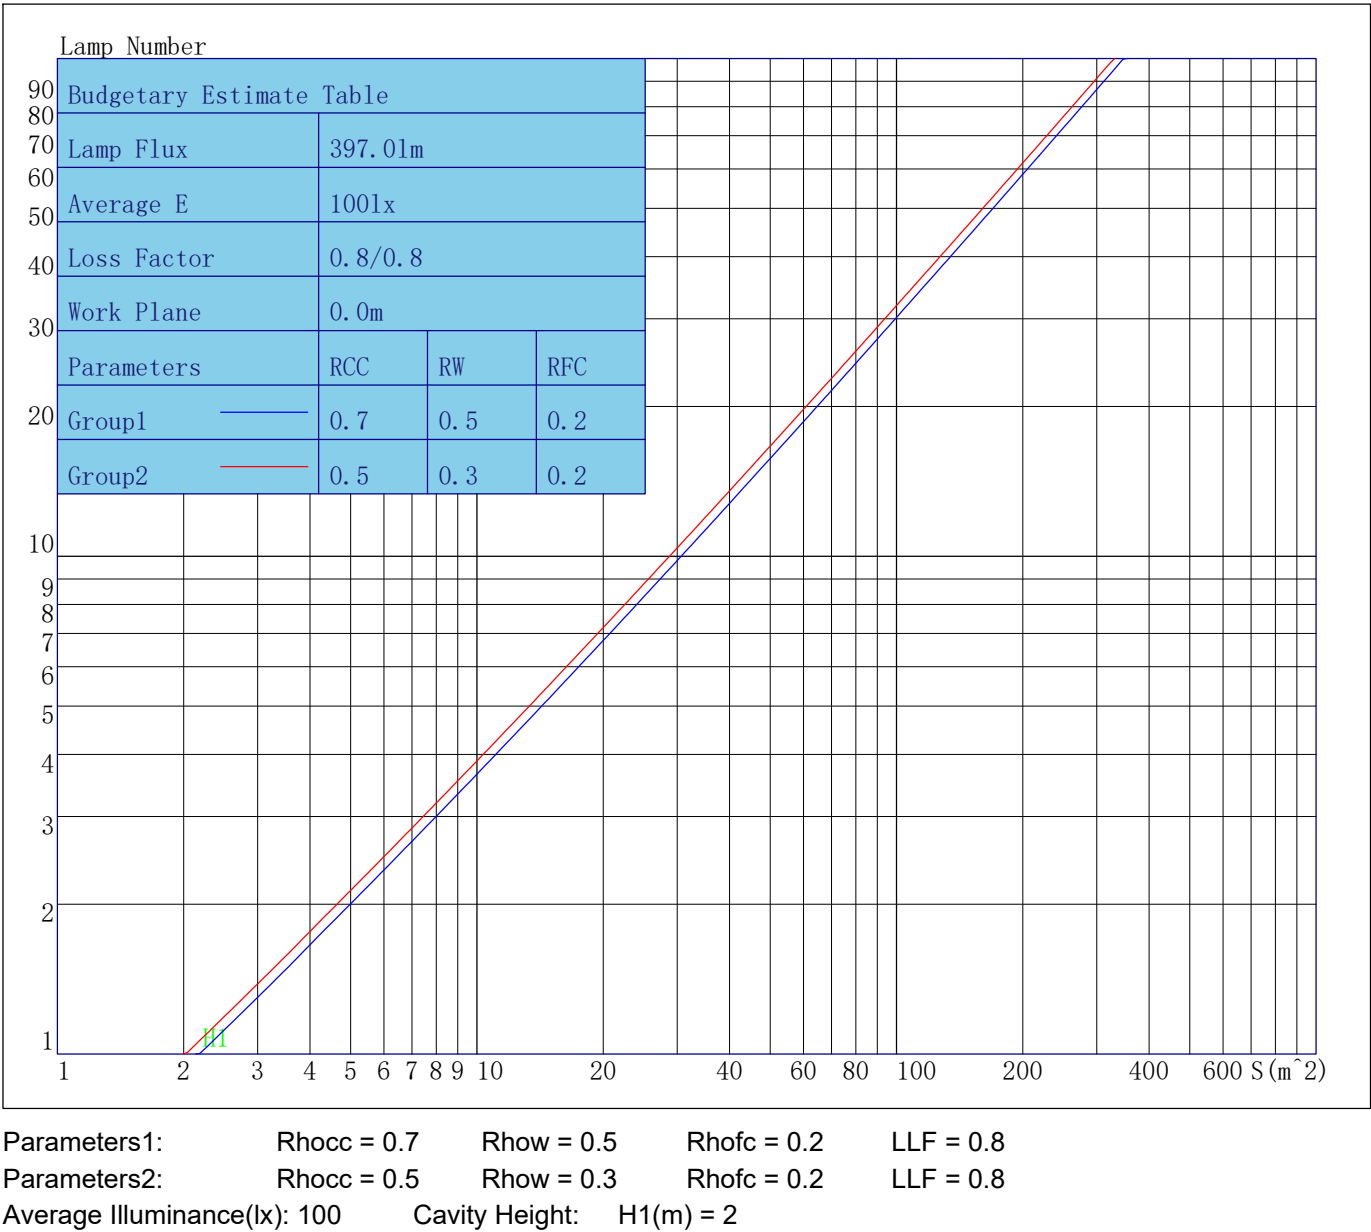

Indoor Coefficient of Utilization Table

Lum. Name:DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/18

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103	102	101	100	99	98	97	96
2	110	106	103	100	108	105	102	99	101	99	97	98	97	95	96	94	93	91
3	106	101	97	94	104	100	96	93	97	94	92	95	92	90	93	91	89	87
4	102	96	92	89	101	95	91	88	93	90	87	91	88	86	90	87	85	84
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81
6	96	89	84	81	94	88	84	80	86	83	80	85	82	79	84	81	79	78
7	92	85	81	77	91	85	80	77	83	80	77	82	79	76	81	78	76	75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72
9	87	79	75	72	86	79	75	72	78	74	72	77	74	71	77	73	71	70
10	84	77	73	70	83	77	72	69	76	72	69	75	72	69	74	71	69	68

Unified Glare Rating Table

Lum. Name:DL52-06-DW-02 1800-3000K RA90 15D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/18

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	13.9	14.9	14.3	15.2	15.5	12.9	13.9	13.2	14.2	14.5
	13.8	14.8	14.2	15.1	15.5	12.8	13.7	13.2	14.1	14.4
	13.8	14.6	14.2	15.0	15.4	12.7	13.6	13.1	13.9	14.3
	13.7	14.5	14.1	14.8	15.2	12.6	13.4	13.0	13.8	14.2
	13.6	14.4	14.1	14.8	15.2	12.5	13.3	13.0	13.7	14.1
	13.6	14.3	14.0	14.7	15.1	12.5	13.2	12.9	13.6	14.0
X=4H Y=2H	13.8	14.7	14.2	15.0	15.4	12.8	13.7	13.2	14.0	14.4
	13.8	14.5	14.2	15.0	15.4	12.8	13.5	13.2	13.9	14.3
	13.8	14.4	14.2	14.8	15.3	12.6	13.3	13.1	13.7	14.2
	13.6	14.2	14.1	14.7	15.1	12.5	13.1	13.0	13.6	14.0
	13.6	14.1	14.1	14.6	15.0	12.5	13.0	12.9	13.4	13.9
	13.5	14.0	14.0	14.5	15.0	12.4	12.9	12.9	13.4	13.8
X=8H Y=4H	13.6	14.1	14.1	14.6	15.1	12.5	13.0	13.0	13.5	14.0
	13.5	13.9	14.0	14.4	15.0	12.4	12.8	12.9	13.3	13.8
	13.4	13.8	13.9	14.3	14.8	12.3	12.7	12.8	13.2	13.7
	13.4	13.7	13.9	14.2	14.8	12.2	12.6	12.8	13.1	13.7
X=12H Y=4H	13.5	14.0	14.0	14.5	15.0	12.4	12.9	12.9	13.4	13.9
	13.4	13.8	14.0	14.3	14.8	12.3	12.7	12.8	13.2	13.7
	13.4	13.7	13.9	14.2	14.8	12.2	12.6	12.8	13.1	13.7
Variations with the objerver position at spacings										
S=1.0H	2.1/-3.4					2.7/-5.7				
S=1.5H	2.6/-4.3					4.5/-8.4				
S=2.0H	3.6/-5.5					4.9/-13.1				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	0.3					0.2				

o the CIE Pub.117,data has been corrected,refers to the lamp’s lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	1601.89	1601.89	1601.89	1601.89
γ 5.0	1217.01	1107.33	1581.33	1830.86
γ 10.0	639.26	543.12	1213.97	1591.07
γ 15.0	256.15	232.02	672.46	1060.36
γ 20.0	122.73	123.93	292.55	496.34
γ 25.0	76.48	75.24	140.78	206.41
γ 30.0	48.35	45.66	79.51	106.84
γ 35.0	30.83	27.81	47.12	61.91
γ 40.0	19.06	16.17	28.42	36.95
γ 45.0	11.40	9.97	17.48	22.68
γ 50.0	7.31	5.57	10.78	14.23
γ 55.0	4.65	3.65	6.73	8.94
γ 60.0	3.18	2.63	4.43	5.42
γ 65.0	1.76	1.54	2.94	3.36
γ 70.0	0.82	0.47	1.73	2.40
γ 75.0	0.43	0.00	0.72	0.89
γ 80.0	0.00	0.00	0.00	0.25
γ 85.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 140.0	0.06	0.00	0.00	0.00
γ 145.0	0.19	0.35	0.00	0.00
γ 150.0	0.83	0.67	0.31	0.11
γ 155.0	0.86	0.94	0.56	0.14
γ 160.0	1.10	0.74	0.74	0.47
γ 165.0	1.09	0.87	0.65	0.79
γ 170.0	0.91	0.50	0.88	0.90
γ 175.0	0.62	0.67	0.88	0.51
γ 180.0	0.56	0.56	0.56	0.56