


6W 9W  
POWER



Black / White

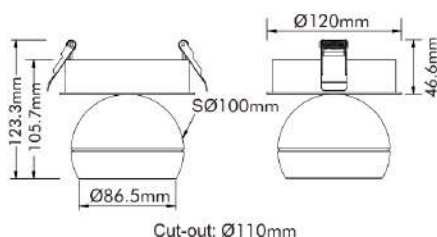

## Packaging

|                     |                              |
|---------------------|------------------------------|
| Box Dimensions      | L175 x W165 x H145mm         |
| Box Net Weight      | 0.72Kg                       |
| Box Gross Weight    | 0.96Kg                       |
| Carton Dimensions   | L540 x W510 x H315 mm/18 PCS |
| Carton Net Weight   | 12.96Kg                      |
| Carton Gross Weight | 17.98Kg                      |

## FEATURES

- Maximum 45°vertical rotation can be created on the main body.
- Optic interchangeable.
- Power selectable.
- Flicker-free internal driver.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee.

## Technical Data

|                        |                                           |
|------------------------|-------------------------------------------|
| Input Voltage/Hz       | AC200-240V 50/60Hz                        |
| Output Voltage/Current | DC34V/210mA(9W) DC33V/145mA(6W)           |
| Power                  | 9W 6W                                     |
| Rated Input Current    | 0.045A                                    |
| THD                    | <25%(9W)   <35%(6W)                       |
| PF value               | >0.9(9W)   >0.8(6W)                       |
| Ingress Protection     | IP20                                      |
| Operating Temperature  | -10-40°C                                  |
| Dimmability            | Triac dimmable with <b>DIMMATE</b> driver |

## Optical Data

|                                |                   |
|--------------------------------|-------------------|
| LED Brand                      | Bridgelux COB LED |
| CRI                            | Ra> 90            |
| Beam Angle                     | 10°/20°/36°/60°   |
| Colour temperatures            | 2700K/3000K/4000K |
| System luminous efficacy up to | 98lm/W            |



| Model         | CCT   | Beam Angle | Lumen | Efficacy | Beam Angle | Lumen | Efficacy |
|---------------|-------|------------|-------|----------|------------|-------|----------|
| DL52-09-XX-01 | 2700K | 10°        | 457lm | 73lm/W   | 10°        | 753lm | 84lm/W   |
|               |       | 20°        | 513lm | 82lm/W   | 20°        | 698lm | 78lm/W   |
|               |       | 36°        | 525lm | 84lm/W   | 36°        | 792lm | 89lm/W   |
|               |       | 60°        | 520lm | 83lm/W   | 60°        | 746lm | 84lm/W   |
| DL52-09-XX-01 | 3000K | 10°        | 448lm | 71lm/W   | 10°        | 781lm | 88lm/W   |
|               |       | 20°        | 474lm | 76lm/W   | 20°        | 717lm | 81lm/W   |
|               |       | 36°        | 546lm | 87lm/W   | 36°        | 786lm | 88lm/W   |
|               |       | 60°        | 536lm | 86lm/W   | 60°        | 773lm | 87lm/W   |
| DL52-09-XX-01 | 4000K | 10°        | 544lm | 87lm/W   | 10°        | 778lm | 88lm/W   |
|               |       | 20°        | 587lm | 94lm/W   | 20°        | 726lm | 82lm/W   |
|               |       | 36°        | 610lm | 98lm/W   | 36°        | 847lm | 95lm/W   |
|               |       | 60°        | 584lm | 93lm/W   | 60°        | 827lm | 93lm/W   |

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS