


6W 9W
POWER



Black / White



Specular
Black
White
Golden

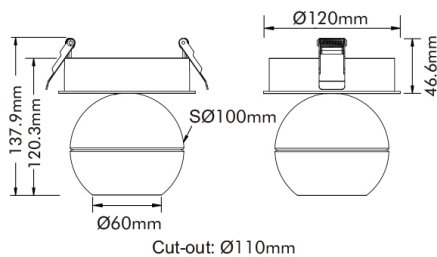

Packaging

Box Dimensions	L175 x W165 x H145mm
Box Net Weight	0.72Kg
Box Gross Weight	0.96Kg
Carton Dimensions	L540 x W510 x H315 mm/18 PCS
Carton Net Weight	12.96Kg
Carton Gross Weight	17.98Kg

FEATURES

- Maximum 45°vertical rotation can be created on the main body.
- Optic interchangeable.
- Power selectable.
- Flicker-free internal driver.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC34V/210mA(9W) DC33V/145mA(6W)
Power	9W 6W
Rated Input Current	0.045A
THD	<25%(9W) <35%(6W)
PF value	>0.9(9W) >0.8(6W)
Ingress Protection	IP20
Operating Temperature	-10-40°C
Dimmability	Triac dimmable with DIMMATE driver

Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra> 90
Beam Angle	18°/30°/42°/55°
Colour temperatures	2700K/3000K/4000K
System luminous efficacy up to	94lm/W



RoHS CE



Model	CCT	Beam Angle	Lumen	Efficacy	Beam Angle	Lumen	Efficacy
DL52-09-XX-02	2700K	18°	462lm	74lm/W	18°	692lm	78lm/W
		30°	560lm	89lm/W	30°	748lm	84lm/W
		42°	525lm	84lm/W	42°	755lm	85lm/W
		55°	507lm	81lm/W	55°	732lm	82lm/W
DL52-09-XX-02	3000K	18°	479lm	76lm/W	18°	640lm	72lm/W
		30°	541lm	87lm/W	30°	759lm	85lm/W
		42°	555lm	89lm/W	42°	756lm	85lm/W
		55°	532lm	85lm/W	55°	743lm	84lm/W
DL52-09-XX-02	4000K	18°	492lm	79lm/W	18°	726lm	82lm/W
		30°	579lm	93lm/W	30°	836lm	94lm/W
		42°	584lm	94lm/W	42°	835lm	94lm/W
		55°	565lm	91lm/W	55°	816lm	92lm/W

Note: The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS