


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 72.31 lm/W
MODEL		Imax (cd)	1774	S/MH(C0/180)	0.51	
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.51	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	710.23	η UP,DN(C0-180)	0.0,50.9	
NOMINAL FLUX(lm)	710.235	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.38	η down (%)	100.0	CIBSE SHR MAX	0.50	

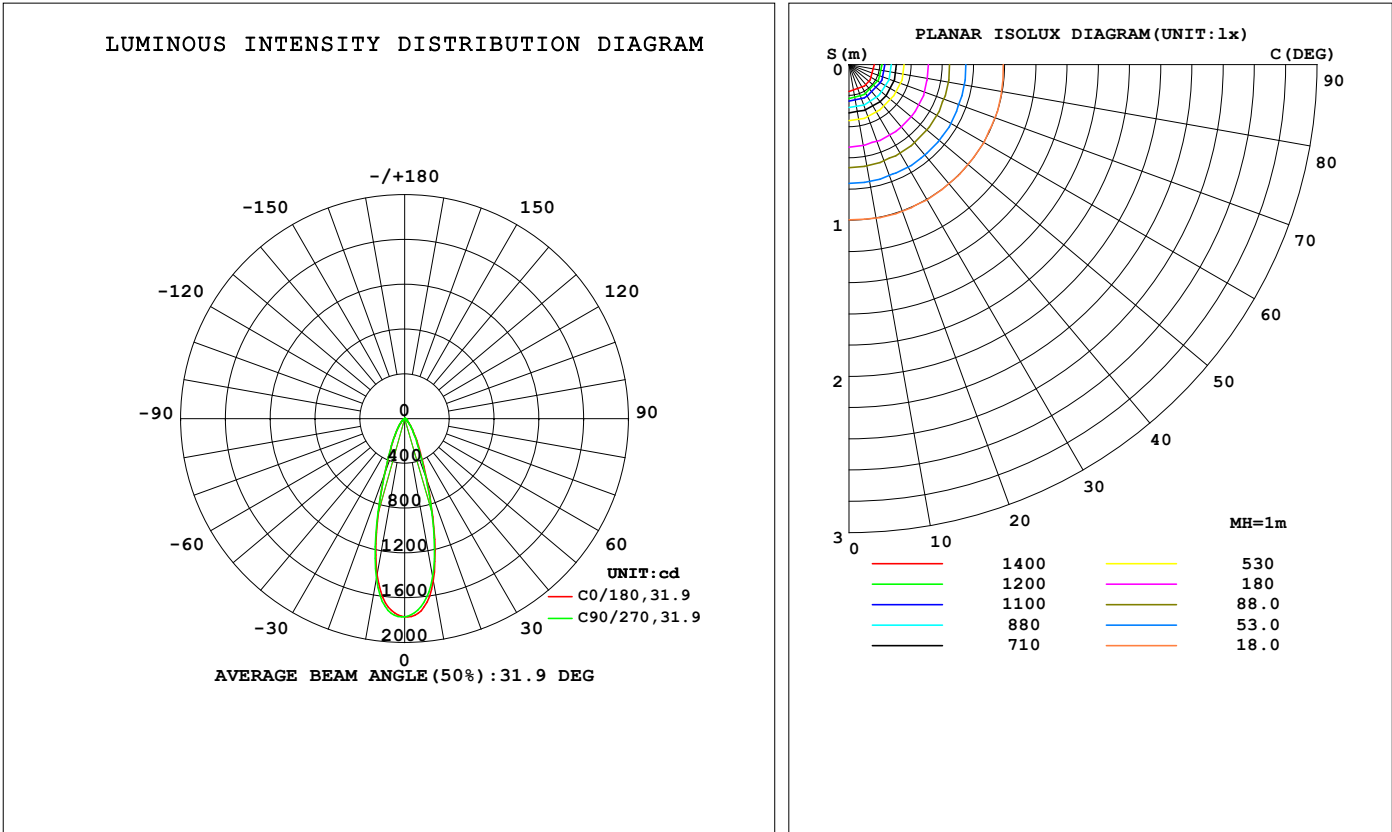

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1472	1464	1437	1428	1419	1423	1453	1469	0- 10	154.6	154.6	21.8,21.8
20	577.5	581.1	552.5	538.1	519.6	510.0	530.2	550.8	10- 20	265.6	420.2	59.2,59.2
30	203.7	201.3	188.0	184.7	182.1	179.4	186.0	193.6	20- 30	147.5	567.7	79.9,79.9
40	78.91	79.90	75.81	74.01	71.50	71.75	73.29	75.67	30- 40	75.79	643.5	90.6,90.6
50	30.93	31.59	30.32	29.38	28.25	28.15	28.52	29.55	40- 50	37.43	680.9	95.9,95.9
60	13.43	13.67	13.17	12.80	12.45	12.31	12.44	12.86	50- 60	17.62	698.5	98.4,98.4
70	5.948	5.940	5.296	5.610	5.409	5.311	5.161	5.635	60- 70	8.772	707.3	99.6,99.6
80	1.169	0.4338	0.2257	0.4672	0.9676	0.3797	0.1886	0.4441	70- 80	2.834	710.1	100,100
90	0.0118	0.0022	0.0129	0.0077	0.0058	0.0055	0.0084	0.0055	80- 90	0.1112	710.2	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 665.69 lm

%lum = 93.7%

%lamp = 93.7%

Conical surface Flux(120deg): 698.52 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

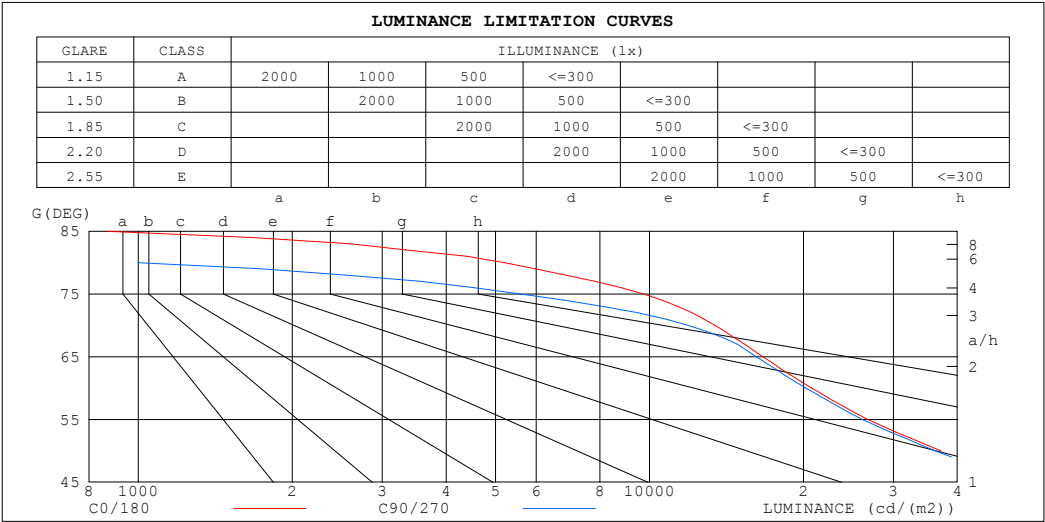

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	870	190
80	5201	999
75	9737	5604
70	13438	11899
65	16650	16177
60	20760	20234
55	26722	26073
50	37184	36242
45	54084	52363


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356		
Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

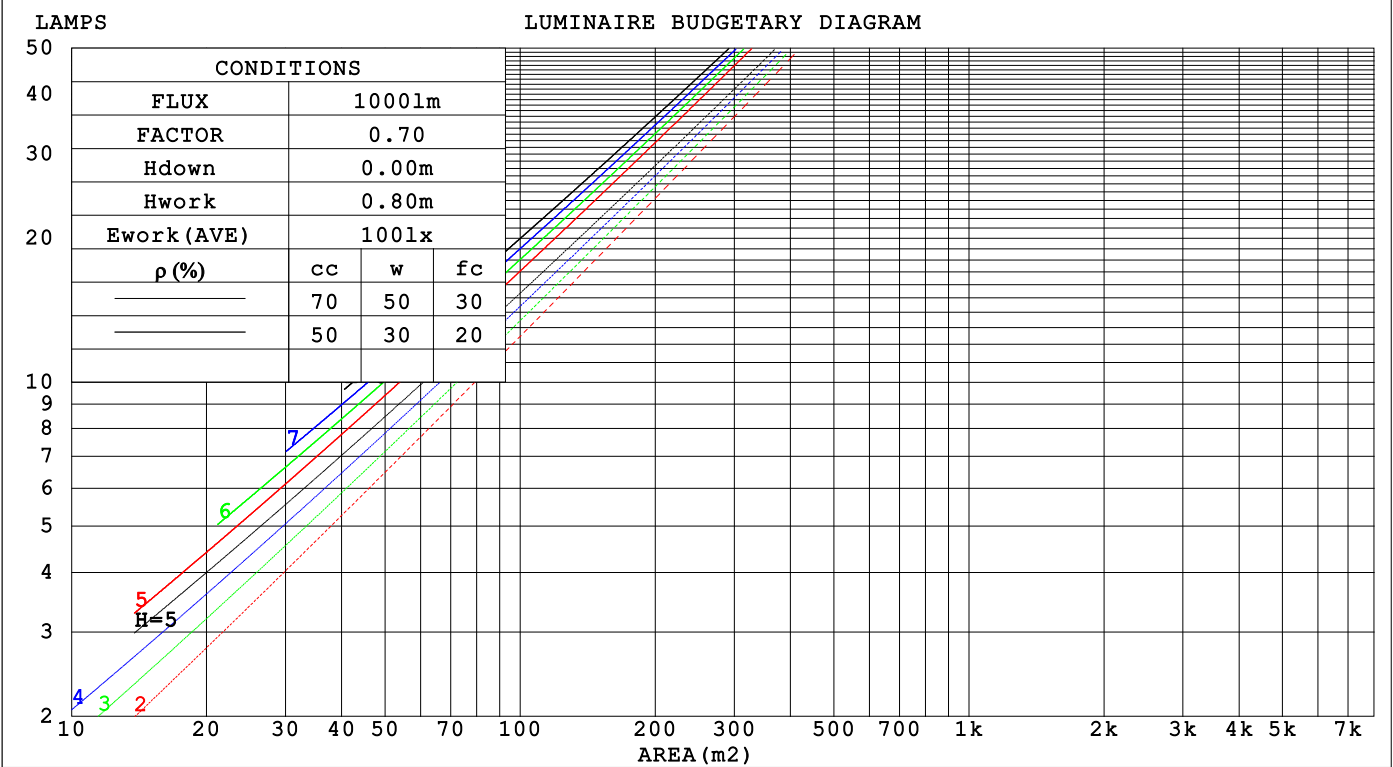

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## WEC AND CCEC

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.166	.094	.030	.159	.091	.029	.146	.084	.027	.135	.078	.025	.124	.072	.023															
2.0	.157	.086	.026	.152	.083	.026	.141	.078	.024	.131	.074	.023	.122	.069	.022															
3.0	.148	.079	.024	.144	.077	.023	.135	.073	.022	.127	.069	.021	.119	.066	.020															
4.0	.140	.073	.021	.136	.071	.021	.128	.068	.020	.121	.065	.020	.115	.062	.019															
5.0	.132	.068	.020	.129	.066	.019	.122	.064	.019	.116	.061	.018	.111	.059	.018															
6.0	.126	.063	.018	.123	.062	.018	.117	.060	.017	.111	.058	.017	.106	.056	.017															
7.0	.119	.059	.017	.117	.058	.017	.112	.056	.016	.107	.055	.016	.103	.053	.016															
8.0	.114	.056	.016	.111	.055	.016	.107	.053	.015	.103	.052	.015	.099	.051	.015															
9.0	.109	.053	.015	.107	.052	.015	.103	.051	.014	.099	.050	.014	.095	.048	.014															
10.0	.104	.050	.014	.102	.049	.014	.098	.048	.014	.095	.047	.013	.092	.046	.013															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.154	.133	.114	.132	.114	.099	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.141	.113	.092	.121	.098	.079	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.130	.099	.075	.112	.085	.065	.077	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.121	.087	.062	.104	.075	.054	.071	.052	.038	.041	.031	.022	.013	.010	.007	
6.0	.112	.077	.052	.097	.067	.045	.067	.047	.032	.039	.028	.019	.012	.009	.006	
7.0	.105	.069	.044	.091	.060	.038	.063	.042	.027	.036	.025	.016	.012	.008	.005	
8.0	.099	.063	.038	.085	.055	.033	.059	.038	.023	.034	.023	.014	.011	.007	.005	
9.0	.094	.057	.033	.081	.050	.029	.056	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.089	.053	.029	.077	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz											
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm											
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 41mm		Shielding Angle:			
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	20.6	21.4	20.8	21.6	21.7	20.4	21.2	20.6	21.4	21.6
	3H	20.8	21.6	21.0	21.8	22.0	20.6	21.4	20.8	21.6	21.8
	4H	20.8	21.6	21.1	21.8	22.0	20.6	21.3	20.8	21.5	21.7
	6H	20.8	21.5	21.1	21.7	21.9	20.5	21.2	20.8	21.4	21.7
	8H	20.7	21.4	21.0	21.7	21.9	20.4	21.1	20.7	21.4	21.6
	12H	20.7	21.3	21.0	21.6	21.9	20.4	21.0	20.7	21.3	21.6
4H	2H	20.6	21.3	20.9	21.6	21.8	20.4	21.2	20.7	21.4	21.6
	3H	20.9	21.5	21.2	21.8	22.1	20.7	21.3	21.0	21.6	21.9
	4H	20.9	21.5	21.3	21.8	22.1	20.7	21.3	21.0	21.6	21.9
	6H	20.9	21.4	21.3	21.8	22.1	20.6	21.1	21.0	21.4	21.8
	8H	20.9	21.3	21.2	21.7	22.1	20.5	21.0	20.9	21.4	21.7
	12H	20.8	21.2	21.2	21.6	22.0	20.5	20.9	20.9	21.3	21.7
8H	4H	20.9	21.3	21.2	21.7	22.0	20.6	21.1	21.0	21.4	21.8
	6H	20.8	21.2	21.2	21.6	22.0	20.5	20.9	20.9	21.3	21.7
	8H	20.8	21.1	21.2	21.5	22.0	20.5	20.8	20.9	21.2	21.7
	12H	20.7	21.0	21.2	21.4	21.9	20.4	20.7	20.9	21.1	21.6
12H	4H	20.8	21.2	21.2	21.6	22.0	20.5	21.0	21.0	21.4	21.7
	6H	20.8	21.1	21.2	21.5	22.0	20.5	20.8	20.9	21.2	21.7
	8H	20.7	21.0	21.2	21.4	21.9	20.4	20.7	20.9	21.1	21.6
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.5 / - 2.5					+ 1.5 / - 2.6				
1.5H		+ 2.4 / - 1.9					+ 2.2 / - 1.9				
2.0H		+ 2.8 / - 2.1					+ 2.8 / - 2.2				

CIE Pub.117, 710.2 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = -1.2$ )  
Area: 0.0013 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	88	97	92	88	96	92	88	83
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	90
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	110	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-07-23

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 $\gamma$  Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

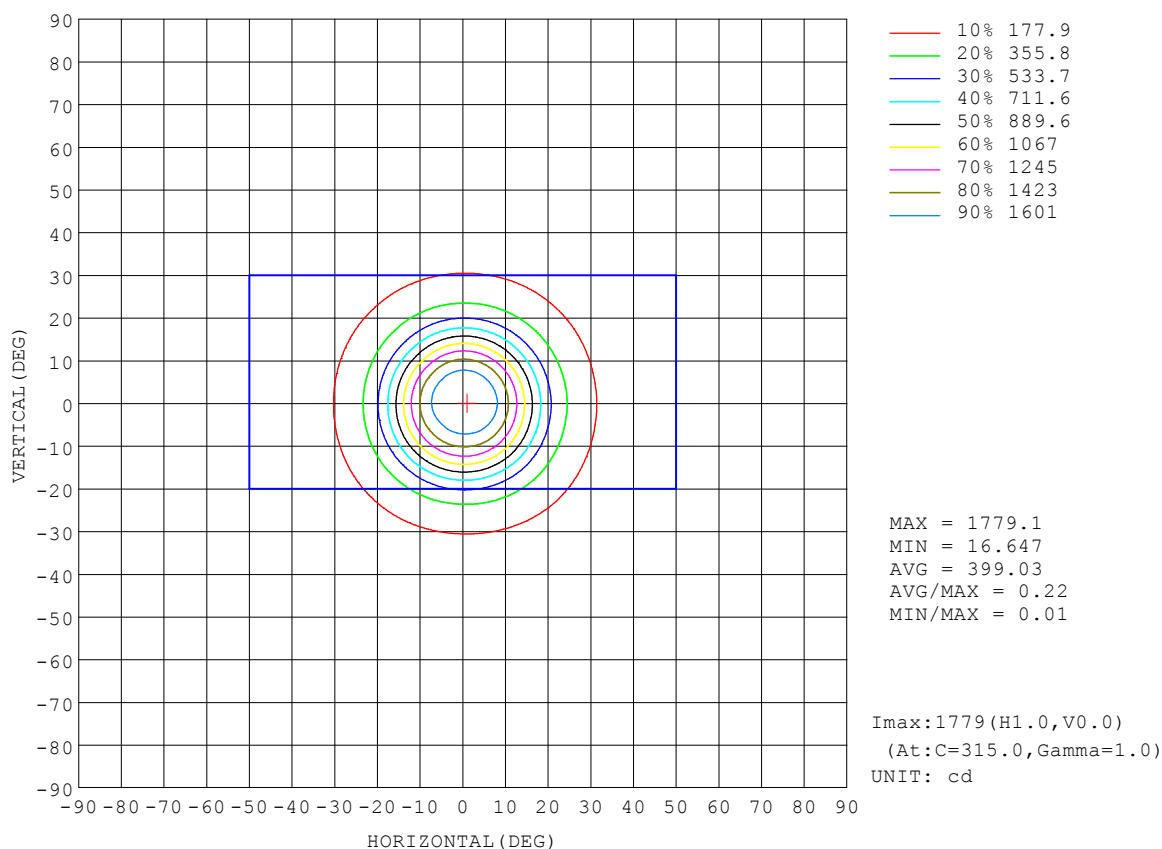


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



## AAI Figure

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

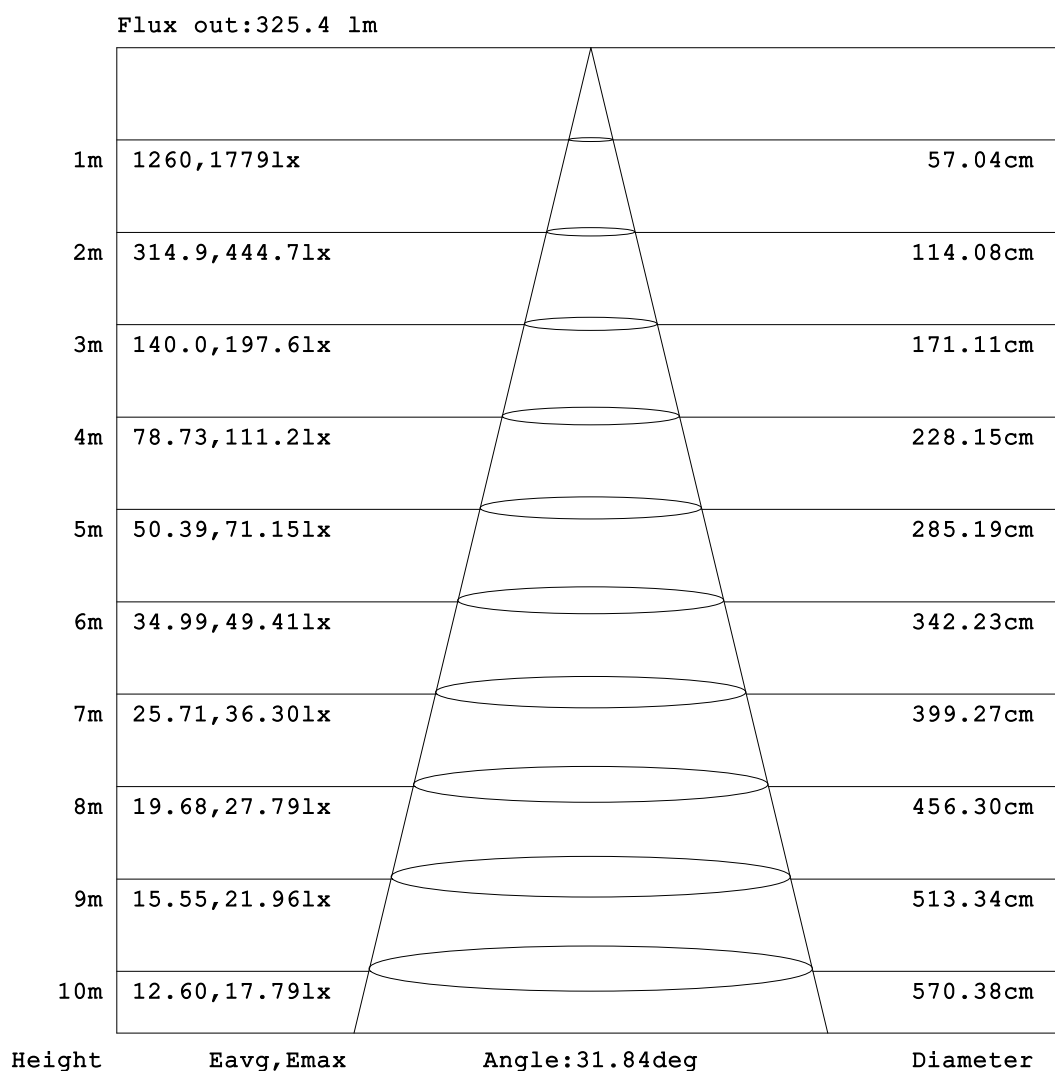


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

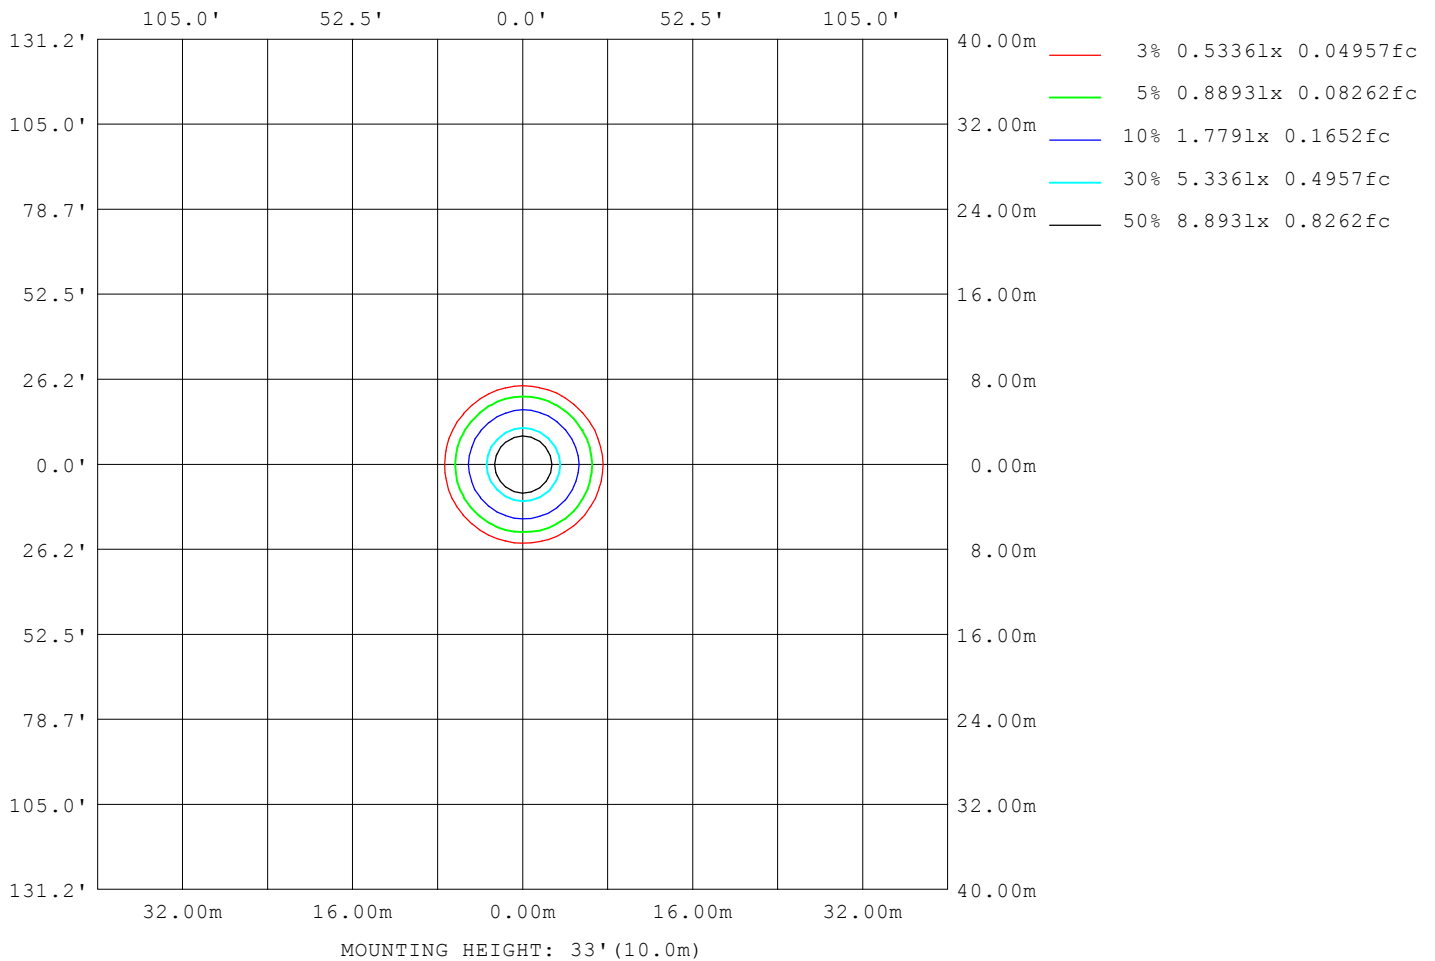

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.5V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz UTHDi:0.17% ITHDi:19.58% KDisp:0.9356 Lamp Flux:710.235x1 lm		
NAME: DL56-10-XX-02 2700K RA90 24D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	15934
L_0~180 (75) av	9109
L_0~180 (85) av	751
L_90~270 (65) av	15715
L_90~270 (75) av	5485
L_90~270 (85) av	185
L_45 (65) av	15880
L_45 (75) av	7564
L_45 (85) av	42

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-07-23

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

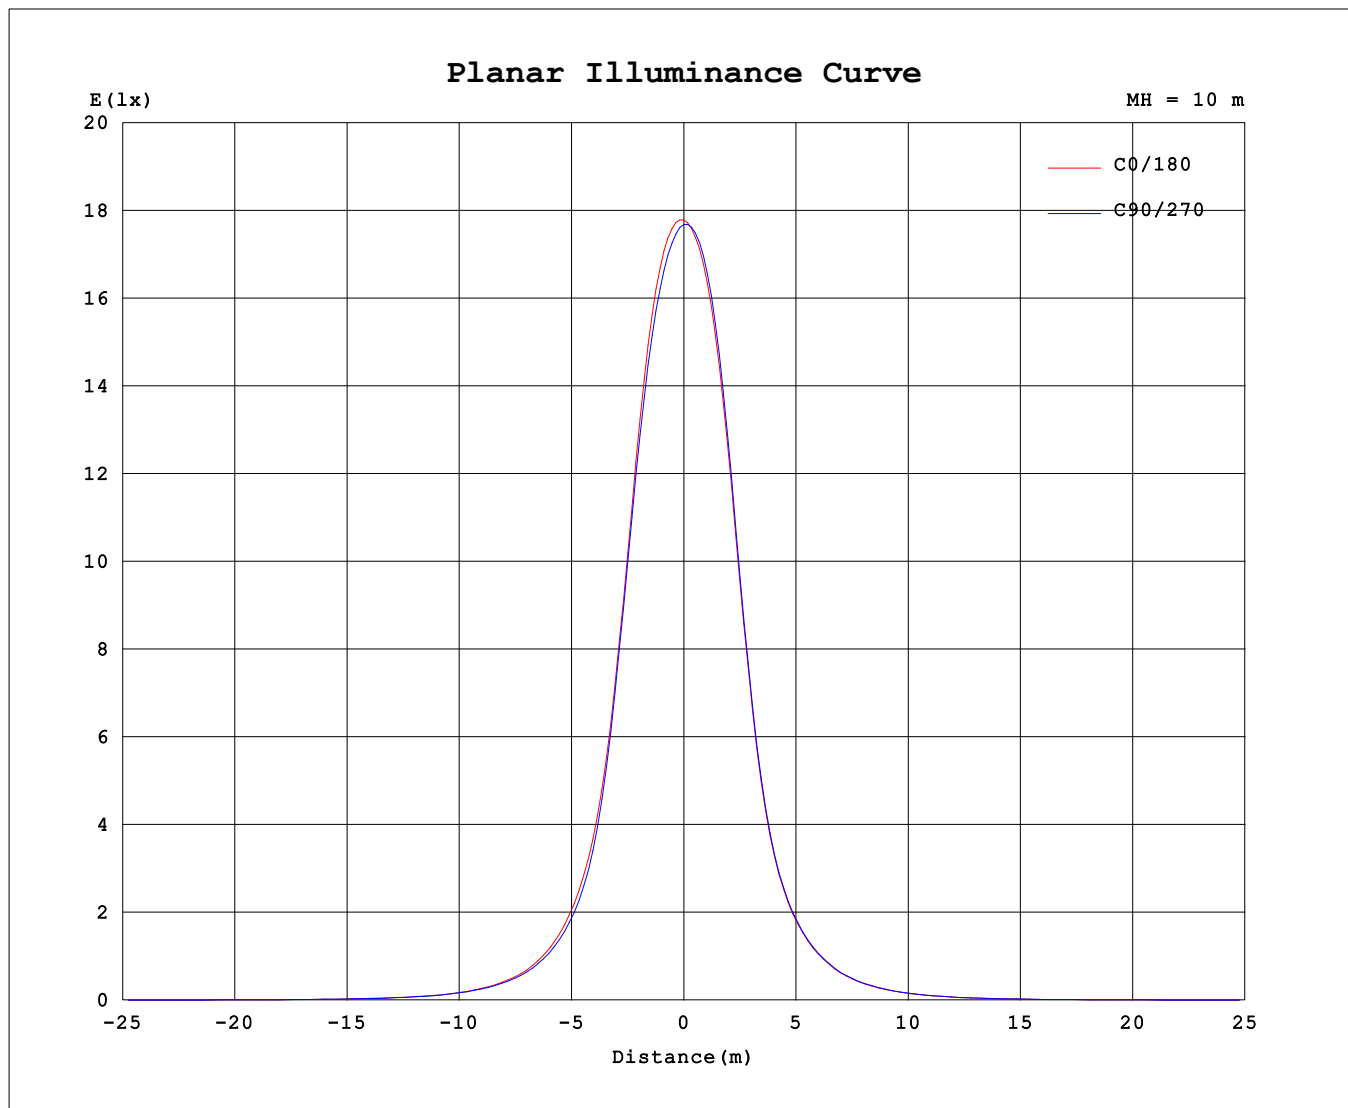

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-07-23

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

## Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	1771	1771	1771	1771	1771	1771	1771	1771
3.0	1758	1749	1735	1734	1739	1747	1758	1763
6.0	1689	1673	1651	1647	1655	1666	1686	1694
9.0	1542	1530	1504	1497	1493	1500	1528	1542
12.0	1305	1306	1281	1265	1246	1240	1275	1295
15.0	1012	1024	997.9	978.1	947.3	936.4	965.8	992.1
18.0	731.6	742.7	713.6	694.8	668.5	657.7	682.2	705.0
21.0	514.3	514.4	485.9	473.7	459.4	452.7	469.7	488.7
24.0	372.3	365.4	341.4	334.3	329.2	325.6	335.8	351.1
27.0	274.8	269.2	251.0	245.7	243.1	240.8	248.6	259.9
30.0	203.7	201.3	188.0	184.7	182.1	179.4	186.0	193.6
33.0	151.9	151.2	141.4	139.7	136.8	134.6	140.1	145.2
36.0	113.7	114.4	107.4	105.7	102.9	102.1	105.3	108.6
39.0	86.70	87.46	82.83	81.00	78.39	78.57	80.34	83.07
42.0	65.52	66.52	63.36	61.80	59.45	59.71	60.93	62.92
45.0	49.49	50.34	48.19	46.80	44.87	45.12	45.99	47.38
48.0	37.30	38.09	36.48	35.34	33.88	33.92	34.52	35.63
51.0	28.24	28.86	27.69	26.86	25.85	25.67	26.02	26.96
54.0	21.63	22.06	21.22	20.56	19.95	19.61	19.97	20.62
57.0	16.94	17.24	16.63	16.13	15.67	15.49	15.66	16.18
60.0	13.43	13.67	13.17	12.80	12.45	12.31	12.44	12.86
63.0	10.63	10.81	10.44	10.16	9.865	9.759	9.825	10.21
66.0	8.406	8.495	8.203	7.987	7.738	7.654	7.715	8.031
69.0	6.520	6.565	6.044	6.181	5.958	5.860	5.860	6.194
72.0	4.838	4.647	3.809	4.443	4.361	4.177	3.697	4.492
75.0	3.262	2.606	1.888	2.600	2.868	2.362	1.803	2.611
78.0	1.847	1.106	0.6907	1.123	1.579	0.9942	0.6433	1.120
81.0	0.8900	0.2051	0.0997	0.2633	0.6850	0.1576	0.0943	0.2041
84.0	0.2233	0.0122	0.0252	0.0157	0.1216	0.0103	0.0267	0.0104
87.0	0.0219	0.0055	0.0187	0.0055	0.0185	0.0032	0.0196	0.0010
90.0	0.0118	0.0022	0.0129	0.0077	0.0058	0.0055	0.0084	0.0055

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-07-23

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks: