


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357 Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 71.64 lm/W
MODEL		Imax (cd)	1027	S/MH(C0/180)	0.67	
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.69	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	703.45	η UP,DN(C0-180)	0.0,50.9	
NOMINAL FLUX(lm)	703.447	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.4	η down (%)	100.0	CIBSE SHR MAX	0.70	

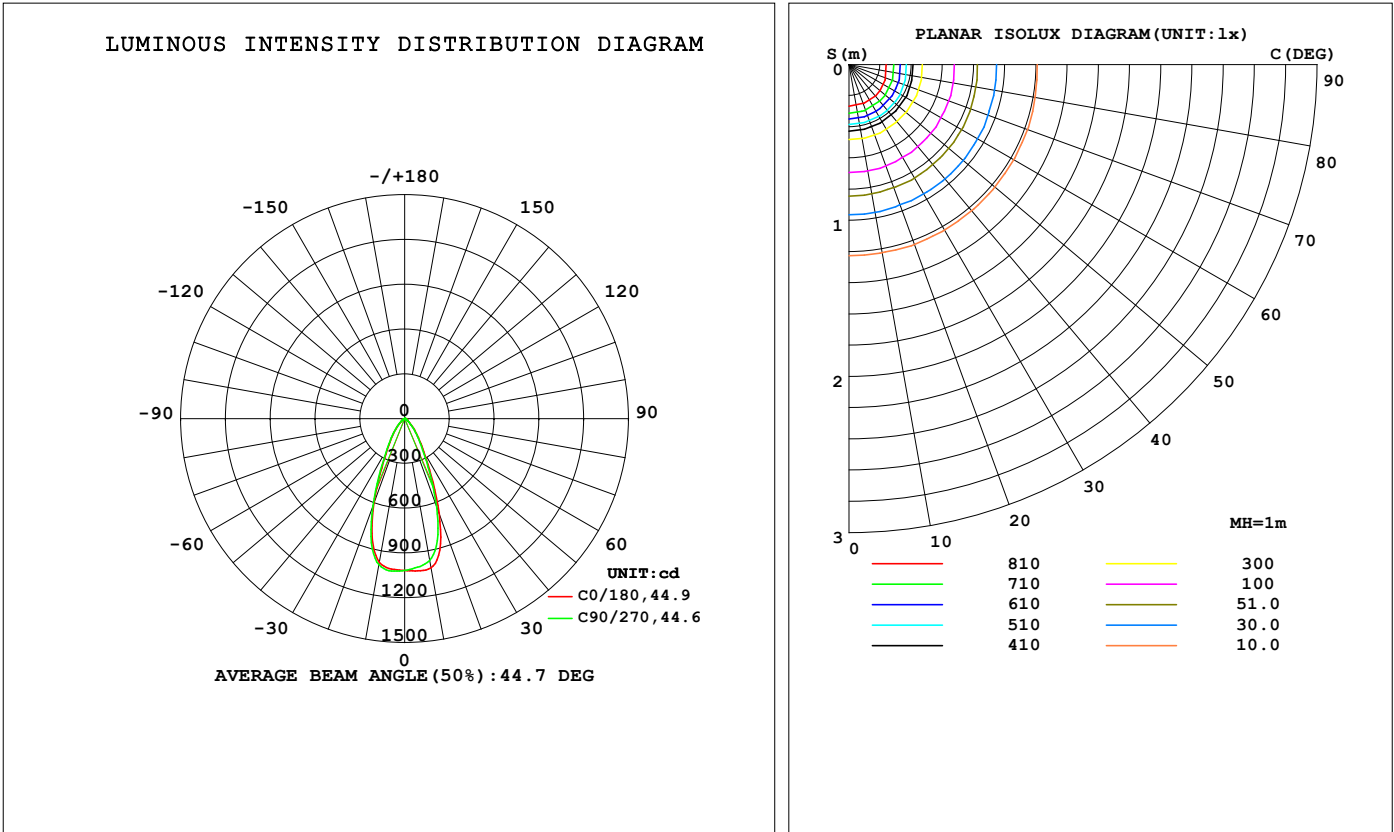

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1015	996.1	964.7	962.5	977.9	982.4	993.7	1006	0- 10	96.12	96.12	13.7,13.7
20	676.9	675.3	627.8	617.5	603.2	605.6	624.1	652.1	10- 20	234.6	330.7	47,47
30	259.5	257.0	243.6	232.2	223.4	226.1	235.8	249.7	20- 30	184.3	515.0	73.2,73.2
40	111.9	111.5	104.5	100.3	96.51	97.75	102.5	107.8	30- 40	101.1	616.0	87.6,87.6
50	42.00	42.07	39.68	37.53	35.68	36.50	38.25	40.39	40- 50	51.19	667.2	94.8,94.8
60	16.75	16.74	16.02	15.33	14.67	14.83	15.54	16.27	50- 60	22.28	689.5	98,98
70	7.176	6.901	5.900	6.411	6.126	6.108	5.775	6.824	60- 70	10.60	700.1	99.5,99.5
80	1.579	0.4569	0.1797	0.4631	1.128	0.3925	0.1641	0.5042	70- 80	3.220	703.3	100,100
90	0.0121	0.0067	0.0100	0.0065	0.0128	0.0029	0.0061	0.0068	80- 90	0.1285	703.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 646.75 lm

%lum = 91.9%

%lamp = 91.9%

Conical surface Flux(120deg): 689.5 lm

%lum = 98.0%


%lamp = 98.0%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357 Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

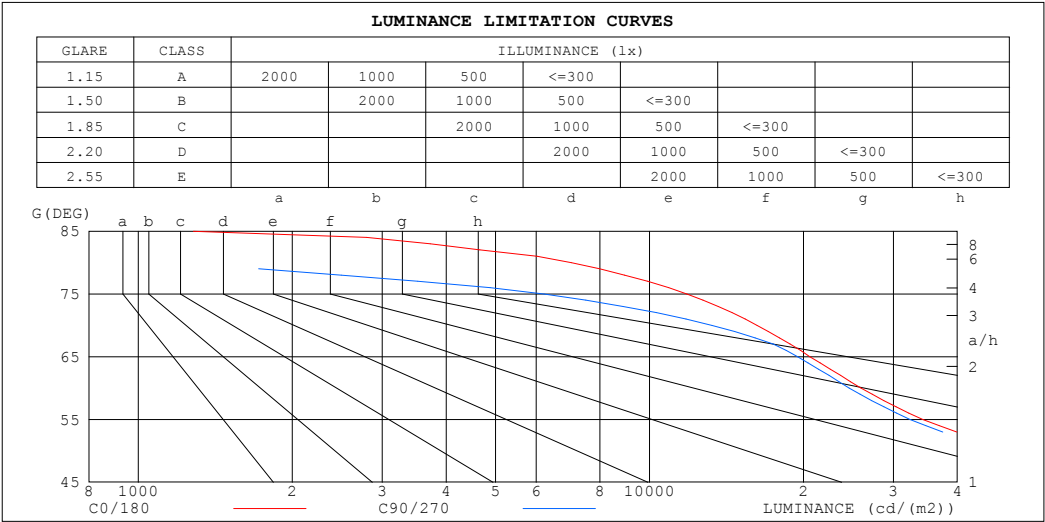

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1282	235
80	7038	794
75	11833	6225
70	16239	13240
65	20603	19501
60	25930	24594
55	34247	32338
50	50573	47383
45	76283	71096


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357		
Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.84	.80	.89	.84	.80	.87	.82	.79	.85	.81	.78	.83	.80	.77	.75
5.0	.84	.79	.74	.84	.78	.74	.82	.77	.73	.80	.76	.73	.79	.75	.72	.71
6.0	.80	.74	.69	.79	.73	.69	.77	.72	.69	.76	.72	.68	.75	.71	.68	.66
7.0	.75	.69	.65	.74	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.63
8.0	.71	.65	.61	.71	.65	.61	.70	.65	.61	.68	.64	.61	.68	.63	.60	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.57	.64	.60	.57	.56
10.0	.64	.59	.55	.64	.58	.55	.63	.58	.55	.62	.58	.55	.62	.57	.54	.53

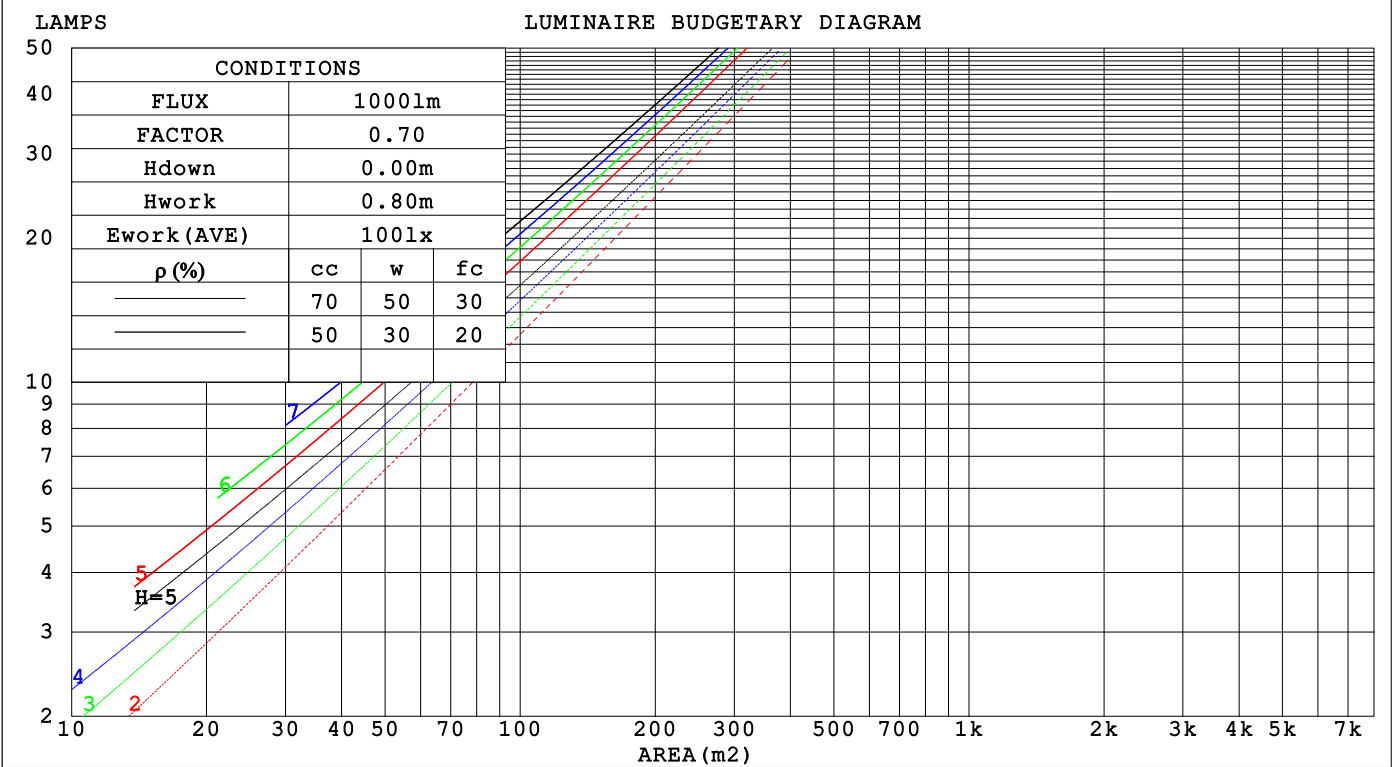

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357 Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.179	.102	.032	.173	.098	.031	.160	.092	.029	.148	.086	.027	.138	.080	.026															
2.0	.172	.094	.029	.166	.091	.028	.155	.086	.027	.146	.082	.026	.137	.077	.024															
3.0	.163	.087	.026	.158	.085	.026	.149	.081	.025	.141	.077	.024	.133	.074	.023															
4.0	.155	.080	.024	.150	.079	.023	.143	.076	.023	.135	.073	.022	.129	.070	.021															
5.0	.147	.075	.022	.143	.073	.021	.136	.071	.021	.130	.069	.020	.124	.066	.020															
6.0	.139	.070	.020	.136	.069	.020	.130	.067	.019	.125	.065	.019	.119	.063	.019															
7.0	.133	.066	.019	.130	.065	.018	.125	.063	.018	.120	.061	.018	.115	.060	.018															
8.0	.126	.062	.017	.124	.061	.017	.119	.060	.017	.115	.058	.017	.111	.057	.017															
9.0	.121	.058	.016	.119	.058	.016	.114	.057	.016	.110	.055	.016	.107	.054	.016															
10.0	.116	.055	.015	.114	.055	.015	.110	.054	.015	.106	.053	.015	.103	.052	.015															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.147	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.132	.113	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.123	.098	.078	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.125	.087	.060	.107	.075	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.101	.067	.043	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.110	.070	.042	.095	.061	.037	.066	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.105	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004	
9.0	.099	.059	.031	.086	.051	.027	.059	.036	.019	.035	.021	.012	.011	.007	.004	
10.0	.095	.054	.028	.082	.047	.024	.057	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz										
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357					Lamp Flux:703.447x1 lm					
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 41mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.6	23.6	22.9	23.7	23.9	22.4	23.3	22.6	23.5	23.6
3H	22.8	23.6	23.0	23.8	24.0	22.5	23.3	22.7	23.5	23.7
4H	22.8	23.6	23.0	23.8	24.0	22.4	23.2	22.7	23.5	23.7
6H	22.7	23.5	23.0	23.7	24.0	22.3	23.1	22.6	23.3	23.6
8H	22.7	23.4	23.0	23.7	23.9	22.3	23.0	22.6	23.3	23.5
12H	22.6	23.4	23.0	23.6	23.9	22.2	23.0	22.6	23.2	23.5
4H 2H	22.6	23.4	22.9	23.6	23.9	22.3	23.2	22.6	23.4	23.6
3H	22.8	23.5	23.1	23.8	24.1	22.5	23.2	22.8	23.5	23.8
4H	22.8	23.5	23.2	23.8	24.1	22.5	23.1	22.8	23.4	23.7
6H	22.8	23.4	23.2	23.7	24.0	22.4	23.0	22.8	23.3	23.6
8H	22.7	23.3	23.1	23.6	24.0	22.3	22.9	22.7	23.2	23.6
12H	22.7	23.2	23.1	23.6	23.9	22.3	22.8	22.7	23.1	23.5
8H 4H	22.7	23.3	23.1	23.6	24.0	22.4	22.9	22.8	23.3	23.6
6H	22.7	23.1	23.1	23.5	23.9	22.3	22.7	22.7	23.1	23.5
8H	22.6	23.0	23.1	23.4	23.9	22.2	22.6	22.7	23.0	23.5
12H	22.6	22.9	23.1	23.4	23.8	22.2	22.5	22.6	22.9	23.4
12H 4H	22.7	23.2	23.1	23.5	23.9	22.3	22.8	22.7	23.2	23.6
6H	22.6	23.0	23.1	23.4	23.9	22.2	22.6	22.7	23.0	23.5
8H	22.6	22.9	23.1	23.4	23.8	22.2	22.5	22.7	23.0	23.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.7 / - 3.0					+ 1.7 / - 3.2				
1.5H	+ 2.6 / - 2.5					+ 2.4 / - 2.5				
2.0H	+ 3.3 / - 2.4					+ 3.2 / - 2.5				

CIE Pub.117, 703.4 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -1.2$)
Area: 0.0013 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357 Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	83	77	72	82	76	72	68
0.80	92	85	81	91	85	81	90	84	80	76
1.00	97	91	87	96	90	86	94	90	86	81
1.25	101	95	92	100	95	91	98	94	90	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	99	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-07-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357 Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

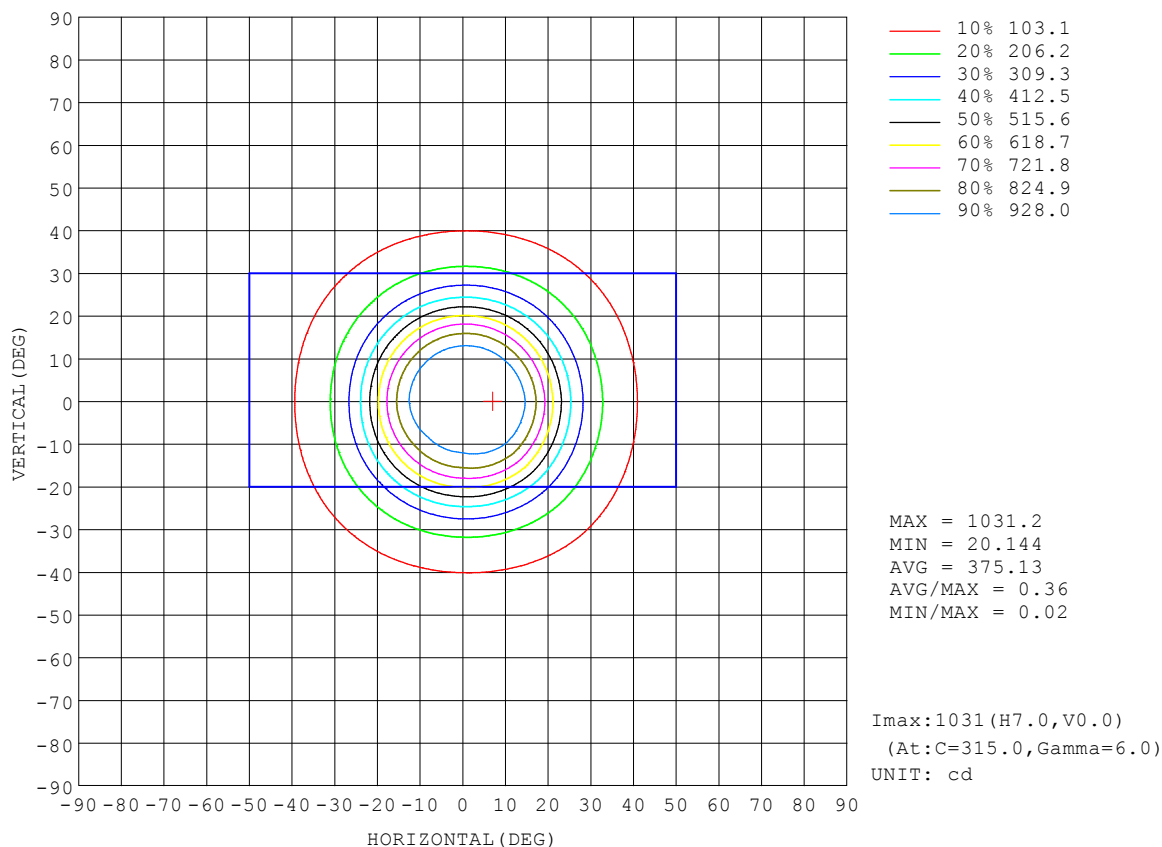


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357 Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

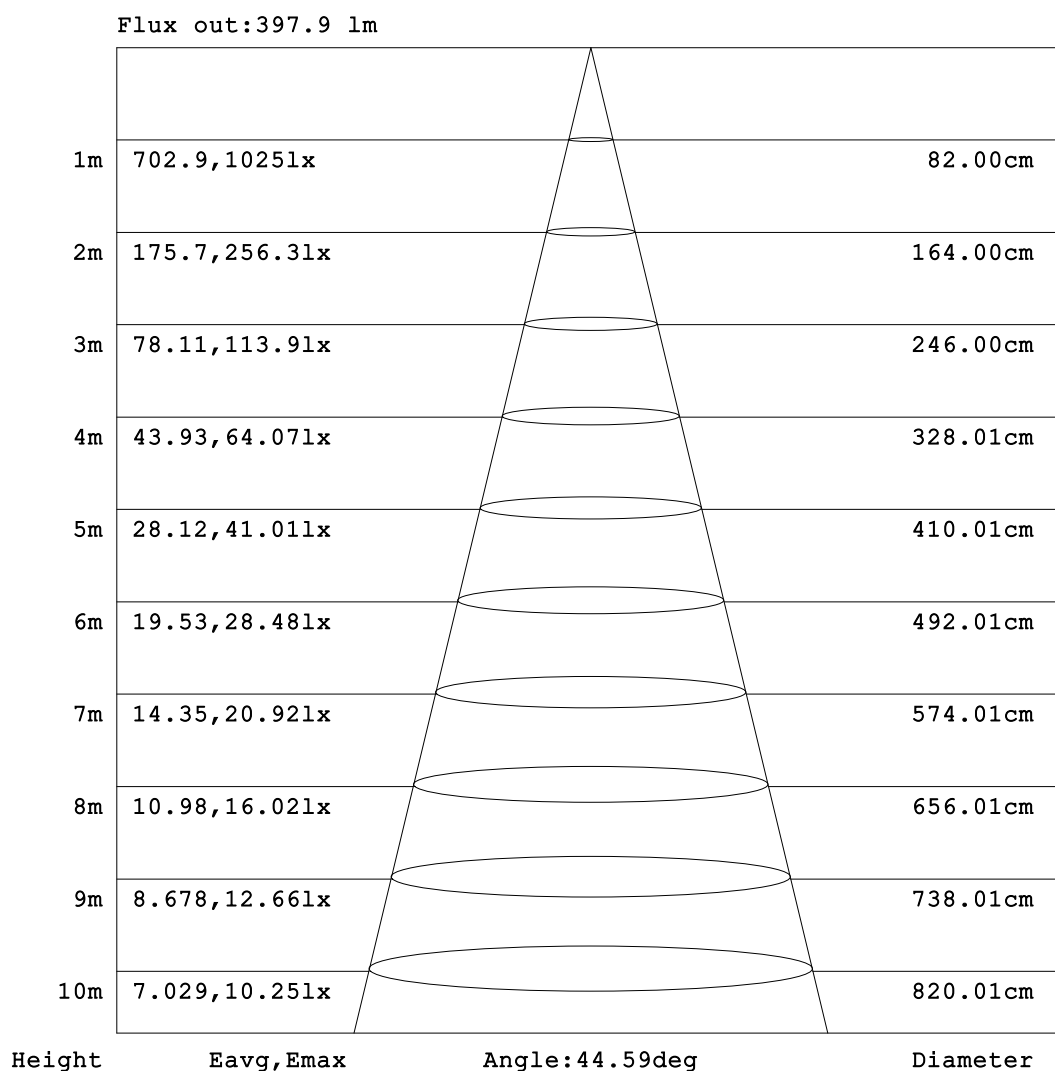


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-07-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.60% KDisp:0.9357 Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

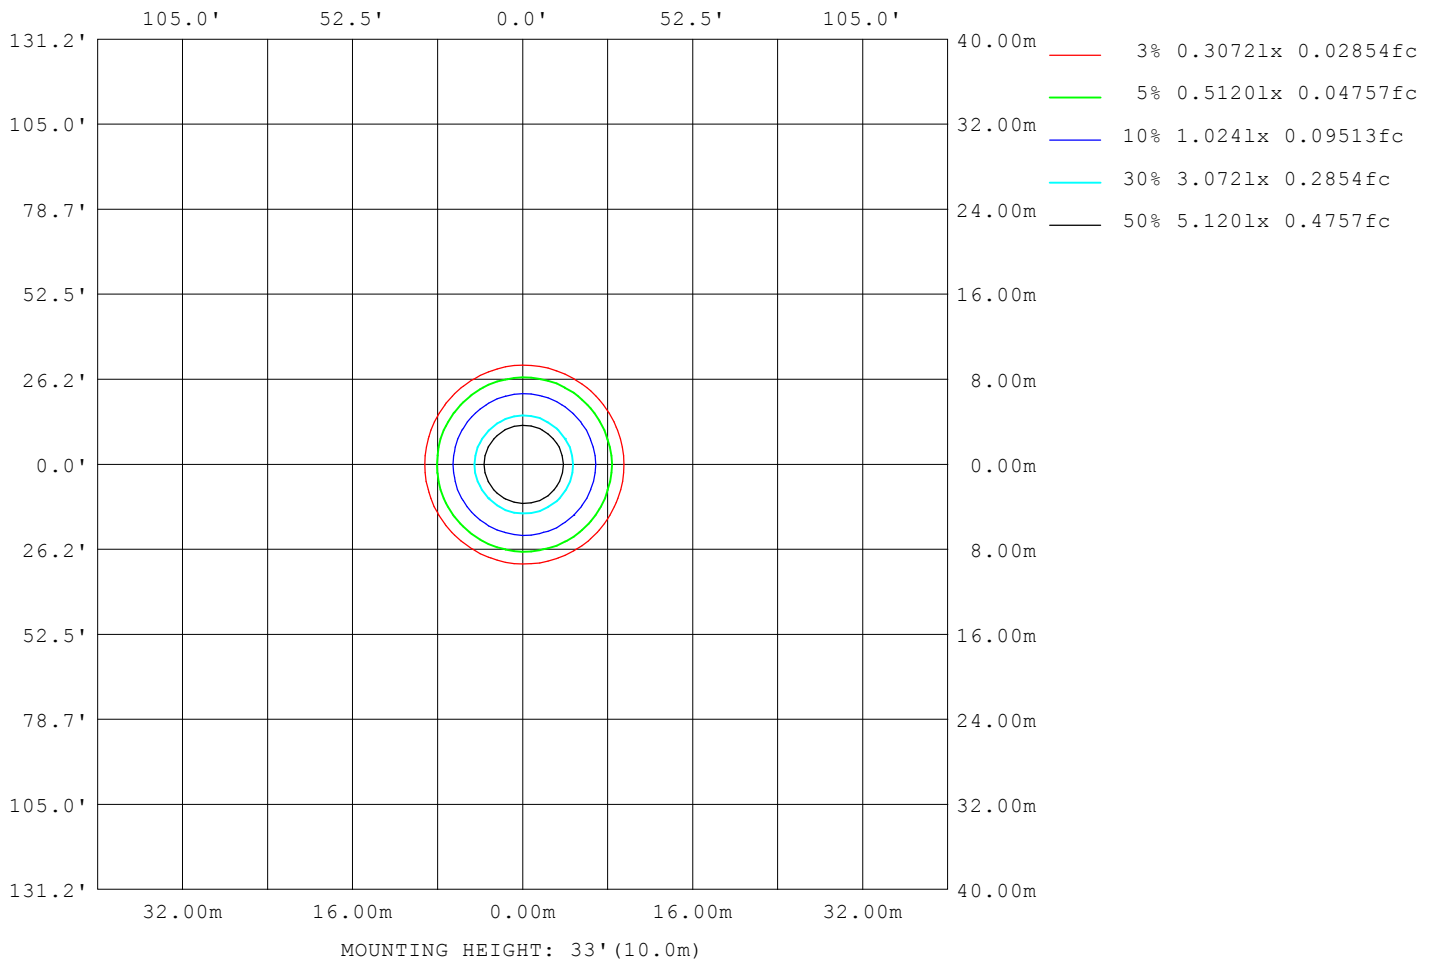

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0445A P:9.8W PF:0.9179 Freq:49.99Hz UTHDi:0.18% ITHDi:19.60% KDisp:0.9357 Lamp Flux:703.447x1 lm		
NAME: DL56-10-XX-02 2700K RA90 36D MAX 反光杯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	19160
L_0~180 (75) av	10683
L_0~180 (85) av	934
L_90~270 (65) av	19222
L_90~270 (75) av	6180
L_90~270 (85) av	215
L_45 (65) av	19272
L_45 (75) av	8459
L_45 (85) av	58

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-07-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

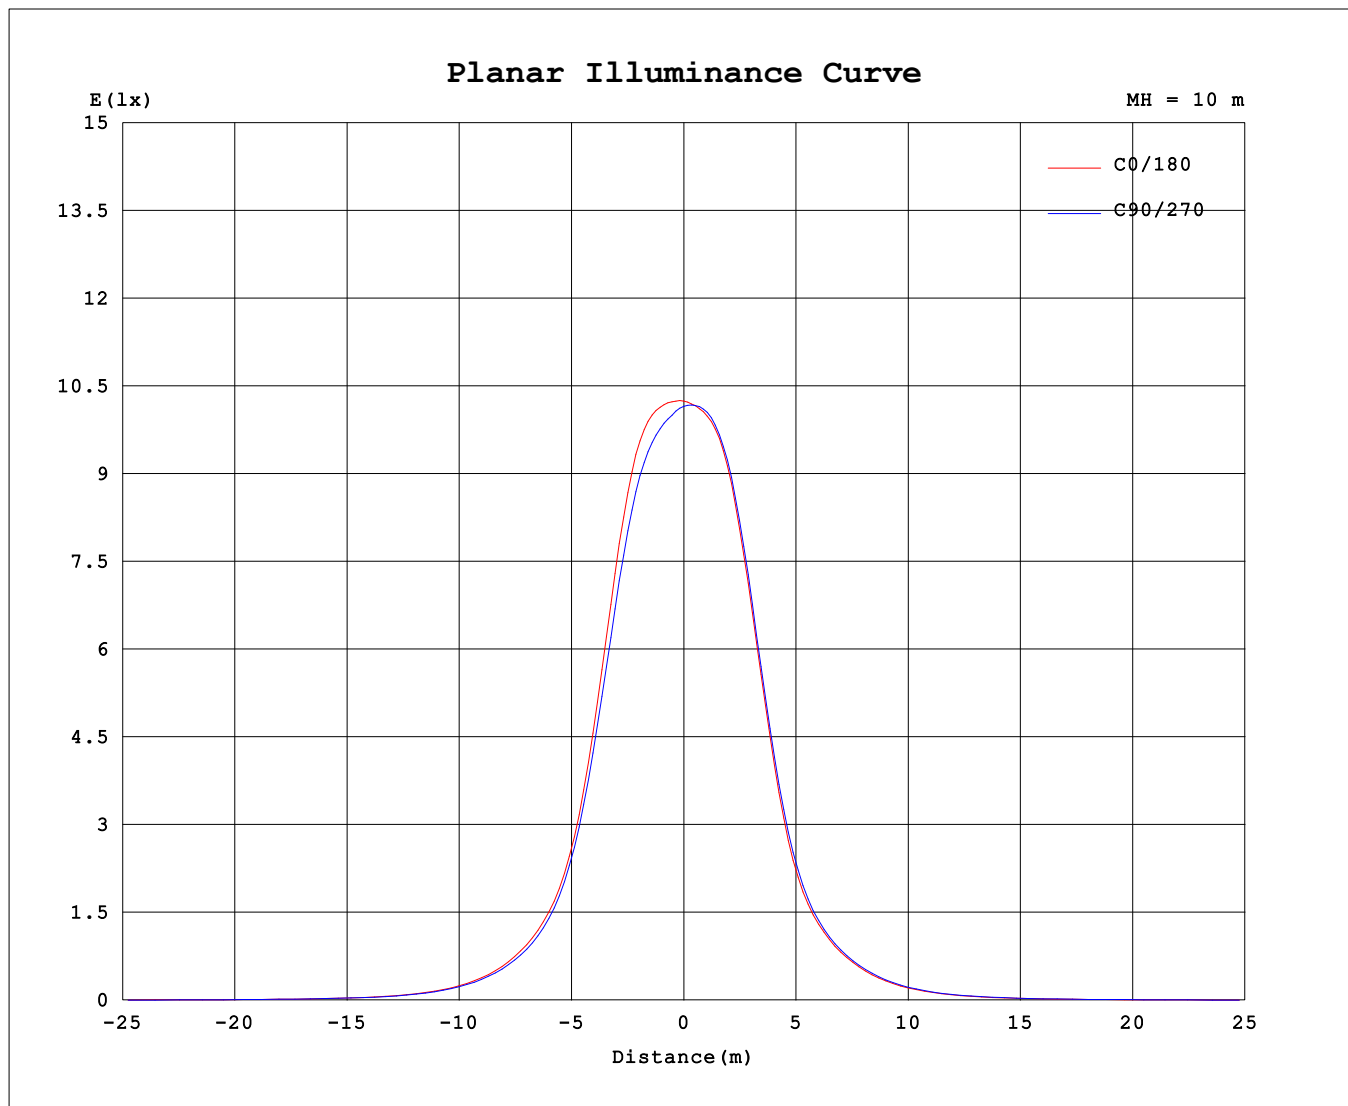

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-07-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	1018	1018	1018	1018	1018	1018	1018	1018
3.0	1021	1014	1006	1008	1014	1019	1023	1026
6.0	1024	1012	995.5	995.3	1009	1017	1024	1027
9.0	1021	1003	975.5	974.8	990.7	996.1	1005	1015
12.0	991.0	971.6	931.0	926.9	937.5	941.6	956.6	975.5
15.0	910.7	896.9	846.5	839.8	839.5	842.4	862.6	889.9
18.0	781.8	774.8	722.3	714.3	705.7	706.9	726.7	757.1
21.0	623.0	623.1	579.8	568.2	551.8	554.3	572.7	598.8
24.0	469.0	470.3	440.4	425.2	406.6	410.5	428.4	449.9
27.0	345.5	345.4	326.2	310.4	295.8	300.6	315.3	332.8
30.0	259.5	257.0	243.6	232.2	223.4	226.1	235.8	249.7
33.0	201.6	198.6	187.1	180.7	174.6	176.0	184.0	194.3
36.0	158.3	156.3	147.0	142.0	137.2	138.3	144.7	152.5
39.0	122.3	121.7	114.1	109.7	105.8	107.1	112.2	118.1
42.0	93.48	92.75	87.47	83.22	79.91	81.57	85.04	90.04
45.0	69.69	69.48	65.50	62.12	59.41	60.75	63.43	67.06
48.0	51.43	51.41	48.47	45.80	43.60	44.64	46.79	49.46
51.0	38.02	38.06	35.94	33.99	32.26	32.94	34.63	36.61
54.0	27.99	28.03	26.58	25.16	23.98	24.35	25.60	27.03
57.0	21.35	21.32	20.38	19.55	18.68	18.83	19.80	20.73
60.0	16.75	16.74	16.02	15.33	14.67	14.83	15.54	16.27
63.0	13.24	13.22	12.67	12.11	11.56	11.67	12.24	12.83
66.0	10.38	10.32	9.806	9.454	8.989	9.091	9.531	10.05
69.0	7.909	7.758	6.847	7.155	6.790	6.831	6.695	7.612
72.0	5.788	5.202	4.156	4.943	4.884	4.656	4.064	5.270
75.0	3.957	2.901	2.099	2.854	3.232	2.613	2.060	3.017
78.0	2.402	1.155	0.6757	1.178	1.869	1.030	0.6742	1.261
81.0	1.217	0.1593	0.0937	0.2013	0.7609	0.1272	0.0881	0.1843
84.0	0.3772	0.0147	0.0281	0.0139	0.1251	0.0078	0.0248	0.0111
87.0	0.0216	0.0039	0.0229	0.0042	0.0150	0.0055	0.0187	0.0068
90.0	0.0121	0.0067	0.0100	0.0065	0.0128	0.0029	0.0061	0.0068

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-07-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks: