


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803 Lamp Flux:1061.23x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.69 lm/W			
MODEL		I _{max} (cd)	2378	S/MH(C0/180)	0.56
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	0.57
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1061.2	η UP,DN(C0-180)	0.0,53.0
NOMINAL FLUX(lm)	1061.23	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,47.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	240.43	η down(%)	100.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

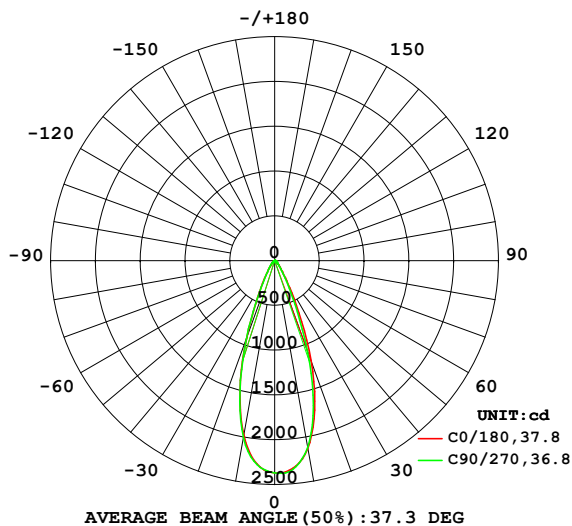

PLANAR ISOLUX DIAGRAM(UNIT:lx)

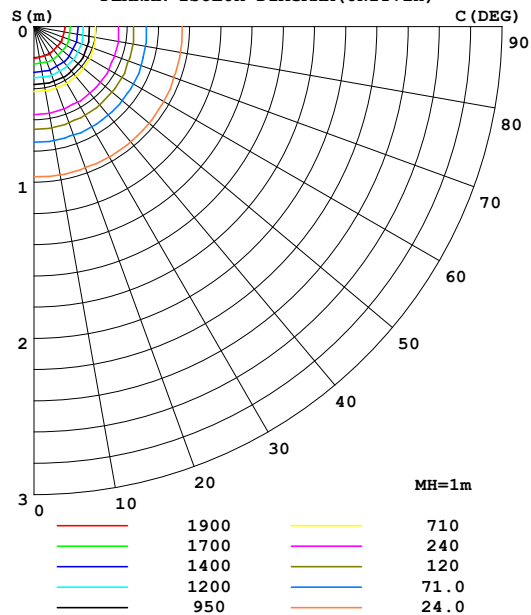

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2135	2147	2121	2037	1978	1970	2015	2077	0- 10	212.6	212.6	20,20
20	1193	1226	1071	951.0	917.9	910.7	927.4	1035	10- 20	432.7	645.3	60.8,60.8
30	306.4	313.9	265.8	232.3	221.5	208.3	220.5	249.4	20- 30	250.5	895.8	84.4,84.4
40	91.20	92.72	84.22	75.27	71.61	69.65	72.45	78.05	30- 40	88.39	984.2	92.7,92.7
50	38.76	38.80	36.96	33.94	33.02	32.37	33.82	35.52	40- 50	40.74	1025	96.6,96.6
60	18.89	19.45	18.90	17.22	16.21	16.13	16.88	17.45	50- 60	22.70	1048	98.7,98.7
70	7.009	6.709	5.707	4.690	3.922	4.452	5.413	6.253	60- 70	11.12	1059	99.8,99.8
80	1.038	0.9402	0.7680	0.6296	0.5938	0.6474	0.8005	0.9465	70- 80	2.215	1061	100,100
90	0.0498	0.0296	0.0331	0.0247	0.0273	0.0244	0.0318	0.0257	80- 90	0.2977	1061	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1007.7 lm

%lum = 95.0%

%lamp = 95.0%

Conical surface Flux(120deg): 1047.6 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803 Lamp Flux:1061.23x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

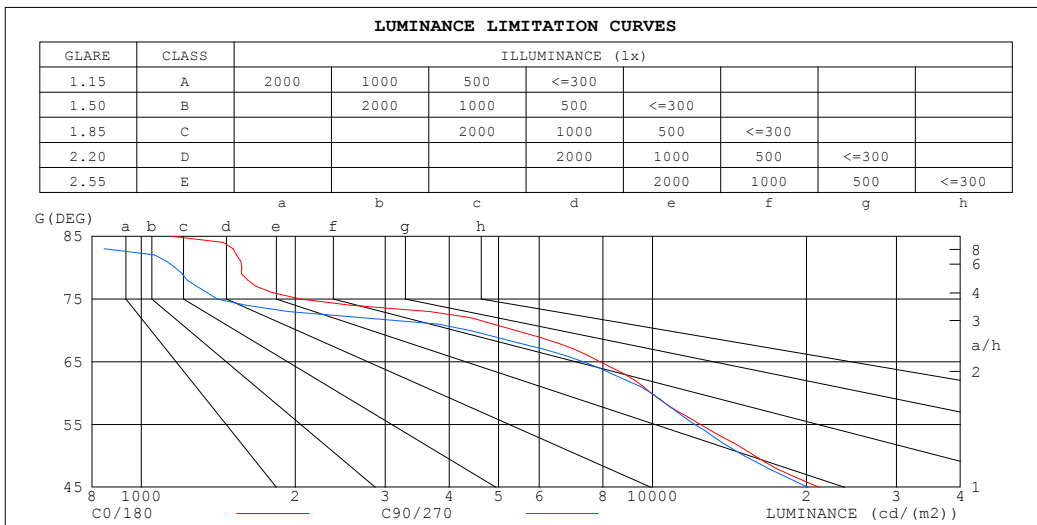


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803 Lamp Flux:1061.23x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95														
2.0	1.05	1.01	.98	1.03	.99	.97	.99	.97	.95	.97	.95	.93	.94	.93	.91	.89														
3.0	.99	.95	.91	.98	.94	.90	.95	.92	.89	.93	.90	.87	.90	.88	.86	.85														
4.0	.94	.89	.85	.93	.88	.85	.90	.87	.84	.89	.85	.83	.87	.84	.82	.80														
5.0	.89	.84	.80	.88	.83	.80	.86	.82	.79	.85	.81	.78	.83	.80	.78	.76														
6.0	.85	.79	.76	.84	.79	.76	.82	.78	.75	.81	.77	.75	.80	.77	.74	.73														
7.0	.81	.76	.72	.80	.75	.72	.79	.75	.71	.78	.74	.71	.77	.73	.71	.69														
8.0	.77	.72	.69	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.68	.66														
9.0	.74	.69	.66	.74	.69	.65	.73	.68	.65	.72	.68	.65	.71	.68	.65	.64														
10.0	.71	.66	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.69	.65	.62	.61														

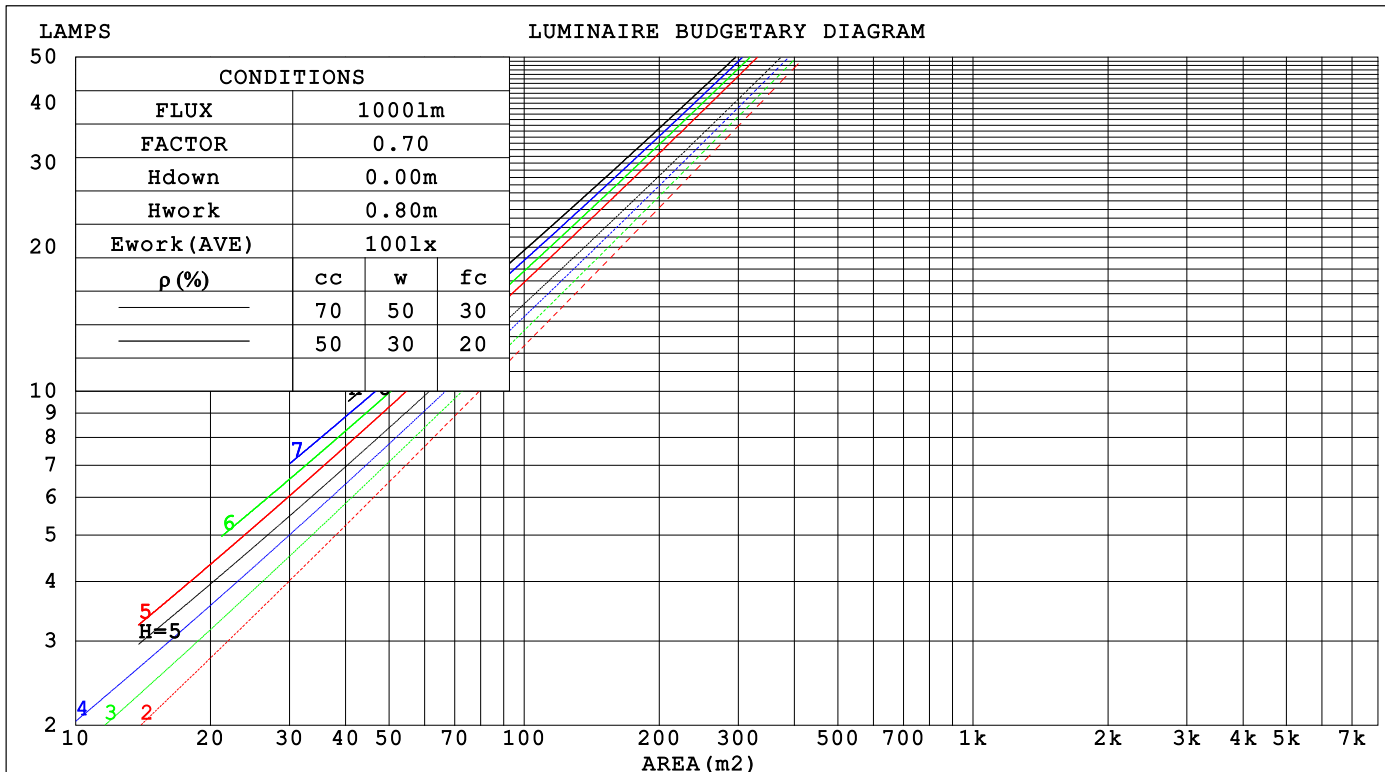

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803 Lamp Flux:1061.23x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.162	.092	.029	.155	.089	.028	.143	.082	.026	.131	.076	.024	.121	.070	.023		
2.0	.153	.084	.026	.148	.081	.025	.137	.076	.024	.128	.072	.022	.119	.067	.021		
3.0	.145	.077	.023	.140	.075	.023	.131	.071	.022	.123	.067	.021	.115	.064	.020		
4.0	.137	.071	.021	.133	.069	.021	.125	.066	.020	.118	.063	.019	.112	.061	.018		
5.0	.129	.066	.019	.126	.065	.019	.119	.062	.018	.113	.060	.018	.108	.058	.017		
6.0	.123	.062	.018	.120	.061	.017	.114	.059	.017	.109	.057	.017	.104	.055	.016		
7.0	.117	.058	.016	.114	.057	.016	.109	.055	.016	.105	.054	.016	.100	.052	.015		
8.0	.112	.055	.015	.109	.054	.015	.105	.052	.015	.101	.051	.015	.097	.050	.014		
9.0	.107	.052	.014	.105	.051	.014	.101	.050	.014	.097	.049	.014	.093	.047	.014		
10.0	.102	.049	.014	.100	.048	.014	.097	.047	.013	.093	.046	.013	.090	.045	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.157	.146	.146	.135	.126	.100	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.154	.133	.115	.132	.114	.099	.090	.079	.069	.052	.046	.041	.017	.015	.013		
3.0	.140	.113	.092	.120	.098	.080	.083	.068	.056	.048	.040	.033	.015	.013	.011		
4.0	.129	.098	.075	.111	.085	.065	.076	.059	.046	.044	.035	.027	.014	.011	.009		
5.0	.120	.087	.062	.103	.075	.054	.071	.052	.038	.041	.031	.023	.013	.010	.007		
6.0	.112	.077	.052	.096	.067	.045	.066	.047	.032	.038	.027	.019	.012	.009	.006		
7.0	.105	.069	.044	.090	.060	.039	.062	.042	.027	.036	.025	.016	.012	.008	.005		
8.0	.098	.063	.038	.085	.054	.033	.059	.038	.024	.034	.023	.014	.011	.007	.005		
9.0	.093	.057	.033	.080	.050	.029	.056	.035	.021	.032	.021	.012	.010	.007	.004		
10.0	.088	.053	.029	.076	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz											
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803 Lamp Flux:1061.23x1 lm											
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D TYPE:						WEIGHT:					
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Norming lighting						SUR.: 70mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	17.2	18.0	17.4	18.1	18.3	16.9	17.7	17.1	17.9	18.0	
	3H	17.4	18.1	17.6	18.3	18.5	17.0	17.8	17.3	18.0	18.2
	4H	17.3	18.0	17.6	18.3	18.5	17.0	17.7	17.3	17.9	18.1
	6H	17.2	17.9	17.5	18.2	18.4	16.9	17.6	17.2	17.8	18.1
	8H	17.2	17.9	17.5	18.1	18.4	16.9	17.5	17.2	17.8	18.0
	12H	17.2	17.8	17.5	18.1	18.3	16.8	17.4	17.1	17.7	18.0
4H	2H	17.2	17.9	17.5	18.1	18.4	17.0	17.7	17.2	17.9	18.1
	3H	17.5	18.1	17.8	18.4	18.6	17.2	17.8	17.5	18.1	18.3
	4H	17.4	18.0	17.8	18.3	18.6	17.1	17.7	17.4	18.0	18.3
	6H	17.4	17.9	17.7	18.2	18.5	17.0	17.5	17.4	17.9	18.2
	8H	17.3	17.8	17.7	18.1	18.5	17.0	17.4	17.4	17.8	18.2
	12H	17.3	17.7	17.7	18.1	18.5	16.9	17.4	17.3	17.7	18.1
8H	4H	17.3	17.8	17.7	18.1	18.5	17.0	17.5	17.4	17.8	18.2
	6H	17.2	17.6	17.7	18.0	18.4	16.9	17.3	17.3	17.7	18.1
	8H	17.2	17.5	17.6	18.0	18.4	16.9	17.2	17.3	17.6	18.1
	12H	17.1	17.4	17.6	17.9	18.4	16.8	17.1	17.3	17.5	18.0
12H	4H	17.3	17.7	17.7	18.1	18.4	16.9	17.4	17.4	17.7	18.1
	6H	17.2	17.5	17.6	17.9	18.4	16.9	17.2	17.3	17.6	18.1
	8H	17.1	17.4	17.6	17.9	18.3	16.8	17.1	17.3	17.5	18.0
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 1.5 / - 2.2					+ 1.4 / - 2.2					
1.5H	+ 2.4 / - 1.4					+ 2.1 / - 1.4					
2.0H	+ 2.2 / - 1.6					+ 2.1 / - 1.6					

CIE Pub.117, 1061 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.2)
Area: 0.0038 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803 Lamp Flux:1061.23x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	86	80	77	86	80	77	73
0.80	94	89	85	94	88	85	93	88	84	81
1.00	99	93	90	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	100	95
3.00	112	108	106	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz UTHDi:0.17% ITHDi:6.76% KDisp:0.9803 Lamp Flux:1061.23x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

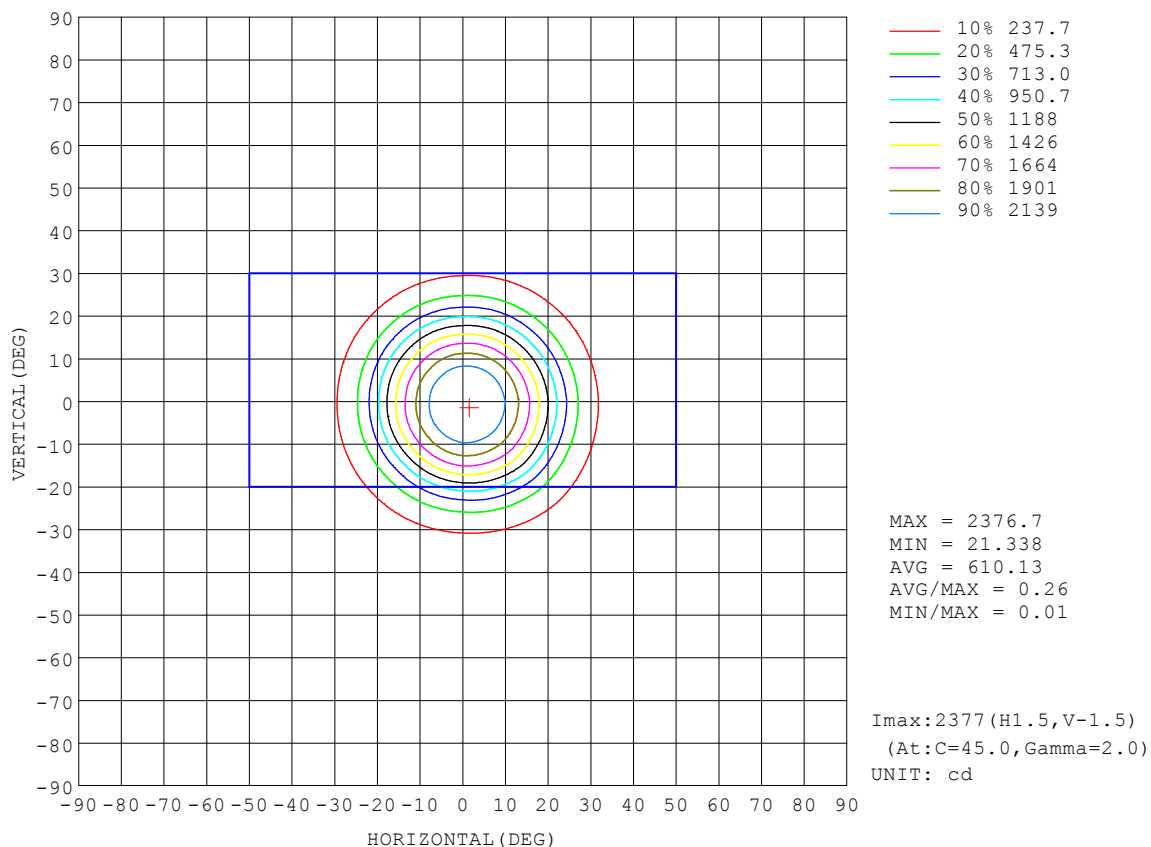


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803		Lamp Flux:1061.23x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

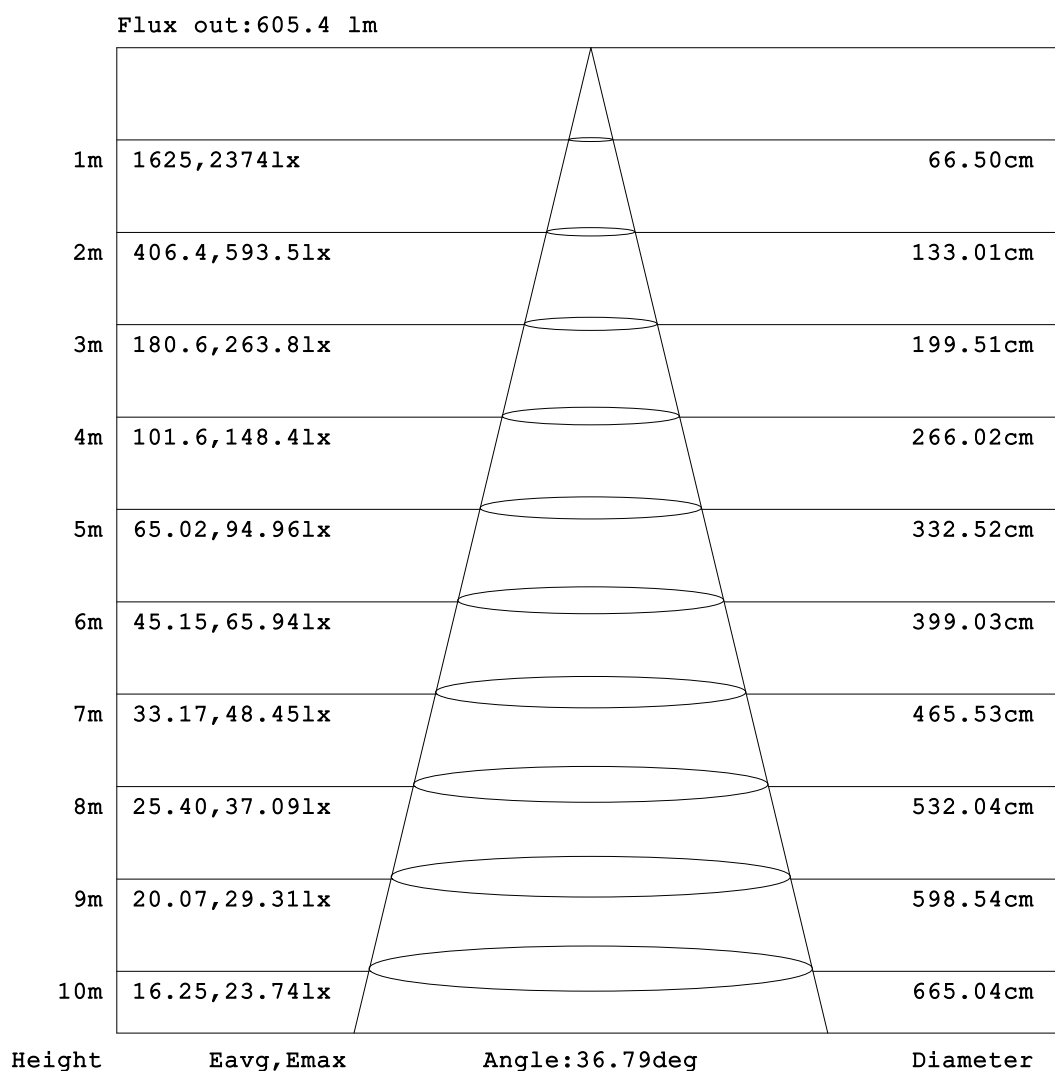


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803		Lamp Flux:1061.23x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

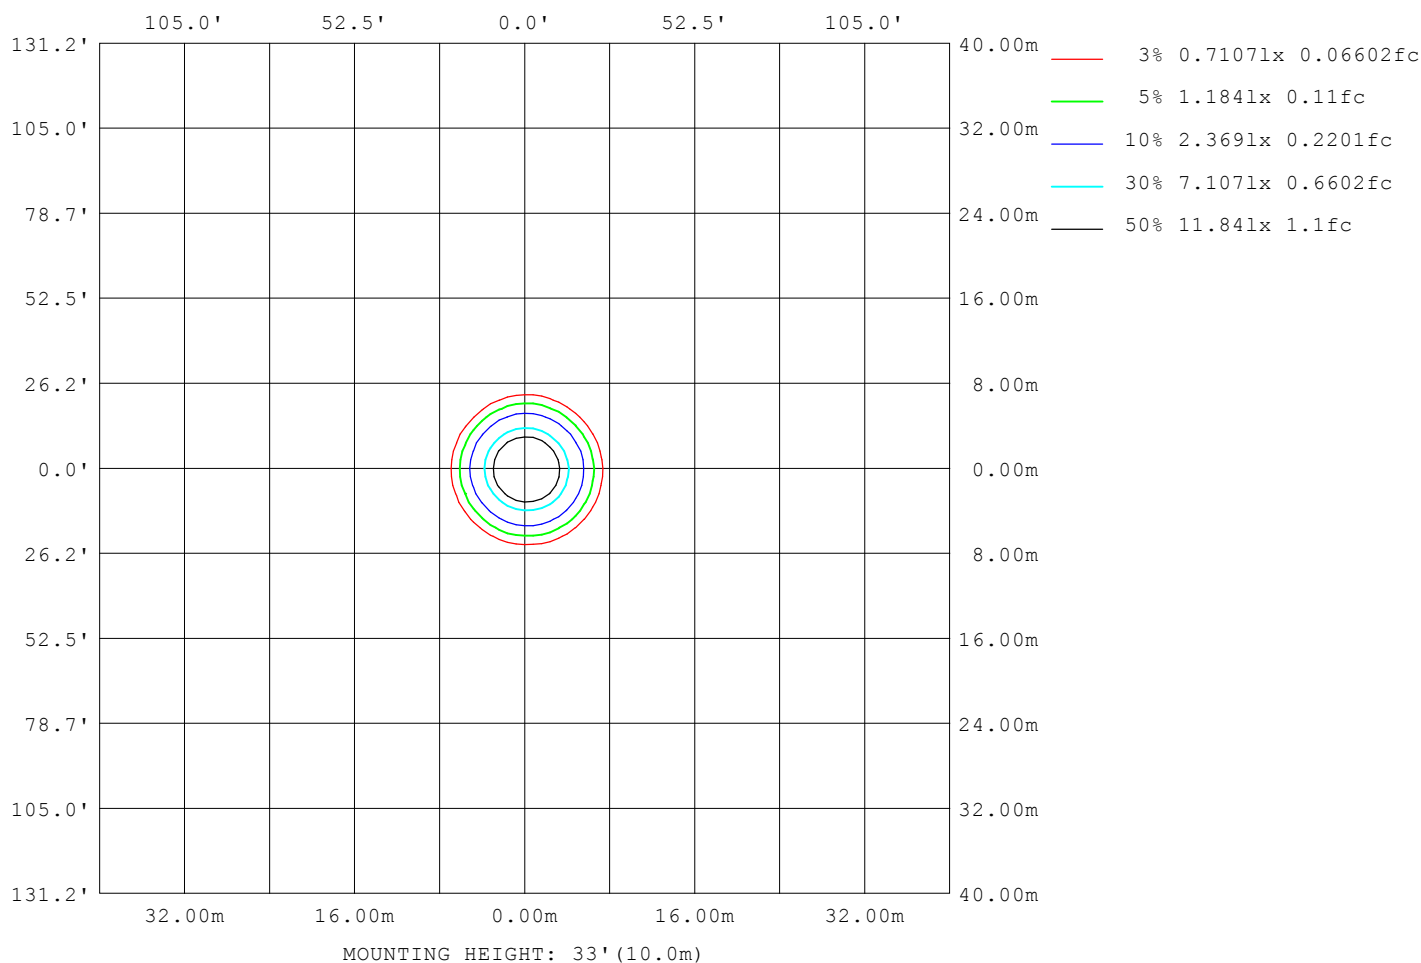

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.5V I:0.0613A P:14.4W PF:0.9777 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.76% KDisp:0.9803 Lamp Flux:1061.23x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6912
L_0~180 (75) av	1624
L_0~180 (85) av	690
L_90~270 (65) av	6986
L_90~270 (75) av	1436
L_90~270 (85) av	367
L_45 (65) av	6913
L_45 (75) av	1531
L_45 (85) av	497

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

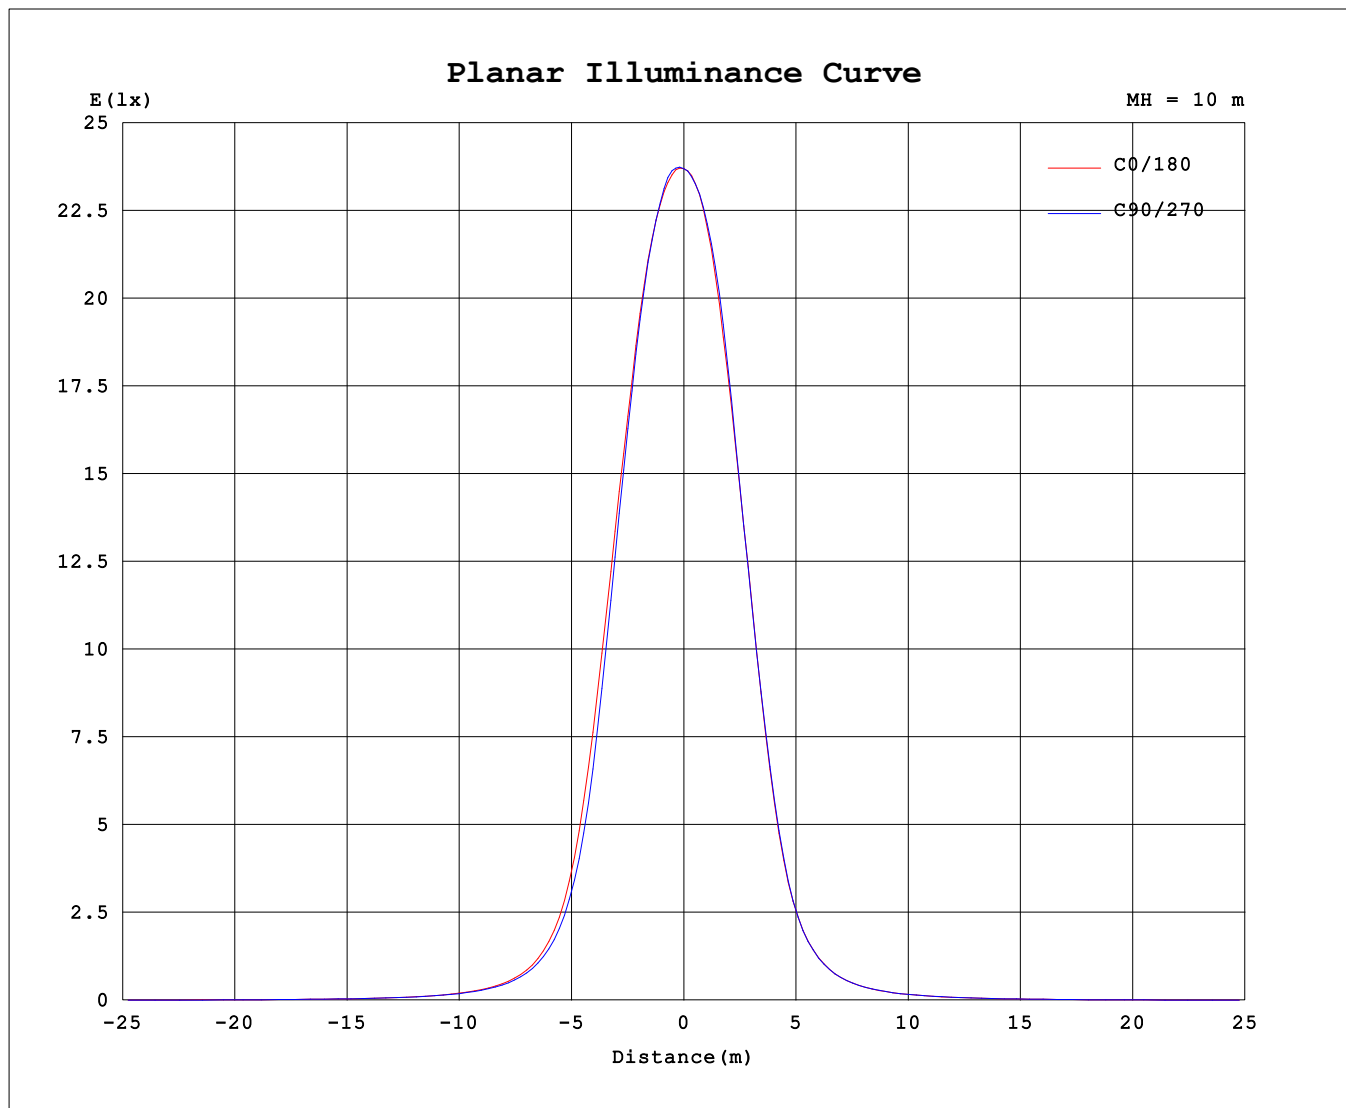

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	2369	2369	2369	2369	2369	2369	2369	2369
3.0	2362	2372	2374	2354	2336	2330	2335	2343
6.0	2305	2323	2310	2269	2238	2231	2249	2275
9.0	2189	2203	2182	2110	2060	2052	2090	2141
12.0	1992	2012	1967	1868	1804	1790	1826	1914
15.0	1729	1761	1677	1563	1500	1480	1499	1612
18.0	1419	1456	1325	1203	1157	1141	1154	1270
21.0	1077	1105	948.9	835.3	807.4	797.6	817.8	922.8
24.0	746.0	759.0	625.5	546.4	524.0	513.9	532.3	611.3
27.0	480.2	487.9	406.9	353.4	334.6	321.8	335.1	386.4
30.0	306.4	313.9	265.8	232.3	221.5	208.3	220.5	249.4
33.0	201.8	209.6	179.5	158.8	149.5	142.2	149.2	167.4
36.0	139.3	143.4	126.2	112.3	106.2	101.7	106.8	117.5
39.0	100.0	102.7	93.04	82.78	78.64	76.25	79.47	86.13
42.0	74.78	76.19	70.00	62.86	60.05	58.59	60.86	64.75
45.0	56.94	58.12	54.14	49.08	47.04	46.03	47.47	49.87
48.0	44.33	45.21	42.81	39.08	38.00	37.16	38.90	39.82
51.0	36.25	36.10	34.43	31.74	30.78	30.25	31.53	33.08
54.0	29.09	29.26	28.29	25.97	24.84	24.31	25.49	26.50
57.0	23.26	23.73	23.08	21.33	20.47	20.03	20.53	21.24
60.0	18.89	19.45	18.90	17.22	16.21	16.13	16.88	17.45
63.0	15.24	15.49	14.43	12.91	12.19	12.19	12.99	13.93
66.0	11.55	11.64	10.41	8.855	8.258	8.484	9.496	10.49
69.0	8.108	7.834	6.663	5.714	5.283	5.545	6.238	7.223
72.0	5.167	4.813	3.160	2.181	1.909	2.097	3.124	4.540
75.0	2.015	1.757	1.383	1.234	1.180	1.257	1.441	1.775
78.0	1.277	1.145	0.9704	0.8359	0.8056	0.8624	1.017	1.159
81.0	0.9304	0.8249	0.6664	0.5187	0.4482	0.5260	0.6952	0.8312
84.0	0.5744	0.4504	0.2114	0.0966	0.0991	0.0996	0.2192	0.4417
87.0	0.1226	0.0921	0.0758	0.0372	0.0382	0.0378	0.0729	0.0896
90.0	0.0498	0.0296	0.0331	0.0247	0.0273	0.0244	0.0318	0.0257

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: