


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866 Lamp Flux:1455.77x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 73.97 lm/W
MODEL		I _{max} (cd)	5557	S/MH(C0/180)		0.39
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)		0.41
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1455.8	η UP,DN(C0-180)		0.0,53.6
NOMINAL FLUX(lm)	1455.77	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,46.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.00
TEST VOLTAGE(V)	240.43	η down (%)	100.0	CIBSE SHR MAX		0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

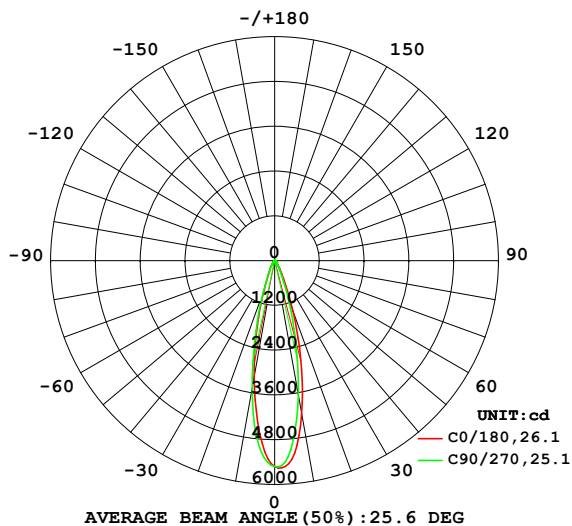

PLANAR ISOLUX DIAGRAM(UNIT:lx)

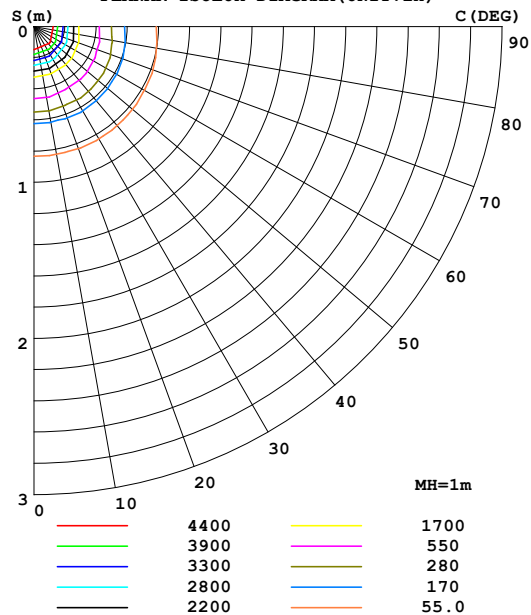

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4180	4078	3664	3316	3172	3222	3502	3900	0- 10	432.1	432.1	29.7,29.7
20	1432	1381	1033	860.5	823.9	867.9	904.5	1109	10- 20	589.7	1022	70.2,70.2
30	336.0	332.6	255.0	224.7	227.4	225.1	226.9	258.4	20- 30	238.4	1260	86.6,86.6
40	114.8	114.3	93.44	82.99	84.05	82.73	85.15	95.44	30- 40	99.01	1359	93.4,93.4
50	50.62	49.91	44.15	40.99	42.25	40.36	42.73	44.13	40- 50	49.32	1409	96.8,96.8
60	26.72	26.39	23.76	21.31	20.93	20.97	21.92	23.56	50- 60	29.04	1438	98.8,98.8
70	9.860	9.169	7.375	5.656	4.912	5.616	7.050	8.306	60- 70	14.92	1453	99.8,99.8
80	1.227	1.123	0.9963	0.8732	0.8745	0.9253	1.058	1.146	70- 80	2.842	1455	100,100
90	0.0654	0.0357	0.0572	0.0347	0.0411	0.0357	0.0453	0.0434	80- 90	0.3849	1456	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1387.5 lm

%lum = 95.3%

%lamp = 95.3%

Conical surface Flux(120deg): 1437.6 lm

%lum = 98.8%


%lamp = 98.8%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866 Lamp Flux:1455.77x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

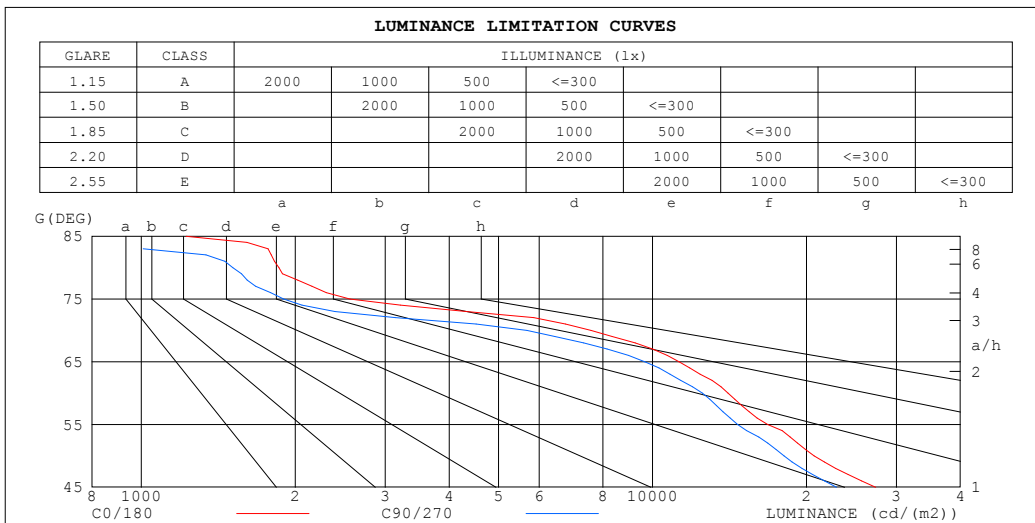


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866 Lamp Flux:1455.77x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0														
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
ρfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	1.00	.99	.98	.97	.95														
2.0	1.06	1.03	.00	1.04	1.01	.99	1.01	.99	.96	.98	.96	.94	.96	.94	.93	.91														
3.0	1.01	.96	.93	.99	.95	.92	.97	.94	.91	.94	.92	.90	.92	.90	.88	.87														
4.0	.96	.91	.88	.95	.91	.87	.93	.89	.86	.91	.88	.85	.89	.87	.84	.83														
5.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.88	.84	.82	.86	.83	.81	.80														
6.0	.88	.83	.80	.87	.83	.79	.86	.82	.79	.84	.81	.78	.83	.80	.78	.77														
7.0	.84	.80	.76	.84	.79	.76	.83	.79	.76	.82	.78	.75	.81	.77	.75	.74														
8.0	.81	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.71														
9.0	.79	.74	.71	.78	.74	.71	.77	.73	.71	.77	.73	.70	.76	.73	.70	.69														
10.0	.76	.71	.68	.76	.71	.68	.75	.71	.68	.74	.71	.68	.74	.70	.68	.67														

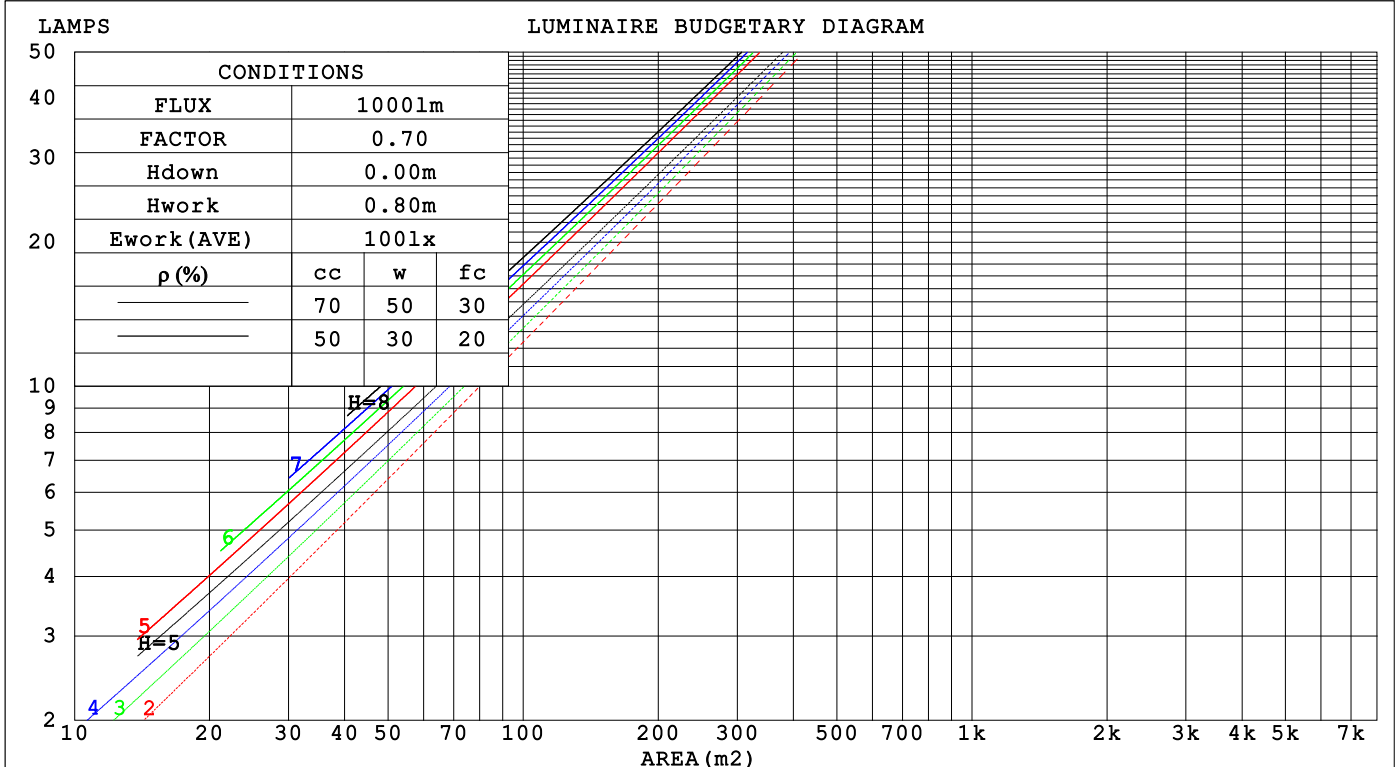

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866 Lamp Flux:1455.77x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.152	.087	.027	.146	.083	.026	.133	.076	.024	.122	.070	.023	.111	.064	.021		
2.0	.143	.078	.024	.138	.076	.023	.127	.071	.022	.118	.066	.021	.109	.062	.019		
3.0	.134	.071	.021	.130	.069	.021	.121	.066	.020	.113	.062	.019	.105	.058	.018		
4.0	.126	.066	.019	.122	.064	.019	.115	.061	.018	.108	.058	.017	.102	.055	.017		
5.0	.119	.061	.018	.116	.059	.017	.109	.057	.017	.103	.055	.016	.098	.052	.016		
6.0	.113	.056	.016	.110	.055	.016	.104	.053	.016	.099	.051	.015	.094	.050	.015		
7.0	.107	.053	.015	.104	.052	.015	.100	.050	.014	.095	.049	.014	.091	.047	.014		
8.0	.102	.050	.014	.099	.049	.014	.095	.048	.014	.091	.046	.013	.087	.045	.013		
9.0	.097	.047	.013	.095	.046	.013	.091	.045	.013	.088	.044	.013	.084	.043	.012		
10.0	.093	.044	.012	.091	.044	.012	.088	.043	.012	.084	.042	.012	.081	.041	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.169	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.152	.133	.116	.131	.114	.100	.089	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.138	.113	.093	.119	.098	.081	.081	.068	.057	.047	.040	.034	.015	.013	.011		
4.0	.127	.098	.077	.109	.085	.067	.075	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.117	.086	.064	.100	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.108	.076	.054	.093	.066	.047	.064	.046	.033	.037	.027	.020	.012	.009	.006		
7.0	.101	.068	.046	.087	.059	.040	.060	.042	.028	.035	.024	.017	.011	.008	.006		
8.0	.094	.062	.039	.081	.054	.034	.056	.038	.024	.033	.022	.015	.011	.007	.005		
9.0	.089	.056	.034	.076	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004		
10.0	.084	.052	.030	.072	.045	.026	.050	.032	.019	.029	.019	.011	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz UTHDi:0.17% ITHDi:5.91% KDisp:0.9866Lamp Flux:1455.77x1 lm										
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.7	18.5	17.9	18.6	18.8	17.0	17.8	17.2	17.9	18.1
3H	18.0	18.7	18.3	18.9	19.1	17.3	18.0	17.5	18.2	18.3
4H	18.0	18.6	18.2	18.8	19.1	17.2	17.9	17.5	18.1	18.3
6H	17.9	18.5	18.2	18.8	19.0	17.1	17.8	17.4	18.0	18.2
8H	17.9	18.5	18.2	18.7	19.0	17.1	17.7	17.4	17.9	18.2
12H	17.8	18.4	18.1	18.7	18.9	17.0	17.6	17.4	17.9	18.2
4H 2H	17.8	18.5	18.1	18.7	18.9	17.2	17.9	17.5	18.1	18.3
3H	18.2	18.8	18.5	19.0	19.3	17.5	18.1	17.8	18.3	18.6
4H	18.1	18.7	18.5	18.9	19.2	17.4	18.0	17.8	18.2	18.6
6H	18.0	18.5	18.4	18.8	19.2	17.3	17.8	17.7	18.1	18.5
8H	18.0	18.4	18.4	18.8	19.1	17.3	17.7	17.7	18.1	18.4
12H	18.0	18.4	18.4	18.7	19.1	17.2	17.6	17.7	18.0	18.4
8H 4H	18.0	18.4	18.4	18.8	19.2	17.3	17.8	17.7	18.1	18.5
6H	17.9	18.3	18.3	18.7	19.1	17.2	17.6	17.7	18.0	18.4
8H	17.9	18.2	18.3	18.6	19.1	17.2	17.5	17.6	17.9	18.4
12H	17.8	18.1	18.3	18.5	19.0	17.1	17.4	17.6	17.8	18.3
12H 4H	18.0	18.4	18.4	18.7	19.1	17.3	17.7	17.7	18.0	18.4
6H	17.9	18.2	18.3	18.6	19.0	17.2	17.5	17.6	17.9	18.4
8H	17.8	18.1	18.3	18.5	19.0	17.1	17.4	17.6	17.8	18.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.4 / - 1.9					+ 1.2 / - 1.9				
1.5H	+ 2.2 / - 1.3					+ 1.7 / - 1.3				
2.0H	+ 1.9 / - 1.4					+ 1.6 / - 1.3				

CIE Pub.117, 1456 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.3)
Area: 0.0038 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866 Lamp Flux:1455.77x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	89	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	95	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	109	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866 Lamp Flux:1455.77x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

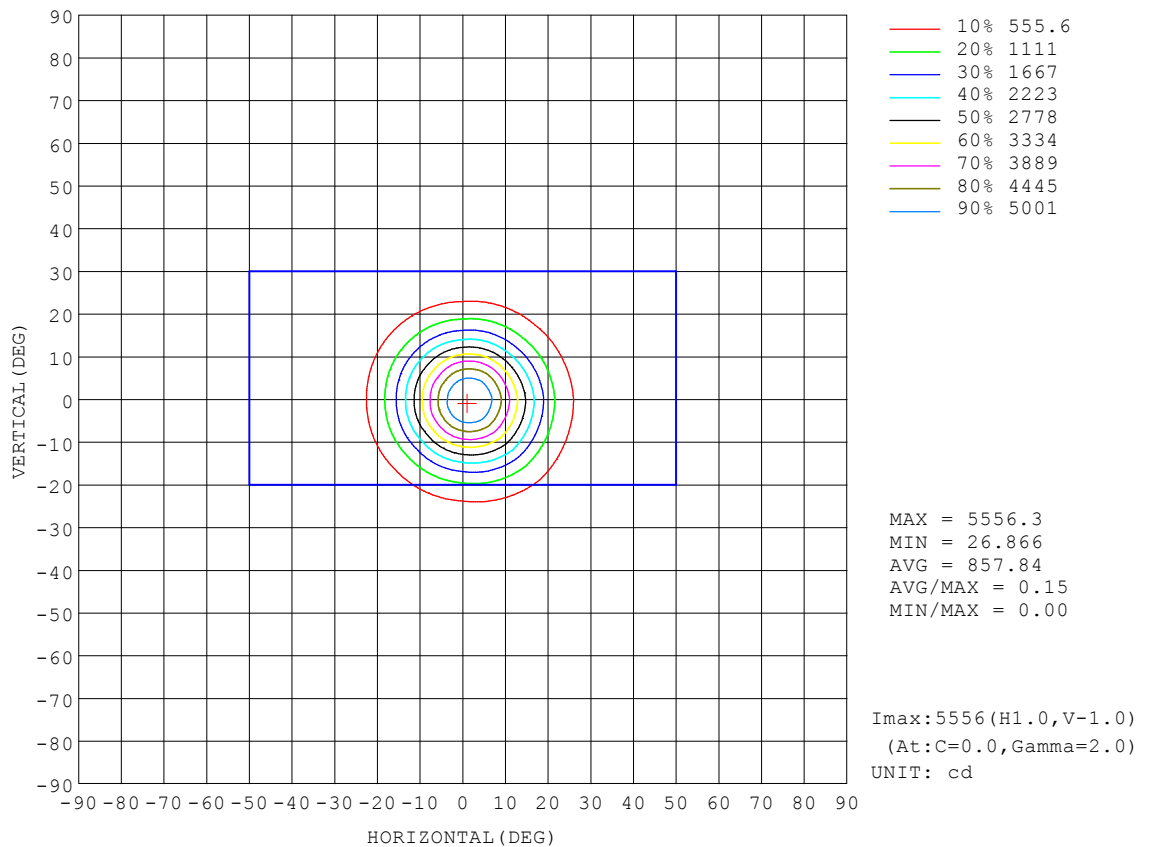


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866		Lamp Flux:1455.77x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

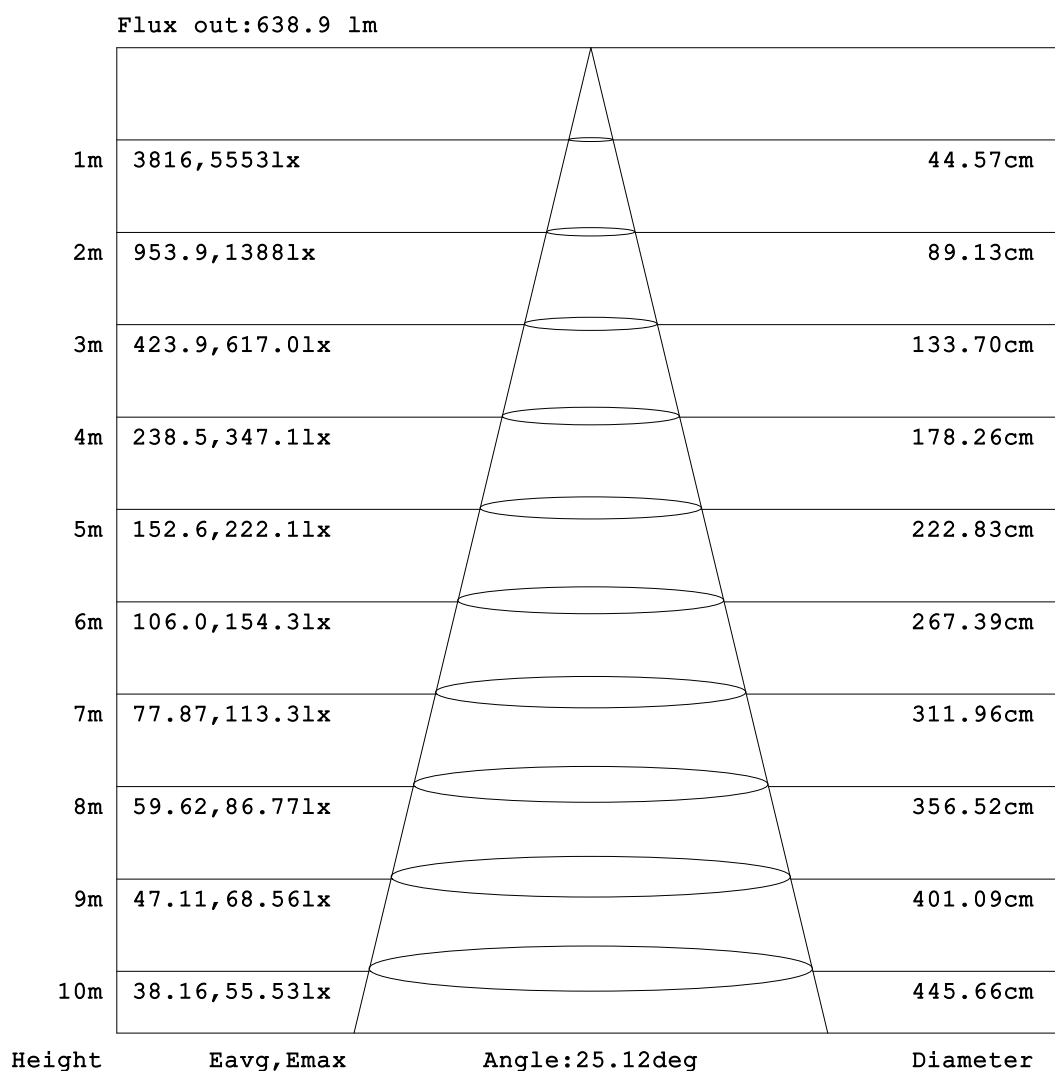


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866		Lamp Flux:1455.77x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

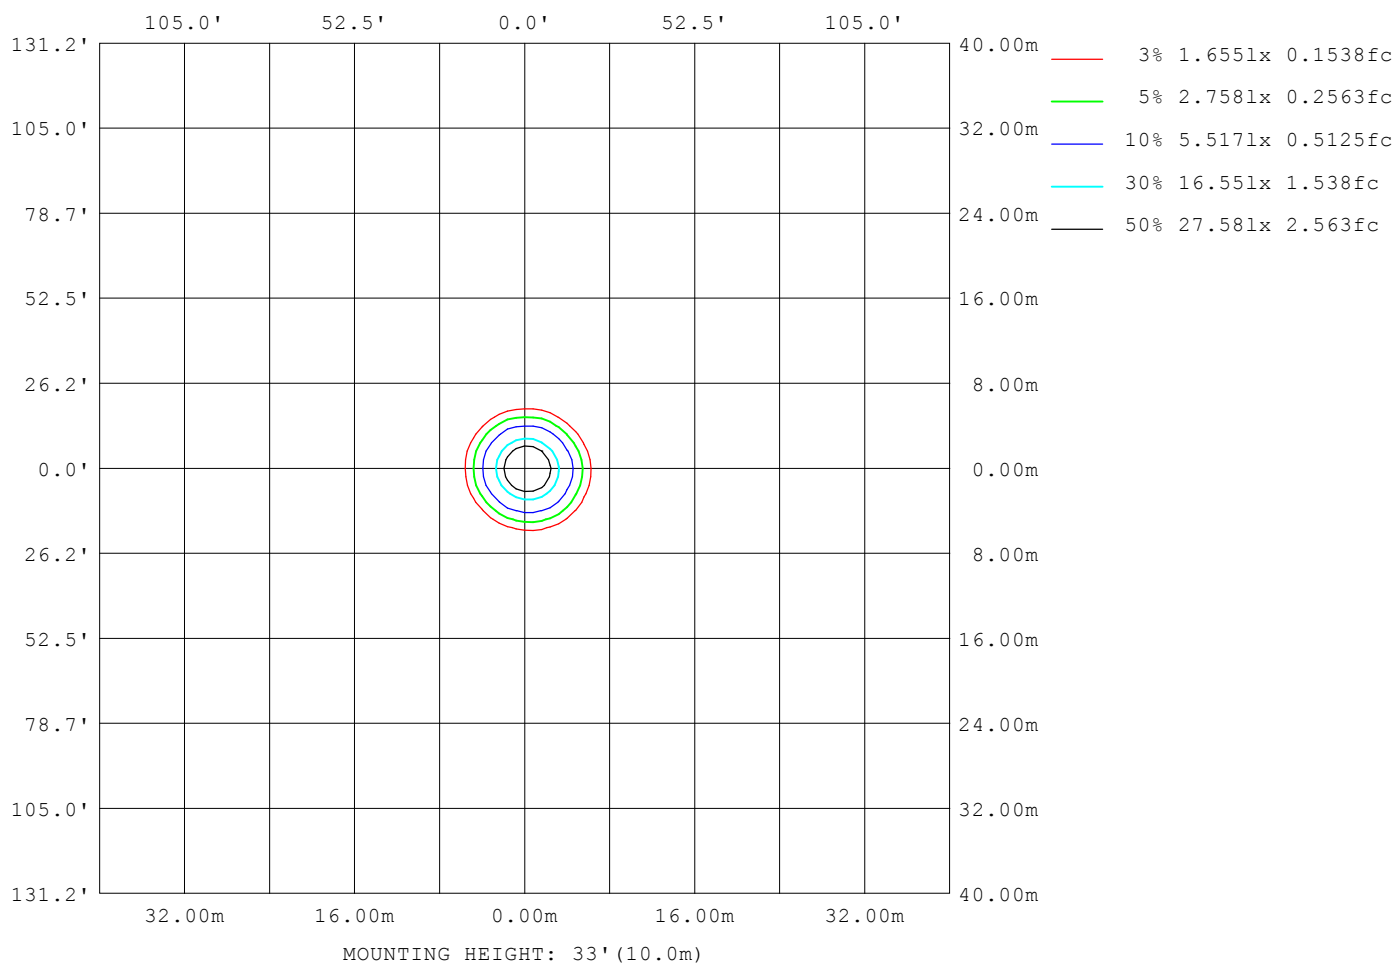

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.5V I:0.0831A P:19.7W PF:0.9853 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.91% KDisp:0.9866		Lamp Flux:1455.77x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01DW 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9713
L_0~180 (75) av	2105
L_0~180 (85) av	806
L_90~270 (65) av	9278
L_90~270 (75) av	1914
L_90~270 (85) av	536
L_45 (65) av	9377
L_45 (75) av	1991
L_45 (85) av	588

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

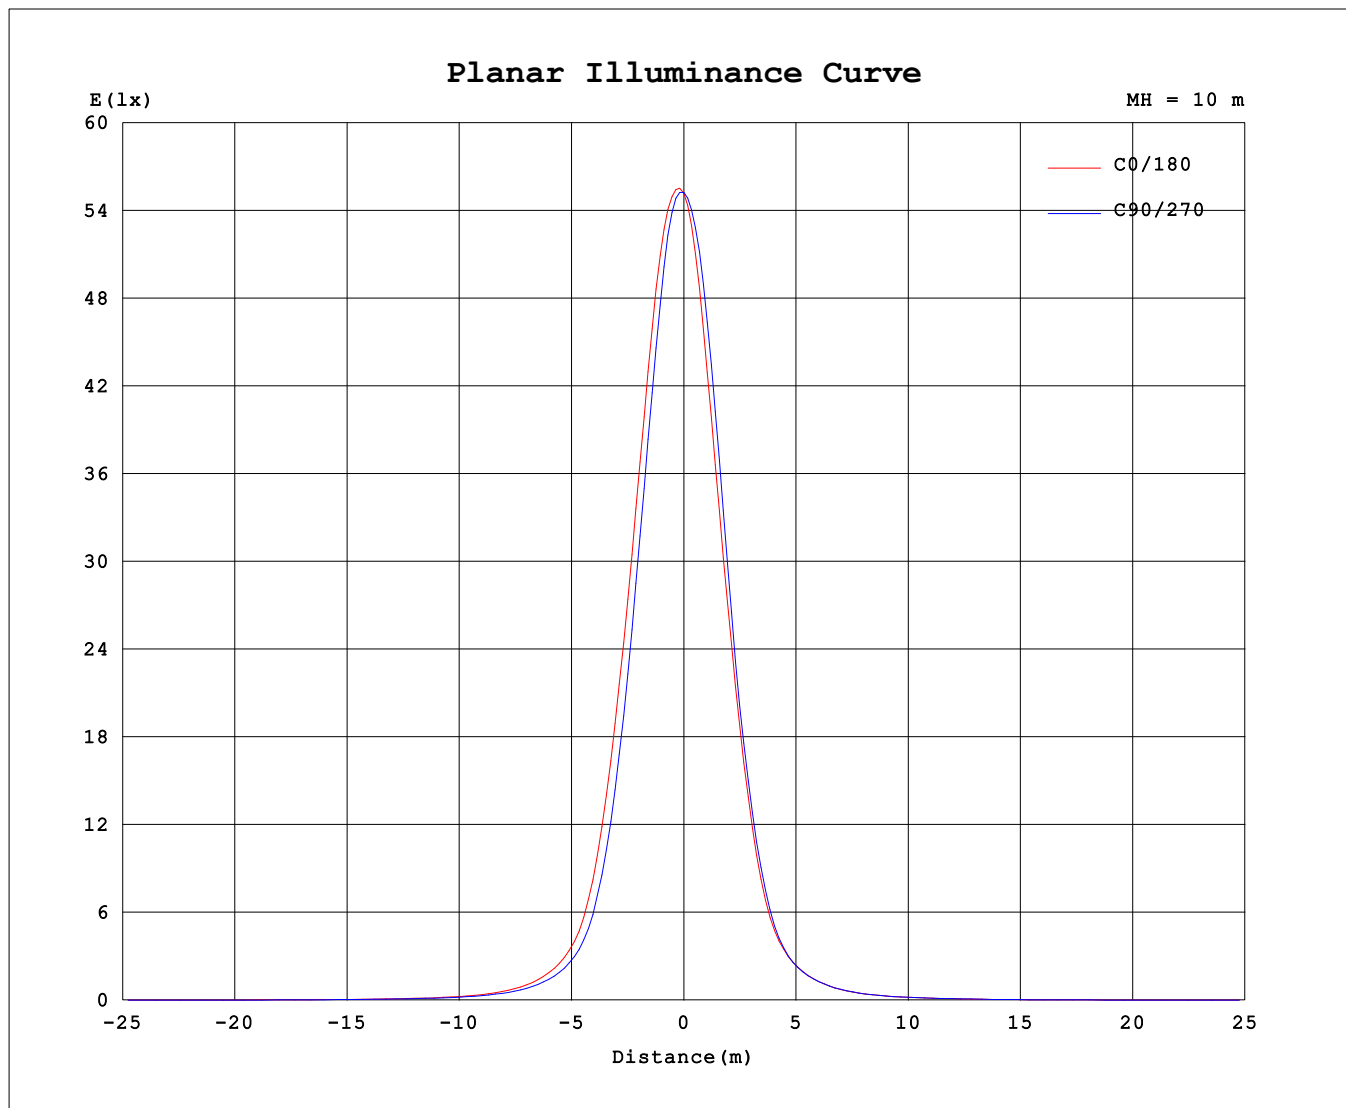

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	5520	5520	5520	5520	5520	5520	5520	5520
3.0	5520	5521	5407	5244	5129	5159	5301	5431
6.0	5178	5125	4828	4535	4365	4429	4711	5008
9.0	4465	4363	3976	3634	3474	3531	3831	4217
12.0	3592	3503	3045	2696	2600	2629	2827	3228
15.0	2712	2653	2156	1860	1805	1841	1951	2271
18.0	1909	1848	1420	1198	1154	1193	1257	1513
21.0	1224	1178	885.1	725.9	699.1	722.8	758.4	946.3
24.0	741.4	724.8	540.4	457.2	457.1	460.4	468.1	560.6
27.0	483.9	477.9	362.0	313.0	317.6	316.6	315.4	367.4
30.0	336.0	332.6	255.0	224.7	227.4	225.1	226.9	258.4
33.0	239.2	237.1	184.6	162.6	165.4	163.0	165.6	187.6
36.0	172.7	171.9	135.6	120.0	122.1	119.9	123.2	138.6
39.0	126.6	126.2	101.5	90.65	91.95	90.72	93.10	103.7
42.0	95.73	94.56	78.34	70.06	70.90	69.62	71.98	80.03
45.0	73.47	72.65	61.52	55.44	56.89	54.90	56.99	62.62
48.0	58.06	57.46	49.83	45.75	47.98	45.57	47.53	50.22
51.0	47.65	46.92	41.72	38.26	39.22	38.16	40.16	41.51
54.0	40.04	39.33	34.12	30.86	30.80	30.50	31.87	34.84
57.0	31.99	31.68	28.42	25.80	25.66	25.49	26.24	28.18
60.0	26.72	26.39	23.76	21.31	20.93	20.97	21.92	23.56
63.0	21.40	20.99	18.67	16.57	16.25	16.35	17.08	18.64
66.0	16.53	16.09	13.86	11.82	11.32	11.68	12.85	14.25
69.0	11.37	10.75	8.764	7.328	6.817	7.207	8.326	9.770
72.0	6.885	6.063	3.683	2.693	2.491	2.743	3.733	5.467
75.0	2.518	2.233	1.866	1.677	1.624	1.710	1.899	2.214
78.0	1.599	1.437	1.272	1.162	1.166	1.216	1.316	1.440
81.0	1.083	0.9814	0.8650	0.7202	0.6960	0.7792	0.9192	1.007
84.0	0.6397	0.4759	0.2417	0.1416	0.1603	0.1656	0.3504	0.5279
87.0	0.1598	0.1078	0.0967	0.0561	0.0687	0.0678	0.1195	0.1232
90.0	0.0654	0.0357	0.0572	0.0347	0.0411	0.0357	0.0453	0.0434

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: