


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809 Lamp Flux:1698.95x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.76 lm/W			
MODEL		Imax (cd)	10653	S/MH(C0/180)	0.27
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	0.26
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1699.0	η UP,DN(C0-180)	0.0,52.3
NOMINAL FLUX(lm)	1698.95	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,47.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.44	η down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

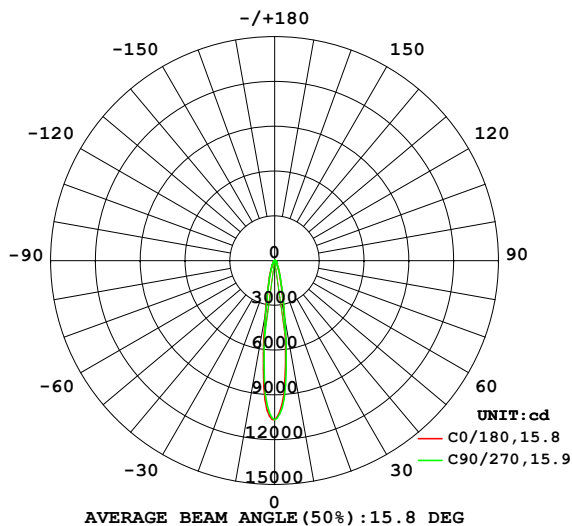

PLANAR ISOLUX DIAGRAM(UNIT:lx)

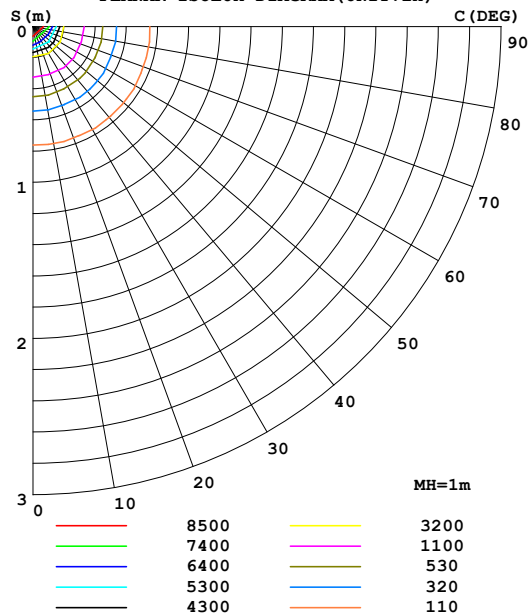

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	377.8	399.0	405.5	387.3	364.1	345.5	346.3	364.3	0- 10	624.4	624.4	36.8,36.8
20	99.18	102.6	100.5	96.05	89.69	84.06	86.02	93.01	10- 20	502.2	1127	66.3,66.3
30	39.40	40.52	38.31	35.49	33.06	31.56	32.82	35.96	20- 30	268.3	1395	82.1,82.1
40	16.76	17.23	16.00	14.87	14.16	13.52	14.09	15.25	30- 40	147.7	1543	90.8,90.8
50	8.004	8.156	7.827	7.316	7.048	6.866	6.971	7.427	40- 50	82.13	1625	95.6,95.6
60	4.023	4.062	3.939	3.648	3.525	3.472	3.644	3.793	50- 60	48.41	1673	98.5,98.5
70	0.8884	0.9054	0.9111	0.8997	0.8969	0.8724	0.8879	0.8953	60- 70	21.75	1695	99.8,99.8
80	0.1420	0.1394	0.1440	0.1476	0.1576	0.1540	0.1513	0.1455	70- 80	3.583	1698	100,100
90	0.0057	0.0039	0.0071	0.0038	0.0043	0.0044	0.0058	0.0042	80- 90	0.5427	1699	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 1589.2 lm

%lum = 93.5%

%lamp = 93.5%

Conical surface Flux(120deg): 1673.1 lm

%lum = 98.5%


%lamp = 98.5%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809 Lamp Flux:1698.95x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

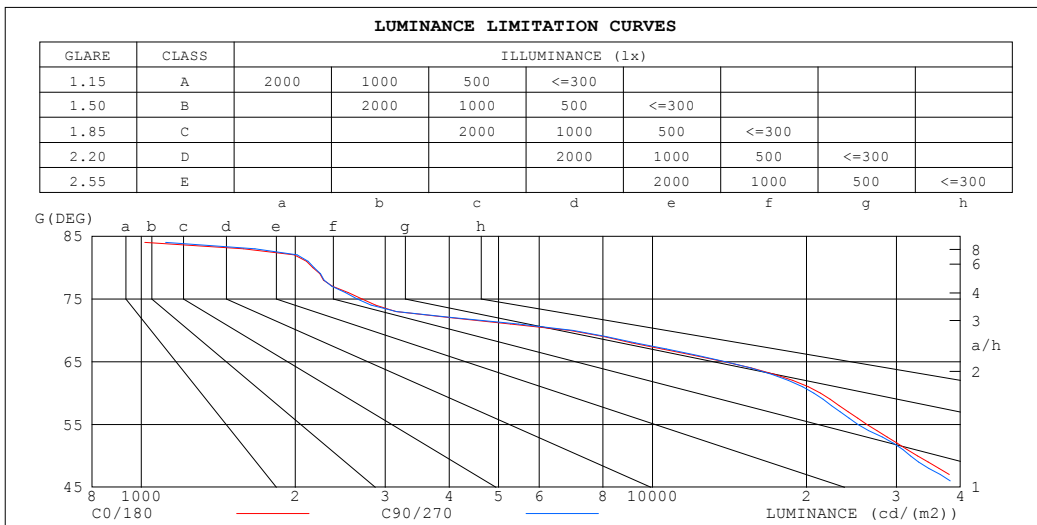


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809		
Lamp Flux:1698.95x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95														
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91														
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.86														
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83														
5.0	.91	.87	.83	.90	.86	.83	.89	.85	.82	.87	.84	.81	.86	.83	.81	.79														
6.0	.88	.83	.79	.87	.82	.79	.85	.81	.79	.84	.81	.78	.83	.80	.78	.76														
7.0	.84	.79	.76	.84	.79	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74														
8.0	.81	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.71														
9.0	.79	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.70	.76	.72	.70	.69														
10.0	.76	.72	.69	.76	.71	.69	.75	.71	.68	.74	.71	.68	.74	.70	.68	.67														

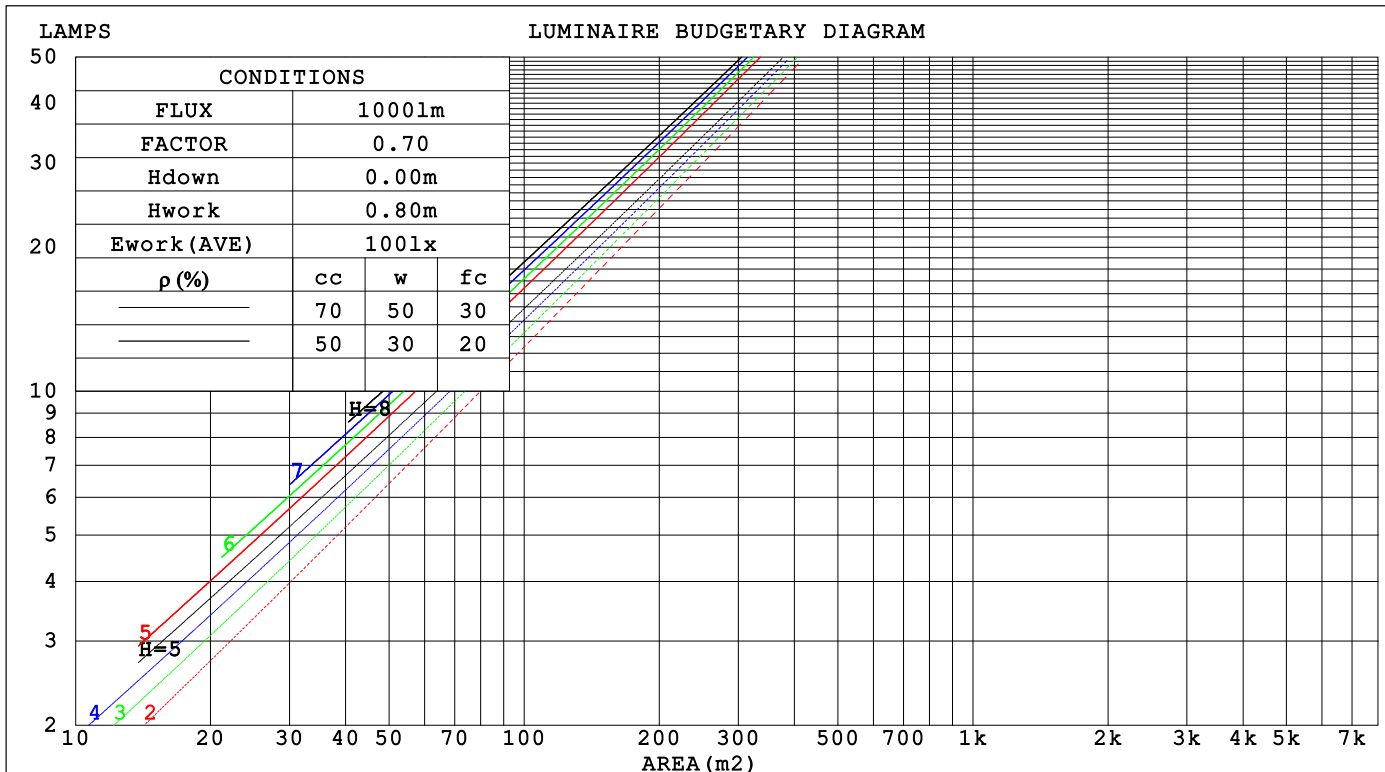

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809 Lamp Flux:1698.95x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.154	.087	.028	.147	.084	.027	.135	.077	.025	.123	.071	.023	.113	.065	.021		
2.0	.145	.079	.024	.139	.077	.024	.129	.072	.022	.120	.067	.021	.111	.063	.020		
3.0	.136	.072	.022	.131	.070	.021	.123	.067	.020	.115	.063	.019	.107	.059	.018		
4.0	.128	.066	.020	.124	.065	.019	.117	.062	.018	.110	.059	.018	.103	.056	.017		
5.0	.120	.061	.018	.117	.060	.017	.111	.058	.017	.105	.055	.016	.099	.053	.016		
6.0	.114	.057	.016	.111	.056	.016	.105	.054	.016	.100	.052	.015	.095	.050	.015		
7.0	.108	.053	.015	.105	.052	.015	.100	.051	.015	.096	.049	.014	.091	.047	.014		
8.0	.102	.050	.014	.100	.049	.014	.096	.048	.014	.092	.046	.013	.088	.045	.013		
9.0	.097	.047	.013	.095	.046	.013	.091	.045	.013	.088	.044	.013	.084	.043	.012		
10.0	.093	.044	.012	.091	.044	.012	.087	.043	.012	.084	.042	.012	.081	.041	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011		
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.117	.086	.064	.100	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.108	.076	.054	.093	.066	.047	.064	.046	.033	.037	.027	.020	.012	.009	.006		
7.0	.101	.068	.046	.087	.059	.040	.060	.042	.028	.035	.025	.017	.011	.008	.006		
8.0	.094	.062	.039	.081	.054	.034	.056	.038	.024	.033	.022	.015	.011	.007	.005		
9.0	.089	.056	.034	.076	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004		
10.0	.084	.052	.030	.072	.045	.026	.050	.031	.019	.029	.019	.011	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz UTHDi:0.16% ITHDi:6.27% KDisp:0.9809Lamp Flux:1698.95x1 lm										
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.9	20.7	20.1	20.8	21.0	19.7	20.5	20.0	20.7	20.8
3H	20.0	20.7	20.2	20.9	21.1	19.8	20.5	20.1	20.7	20.9
4H	19.9	20.6	20.2	20.8	21.0	19.8	20.4	20.0	20.6	20.9
6H	19.8	20.5	20.1	20.7	20.9	19.7	20.3	20.0	20.6	20.8
8H	19.8	20.4	20.1	20.6	20.9	19.6	20.3	19.9	20.5	20.8
12H	19.7	20.3	20.1	20.6	20.9	19.6	20.2	19.9	20.5	20.7
4H 2H	20.0	20.7	20.2	20.9	21.1	19.8	20.5	20.1	20.7	20.9
3H	20.1	20.7	20.4	20.9	21.2	19.9	20.5	20.3	20.8	21.1
4H	20.0	20.5	20.3	20.8	21.1	19.9	20.4	20.2	20.7	21.0
6H	19.9	20.4	20.3	20.7	21.1	19.8	20.3	20.2	20.6	20.9
8H	19.9	20.3	20.2	20.6	21.0	19.7	20.2	20.1	20.5	20.9
12H	19.8	20.2	20.2	20.6	21.0	19.7	20.1	20.1	20.5	20.8
8H 4H	19.9	20.3	20.2	20.6	21.0	19.7	20.2	20.1	20.5	20.9
6H	19.8	20.1	20.2	20.5	20.9	19.6	20.0	20.1	20.4	20.8
8H	19.7	20.0	20.2	20.5	20.9	19.6	19.9	20.0	20.3	20.8
12H	19.7	19.9	20.1	20.4	20.8	19.5	19.8	20.0	20.3	20.7
12H 4H	19.8	20.2	20.2	20.6	21.0	19.7	20.1	20.1	20.5	20.8
6H	19.7	20.0	20.2	20.4	20.9	19.6	19.9	20.0	20.3	20.8
8H	19.7	19.9	20.1	20.4	20.8	19.5	19.8	20.0	20.3	20.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.3 / - 2.0					+ 1.3 / - 2.0				
1.5H	+ 1.8 / - 1.1					+ 1.6 / - 1.1				
2.0H	+ 2.0 / - 2.1					+ 1.9 / - 2.0				

CIE Pub.117, 1699 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 1.8$)
Area: 0.0038 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809 Lamp Flux:1698.95x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	79	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	88	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809 Lamp Flux:1698.95x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

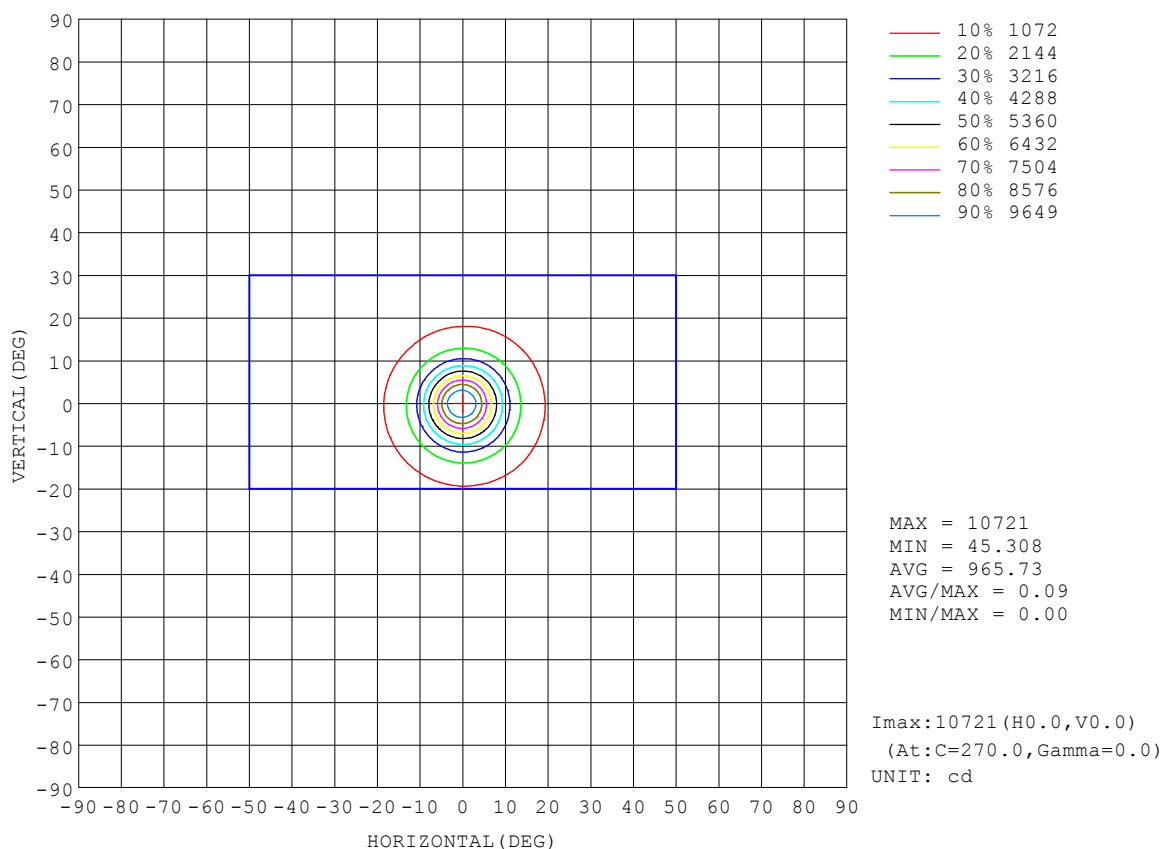


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809		Lamp Flux:1698.95x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

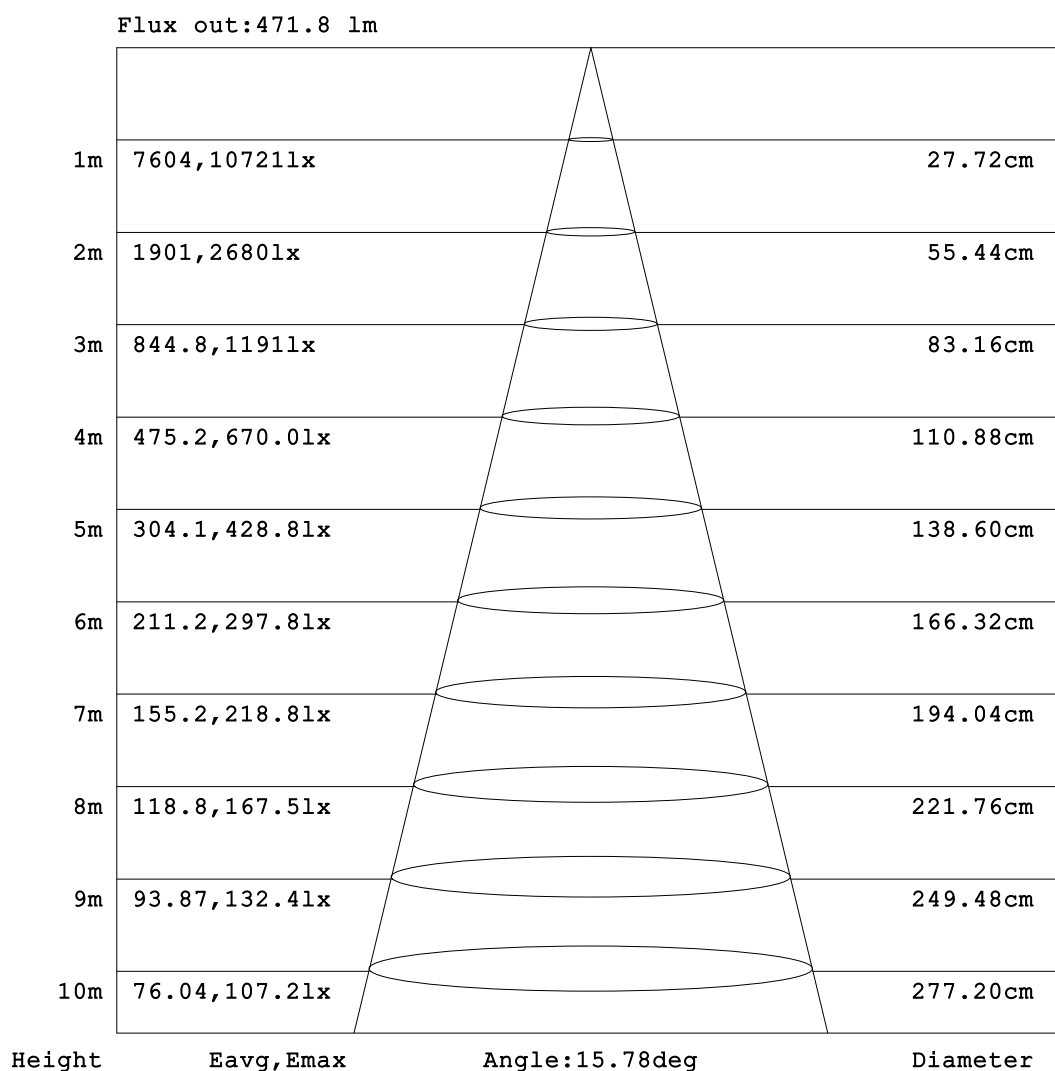


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809		Lamp Flux:1698.95x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

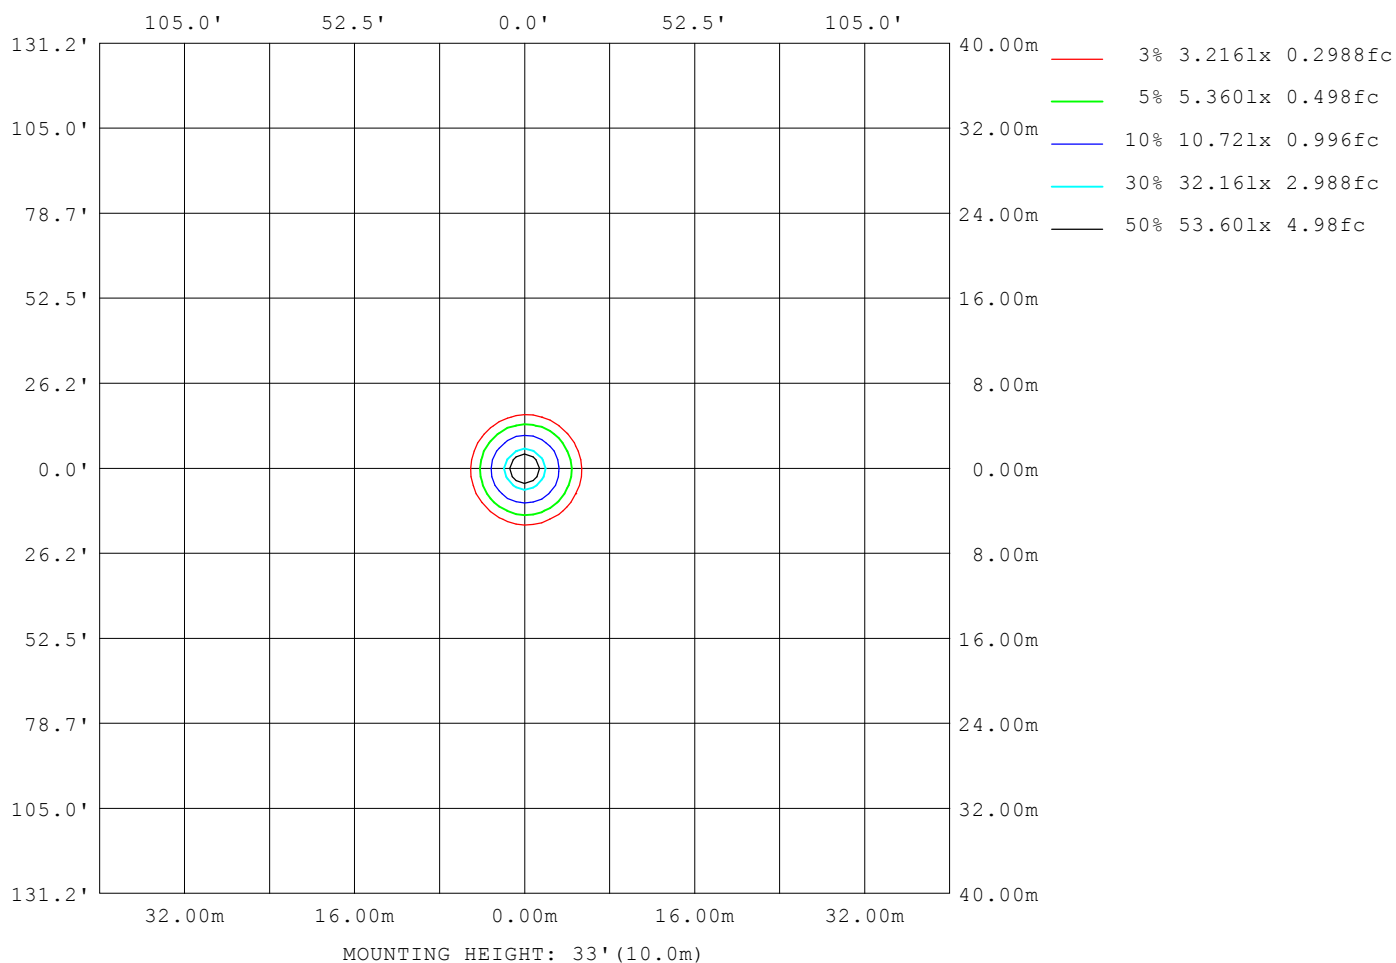

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.5V I:0.0629A P:14.8W PF:0.9786 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.27% KDisp:0.9809 Lamp Flux:1698.95x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13253
L_0~180 (75) av	2769
L_0~180 (85) av	741
L_90~270 (65) av	13543
L_90~270 (75) av	2706
L_90~270 (85) av	747
L_45 (65) av	13286
L_45 (75) av	2733
L_45 (85) av	655

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

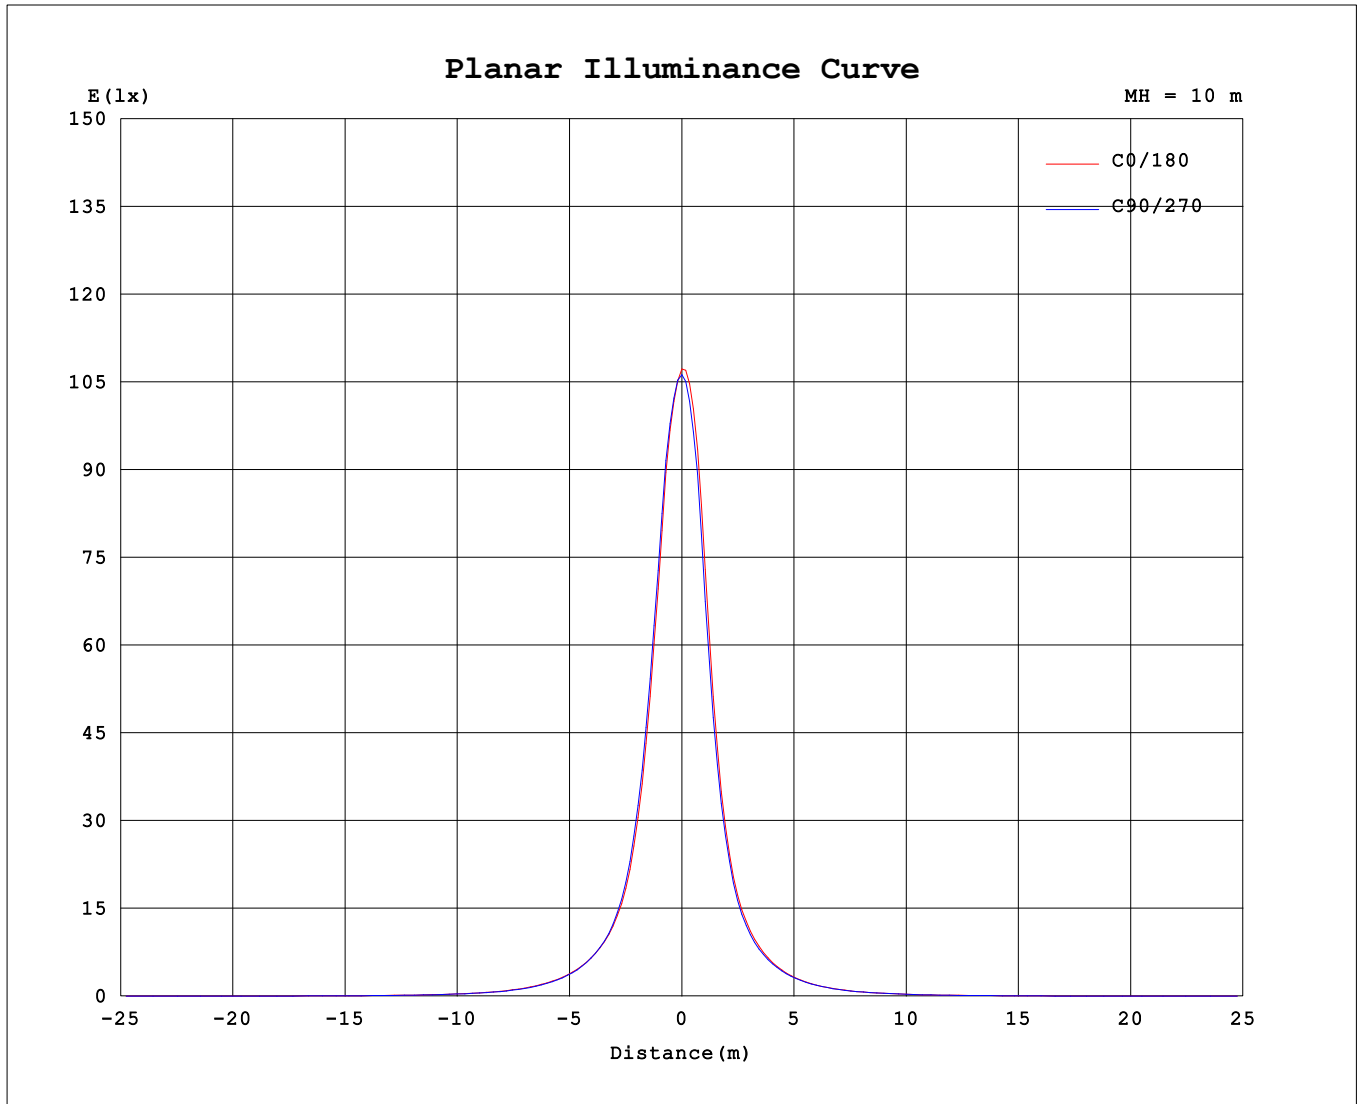

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	10653	10653	10653	10653	10653	10653	10653	10653
3.0	9654	9744	9851	9964	10017	9834	9710	9665
6.0	7034	7241	7418	7459	7368	7022	6881	6994
9.0	4461	4682	4780	4622	4375	4158	4114	4323
12.0	2730	2909	2935	2760	2573	2427	2466	2602
15.0	1745	1856	1845	1751	1634	1534	1562	1660
18.0	1224	1275	1254	1200	1126	1048	1073	1152
21.0	900.4	928.9	907.8	864.0	804.5	756.7	774.2	840.1
24.0	676.4	698.1	673.2	636.8	589.6	558.1	574.2	627.4
27.0	514.0	530.2	505.0	472.9	438.2	417.4	431.0	472.4
30.0	394.0	405.2	383.1	354.9	330.6	315.6	328.2	359.6
33.0	303.1	311.0	292.2	269.9	252.7	241.9	251.6	275.7
36.0	233.9	239.7	224.3	207.8	196.0	187.0	195.1	212.4
39.0	181.8	186.9	173.7	161.3	153.3	146.4	152.5	165.3
42.0	142.8	146.5	136.4	126.9	121.4	116.3	120.9	130.4
45.0	113.4	116.3	108.7	101.2	97.29	93.95	97.32	104.1
48.0	91.84	93.52	88.47	81.63	78.78	76.58	79.21	84.73
51.0	74.75	76.14	74.00	69.69	67.99	64.78	65.48	69.71
54.0	60.95	61.54	59.22	56.08	55.94	53.03	54.61	57.70
57.0	49.66	50.07	48.29	44.65	43.06	42.38	44.47	46.56
60.0	40.23	40.62	39.39	36.48	35.25	34.72	36.44	37.93
63.0	29.63	30.15	29.56	27.62	26.83	26.23	27.56	28.47
66.0	18.52	19.23	18.95	18.01	17.49	17.11	17.93	18.15
69.0	10.85	11.06	11.06	10.75	10.64	10.47	10.65	10.73
72.0	4.686	4.724	4.784	4.877	4.971	4.797	4.832	4.844
75.0	2.643	2.597	2.607	2.695	2.802	2.762	2.716	2.698
78.0	1.784	1.752	1.805	1.856	1.949	1.937	1.896	1.831
81.0	1.243	1.220	1.262	1.281	1.372	1.337	1.317	1.267
84.0	0.4010	0.4108	0.4439	0.4188	0.4453	0.3684	0.3958	0.3731
87.0	0.1472	0.1216	0.1559	0.1235	0.1405	0.1168	0.1489	0.1178
90.0	0.0571	0.0385	0.0715	0.0381	0.0428	0.0437	0.0583	0.0416

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: