


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.37% KDisp:0.9807 Lamp Flux:1547.15x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.01 lm/W			
MODEL		I <sub>max</sub> (cd)	5495	S/MH(C0/180)	0.39
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	0.44
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1547.1	η UP,DN(C0-180)	0.0,53.5
NOMINAL FLUX(lm)	1547.15	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,46.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.32	η down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

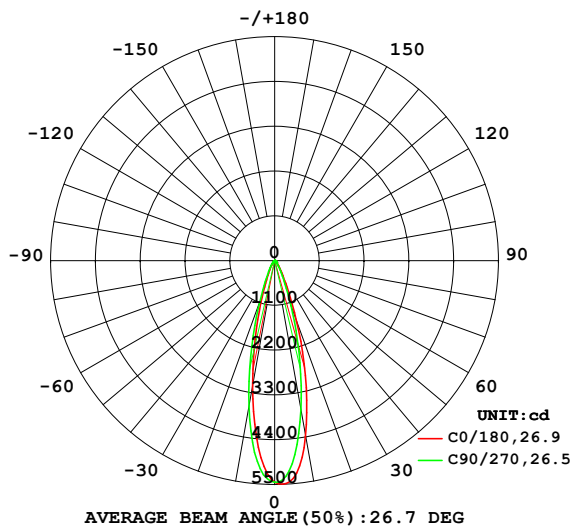

PLANAR ISOLUX DIAGRAM(UNIT:lx)

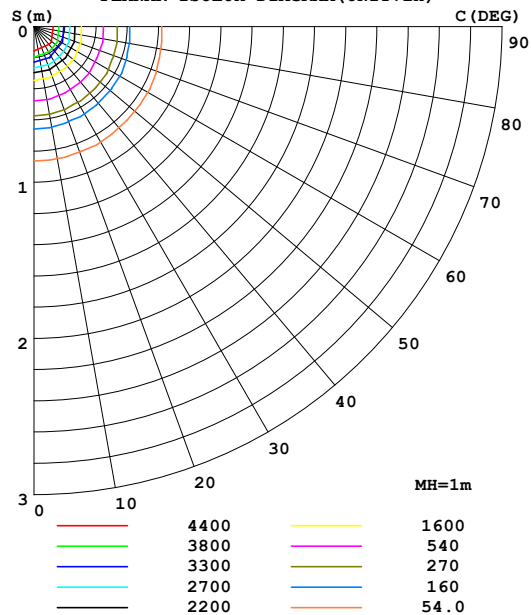

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	4382	4191	3723	3323	3131	3238	3643	4115	0- 10	434.1	434.1	28.1,28.1
20	1584	1465	1179	935.3	809.5	876.3	1077	1378	10- 20	624.1	1058	68.4,68.4
30	381.9	360.2	301.9	251.1	227.5	234.3	277.9	339.3	20- 30	269.9	1328	85.8,85.8
40	130.2	124.7	107.3	91.89	85.37	86.99	101.6	118.1	30- 40	112.3	1440	93.1,93.1
50	56.30	54.33	50.22	44.57	42.86	42.64	49.65	52.54	40- 50	55.11	1496	96.7,96.7
60	29.37	28.43	26.54	22.34	20.64	21.64	25.28	27.61	50- 60	31.92	1527	98.7,98.7
70	11.11	10.18	8.023	5.377	4.080	5.104	7.834	9.986	60- 70	16.19	1544	99.8,99.8
80	1.369	1.252	1.077	0.8815	0.8320	0.9090	1.108	1.280	70- 80	3.102	1547	100,100
90	0.0730	0.0431	0.0584	0.0389	0.0434	0.0379	0.0443	0.0482	80- 90	0.4141	1547	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1472 lm

%lum = 95.1%

%lamp = 95.1%

Conical surface Flux(120deg): 1527.4 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.37% KDisp:0.9807 Lamp Flux:1547.15x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

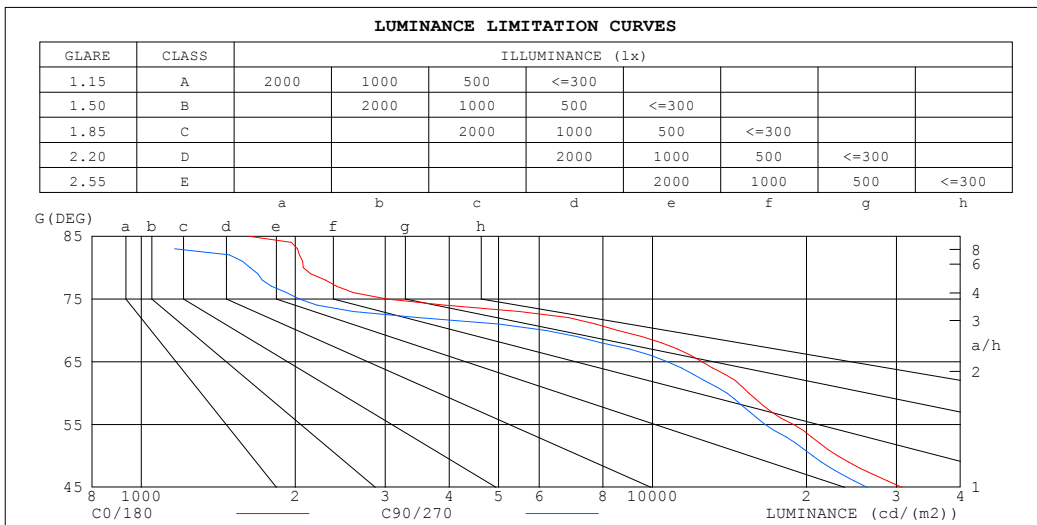


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.37% KDisp:0.9807 Lamp Flux:1547.15x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

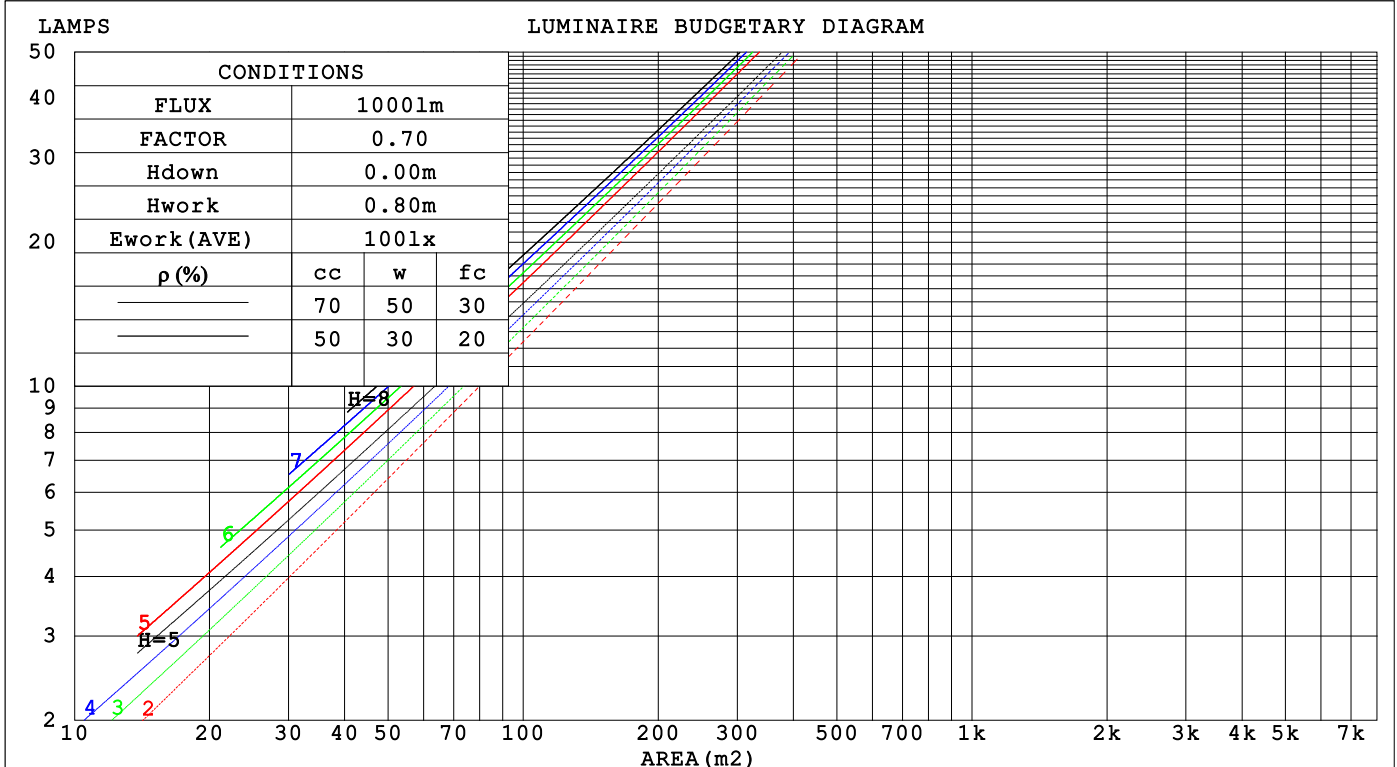

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.37% KDisp:0.9807 Lamp Flux:1547.15x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.154	.088	.028	.148	.084	.027	.135	.078	.025	.124	.071	.023	.113	.066	.021		
2.0	.145	.080	.024	.140	.077	.024	.129	.072	.022	.120	.067	.021	.111	.063	.020		
3.0	.136	.073	.022	.132	.071	.021	.123	.067	.020	.115	.063	.019	.107	.059	.018		
4.0	.128	.067	.020	.124	.065	.019	.117	.062	.019	.110	.059	.018	.104	.056	.017		
5.0	.121	.062	.018	.118	.060	.018	.111	.058	.017	.105	.056	.017	.100	.053	.016		
6.0	.115	.057	.016	.112	.056	.016	.106	.054	.016	.101	.052	.015	.096	.051	.015		
7.0	.109	.054	.015	.106	.053	.015	.101	.051	.015	.097	.050	.014	.093	.048	.014		
8.0	.104	.051	.014	.101	.050	.014	.097	.049	.014	.093	.047	.014	.089	.046	.013		
9.0	.099	.048	.013	.097	.047	.013	.093	.046	.013	.090	.045	.013	.086	.044	.013		
10.0	.095	.045	.013	.093	.045	.013	.089	.044	.012	.086	.043	.012	.083	.042	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011		
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.109	.077	.053	.093	.066	.046	.064	.046	.033	.037	.027	.020	.012	.009	.006		
7.0	.101	.069	.045	.087	.059	.040	.060	.042	.028	.035	.025	.017	.011	.008	.006		
8.0	.095	.062	.039	.082	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005		
9.0	.090	.056	.034	.077	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004		
10.0	.085	.052	.030	.073	.045	.026	.051	.032	.019	.030	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz UTHDi:0.17% ITHDi:6.37% KDisp:0.9807Lamp Flux:1547.15x1 lm											
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D TYPE:						WEIGHT:					
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	18.2	19.0	18.4	19.1	19.3	17.6	18.4	17.8	18.5	18.7
	3H	18.5	19.2	18.8	19.4	19.6	17.8	18.5	18.1	18.7	18.9
	4H	18.5	19.2	18.8	19.4	19.6	17.8	18.4	18.0	18.6	18.9
	6H	18.4	19.0	18.7	19.3	19.5	17.7	18.3	18.0	18.5	18.8
	8H	18.4	19.0	18.7	19.2	19.5	17.6	18.2	17.9	18.5	18.8
	12H	18.3	18.9	18.6	19.2	19.5	17.6	18.2	17.9	18.4	18.7
4H	2H	18.3	19.0	18.6	19.2	19.4	17.8	18.4	18.0	18.6	18.9
	3H	18.7	19.3	19.0	19.5	19.8	18.0	18.6	18.3	18.9	19.1
	4H	18.6	19.2	19.0	19.5	19.8	18.0	18.5	18.3	18.8	19.1
	6H	18.6	19.0	18.9	19.4	19.7	17.9	18.3	18.2	18.7	19.0
	8H	18.5	19.0	18.9	19.3	19.7	17.8	18.3	18.2	18.6	19.0
	12H	18.5	18.9	18.9	19.2	19.6	17.8	18.2	18.2	18.5	18.9
8H	4H	18.5	19.0	18.9	19.3	19.7	17.8	18.3	18.2	18.6	19.0
	6H	18.4	18.8	18.9	19.2	19.6	17.8	18.1	18.2	18.5	18.9
	8H	18.4	18.7	18.8	19.1	19.6	17.7	18.0	18.2	18.5	18.9
	12H	18.3	18.6	18.8	19.1	19.5	17.7	17.9	18.1	18.4	18.8
12H	4H	18.5	18.9	18.9	19.2	19.6	17.8	18.2	18.2	18.6	19.0
	6H	18.4	18.7	18.8	19.1	19.6	17.7	18.0	18.2	18.4	18.9
	8H	18.3	18.6	18.8	19.1	19.5	17.7	17.9	18.1	18.4	18.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.4 / - 2.0					+ 1.3 / - 1.9				
1.5H		+ 2.3 / - 1.3					+ 1.7 / - 1.2				
2.0H		+ 2.1 / - 1.5					+ 1.7 / - 1.3				

CIE Pub.117, 1547 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 1.5$ )  
Area: 0.0038 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.37% KDisp:0.9807 Lamp Flux:1547.15x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	88	85	93	88	84	81
1.00	99	93	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz UTHDi:0.17% ITHDi:6.37% KDisp:0.9807 Lamp Flux:1547.15x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

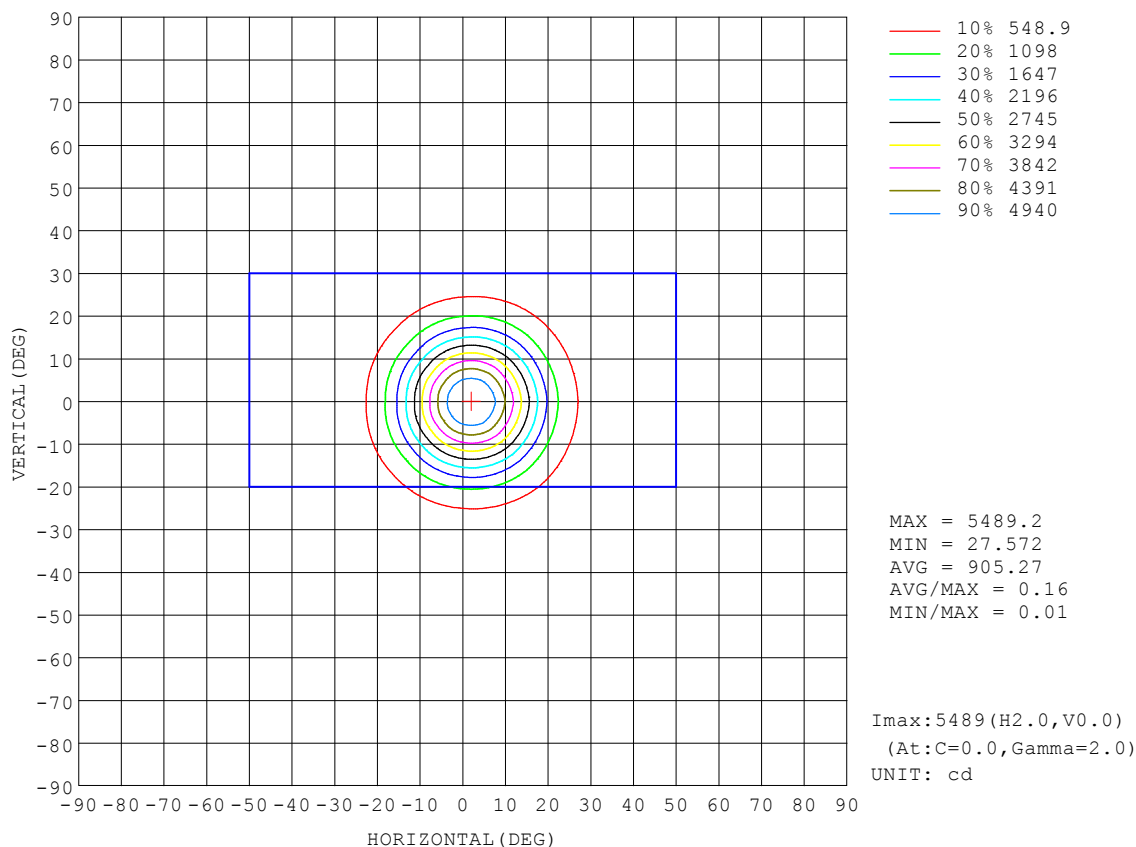


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.37% KDisp:0.9807		Lamp Flux:1547.15x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

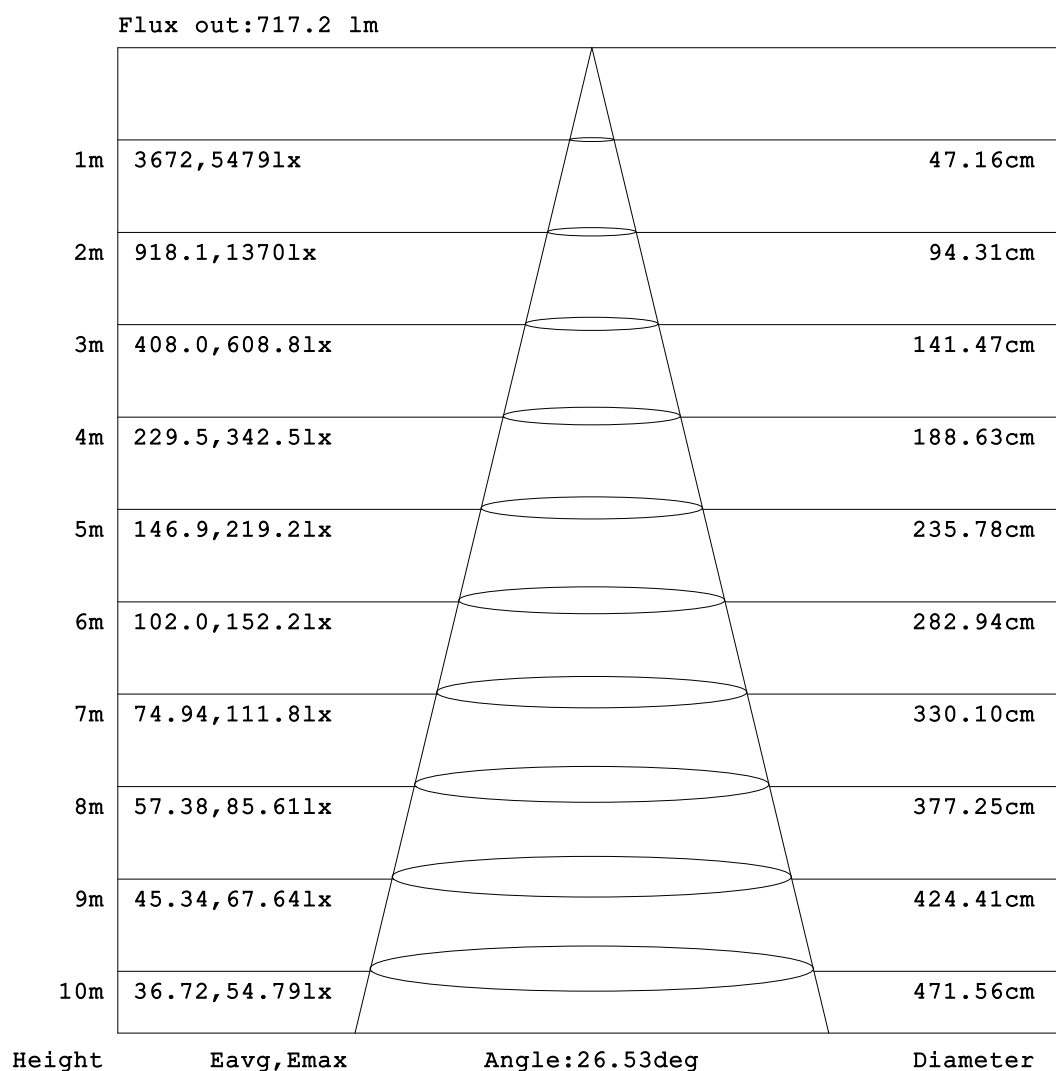


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.37% KDisp:0.9807		Lamp Flux:1547.15x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

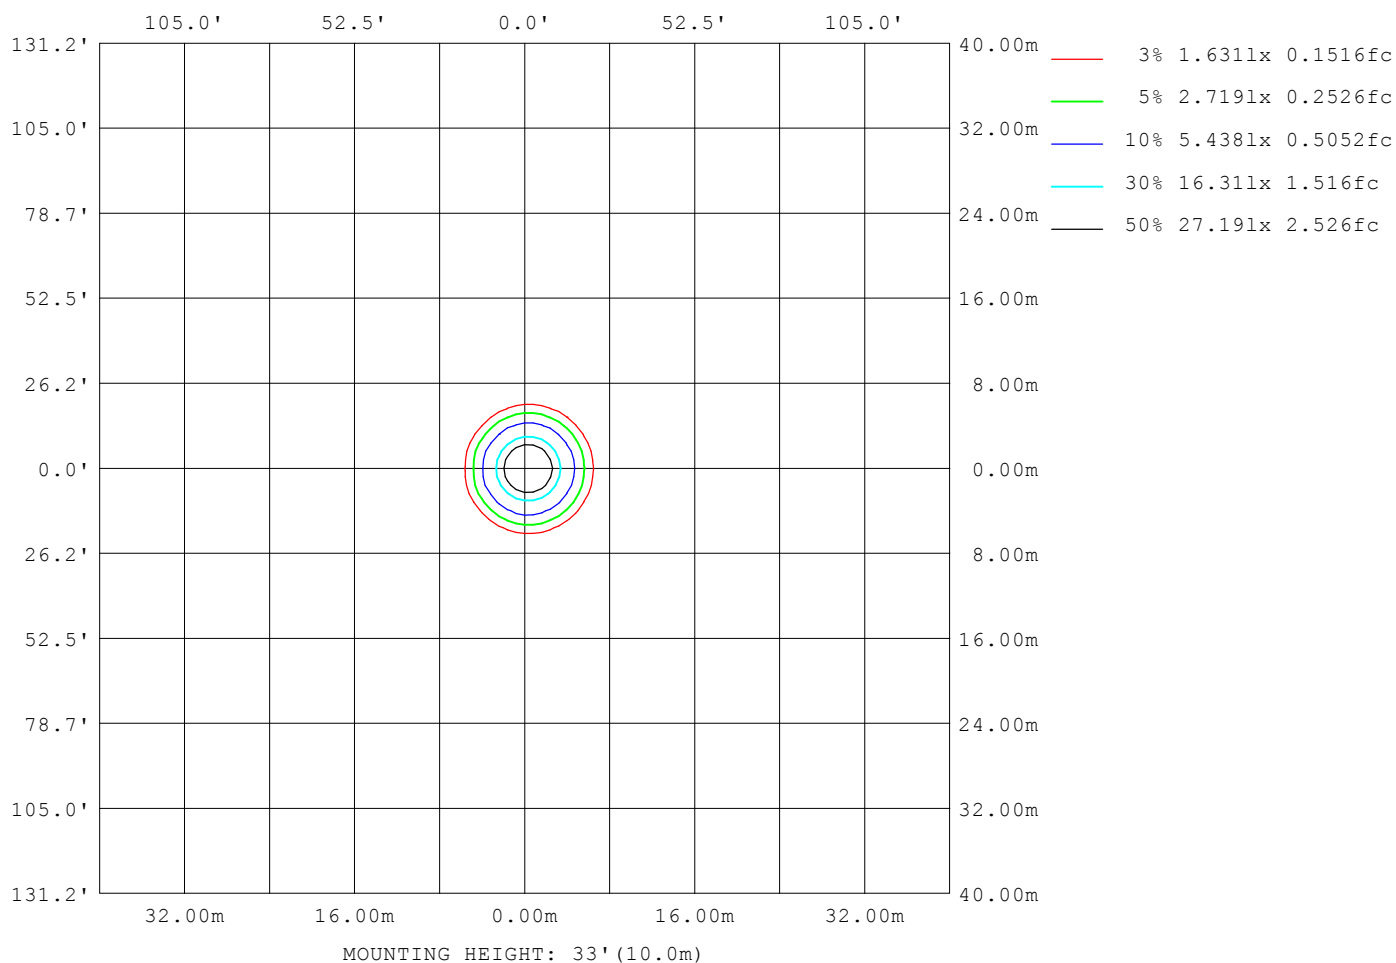

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.4V I:0.0626A P:14.7W PF:0.9786 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.37% KDisp:0.9807 Lamp Flux:1547.15x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10142
L_0~180 (75) av	2321
L_0~180 (85) av	999
L_90~270 (65) av	10472
L_90~270 (75) av	2050
L_90~270 (85) av	564
L_45 (65) av	10127
L_45 (75) av	2139
L_45 (85) av	721

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

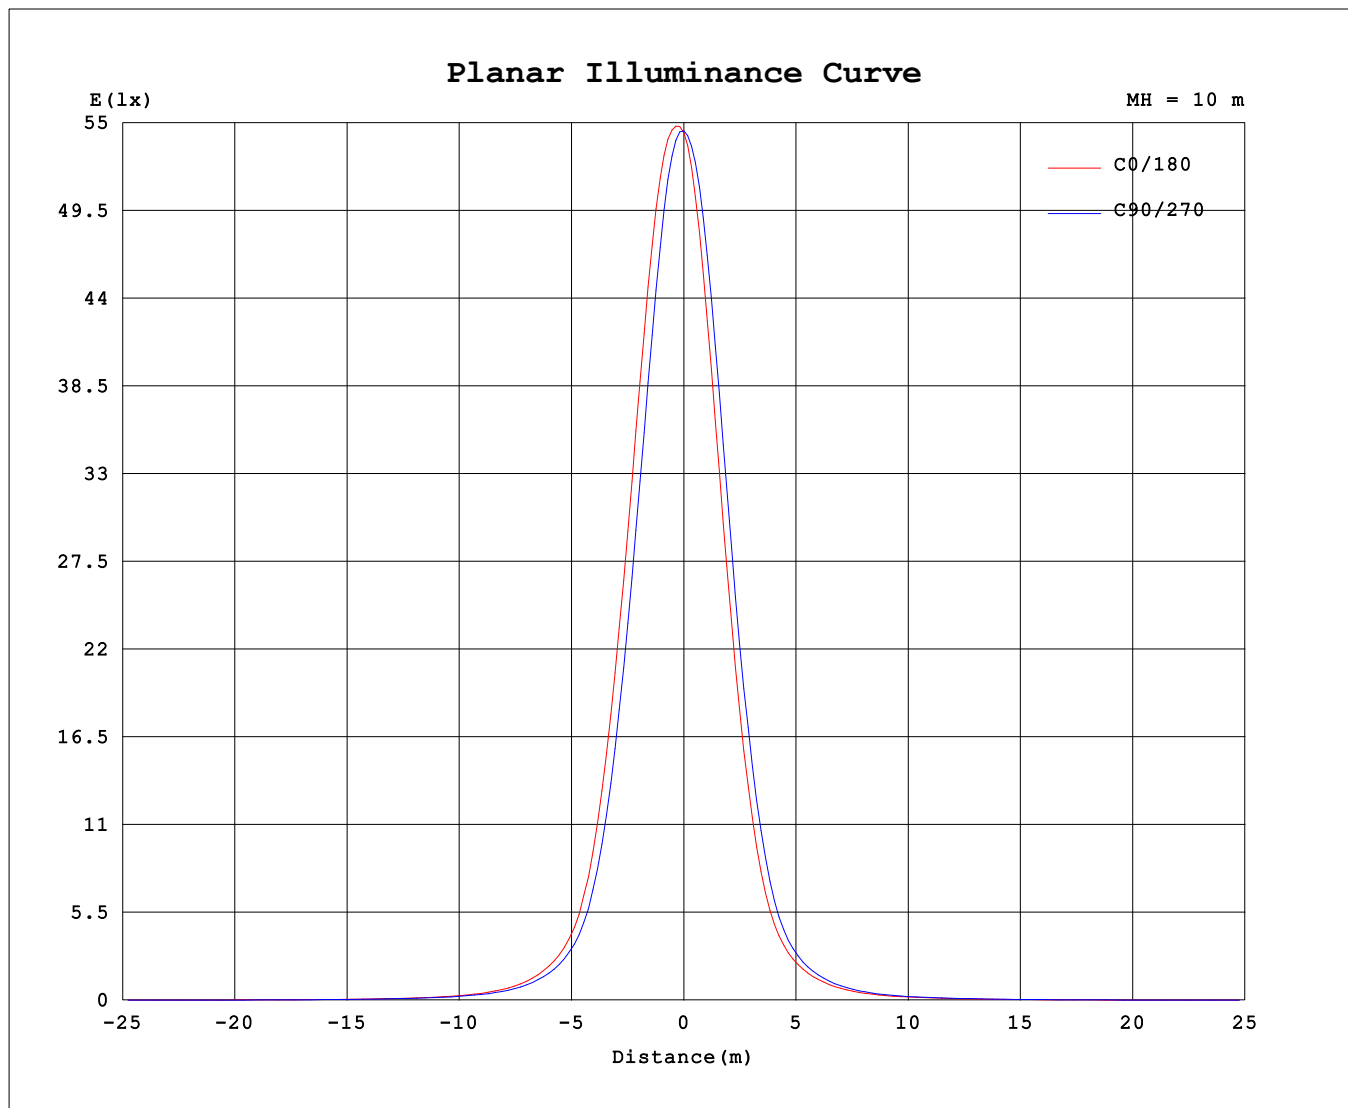

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	5443	5443	5443	5443	5443	5443	5443	5443
3.0	5484	5452	5310	5151	5060	5111	5266	5401
6.0	5243	5133	4790	4486	4336	4436	4739	5065
9.0	4646	4466	4012	3627	3441	3549	3941	4393
12.0	3817	3622	3145	2737	2536	2634	3030	3524
15.0	2922	2744	2310	1945	1741	1829	2168	2629
18.0	2086	1942	1580	1282	1121	1190	1457	1834
21.0	1365	1260	1008	795.3	691.7	736.2	915.5	1182
24.0	859.0	788.4	636.3	511.3	454.8	475.4	579.5	732.8
27.0	550.2	517.8	428.2	352.5	316.7	328.6	392.7	484.8
30.0	381.9	360.2	301.9	251.1	227.5	234.3	277.9	339.3
33.0	272.3	257.2	217.6	182.5	166.3	170.0	202.0	243.2
36.0	196.5	186.9	158.6	134.2	123.3	125.6	148.6	176.6
39.0	143.7	137.5	117.8	100.6	93.27	95.26	111.4	130.4
42.0	107.4	103.3	90.35	77.17	72.09	73.27	85.32	97.96
45.0	82.74	79.56	70.54	60.82	58.72	57.78	67.09	76.10
48.0	64.91	62.69	56.85	49.94	49.29	48.05	55.58	60.19
51.0	52.74	50.94	47.34	41.50	39.73	40.29	46.65	49.35
54.0	44.14	42.82	38.64	33.18	31.08	31.89	36.99	41.14
57.0	35.35	34.19	32.00	27.56	25.85	26.62	30.40	33.12
60.0	29.37	28.43	26.54	22.34	20.64	21.64	25.28	27.61
63.0	23.91	22.76	20.71	17.23	15.90	16.78	19.77	22.06
66.0	18.40	17.49	15.33	12.01	10.72	11.62	14.76	16.94
69.0	12.98	11.94	9.662	7.303	6.121	7.023	9.363	11.56
72.0	8.051	7.071	4.090	2.636	2.376	2.612	4.025	6.769
75.0	2.980	2.501	2.002	1.703	1.585	1.710	2.031	2.500
78.0	1.813	1.599	1.361	1.186	1.129	1.205	1.391	1.619
81.0	1.230	1.100	0.9368	0.7110	0.5961	0.7382	0.9658	1.127
84.0	0.7819	0.6080	0.2938	0.1510	0.1565	0.1540	0.3324	0.6322
87.0	0.1770	0.1276	0.1149	0.0565	0.0600	0.0592	0.1189	0.1314
90.0	0.0730	0.0431	0.0584	0.0389	0.0434	0.0379	0.0443	0.0482

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: