


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.49% KDisp:0.9807		Lamp Flux:1553.94x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 105.06 lm/W
MODEL		I _{max} (cd)	3382	S/MH(C0/180)		0.57
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)		0.59
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1553.9	η UP,DN(C0-180)		0.0,51.7
NOMINAL FLUX(lm)	1553.94	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,48.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)	240.42	η down (%)	100.0	CIBSE SHR MAX		0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

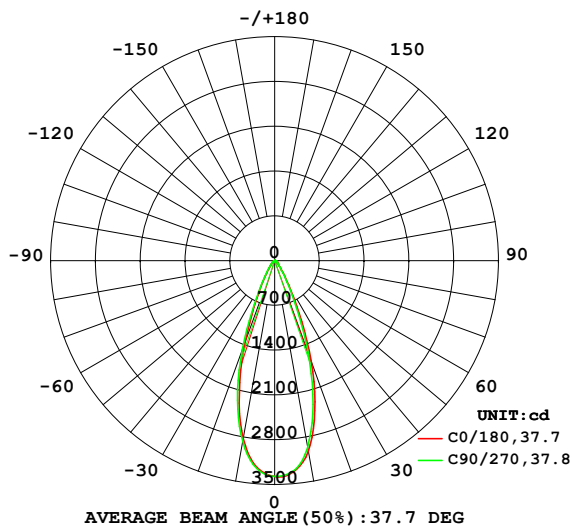

PLANAR ISOLUX DIAGRAM(UNIT:lx)

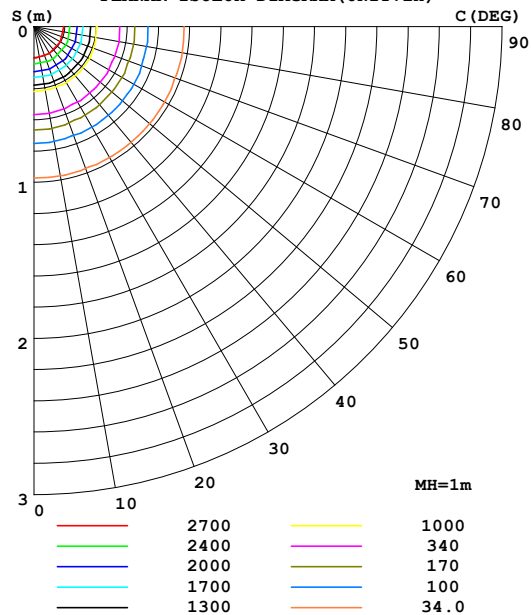

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3030	3037	2967	2891	2827	2811	2877	2960	0- 10	302.0	302.0	19.4,19.4
20	1670	1655	1536	1424	1347	1358	1478	1573	10- 20	619.8	921.8	59.3,59.3
30	443.3	441.2	396.5	367.4	343.5	345.5	373.5	411.7	20- 30	377.2	1299	83.6,83.6
40	132.0	132.3	124.7	116.7	111.3	111.7	121.0	126.6	30- 40	137.1	1436	92.4,92.4
50	57.34	57.83	57.30	52.85	49.81	49.31	53.90	54.85	40- 50	62.54	1499	96.4,96.4
60	28.94	29.04	28.56	25.43	23.68	24.27	27.50	28.09	50- 60	34.60	1533	98.7,98.7
70	10.36	9.981	8.717	7.128	6.108	6.780	8.339	9.552	60- 70	16.94	1550	99.8,99.8
80	1.473	1.355	1.188	1.030	0.9956	1.053	1.234	1.375	70- 80	3.357	1553	100,100
90	0.0600	0.0369	0.0572	0.0392	0.0420	0.0389	0.0469	0.0357	80- 90	0.4466	1554	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1472.3 lm

%lum = 94.7%

%lamp = 94.7%

Conical surface Flux(120deg): 1533.2 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.49% KDisp:0.9807 Lamp Flux:1553.94x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

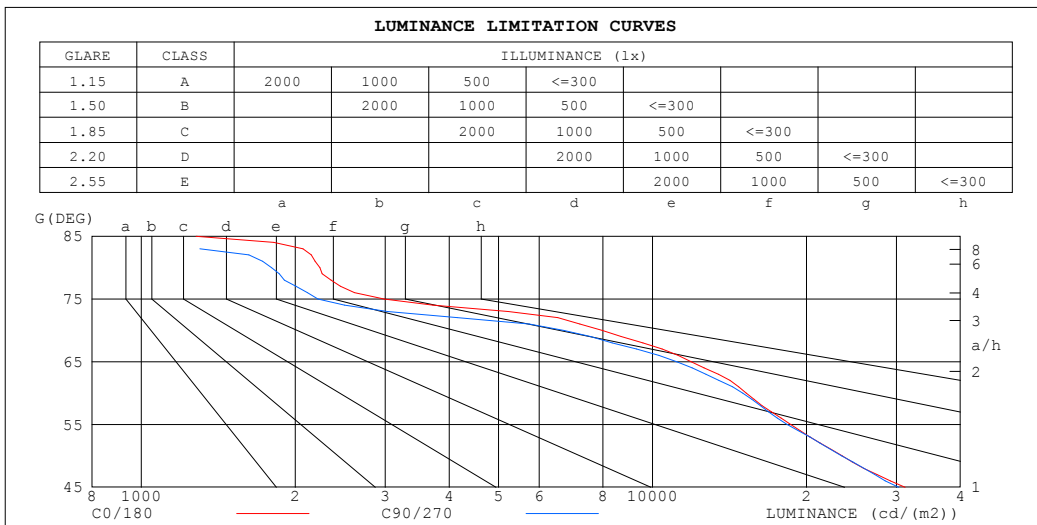


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.49% KDisp:0.9807 Lamp Flux:1553.94x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95														
2.0	1.05	1.01	.98	1.03	.99	.97	.99	.97	.95	.97	.95	.93	.94	.92	.91	.89														
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.89	.92	.90	.87	.90	.88	.86	.84														
4.0	.93	.88	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.86	.84	.81	.80														
5.0	.89	.83	.80	.88	.83	.79	.86	.82	.79	.84	.81	.78	.83	.80	.77	.76														
6.0	.84	.79	.75	.83	.79	.75	.82	.78	.74	.81	.77	.74	.79	.76	.73	.72														
7.0	.80	.75	.71	.80	.75	.71	.78	.74	.71	.77	.73	.70	.76	.73	.70	.69														
8.0	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.73	.70	.67	.66														
9.0	.73	.68	.65	.73	.68	.65	.72	.68	.65	.71	.67	.64	.71	.67	.64	.63														
10.0	.71	.65	.62	.70	.65	.62	.69	.65	.62	.69	.65	.62	.68	.64	.62	.60														

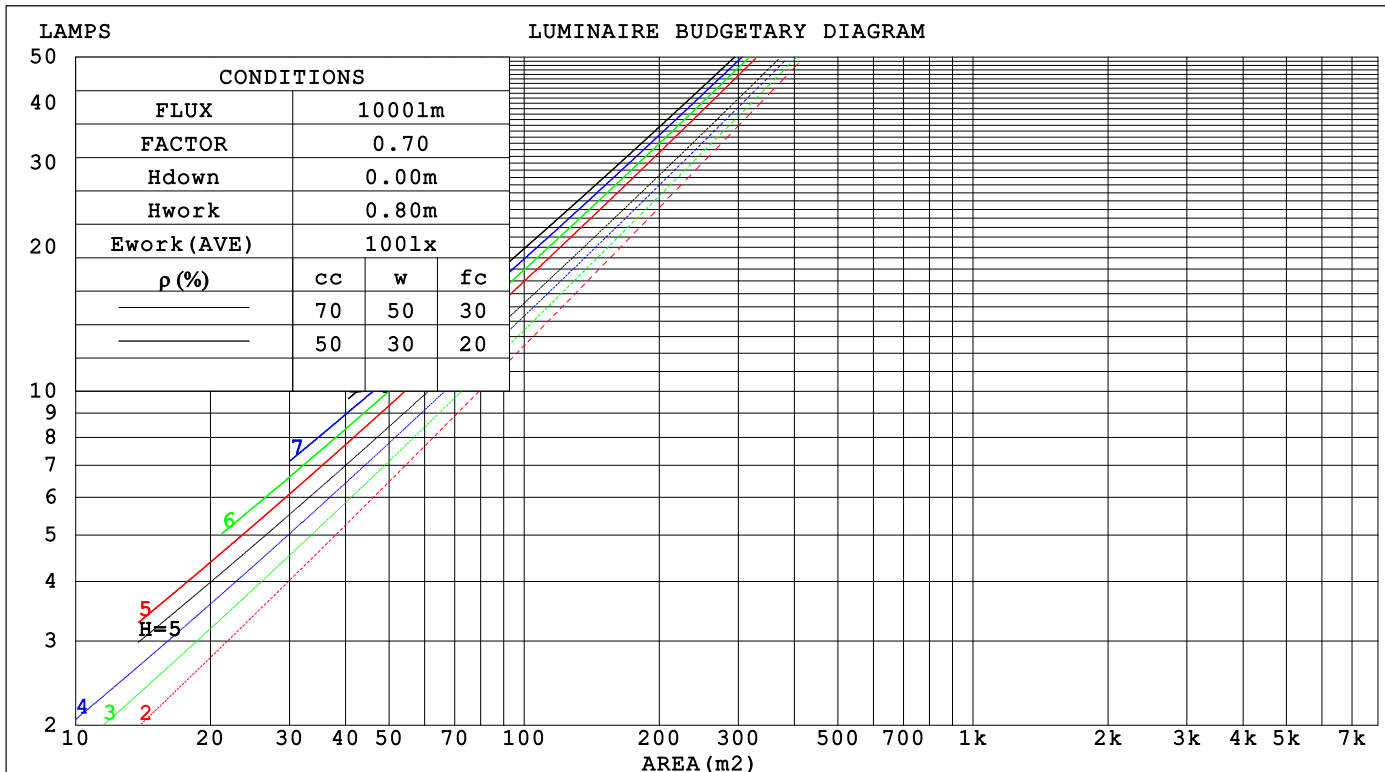

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.49% KDisp:0.9807 Lamp Flux:1553.94x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.164	.093	.029	.157	.089	.028	.144	.083	.026	.133	.077	.025	.122	.071	.023		
2.0	.155	.085	.026	.149	.082	.025	.139	.077	.024	.129	.073	.023	.120	.068	.021		
3.0	.146	.078	.023	.142	.076	.023	.133	.072	.022	.125	.068	.021	.117	.065	.020		
4.0	.138	.072	.021	.134	.070	.021	.127	.067	.020	.120	.064	.019	.113	.061	.019		
5.0	.131	.067	.019	.127	.065	.019	.121	.063	.019	.115	.061	.018	.109	.058	.018		
6.0	.124	.062	.018	.121	.061	.018	.116	.059	.017	.110	.057	.017	.105	.055	.016		
7.0	.118	.059	.017	.116	.058	.016	.111	.056	.016	.106	.054	.016	.102	.053	.016		
8.0	.113	.055	.016	.111	.054	.015	.106	.053	.015	.102	.052	.015	.098	.050	.015		
9.0	.108	.052	.015	.106	.052	.014	.102	.050	.014	.098	.049	.014	.095	.048	.014		
10.0	.103	.050	.014	.102	.049	.014	.098	.048	.014	.095	.047	.013	.091	.046	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.157	.146	.146	.135	.126	.100	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.154	.133	.115	.132	.114	.099	.090	.079	.069	.052	.046	.040	.017	.015	.013		
3.0	.141	.113	.092	.121	.098	.080	.083	.068	.056	.048	.040	.033	.015	.013	.011		
4.0	.130	.099	.075	.111	.085	.065	.076	.059	.046	.044	.035	.027	.014	.011	.009		
5.0	.120	.087	.062	.103	.075	.054	.071	.052	.038	.041	.031	.023	.013	.010	.007		
6.0	.112	.077	.052	.096	.067	.045	.066	.047	.032	.039	.027	.019	.012	.009	.006		
7.0	.105	.069	.044	.090	.060	.039	.062	.042	.027	.036	.025	.016	.012	.008	.005		
8.0	.099	.063	.038	.085	.054	.033	.059	.038	.023	.034	.023	.014	.011	.007	.005		
9.0	.094	.057	.033	.081	.050	.029	.056	.035	.020	.033	.021	.012	.011	.007	.004		
10.0	.089	.053	.029	.077	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz UTHDi:0.17% ITHDi:6.49% KDisp:0.9807 Lamp Flux:1553.94x1 lm											
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D TYPE:						WEIGHT:					
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H		18.5	19.3	18.7	19.5	19.6	18.3	19.1	18.5	19.3	19.4
	3H	18.7	19.5	19.0	19.7	19.9	18.5	19.2	18.7	19.4	19.6
	4H	18.7	19.4	18.9	19.6	19.8	18.4	19.1	18.7	19.3	19.6
	6H	18.6	19.3	18.9	19.5	19.8	18.3	19.0	18.6	19.2	19.5
	8H	18.6	19.2	18.9	19.5	19.7	18.3	18.9	18.6	19.2	19.4
	12H	18.5	19.1	18.8	19.4	19.7	18.2	18.9	18.5	19.1	19.4
4H	2H	18.6	19.3	18.8	19.5	19.7	18.4	19.1	18.6	19.3	19.5
	3H	18.8	19.5	19.1	19.7	20.0	18.6	19.2	18.9	19.5	19.8
	4H	18.8	19.4	19.1	19.7	20.0	18.5	19.1	18.9	19.4	19.7
	6H	18.7	19.2	19.1	19.5	19.9	18.4	18.9	18.8	19.3	19.6
	8H	18.7	19.1	19.1	19.5	19.9	18.4	18.9	18.8	19.2	19.6
	12H	18.6	19.0	19.0	19.4	19.8	18.3	18.8	18.7	19.1	19.5
8H	4H	18.7	19.1	19.1	19.5	19.9	18.4	18.9	18.8	19.2	19.6
	6H	18.6	19.0	19.0	19.4	19.8	18.3	18.7	18.8	19.1	19.5
	8H	18.5	18.9	19.0	19.3	19.7	18.3	18.6	18.7	19.0	19.5
	12H	18.5	18.8	19.0	19.2	19.7	18.2	18.5	18.7	19.0	19.4
12H	4H	18.6	19.0	19.0	19.4	19.8	18.4	18.8	18.8	19.2	19.5
	6H	18.5	18.9	19.0	19.3	19.7	18.3	18.6	18.7	19.0	19.5
	8H	18.5	18.8	19.0	19.2	19.7	18.2	18.5	18.7	19.0	19.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.5 / - 2.1					+ 1.3 / - 2.1				
1.5H		+ 2.4 / - 1.3					+ 2.0 / - 1.3				
2.0H		+ 2.1 / - 1.7					+ 2.0 / - 1.7				

CIE Pub.117, 1554 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.5)
Area: 0.0038 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.49% KDisp:0.9807 Lamp Flux:1553.94x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	80	76	73
0.80	94	88	85	94	88	84	92	87	84	80
1.00	99	93	89	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	97	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	107	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz UTHDi:0.17% ITHDi:6.49% KDisp:0.9807 Lamp Flux:1553.94x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

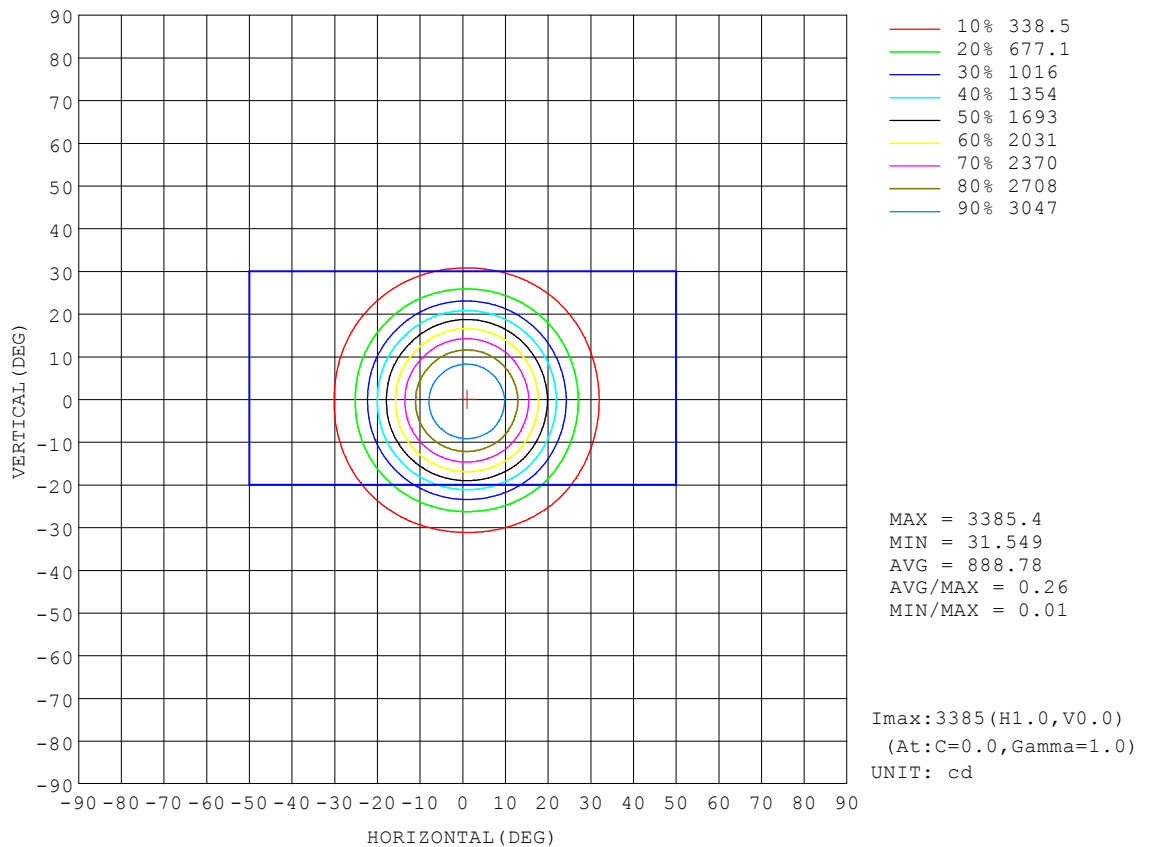


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.49% KDisp:0.9807		Lamp Flux:1553.94x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

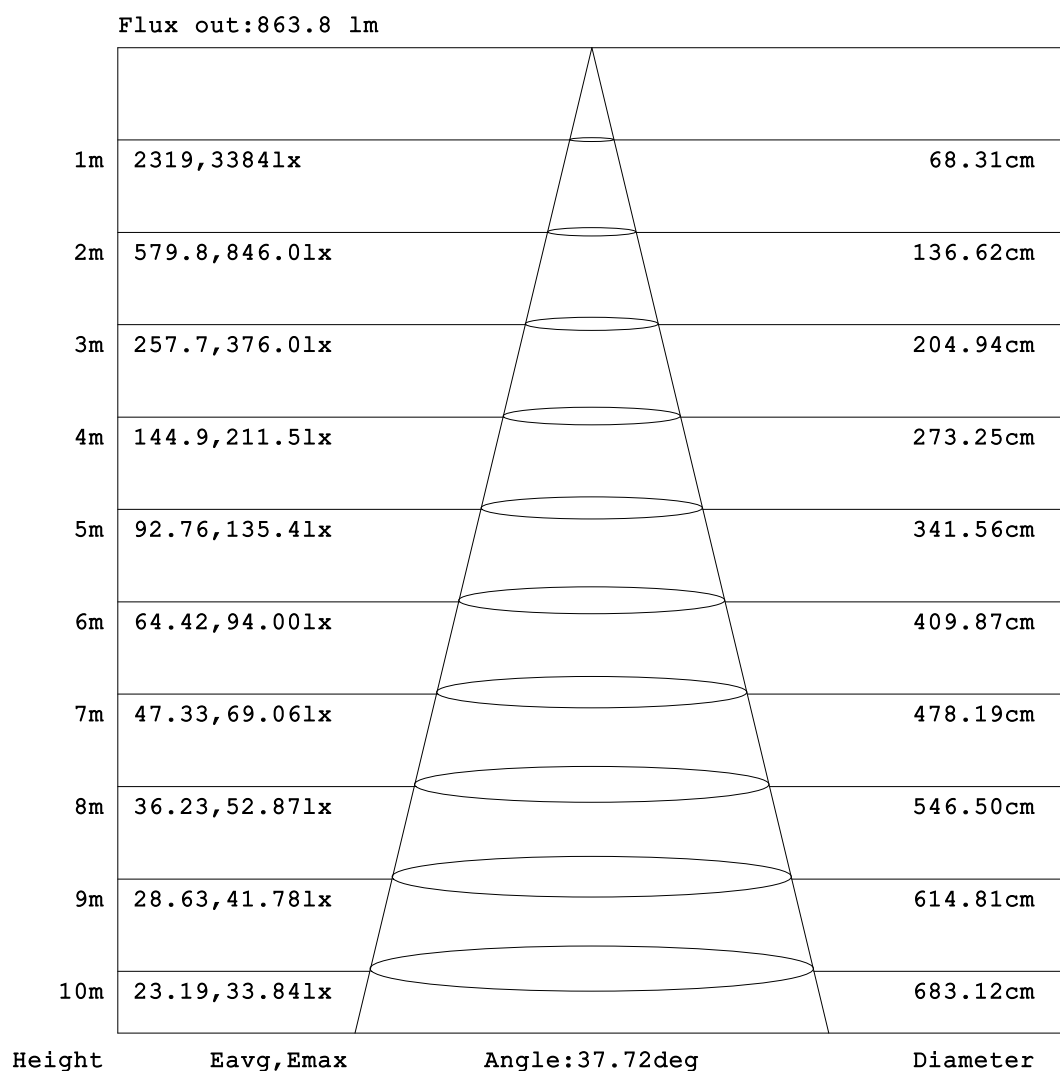


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz		
UTHDi:0.17% ITHDi:6.49% KDisp:0.9807		Lamp Flux:1553.94x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

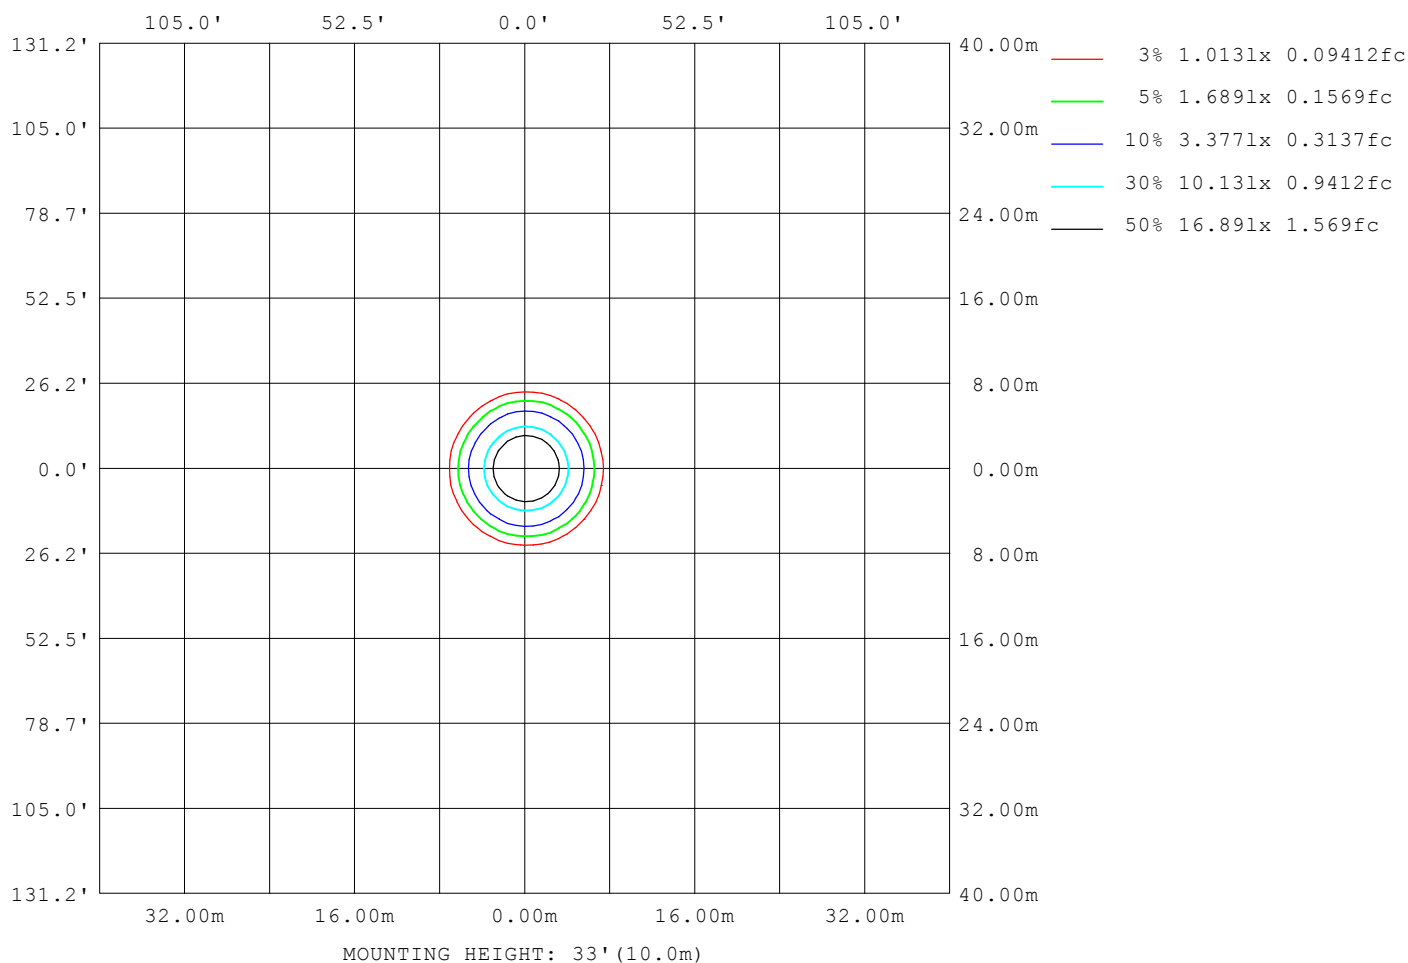

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.5V I:0.0629A P:14.8W PF:0.9785 Freq:49.99Hz UTHDi:0.17% ITHDi:6.49% KDisp:0.9807 Lamp Flux:1553.94x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10380
L_0~180 (75) av	2431
L_0~180 (85) av	850
L_90~270 (65) av	10939
L_90~270 (75) av	2200
L_90~270 (85) av	561
L_45 (65) av	10499
L_45 (75) av	2316
L_45 (85) av	617

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

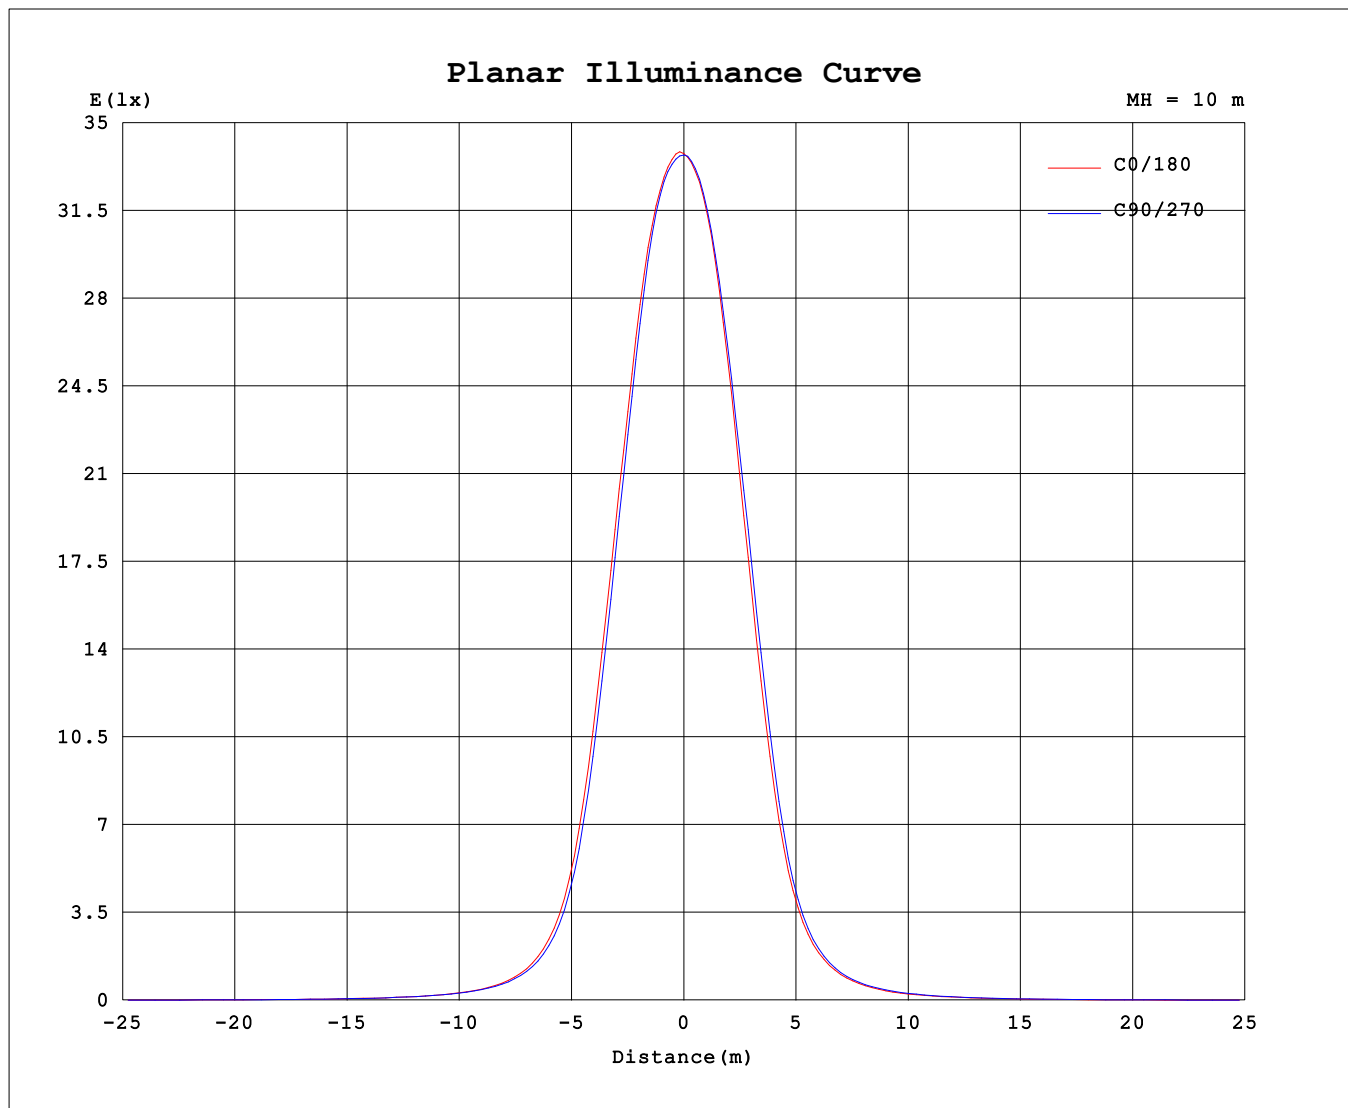

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	3374	3374	3374	3374	3374	3374	3374	3374
3.0	3365	3363	3350	3332	3316	3316	3333	3346
6.0	3281	3290	3265	3222	3184	3175	3206	3242
9.0	3113	3123	3065	2997	2935	2923	2976	3049
12.0	2820	2819	2732	2655	2584	2567	2650	2744
15.0	2432	2425	2325	2228	2142	2146	2259	2351
18.0	1991	1971	1861	1750	1668	1679	1801	1899
21.0	1509	1493	1375	1267	1195	1205	1317	1408
24.0	1049	1040	943.4	850.7	800.5	804.2	883.2	955.8
27.0	684.1	681.2	607.2	556.9	520.0	522.2	568.6	626.9
30.0	443.3	441.2	396.5	367.4	343.5	345.5	373.5	411.7
33.0	295.0	292.7	266.3	249.9	235.3	236.3	254.4	277.2
36.0	203.8	202.7	187.0	176.3	167.5	167.7	180.7	193.5
39.0	146.2	146.3	137.0	128.7	122.7	123.1	133.1	140.0
42.0	108.6	109.4	104.0	96.78	92.59	93.53	101.1	104.7
45.0	83.69	84.20	81.42	74.69	71.44	72.16	78.53	80.96
48.0	65.74	66.49	65.95	61.06	57.82	56.88	62.30	63.67
51.0	53.48	53.69	53.42	48.98	46.21	45.84	50.31	51.04
54.0	43.39	43.67	43.08	38.48	36.45	37.03	41.41	41.70
57.0	35.29	35.27	34.91	31.39	29.58	29.99	33.66	34.14
60.0	28.94	29.04	28.56	25.43	23.68	24.27	27.50	28.09
63.0	23.20	22.88	21.95	19.36	17.91	18.38	21.05	22.09
66.0	17.32	17.15	15.90	13.58	12.38	12.86	15.28	16.36
69.0	11.81	11.53	10.30	8.686	7.830	8.184	9.752	10.90
72.0	7.653	7.101	4.877	3.436	2.967	3.247	4.840	6.821
75.0	2.933	2.634	2.180	1.939	1.848	1.894	2.147	2.647
78.0	1.856	1.734	1.505	1.345	1.319	1.380	1.538	1.726
81.0	1.300	1.187	1.027	0.8649	0.8126	0.8822	1.076	1.203
84.0	0.7204	0.5733	0.3154	0.1762	0.1784	0.1785	0.3515	0.5725
87.0	0.1572	0.1192	0.1145	0.0737	0.0744	0.0712	0.1144	0.1205
90.0	0.0600	0.0369	0.0572	0.0392	0.0420	0.0389	0.0469	0.0357

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: