


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz		
UTHDi:0.18% ITHDi:6.49% KDisp:0.9805 Lamp Flux:1634.1lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.17 lm/W			
MODEL		Imax (cd)	1564	S/MH(C0/180)	0.88
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	0.90
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1634.1	η UP,DN(C0-180)	0.0,53.2
NOMINAL FLUX(lm)	1634.11	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,46.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	240.38	η down (%)	100.0	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

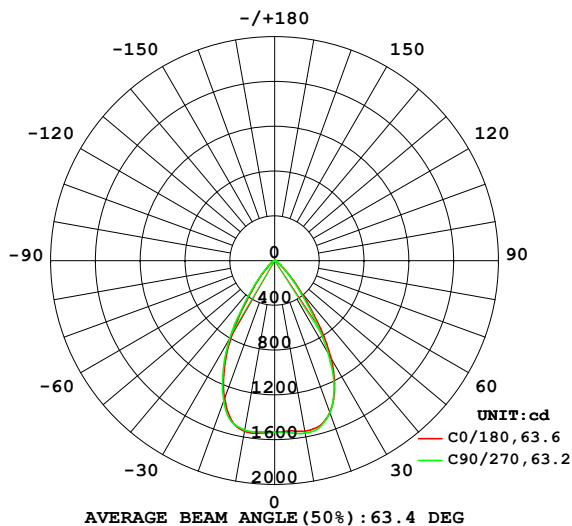

PLANAR ISOLUX DIAGRAM(UNIT:lx)

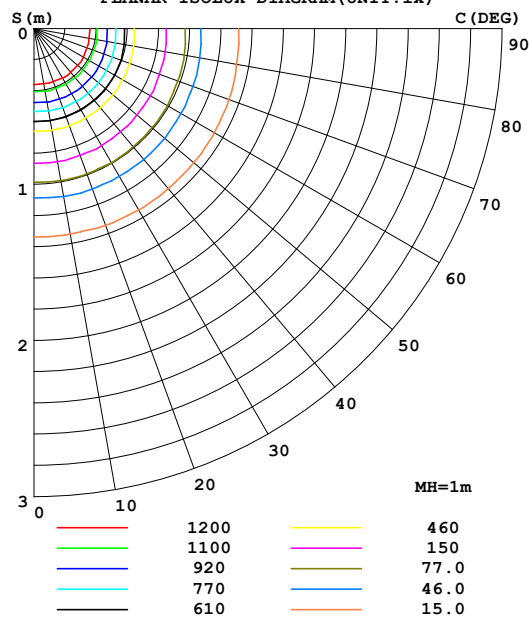

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1547	1551	1563	1558	1547	1538	1538	1545	0- 10	147.3	147.3	9.02,9.02
20	1441	1468	1446	1384	1311	1301	1333	1391	10- 20	421.3	568.6	34.8,34.8
30	1012	1042	956.6	847.1	763.7	746.5	810.1	906.1	20- 30	529.7	1098	67.2,67.2
40	367.1	382.4	336.1	279.7	236.3	233.2	259.1	312.9	30- 40	347.0	1445	88.4,88.4
50	102.7	107.5	94.89	77.93	64.74	63.99	72.52	87.77	40- 50	130.3	1576	96.4,96.4
60	27.99	28.30	25.47	21.34	18.76	18.92	22.32	24.56	50- 60	42.40	1618	99,99
70	7.544	7.437	6.748	6.004	5.465	5.761	6.429	6.920	60- 70	12.67	1631	99.8,99.8
80	1.405	1.291	1.187	1.105	1.112	1.198	1.361	1.437	70- 80	3.088	1634	100,100
90	0.0533	0.0360	0.0434	0.0360	0.0388	0.0389	0.0418	0.0396	80- 90	0.4363	1634	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1527.9 lm

%lum = 93.5%

%lamp = 93.5%

Conical surface Flux(120deg): 1617.9 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz		
UTHDi:0.18% ITHDi:6.49% KDisp:0.9805 Lamp Flux:1634.1lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

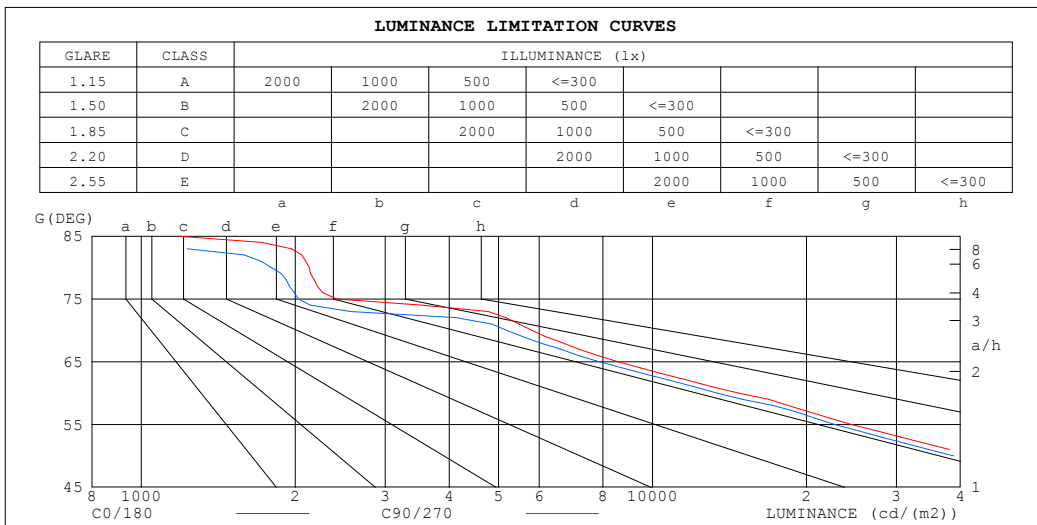


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz		
UTHDi:0.18% ITHDi:6.49% KDisp:0.9805 Lamp Flux:1634.11x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93														
2.0	1.02	.98	.94	1.01	.97	.93	.97	.94	.91	.94	.92	.89	.91	.89	.88	.86														
3.0	.95	.90	.86	.93	.89	.85	.91	.87	.83	.88	.85	.82	.86	.83	.81	.79														
4.0	.88	.82	.78	.87	.82	.78	.85	.80	.77	.83	.79	.76	.81	.78	.75	.73														
5.0	.82	.76	.72	.81	.76	.71	.79	.75	.71	.78	.73	.70	.76	.72	.69	.68														
6.0	.77	.71	.66	.76	.70	.66	.75	.69	.65	.73	.69	.65	.72	.68	.65	.63														
7.0	.72	.66	.61	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.63	.60	.59														
8.0	.68	.61	.57	.67	.61	.57	.66	.61	.57	.65	.60	.56	.64	.59	.56	.55														
9.0	.64	.57	.53	.63	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.51														
10.0	.60	.54	.50	.60	.54	.50	.59	.53	.50	.58	.53	.50	.57	.53	.49	.48														

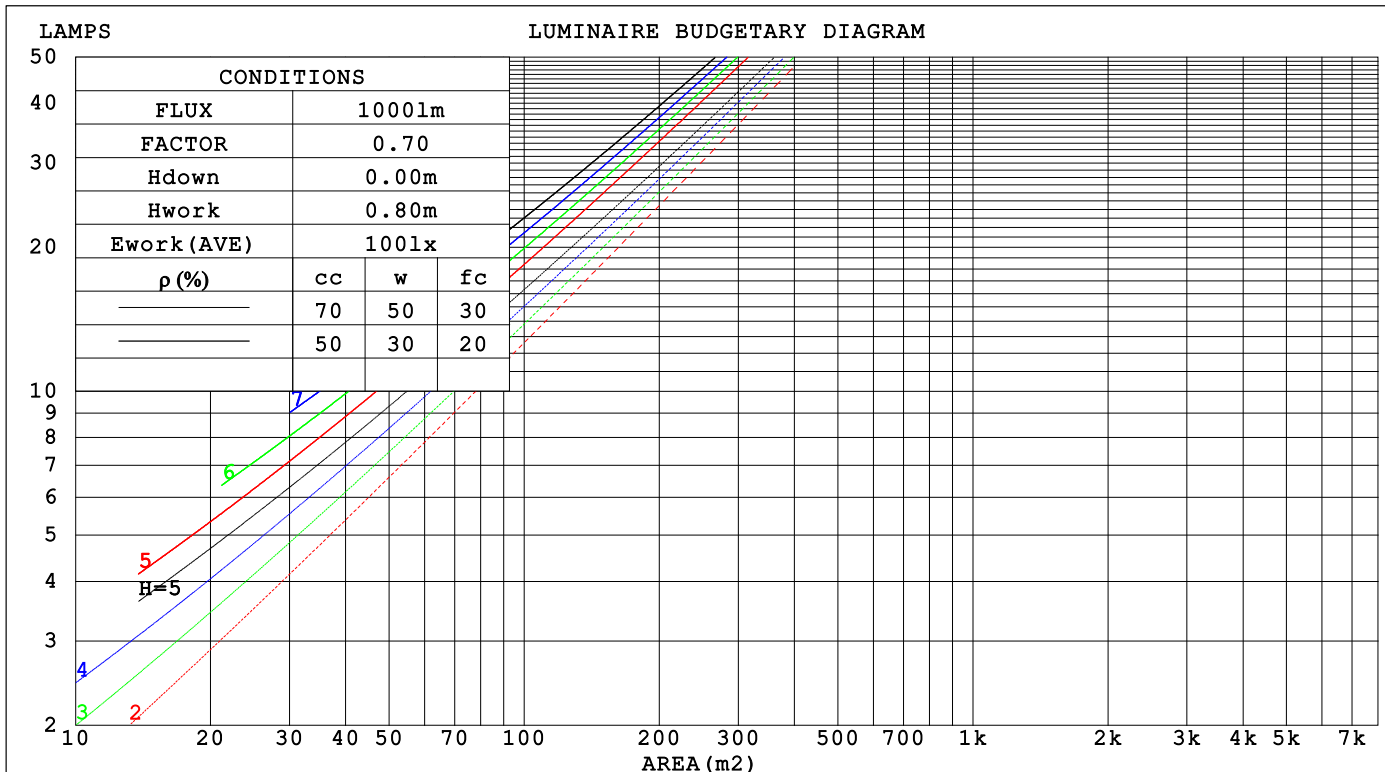

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz		
UTHDi:0.18% ITHDi:6.49% KDisp:0.9805 Lamp Flux:1634.1lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.185	.105	.033	.179	.102	.032	.166	.095	.030	.154	.089	.029	.144	.083	.027		
2.0	.179	.098	.030	.173	.095	.029	.162	.090	.028	.152	.085	.027	.143	.081	.026		
3.0	.171	.091	.027	.166	.089	.027	.157	.085	.026	.148	.081	.025	.140	.078	.024		
4.0	.163	.085	.025	.158	.083	.025	.150	.080	.024	.143	.077	.023	.136	.074	.023		
5.0	.155	.079	.023	.151	.078	.023	.144	.075	.022	.138	.073	.022	.132	.070	.021		
6.0	.148	.074	.021	.145	.073	.021	.139	.071	.021	.133	.069	.020	.127	.067	.020		
7.0	.141	.070	.020	.138	.069	.020	.133	.067	.019	.128	.066	.019	.123	.064	.019		
8.0	.135	.066	.019	.132	.065	.018	.128	.064	.018	.123	.062	.018	.119	.061	.018		
9.0	.129	.063	.017	.127	.062	.017	.123	.061	.017	.118	.059	.017	.115	.058	.017		
10.0	.124	.059	.016	.122	.059	.016	.118	.058	.016	.114	.057	.016	.111	.056	.016		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016		
2.0	.157	.132	.112	.135	.114	.097	.092	.079	.067	.053	.046	.039	.017	.015	.013		
3.0	.145	.114	.088	.125	.098	.077	.086	.068	.054	.049	.040	.032	.016	.013	.010		
4.0	.136	.099	.071	.116	.086	.062	.080	.060	.044	.046	.035	.026	.015	.011	.008		
5.0	.127	.088	.058	.109	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007		
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006		
7.0	.114	.071	.041	.098	.062	.036	.068	.043	.025	.039	.025	.015	.013	.008	.005		
8.0	.108	.065	.035	.093	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004		
9.0	.103	.060	.030	.089	.052	.027	.061	.036	.019	.036	.022	.011	.012	.007	.004		
10.0	.098	.055	.027	.085	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz UTHDi:0.18% ITHDi:6.49% KDisp:0.9805Lamp Flux:1634.1lx1 lm										
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.9	25.0	24.2	25.1	25.3	23.6	24.6	23.8	24.8	24.9
3H	23.8	24.7	24.1	24.9	25.1	23.5	24.4	23.7	24.6	24.8
4H	23.7	24.6	24.0	24.8	25.0	23.4	24.2	23.7	24.5	24.7
6H	23.6	24.5	23.9	24.7	25.0	23.3	24.1	23.6	24.3	24.6
8H	23.6	24.4	23.9	24.6	24.9	23.2	24.0	23.5	24.3	24.5
12H	23.6	24.3	23.9	24.6	24.8	23.2	23.9	23.5	24.2	24.5
4H 2H	23.7	24.6	24.0	24.8	25.1	23.4	24.3	23.7	24.5	24.7
3H	23.6	24.4	23.9	24.6	24.9	23.3	24.0	23.6	24.3	24.6
4H	23.5	24.2	23.9	24.5	24.8	23.2	23.8	23.5	24.1	24.5
6H	23.4	24.0	23.8	24.4	24.7	23.1	23.7	23.5	24.0	24.4
8H	23.4	23.9	23.8	24.3	24.7	23.0	23.6	23.4	23.9	24.3
12H	23.3	23.8	23.8	24.2	24.6	23.0	23.5	23.4	23.9	24.2
8H 4H	23.4	23.9	23.8	24.3	24.7	23.0	23.6	23.4	23.9	24.3
6H	23.3	23.7	23.7	24.1	24.6	22.9	23.4	23.4	23.8	24.2
8H	23.2	23.6	23.7	24.1	24.5	22.9	23.3	23.3	23.7	24.1
12H	23.2	23.5	23.7	24.0	24.4	22.8	23.2	23.3	23.6	24.1
12H 4H	23.3	23.8	23.8	24.2	24.6	23.0	23.5	23.4	23.9	24.3
6H	23.2	23.6	23.7	24.1	24.5	22.9	23.3	23.3	23.7	24.1
8H	23.2	23.5	23.7	24.0	24.4	22.8	23.2	23.3	23.6	24.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.7 / - 7.1					+ 2.4 / - 7.0				
1.5H	+ 4.2 / - 5.2					+ 3.8 / - 5.0				
2.0H	+ 4.9 / - 6.2					+ 4.7 / - 6.0				

CIE Pub.117, 1634 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.7)
Area: 0.0038 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz		
UTHDi:0.18% ITHDi:6.49% KDisp:0.9805 Lamp Flux:1634.1lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	82	90	85	81	77
1.00	97	91	87	96	91	87	95	91	87	82
1.25	102	96	92	101	96	92	99	94	91	87
1.50	105	100	96	103	99	95	101	97	94	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	105	102	108	104	101	105	102	100	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz		
UTHDi:0.18% ITHDi:6.49% KDisp:0.9805 Lamp Flux:1634.1lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

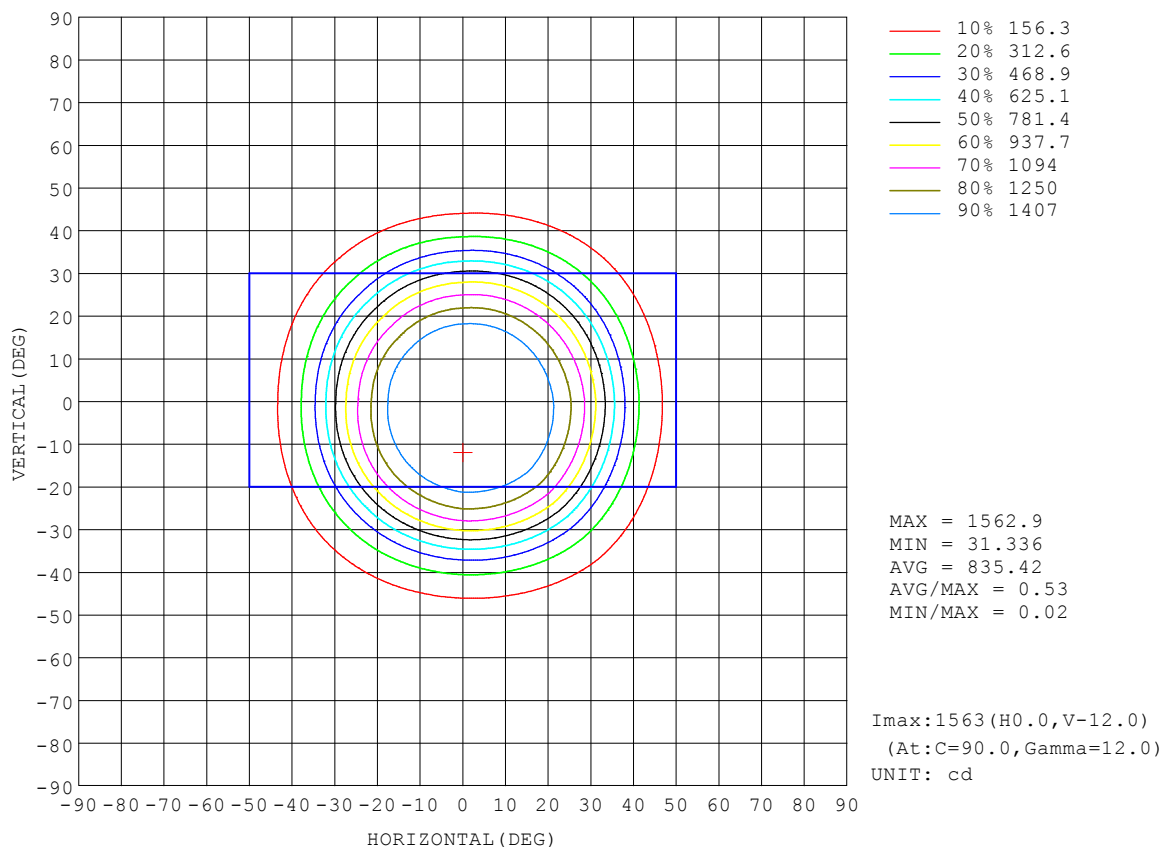


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz		
UTHDi:0.18% ITHDi:6.49% KDisp:0.9805		Lamp Flux:1634.1lx1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

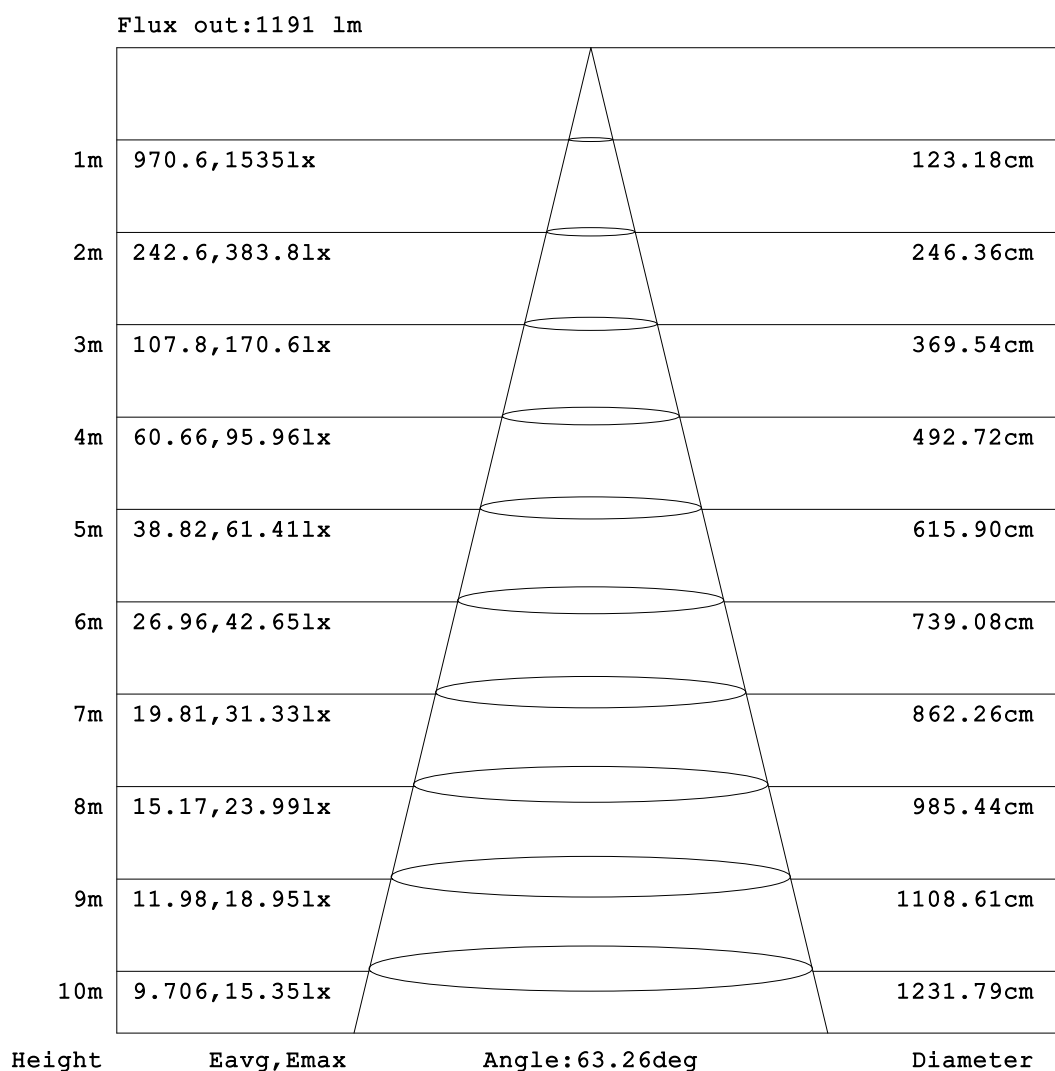


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz		
UTHDi:0.18% ITHDi:6.49% KDisp:0.9805		Lamp Flux:1634.1lx1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

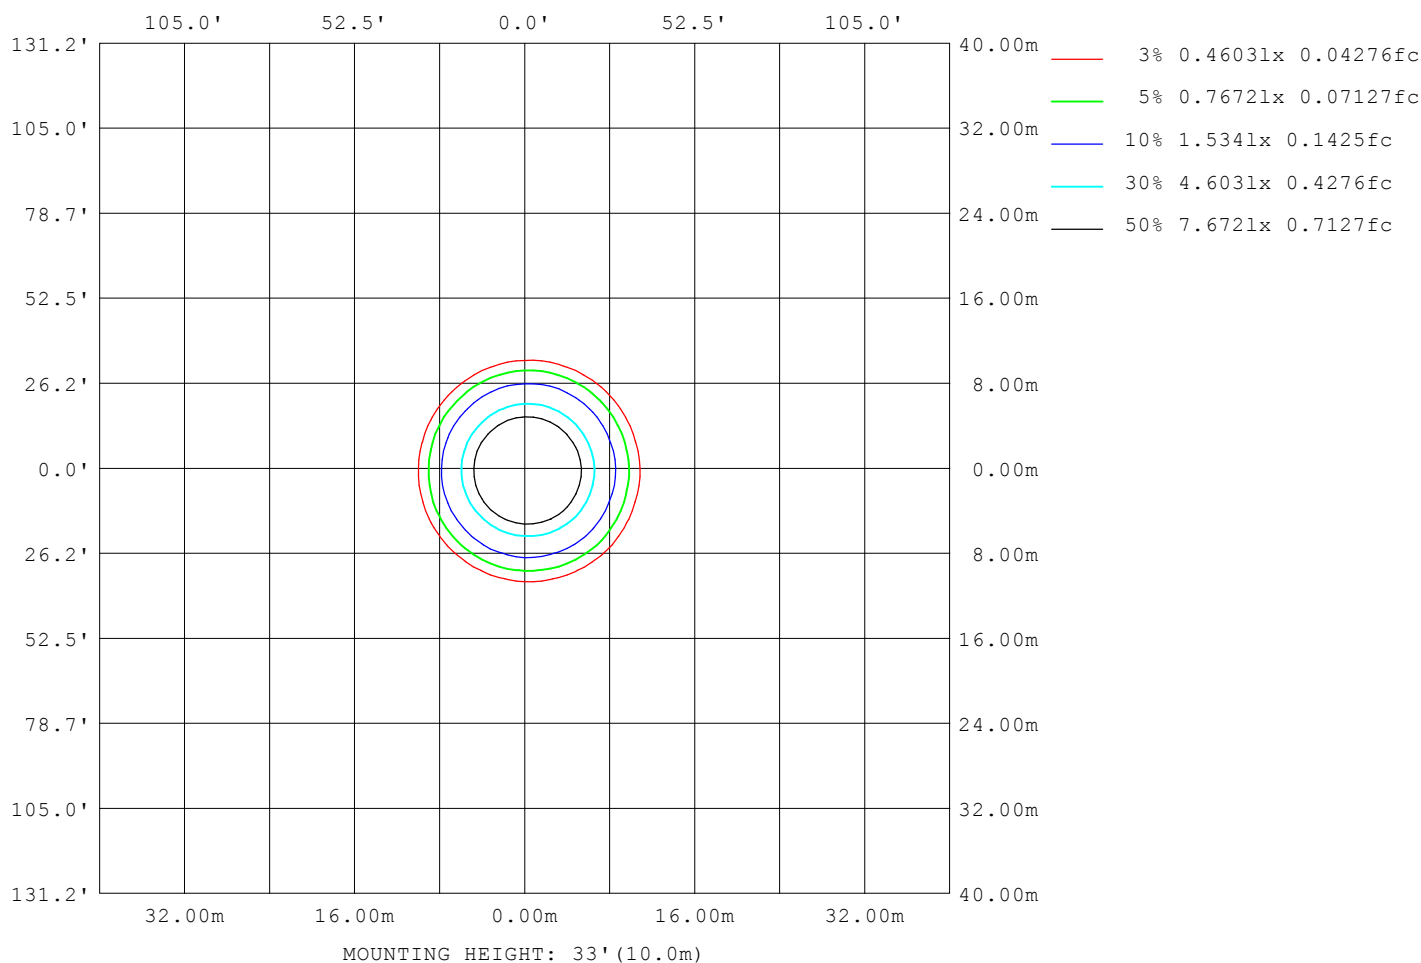

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0625A P:14.7W PF:0.9784 Freq:49.99Hz UTHDi:0.18% ITHDi:6.49% KDisp:0.9805 Lamp Flux:1634.11x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 2700K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7245
L_0~180 (75) av	2216
L_0~180 (85) av	748
L_90~270 (65) av	7514
L_90~270 (75) av	2139
L_90~270 (85) av	432
L_45 (65) av	7285
L_45 (75) av	2181
L_45 (85) av	553

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

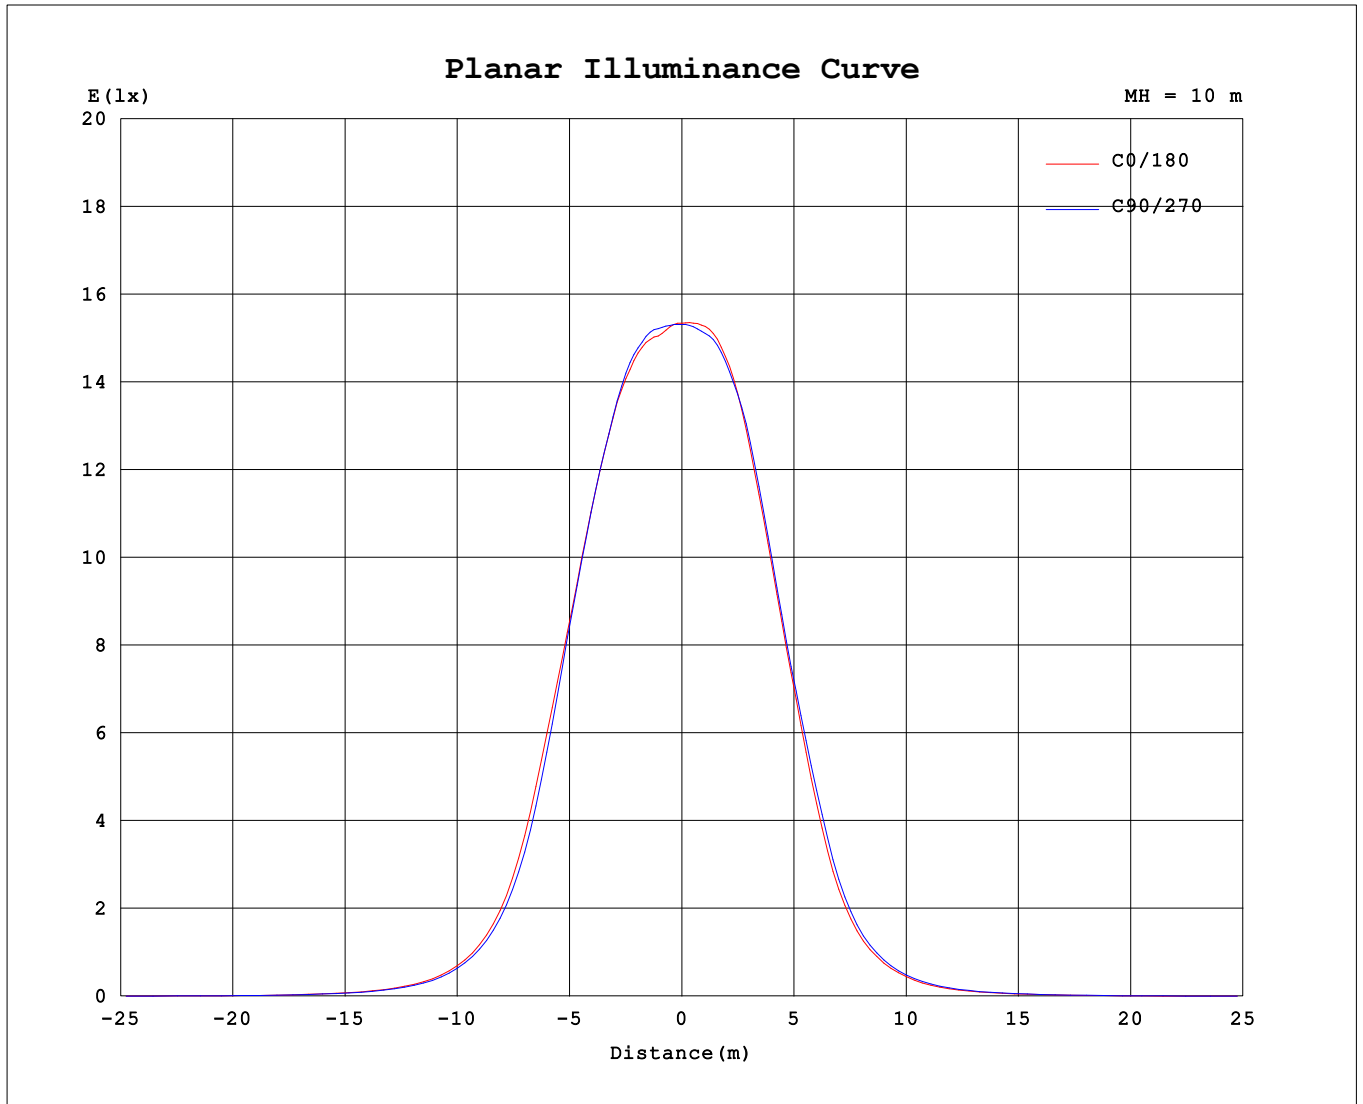

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	1532	1532	1532	1532	1532	1532	1532	1532
3.0	1530	1534	1536	1537	1538	1535	1534	1531
6.0	1528	1538	1548	1550	1550	1543	1537	1532
9.0	1544	1550	1562	1560	1553	1544	1541	1544
12.0	1546	1547	1564	1554	1532	1524	1522	1536
15.0	1533	1534	1545	1517	1481	1479	1490	1517
18.0	1488	1502	1491	1444	1388	1383	1412	1456
21.0	1413	1445	1416	1348	1268	1254	1290	1354
24.0	1308	1345	1303	1216	1120	1099	1143	1221
27.0	1171	1212	1154	1052	956.4	935.9	984.0	1072
30.0	1012	1042	956.6	847.1	763.7	746.5	810.1	906.1
33.0	809.3	830.7	736.0	633.5	561.5	545.4	613.0	708.1
36.0	594.2	611.2	535.5	451.9	391.3	381.5	428.8	509.2
39.0	415.1	431.5	378.7	316.2	268.3	264.5	293.8	354.7
42.0	286.4	298.7	262.1	220.0	184.4	181.6	202.1	243.3
45.0	196.0	207.2	180.3	149.9	125.9	122.9	137.6	166.2
48.0	133.3	140.1	121.7	101.2	84.58	83.10	93.49	112.8
51.0	91.08	94.14	83.01	68.58	56.96	56.30	63.97	76.54
54.0	61.04	62.94	56.35	47.37	39.65	39.42	44.69	51.78
57.0	41.79	43.22	39.51	33.30	28.65	28.49	32.29	36.06
60.0	27.99	28.30	25.47	21.34	18.76	18.92	22.32	24.56
63.0	18.15	18.71	16.77	13.94	12.29	12.70	14.88	16.05
66.0	12.05	12.08	11.05	9.421	8.466	8.774	10.13	10.81
69.0	8.389	8.304	7.586	6.732	6.143	6.410	7.135	7.677
72.0	6.055	5.923	4.846	3.356	2.821	3.496	5.025	5.592
75.0	2.371	2.194	1.996	1.941	1.988	2.071	2.211	2.373
78.0	1.722	1.597	1.518	1.483	1.519	1.593	1.720	1.749
81.0	1.245	1.133	1.020	0.9069	0.8859	0.9907	1.175	1.256
84.0	0.6818	0.5370	0.2677	0.1283	0.1300	0.1382	0.3381	0.5960
87.0	0.1197	0.0986	0.0868	0.0549	0.0574	0.0601	0.0916	0.0982
90.0	0.0533	0.0360	0.0434	0.0360	0.0388	0.0389	0.0418	0.0396

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: