


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869 Lamp Flux:2112.16x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.27 lm/W			
MODEL		Imax (cd)	13305	S/MH(C0/180)	0.23
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	0.28
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2112.2	$\eta$ UP,DN(C0-180)	0.0,50.8
NOMINAL FLUX(lm)	2112.16	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,49.2
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.42	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

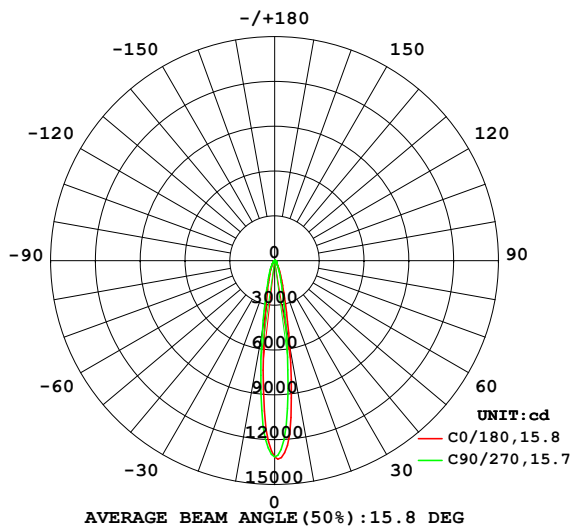

PLANAR ISOLUX DIAGRAM(UNIT:lx)

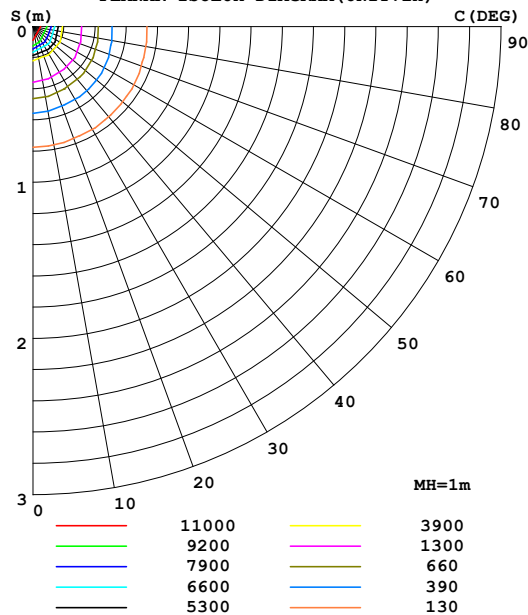

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	583.9	516.7	437.5	377.8	367.4	405.5	478.9	558.1	0- 10	770.9	770.9	36.5,36.5
20	139.2	126.6	108.6	98.93	99.98	108.7	121.4	133.7	10- 20	627.1	1398	66.2,66.2
30	51.23	47.13	41.08	37.96	38.84	43.01	47.80	50.91	20- 30	334.6	1733	82,82
40	21.25	19.77	17.70	16.47	16.78	18.35	20.35	21.29	30- 40	184.0	1917	90.7,90.7
50	10.10	9.645	9.193	8.130	8.279	8.927	9.777	10.02	40- 50	102.3	2019	95.6,95.6
60	5.142	4.880	4.570	4.184	4.174	4.523	5.008	5.114	50- 60	60.43	2079	98.4,98.4
70	1.417	1.325	1.123	0.8980	0.7986	0.9229	1.176	1.326	60- 70	27.45	2107	99.7,99.7
80	0.2143	0.2082	0.1908	0.1642	0.1567	0.1625	0.1824	0.1996	70- 80	4.630	2111	100,100
90	0.0107	0.0062	0.0092	0.0061	0.0063	0.0056	0.0075	0.0061	80- 90	0.6936	2112	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 1974.8 lm

%lum = 93.5%

%lamp = 93.5%

Conical surface Flux(120deg): 2079.4 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869 Lamp Flux:2112.16x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

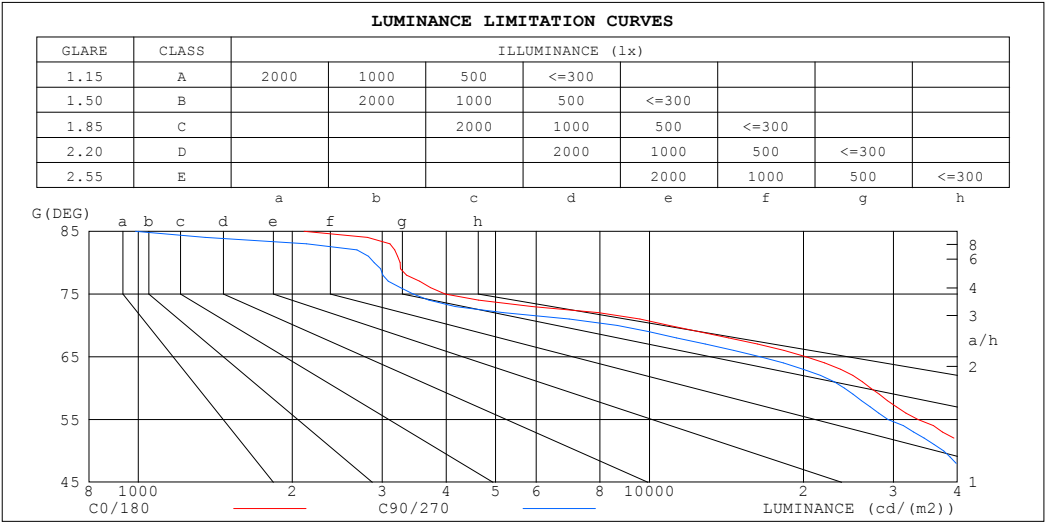

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2110	987
80	3251	2893
75	3983	3449
70	10913	8647
65	20240	16455
60	27096	24060
55	33525	29263
50	41411	37647
45	53380	45653


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869 Lamp Flux:2112.16x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

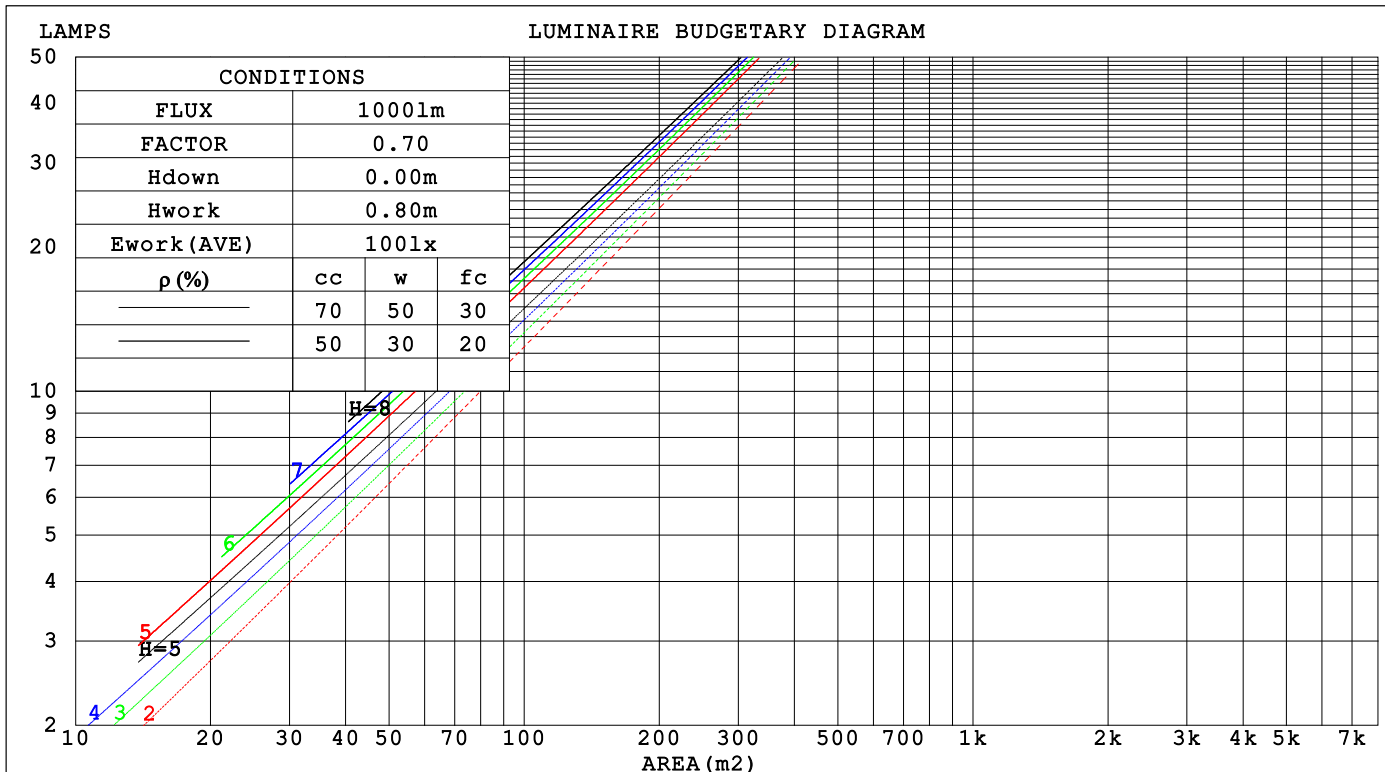

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869 Lamp Flux:2112.16x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.154	.088	.028	.147	.084	.027	.135	.077	.025	.123	.071	.023	.113	.065	.021		
2.0	.145	.080	.024	.140	.077	.024	.129	.072	.022	.120	.067	.021	.111	.063	.020		
3.0	.136	.073	.022	.132	.071	.021	.123	.067	.020	.115	.063	.019	.107	.060	.018		
4.0	.128	.067	.020	.124	.065	.019	.117	.062	.018	.110	.059	.018	.103	.056	.017		
5.0	.121	.061	.018	.117	.060	.018	.111	.058	.017	.105	.055	.016	.099	.053	.016		
6.0	.114	.057	.016	.111	.056	.016	.105	.054	.016	.100	.052	.015	.095	.050	.015		
7.0	.108	.053	.015	.105	.052	.015	.100	.051	.015	.096	.049	.014	.092	.048	.014		
8.0	.102	.050	.014	.100	.049	.014	.096	.048	.014	.092	.047	.013	.088	.045	.013		
9.0	.097	.047	.013	.095	.046	.013	.092	.045	.013	.088	.044	.013	.085	.043	.012		
10.0	.093	.044	.012	.091	.044	.012	.088	.043	.012	.084	.042	.012	.081	.041	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011		
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.108	.076	.053	.093	.066	.047	.064	.046	.033	.037	.027	.020	.012	.009	.006		
7.0	.101	.068	.046	.087	.059	.040	.060	.042	.028	.035	.025	.017	.011	.008	.006		
8.0	.095	.062	.039	.081	.054	.034	.056	.038	.024	.033	.022	.014	.011	.007	.005		
9.0	.089	.056	.034	.077	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004		
10.0	.084	.052	.030	.072	.045	.026	.050	.032	.019	.029	.019	.011	.009	.006	.004		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz UTHDi:0.17% ITHDi:5.73% KDisp:0.9869 Lamp Flux:2112.16x1 lm										
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:								WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 70mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.6	21.4	20.8	21.5	21.7	20.0	20.7	20.2	20.9	21.1
3H	20.8	21.5	21.0	21.7	21.9	20.1	20.8	20.4	21.0	21.2
4H	20.7	21.4	21.0	21.6	21.8	20.1	20.7	20.3	20.9	21.2
6H	20.7	21.3	20.9	21.5	21.8	20.0	20.6	20.3	20.9	21.1
8H	20.6	21.2	20.9	21.5	21.7	19.9	20.6	20.2	20.8	21.1
12H	20.6	21.2	20.9	21.4	21.7	19.9	20.5	20.2	20.8	21.0
4H 2H	20.7	21.4	21.0	21.6	21.8	20.1	20.8	20.4	21.0	21.2
3H	20.9	21.5	21.2	21.8	22.0	20.3	20.9	20.6	21.2	21.4
4H	20.8	21.4	21.2	21.7	22.0	20.2	20.8	20.6	21.1	21.4
6H	20.8	21.2	21.1	21.6	21.9	20.2	20.6	20.5	21.0	21.3
8H	20.7	21.2	21.1	21.5	21.9	20.1	20.6	20.5	20.9	21.3
12H	20.7	21.1	21.1	21.4	21.8	20.1	20.5	20.5	20.8	21.2
8H 4H	20.7	21.2	21.1	21.5	21.9	20.1	20.6	20.5	20.9	21.3
6H	20.6	21.0	21.1	21.4	21.8	20.0	20.4	20.5	20.8	21.2
8H	20.6	20.9	21.0	21.3	21.8	20.0	20.3	20.4	20.7	21.2
12H	20.5	20.8	21.0	21.3	21.7	19.9	20.2	20.4	20.6	21.1
12H 4H	20.7	21.1	21.1	21.4	21.8	20.1	20.5	20.5	20.8	21.2
6H	20.6	20.9	21.0	21.3	21.8	20.0	20.3	20.4	20.7	21.2
8H	20.5	20.8	21.0	21.2	21.7	19.9	20.2	20.4	20.7	21.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.3 / - 1.9					+ 1.2 / - 1.9				
1.5H	+ 1.9 / - 1.2					+ 1.3 / - 0.9				
2.0H	+ 2.0 / - 1.7					+ 1.7 / - 1.6				

CIE Pub.117, 2112 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 2.6$ )  
Area: 0.0038 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869 Lamp Flux:2112.16x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	88	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	90
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869 Lamp Flux:2112.16x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

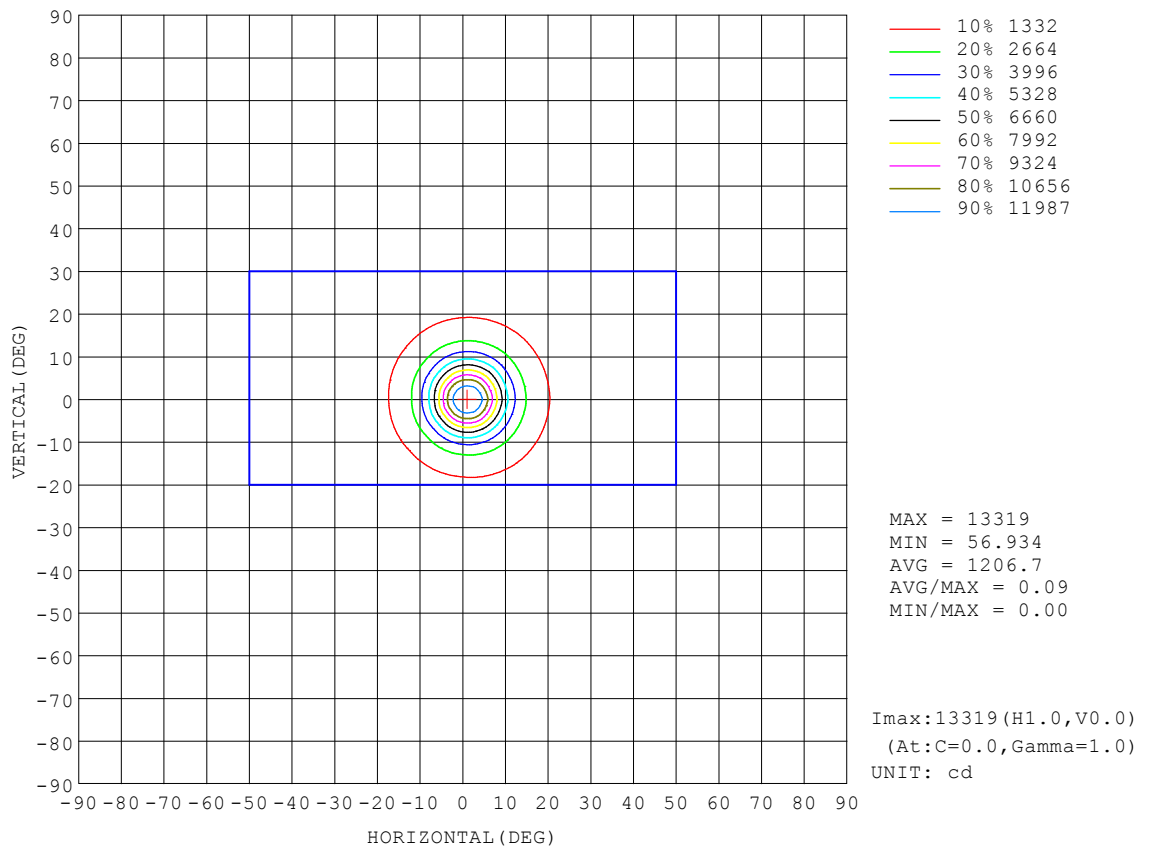


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869		Lamp Flux:2112.16x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

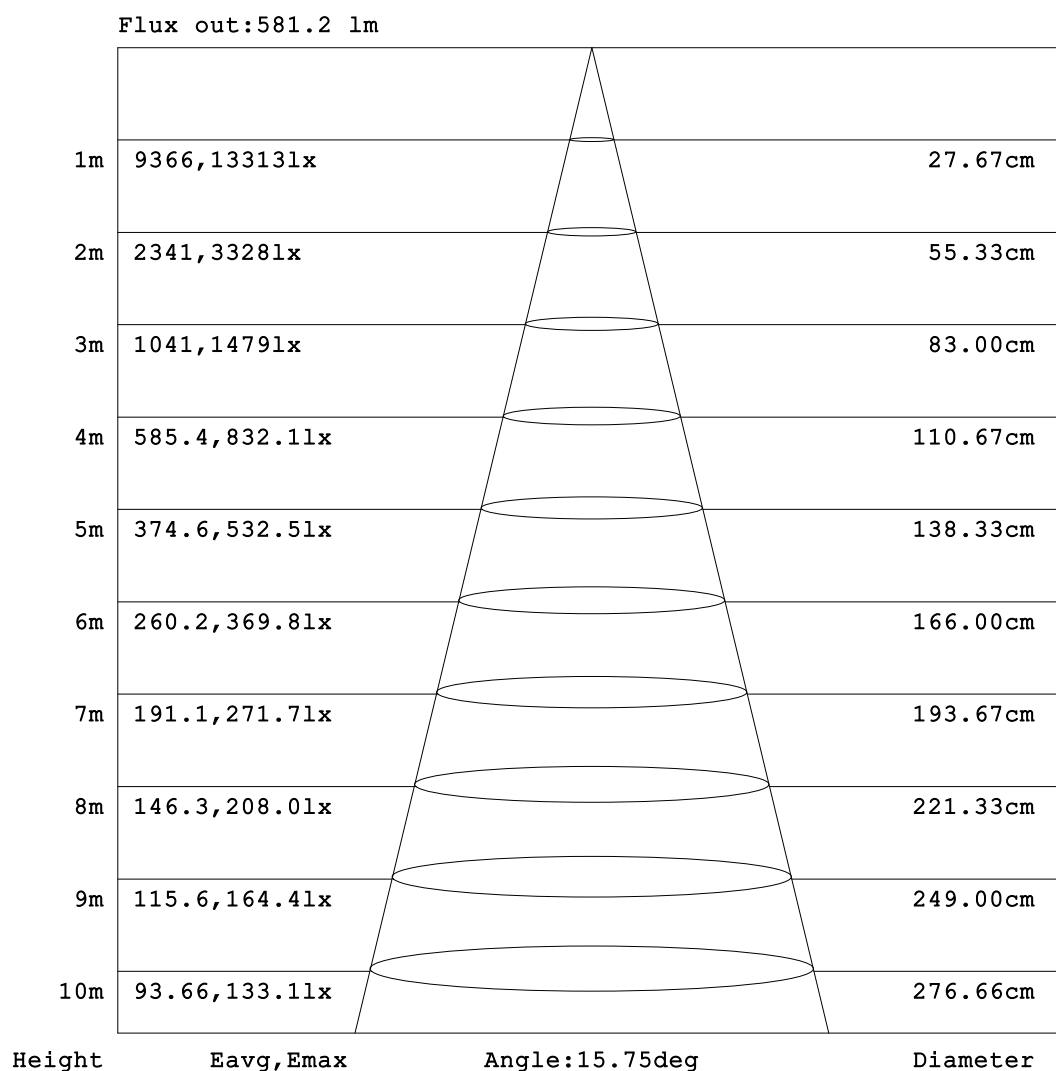


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869		Lamp Flux:2112.16x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

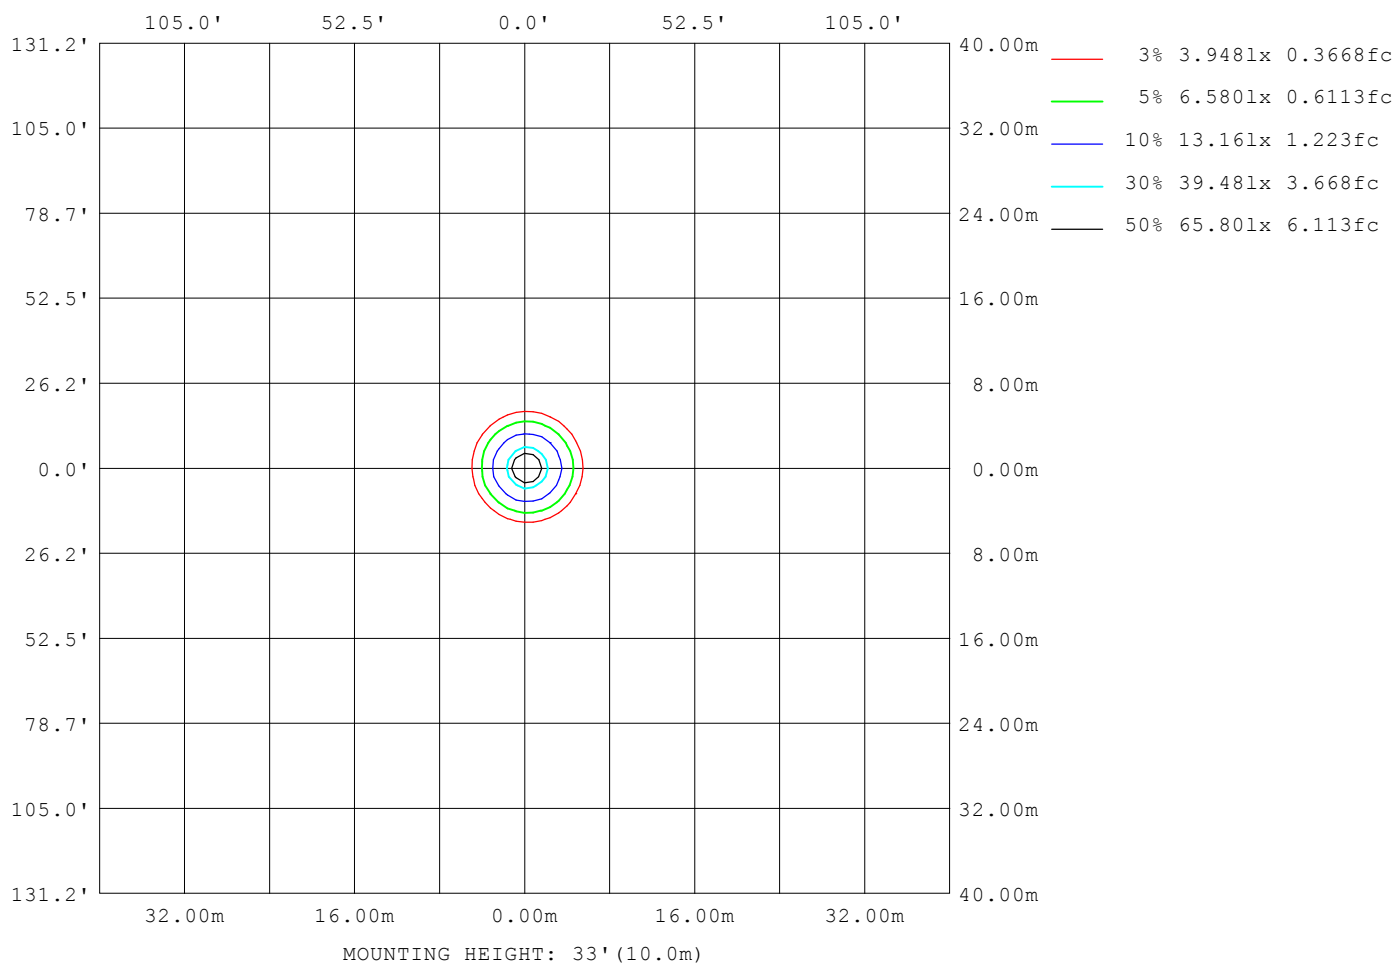

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.5V I:0.0847A P:20.1W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.73% KDisp:0.9869 Lamp Flux:2112.16x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	16814
L_0~180 (75) av	3493
L_0~180 (85) av	1389
L_90~270 (65) av	17219
L_90~270 (75) av	3443
L_90~270 (85) av	962
L_45 (65) av	16813
L_45 (75) av	3447
L_45 (85) av	1047

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

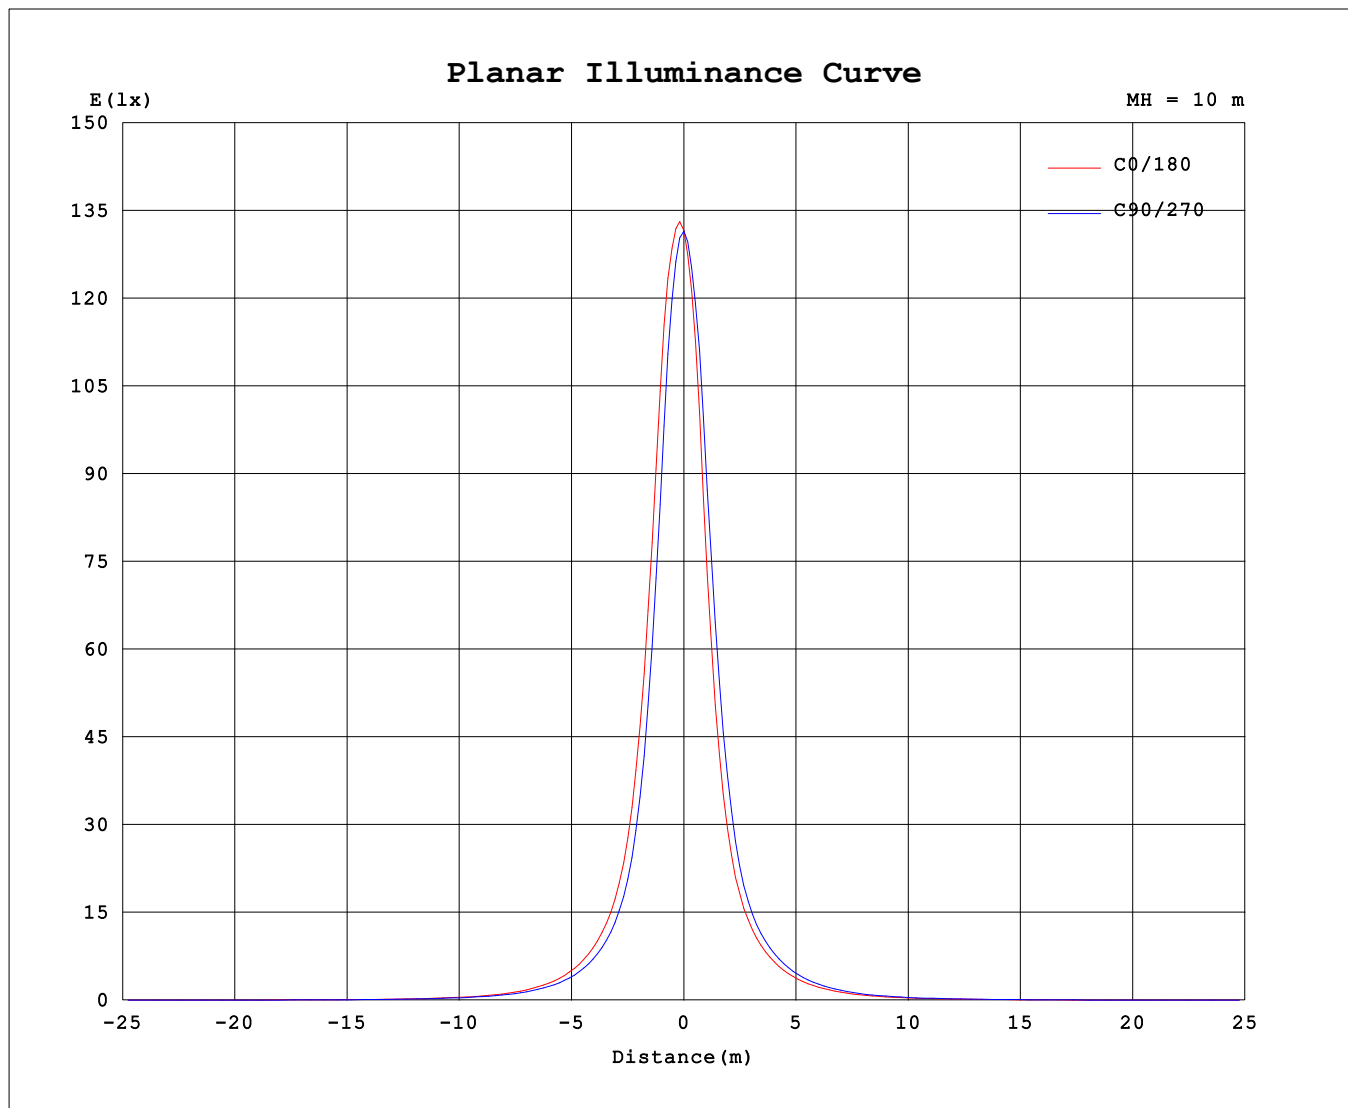

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	13145	13145	13145	13145	13145	13145	13145	13145
3.0	12896	12638	12026	11519	11315	11503	11961	12545
6.0	10570	9835	8616	7669	7386	7907	8863	9995
9.0	6905	6157	5233	4519	4360	4815	5647	6569
12.0	4188	3707	3100	2697	2645	2918	3454	4014
15.0	2603	2342	1969	1757	1741	1889	2179	2500
18.0	1748	1589	1356	1229	1236	1334	1502	1677
21.0	1249	1137	977.2	893.7	903.7	985.8	1098	1202
24.0	915.8	838.8	723.0	663.8	673.5	744.8	824.4	894.3
27.0	681.0	626.1	541.2	498.7	508.6	563.9	624.7	672.0
30.0	512.3	471.3	410.8	379.6	388.4	430.1	478.0	509.1
33.0	389.7	358.2	315.3	291.9	298.4	330.3	367.5	388.8
36.0	298.7	275.1	244.1	226.3	231.1	255.0	283.1	298.9
39.0	230.9	214.9	191.4	178.0	181.6	198.9	220.2	231.3
42.0	180.7	168.9	152.2	141.6	144.0	157.2	173.7	181.1
45.0	143.3	134.8	122.6	113.8	115.6	125.6	138.4	143.5
48.0	115.1	108.7	101.2	92.55	93.84	101.5	111.9	115.1
51.0	96.58	91.51	86.19	76.54	78.01	83.60	91.47	94.64
54.0	80.10	76.24	70.06	63.45	63.30	68.46	75.28	78.80
57.0	62.81	59.49	55.83	51.50	51.72	55.88	61.33	62.46
60.0	51.42	48.80	45.70	41.84	41.74	45.23	50.08	51.14
63.0	40.73	38.35	34.47	30.20	29.60	32.64	37.84	40.00
66.0	28.28	26.06	22.58	19.13	18.06	20.06	24.52	27.10
69.0	16.94	15.73	13.53	11.36	10.72	11.87	14.27	15.82
72.0	9.315	8.294	6.076	4.778	4.434	4.889	6.287	8.116
75.0	3.913	3.772	3.391	3.064	2.958	3.105	3.382	3.619
78.0	2.640	2.529	2.377	2.126	2.062	2.119	2.302	2.461
81.0	1.909	1.832	1.675	1.386	1.259	1.370	1.595	1.750
84.0	1.113	0.9258	0.5368	0.2870	0.2819	0.2729	0.5397	0.8777
87.0	0.2777	0.2137	0.1997	0.1123	0.1153	0.1070	0.1903	0.2051
90.0	0.1066	0.0623	0.0915	0.0609	0.0632	0.0555	0.0748	0.0612

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: