


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868 Lamp Flux:2064.36x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.88 lm/W			
MODEL		I <sub>max</sub> (cd)	7322	S/MH(C0/180)	0.40
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	0.46
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2064.4	η UP,DN(C0-180)	0.0,51.8
NOMINAL FLUX(lm)	2064.36	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.4	η down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

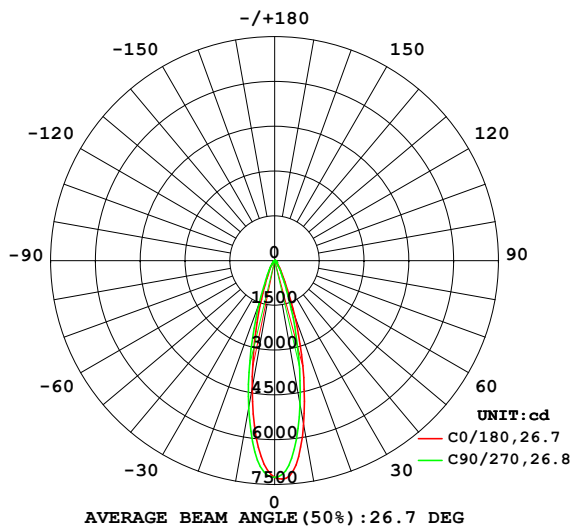

PLANAR ISOLUX DIAGRAM(UNIT:lx)

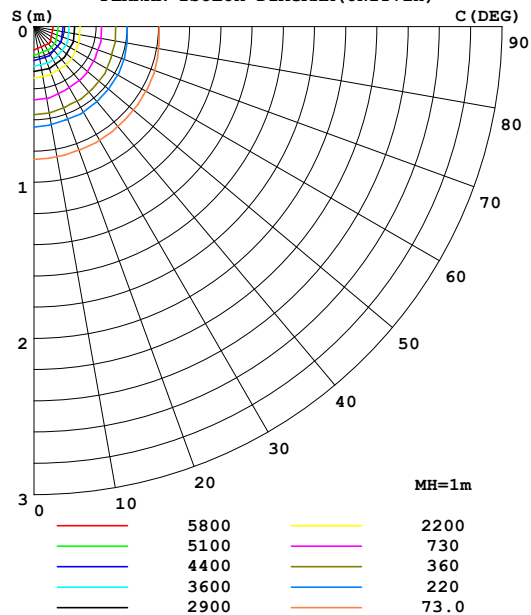

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	5593	5387	4907	4501	4366	4570	5027	5402	0- 10	580.9	580.9	28.1,28.1
20	1982	1814	1495	1254	1167	1262	1522	1828	10- 20	830.8	1412	68.4,68.4
30	483.8	448.1	380.1	341.4	329.4	344.5	389.9	448.9	20- 30	358.4	1770	85.7,85.7
40	166.6	158.1	137.0	125.8	122.9	126.9	141.6	156.8	30- 40	150.2	1920	93,93
50	72.66	73.16	66.34	61.61	59.82	61.35	67.10	69.58	40- 50	74.09	1994	96.6,96.6
60	38.11	36.80	35.01	31.05	30.04	31.20	35.49	36.57	50- 60	43.30	2038	98.7,98.7
70	13.57	13.03	10.87	8.488	6.784	7.753	10.60	12.34	60- 70	21.94	2060	99.8,99.8
80	1.829	1.781	1.611	1.356	1.232	1.247	1.435	1.626	70- 80	4.102	2064	100,100
90	0.0964	0.0621	0.0810	0.0534	0.0614	0.0546	0.0678	0.0485	80- 90	0.5698	2064	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1962.8 lm

%lum = 95.1%

%lamp = 95.1%

Conical surface Flux(120deg): 2037.7 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868 Lamp Flux:2064.36x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

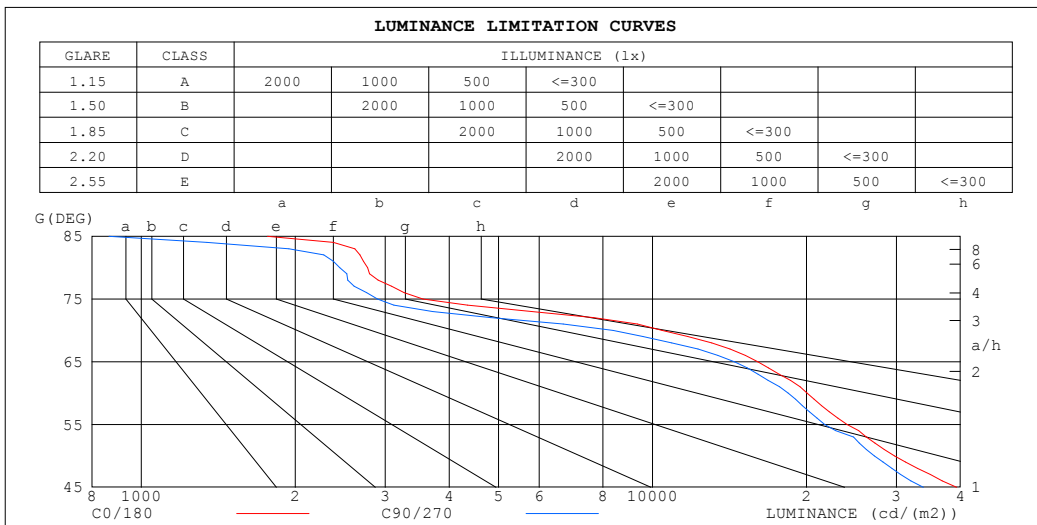


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868 Lamp Flux:2064.36x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

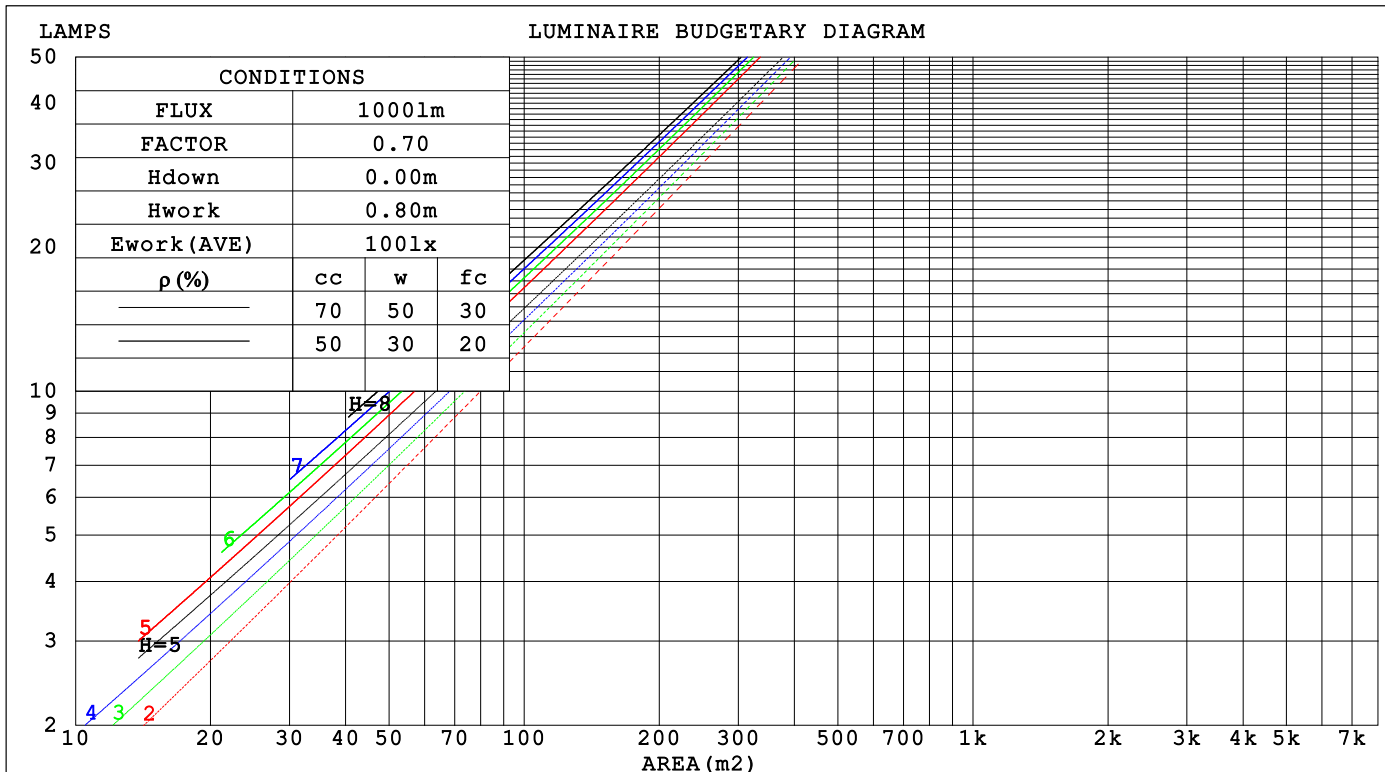

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868 Lamp Flux:2064.36x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.154	.088	.028	.148	.084	.027	.135	.078	.025	.124	.071	.023	.113	.066	.021		
2.0	.145	.080	.024	.140	.077	.024	.129	.072	.022	.120	.067	.021	.111	.063	.020		
3.0	.136	.073	.022	.132	.071	.021	.123	.067	.020	.115	.063	.019	.107	.060	.018		
4.0	.128	.067	.020	.124	.065	.019	.117	.062	.019	.110	.059	.018	.104	.056	.017		
5.0	.121	.062	.018	.118	.060	.018	.111	.058	.017	.105	.056	.017	.100	.053	.016		
6.0	.115	.058	.016	.112	.056	.016	.106	.054	.016	.101	.053	.015	.096	.051	.015		
7.0	.109	.054	.015	.106	.053	.015	.101	.051	.015	.097	.050	.014	.093	.048	.014		
8.0	.104	.051	.014	.101	.050	.014	.097	.049	.014	.093	.047	.014	.089	.046	.013		
9.0	.099	.048	.013	.097	.047	.013	.093	.046	.013	.090	.045	.013	.086	.044	.013		
10.0	.095	.045	.013	.093	.045	.013	.089	.044	.012	.086	.043	.012	.083	.042	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011		
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.109	.077	.053	.093	.066	.046	.064	.046	.033	.037	.027	.020	.012	.009	.006		
7.0	.101	.069	.045	.087	.059	.040	.060	.042	.028	.035	.025	.017	.011	.008	.006		
8.0	.095	.062	.039	.082	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005		
9.0	.090	.056	.034	.077	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004		
10.0	.085	.052	.030	.073	.045	.026	.051	.032	.019	.030	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz UTHDi:0.17% ITHDi:5.76% KDisp:0.9868Lamp Flux:2064.36x1 lm										
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.9	19.7	19.2	19.9	20.0	18.4	19.1	18.6	19.3	19.4
3H	19.2	19.9	19.5	20.1	20.3	18.6	19.3	18.9	19.5	19.7
4H	19.2	19.9	19.4	20.1	20.3	18.6	19.2	18.8	19.4	19.7
6H	19.1	19.7	19.4	20.0	20.2	18.5	19.1	18.8	19.4	19.6
8H	19.1	19.7	19.4	19.9	20.2	18.4	19.1	18.7	19.3	19.6
12H	19.0	19.6	19.3	19.9	20.2	18.4	19.0	18.7	19.2	19.5
4H 2H	19.1	19.7	19.3	19.9	20.2	18.5	19.2	18.8	19.4	19.6
3H	19.4	20.0	19.7	20.2	20.5	18.8	19.4	19.1	19.7	19.9
4H	19.3	19.9	19.7	20.2	20.5	18.8	19.3	19.1	19.6	19.9
6H	19.3	19.7	19.6	20.1	20.4	18.7	19.2	19.0	19.5	19.8
8H	19.2	19.7	19.6	20.0	20.4	18.6	19.1	19.0	19.4	19.8
12H	19.2	19.6	19.6	19.9	20.3	18.6	19.0	19.0	19.4	19.7
8H 4H	19.2	19.7	19.6	20.0	20.4	18.6	19.1	19.0	19.4	19.8
6H	19.1	19.5	19.6	19.9	20.3	18.6	18.9	19.0	19.3	19.7
8H	19.1	19.4	19.5	19.8	20.3	18.5	18.9	19.0	19.3	19.7
12H	19.0	19.3	19.5	19.8	20.2	18.5	18.8	18.9	19.2	19.7
12H 4H	19.2	19.6	19.6	19.9	20.3	18.6	19.0	19.0	19.4	19.8
6H	19.1	19.4	19.5	19.8	20.3	18.5	18.8	19.0	19.3	19.7
8H	19.0	19.3	19.5	19.8	20.2	18.5	18.8	18.9	19.2	19.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.5 / - 1.9					+ 1.2 / - 1.8				
1.5H	+ 2.3 / - 1.3					+ 1.6 / - 1.2				
2.0H	+ 2.0 / - 1.5					+ 1.6 / - 1.3				

CIE Pub.117, 2064 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 2.5$ )  
Area: 0.0038 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868 Lamp Flux:2064.36x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	88	85	93	88	84	81
1.00	99	93	90	98	93	89	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868 Lamp Flux:2064.36x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

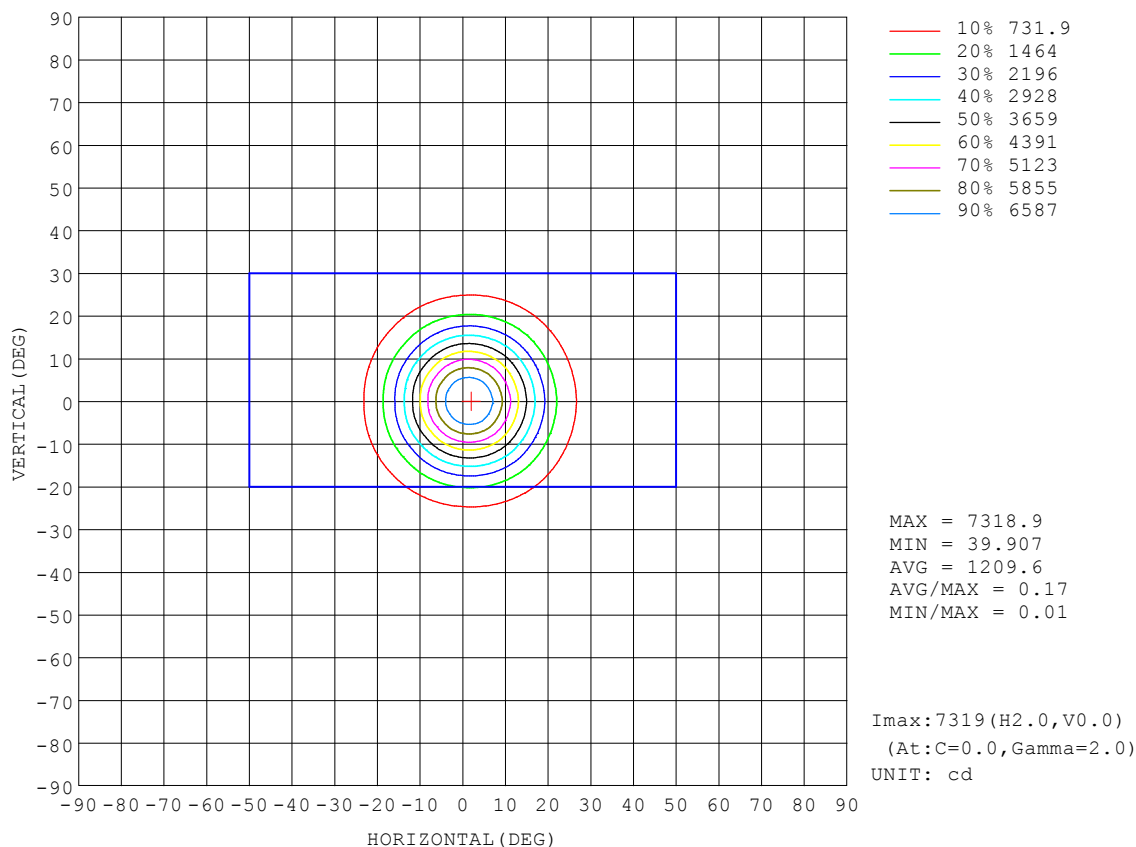


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868		Lamp Flux:2064.36x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

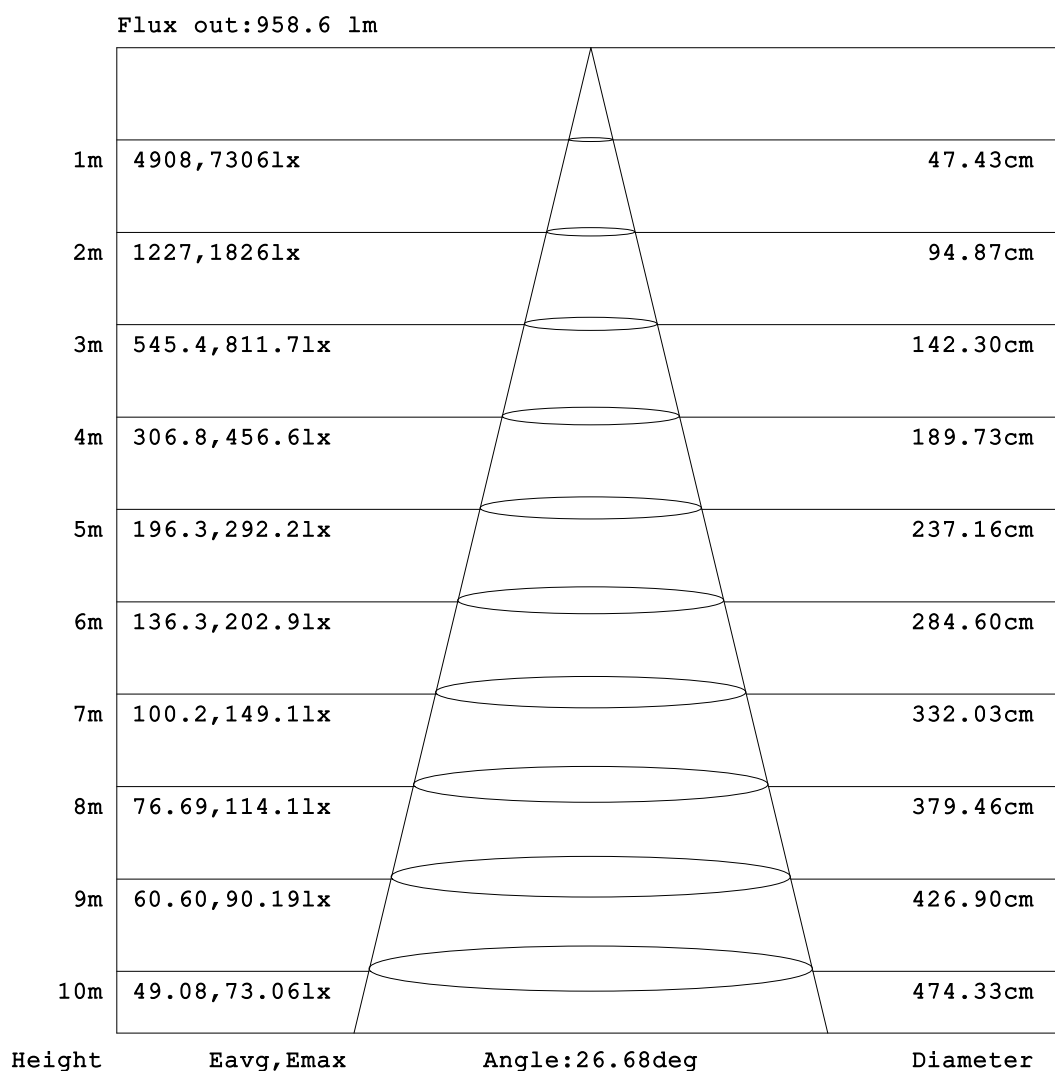


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868		Lamp Flux:2064.36x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

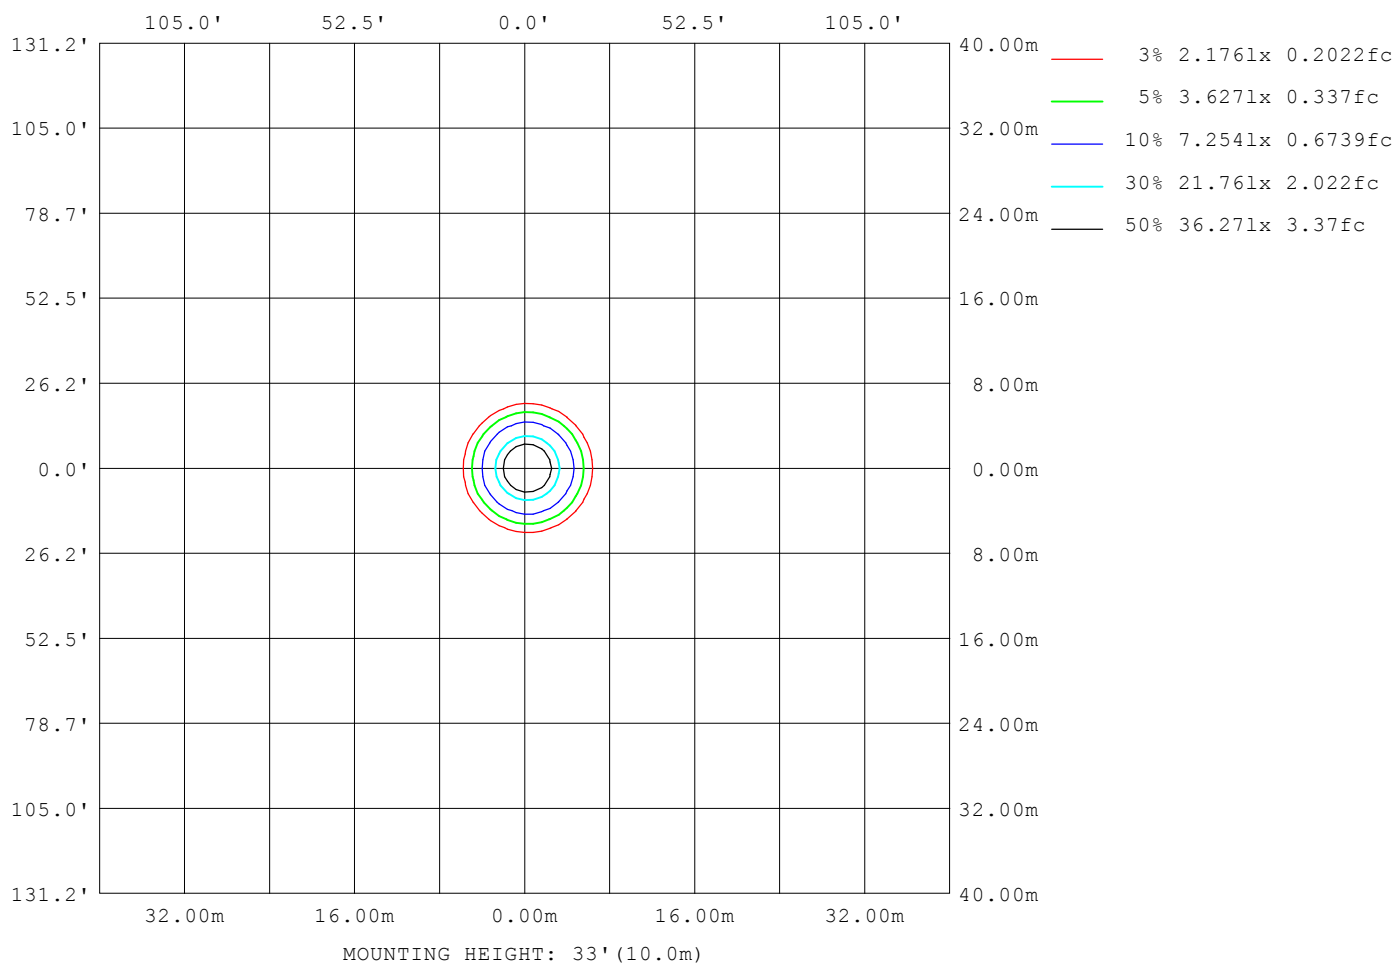

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-11-05

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LED Avg.L Report

Test:U:240.5V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.76% KDisp:0.9868 Lamp Flux:2064.36x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13765
L_0~180 (75) av	2971
L_0~180 (85) av	1171
L_90~270 (65) av	14344
L_90~270 (75) av	2850
L_90~270 (85) av	793
L_45 (65) av	13749
L_45 (75) av	2900
L_45 (85) av	876

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

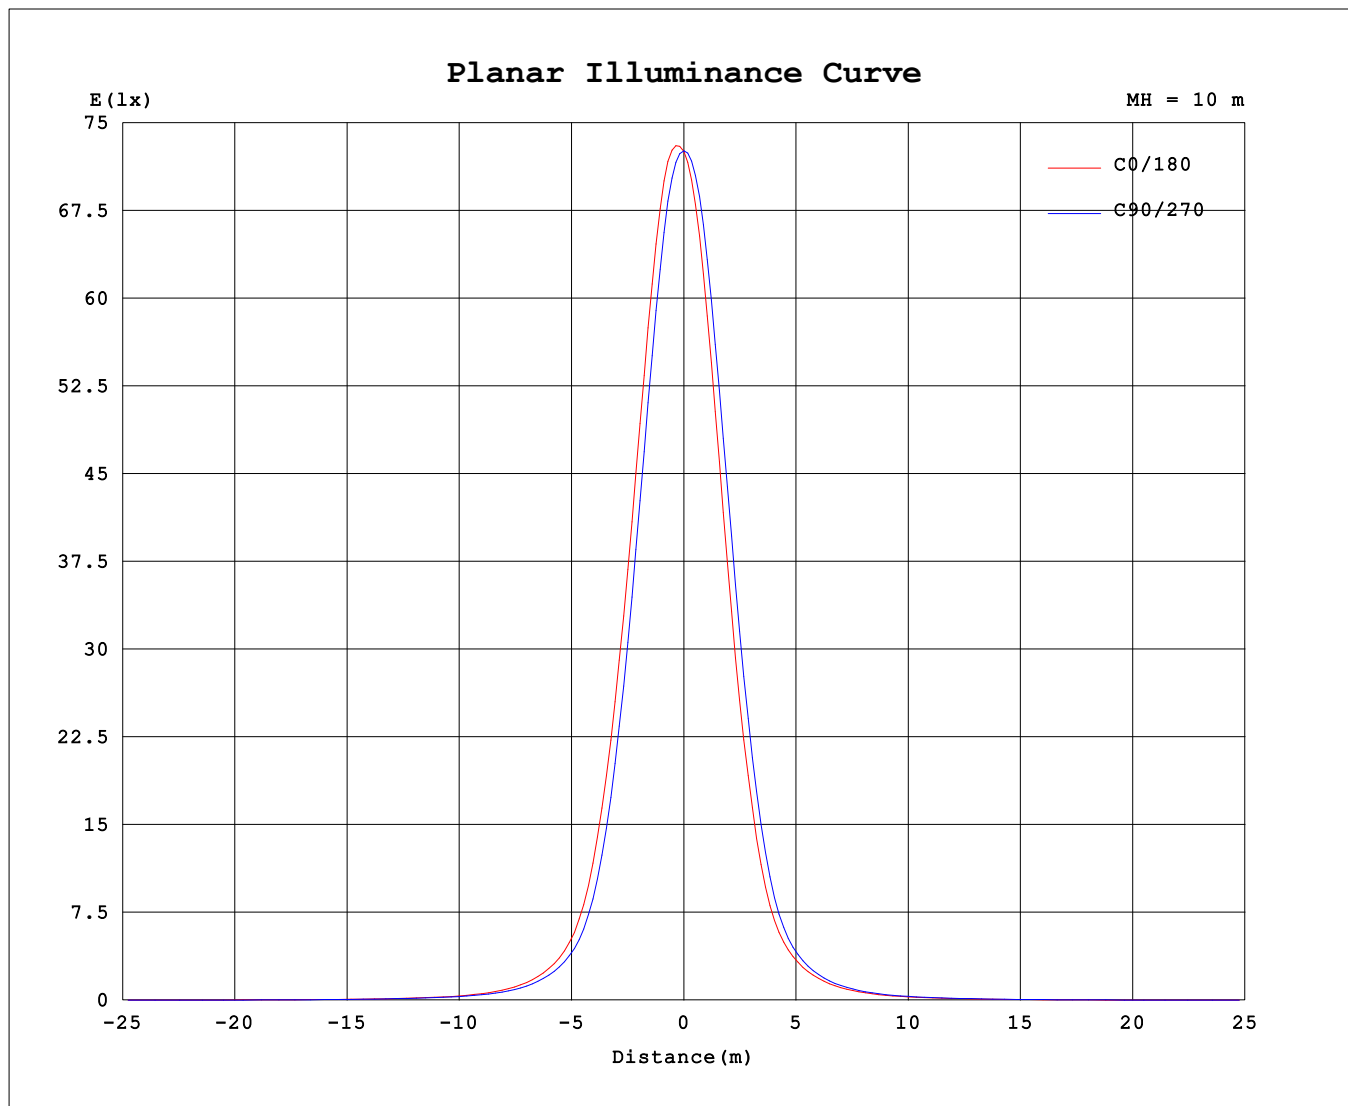

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-05

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	7257	7257	7257	7257	7257	7257	7257	7257
3.0	7299	7225	7055	6897	6834	6908	7076	7232
6.0	6880	6721	6349	6052	5947	6096	6432	6733
9.0	5966	5759	5299	4914	4779	4973	5407	5776
12.0	4816	4607	4116	3690	3551	3763	4238	4629
15.0	3647	3449	2978	2603	2472	2655	3069	3476
18.0	2586	2398	2014	1716	1609	1737	2074	2423
21.0	1716	1561	1276	1069	993.5	1070	1295	1568
24.0	1073	969.4	799.8	691.2	652.8	693.6	816.1	968.5
27.0	698.6	641.1	538.5	477.5	457.5	481.3	550.7	641.4
30.0	483.8	448.1	380.1	341.4	329.4	344.5	389.9	448.9
33.0	345.3	321.1	274.1	248.1	240.5	250.9	282.3	322.0
36.0	250.0	234.0	201.0	183.4	178.3	184.9	208.8	234.3
39.0	183.8	174.0	150.1	137.7	134.4	138.9	155.2	172.9
42.0	137.8	131.6	115.0	105.8	103.7	106.8	119.0	130.1
45.0	105.8	101.8	91.01	83.19	81.93	84.69	93.58	99.98
48.0	83.91	82.37	74.69	69.32	68.00	69.04	75.69	79.66
51.0	67.99	68.51	62.59	58.57	56.04	57.83	63.66	65.54
54.0	56.52	55.59	50.94	45.51	44.81	46.40	51.78	53.72
57.0	45.86	44.23	41.95	37.75	37.29	38.60	42.96	43.92
60.0	38.11	36.80	35.01	31.05	30.04	31.20	35.49	36.57
63.0	30.54	29.47	27.73	24.09	23.11	24.10	27.59	28.89
66.0	23.48	22.66	20.73	17.35	15.98	16.94	20.29	21.95
69.0	15.97	15.31	13.04	10.76	9.594	10.38	12.69	14.43
72.0	9.014	8.687	5.669	4.121	3.618	3.960	5.362	7.779
75.0	3.500	3.280	2.847	2.536	2.344	2.460	2.759	3.134
78.0	2.298	2.176	2.001	1.783	1.644	1.649	1.834	2.045
81.0	1.618	1.561	1.410	1.142	0.9736	1.020	1.239	1.420
84.0	0.9439	0.8497	0.5330	0.2521	0.2379	0.2151	0.3592	0.6550
87.0	0.2307	0.1843	0.1771	0.1013	0.0980	0.0848	0.1524	0.1580
90.0	0.0964	0.0621	0.0810	0.0534	0.0614	0.0546	0.0678	0.0485

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-05

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: