


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.77% KDisp:0.9868 Lamp Flux:2159.7lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.82 lm/W			
MODEL		I _{max} (cd)	7653	S/MH(C0/180)	0.41
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	0.45
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2159.7	η UP,DN(C0-180)	0.0,51.9
NOMINAL FLUX(lm)	2159.71	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.42	η down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

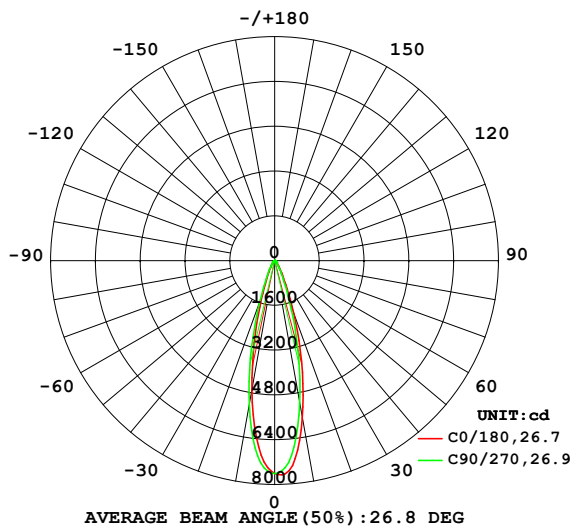

PLANAR ISOLUX DIAGRAM(UNIT:lx)

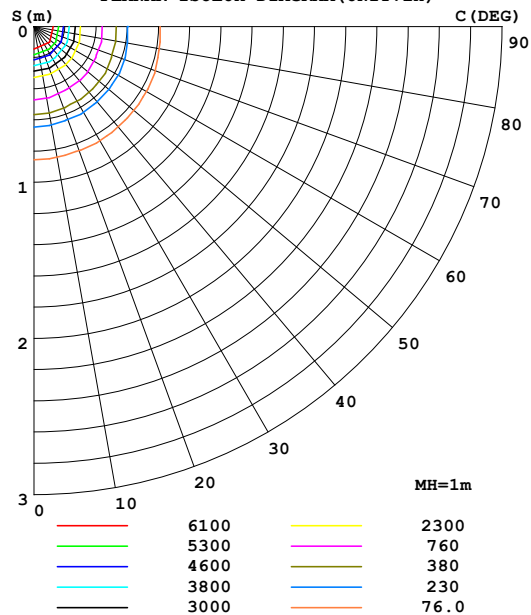

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5722	5573	5178	4824	4698	4866	5243	5555	0- 10	608.9	608.9	28.2,28.2
20	2021	1901	1597	1360	1254	1334	1575	1861	10- 20	870.2	1479	68.5,68.5
30	508.7	478.0	405.9	360.2	340.8	352.6	400.8	465.0	20- 30	374.0	1853	85.8,85.8
40	174.9	167.4	145.0	132.5	127.4	130.5	145.7	162.4	30- 40	157.0	2010	93.1,93.1
50	75.78	76.44	69.71	63.94	62.08	63.21	69.18	72.07	40- 50	77.15	2087	96.6,96.6
60	39.19	38.01	36.50	32.54	31.89	33.04	36.75	37.55	50- 60	44.97	2132	98.7,98.7
70	12.99	12.47	10.86	9.451	8.892	9.365	11.45	12.37	60- 70	22.75	2155	99.8,99.8
80	1.672	1.606	1.548	1.429	1.417	1.439	1.551	1.599	70- 80	4.174	2159	100,100
90	0.0797	0.0498	0.0832	0.0556	0.0601	0.0537	0.0697	0.0469	80- 90	0.5706	2160	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2054.4 lm

%lum = 95.1%

%lamp = 95.1%

Conical surface Flux(120deg): 2132.2 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.77% KDisp:0.9868 Lamp Flux:2159.71x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

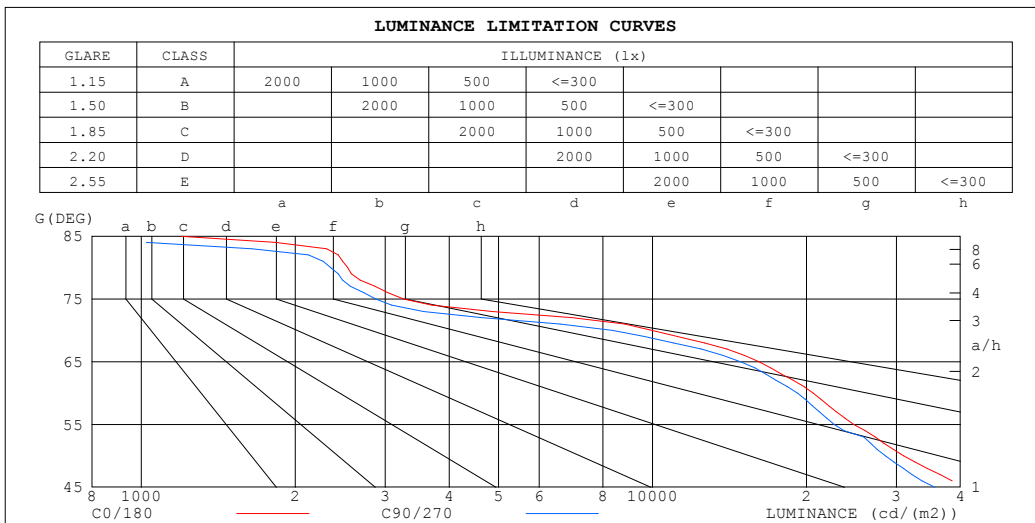


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.77% KDisp:0.9868 Lamp Flux:2159.71x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95														
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91														
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.86														
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83														
5.0	.91	.86	.83	.90	.86	.82	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79														
6.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.83	.80	.77	.76														
7.0	.84	.79	.76	.83	.79	.75	.82	.78	.75	.81	.77	.75	.80	.77	.74	.73														
8.0	.81	.76	.73	.80	.76	.72	.79	.75	.72	.78	.75	.72	.77	.74	.72	.70														
9.0	.78	.73	.70	.77	.73	.70	.76	.72	.70	.76	.72	.69	.75	.72	.69	.68														
10.0	.75	.71	.67	.75	.70	.67	.74	.70	.67	.73	.70	.67	.73	.69	.67	.66														

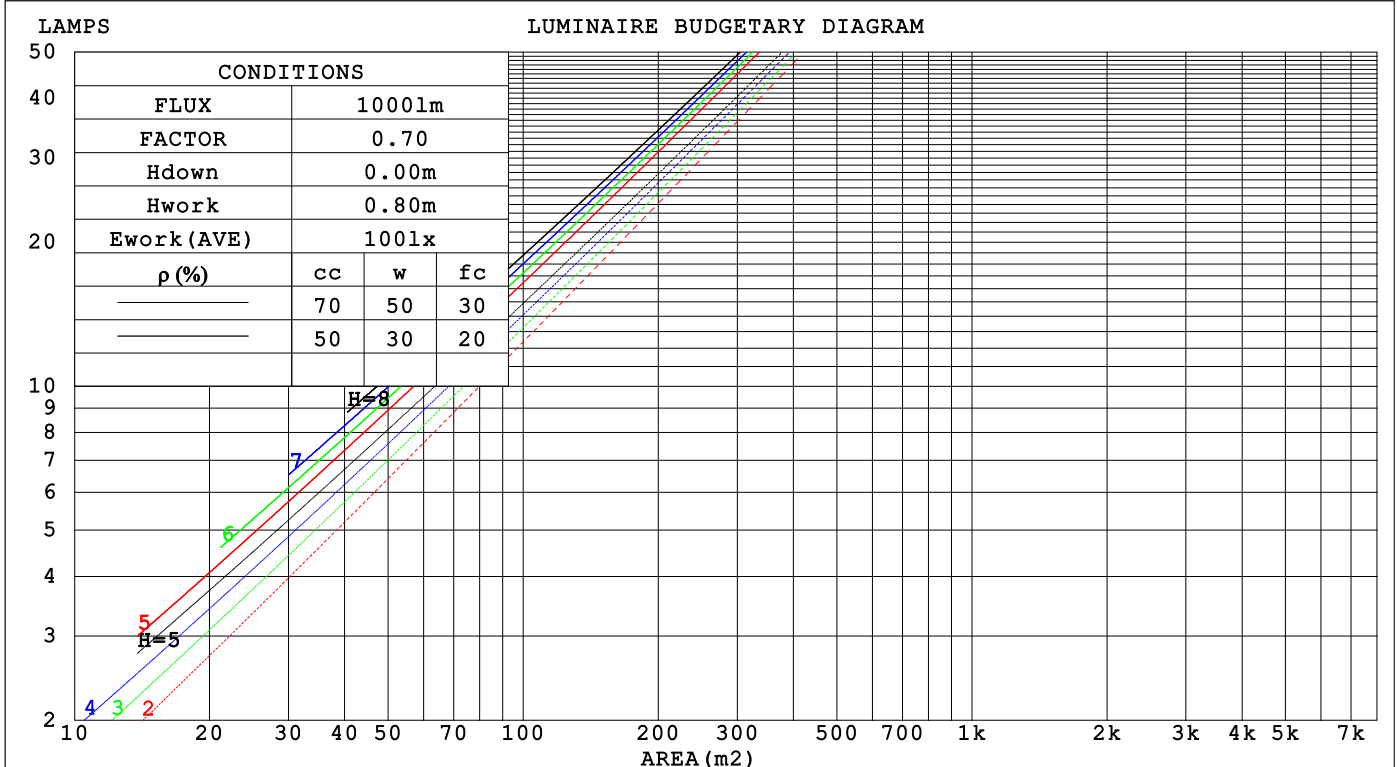

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.77% KDisp:0.9868 Lamp Flux:2159.71x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.154	.088	.028	.148	.084	.027	.135	.077	.025	.124	.071	.023	.113	.065	.021		
2.0	.145	.080	.024	.140	.077	.024	.129	.072	.022	.120	.067	.021	.111	.063	.020		
3.0	.136	.073	.022	.132	.071	.021	.123	.067	.020	.115	.063	.019	.107	.059	.018		
4.0	.128	.067	.020	.124	.065	.019	.117	.062	.019	.110	.059	.018	.104	.056	.017		
5.0	.121	.062	.018	.118	.060	.018	.111	.058	.017	.105	.056	.017	.100	.053	.016		
6.0	.115	.057	.016	.112	.056	.016	.106	.054	.016	.101	.052	.015	.096	.051	.015		
7.0	.109	.054	.015	.106	.053	.015	.101	.051	.015	.097	.050	.014	.093	.048	.014		
8.0	.104	.051	.014	.101	.050	.014	.097	.048	.014	.093	.047	.014	.089	.046	.013		
9.0	.099	.048	.013	.097	.047	.013	.093	.046	.013	.089	.045	.013	.086	.044	.013		
10.0	.095	.045	.013	.093	.045	.012	.089	.044	.012	.086	.043	.012	.083	.042	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011		
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.109	.077	.053	.093	.066	.047	.064	.046	.033	.037	.027	.020	.012	.009	.006		
7.0	.101	.069	.045	.087	.059	.040	.060	.042	.028	.035	.025	.017	.011	.008	.006		
8.0	.095	.062	.039	.082	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005		
9.0	.090	.056	.034	.077	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004		
10.0	.085	.052	.030	.073	.045	.026	.051	.032	.019	.030	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz UTHDi:0.18% ITHDi:5.77% KDisp:0.9868 Lamp Flux:2159.7lx1 lm											
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:						WEIGHT:					
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	19.1	19.9	19.3	20.0	20.2	18.6	19.3	18.8	19.5	19.6
	3H	19.3	20.0	19.6	20.2	20.4	18.8	19.5	19.0	19.7	19.9
	4H	19.3	19.9	19.5	20.2	20.4	18.7	19.4	19.0	19.6	19.8
	6H	19.2	19.8	19.5	20.1	20.3	18.6	19.3	18.9	19.5	19.7
	8H	19.2	19.8	19.5	20.0	20.3	18.6	19.2	18.9	19.4	19.7
	12H	19.1	19.7	19.4	20.0	20.2	18.5	19.1	18.9	19.4	19.7
4H	2H	19.2	19.9	19.4	20.1	20.3	18.7	19.4	19.0	19.6	19.8
	3H	19.4	20.0	19.8	20.3	20.6	18.9	19.5	19.2	19.8	20.1
	4H	19.4	19.9	19.7	20.2	20.5	18.9	19.4	19.2	19.7	20.0
	6H	19.3	19.8	19.7	20.1	20.4	18.8	19.3	19.2	19.6	19.9
	8H	19.3	19.7	19.6	20.0	20.4	18.7	19.2	19.1	19.5	19.9
	12H	19.2	19.6	19.6	20.0	20.4	18.7	19.1	19.1	19.5	19.9
8H	4H	19.3	19.7	19.6	20.0	20.4	18.8	19.2	19.1	19.5	19.9
	6H	19.2	19.5	19.6	19.9	20.3	18.7	19.0	19.1	19.4	19.8
	8H	19.1	19.5	19.6	19.9	20.3	18.6	18.9	19.1	19.4	19.8
	12H	19.1	19.4	19.5	19.8	20.3	18.6	18.8	19.0	19.3	19.8
12H	4H	19.2	19.6	19.6	20.0	20.4	18.7	19.1	19.1	19.5	19.9
	6H	19.1	19.4	19.6	19.9	20.3	18.6	18.9	19.1	19.4	19.8
	8H	19.1	19.4	19.5	19.8	20.3	18.6	18.8	19.0	19.3	19.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 1.5 / - 2.1					+ 1.3 / - 1.9					
1.5H	+ 2.4 / - 1.4					+ 1.7 / - 1.2					
2.0H	+ 2.1 / - 1.6					+ 1.7 / - 1.4					

CIE Pub.117, 2160 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.7$)
Area: 0.0038 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.77% KDisp:0.9868 Lamp Flux:2159.7lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	88	85	93	88	84	81
1.00	99	93	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.77% KDisp:0.9868 Lamp Flux:2159.7lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

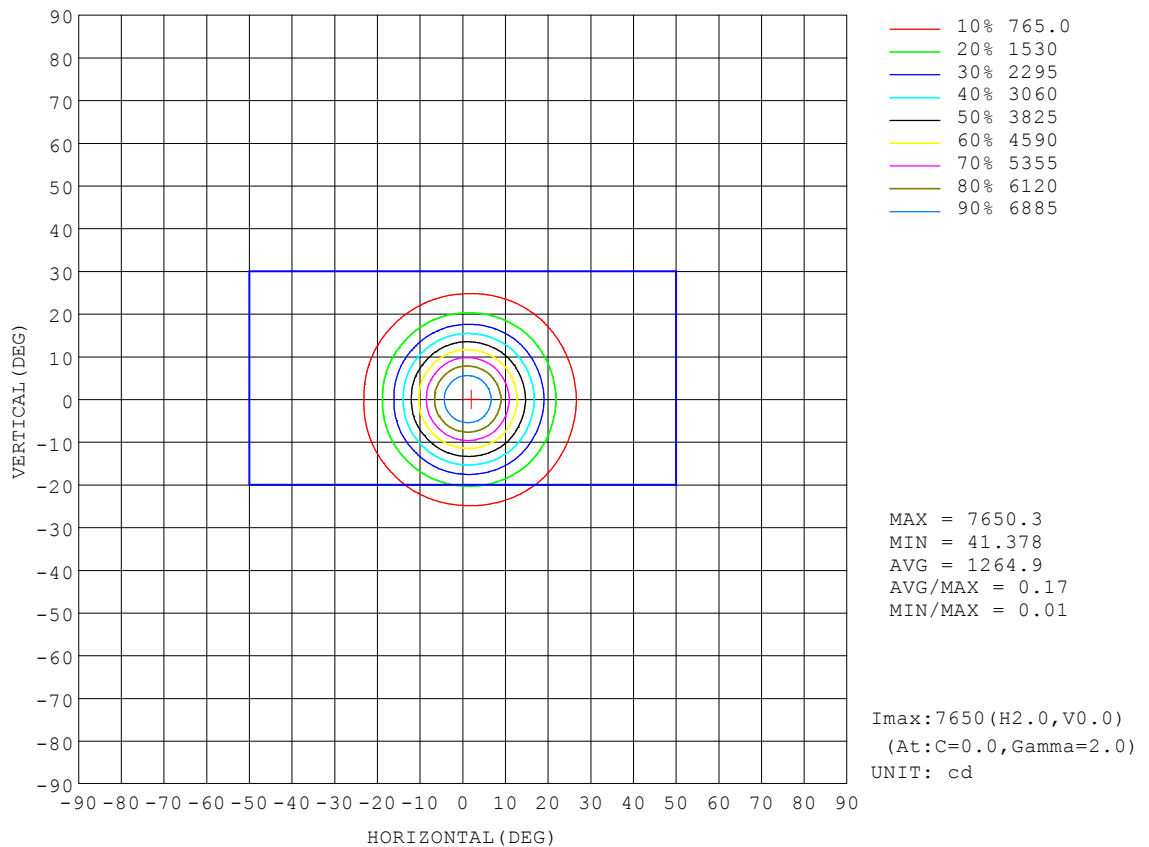


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.77% KDisp:0.9868		Lamp Flux:2159.7lx1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

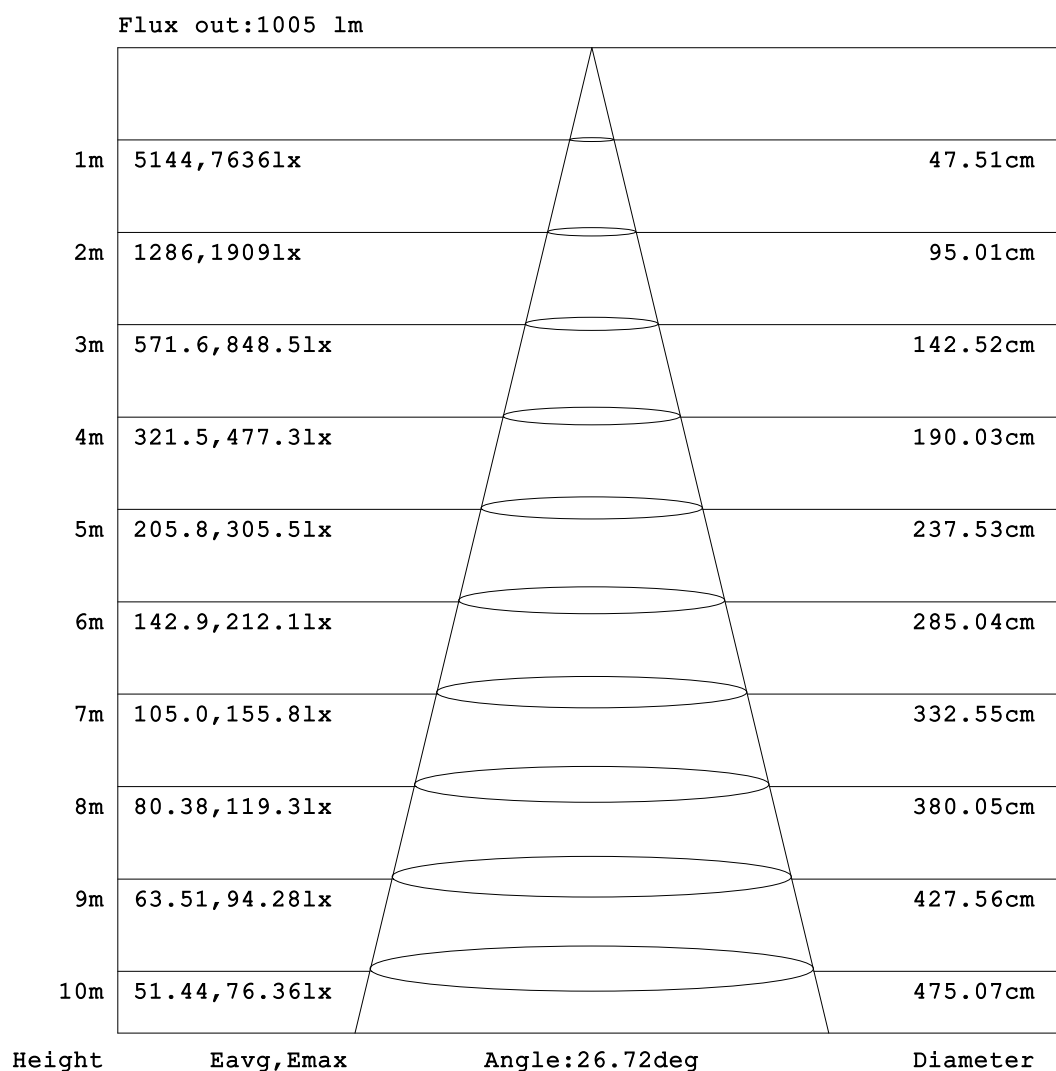


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.77% KDisp:0.9868		Lamp Flux:2159.7lx1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

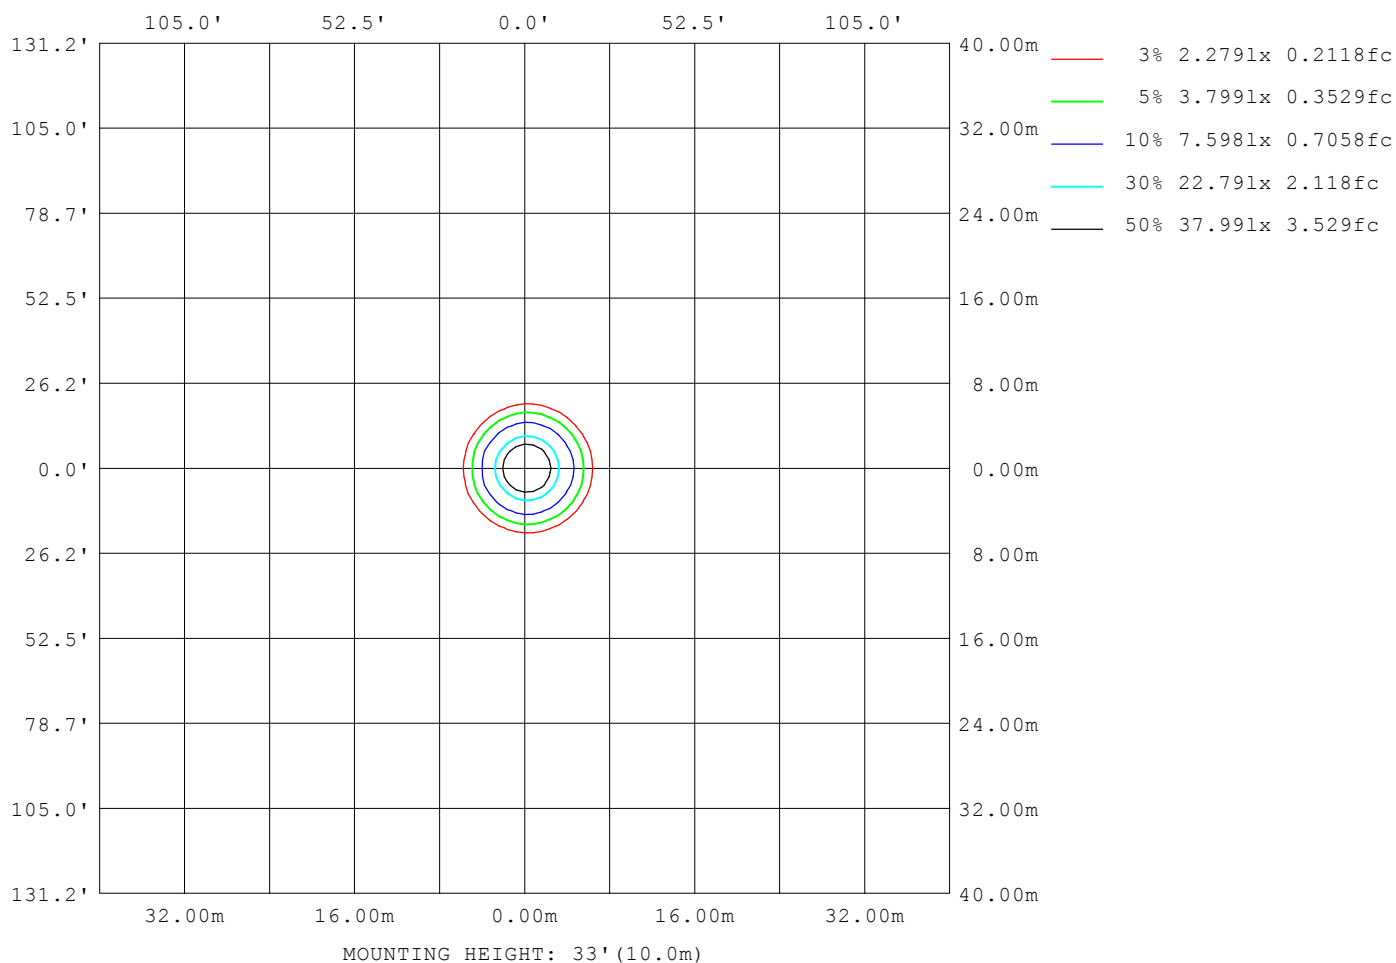

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz UTHDi:0.18% ITHDi:5.77% KDisp:0.9868 Lamp Flux:2159.7lx1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	14313
L_0~180 (75) av	2975
L_0~180 (85) av	952
L_90~270 (65) av	14854
L_90~270 (75) av	2914
L_90~270 (85) av	807
L_45 (65) av	14272
L_45 (75) av	2932
L_45 (85) av	753

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

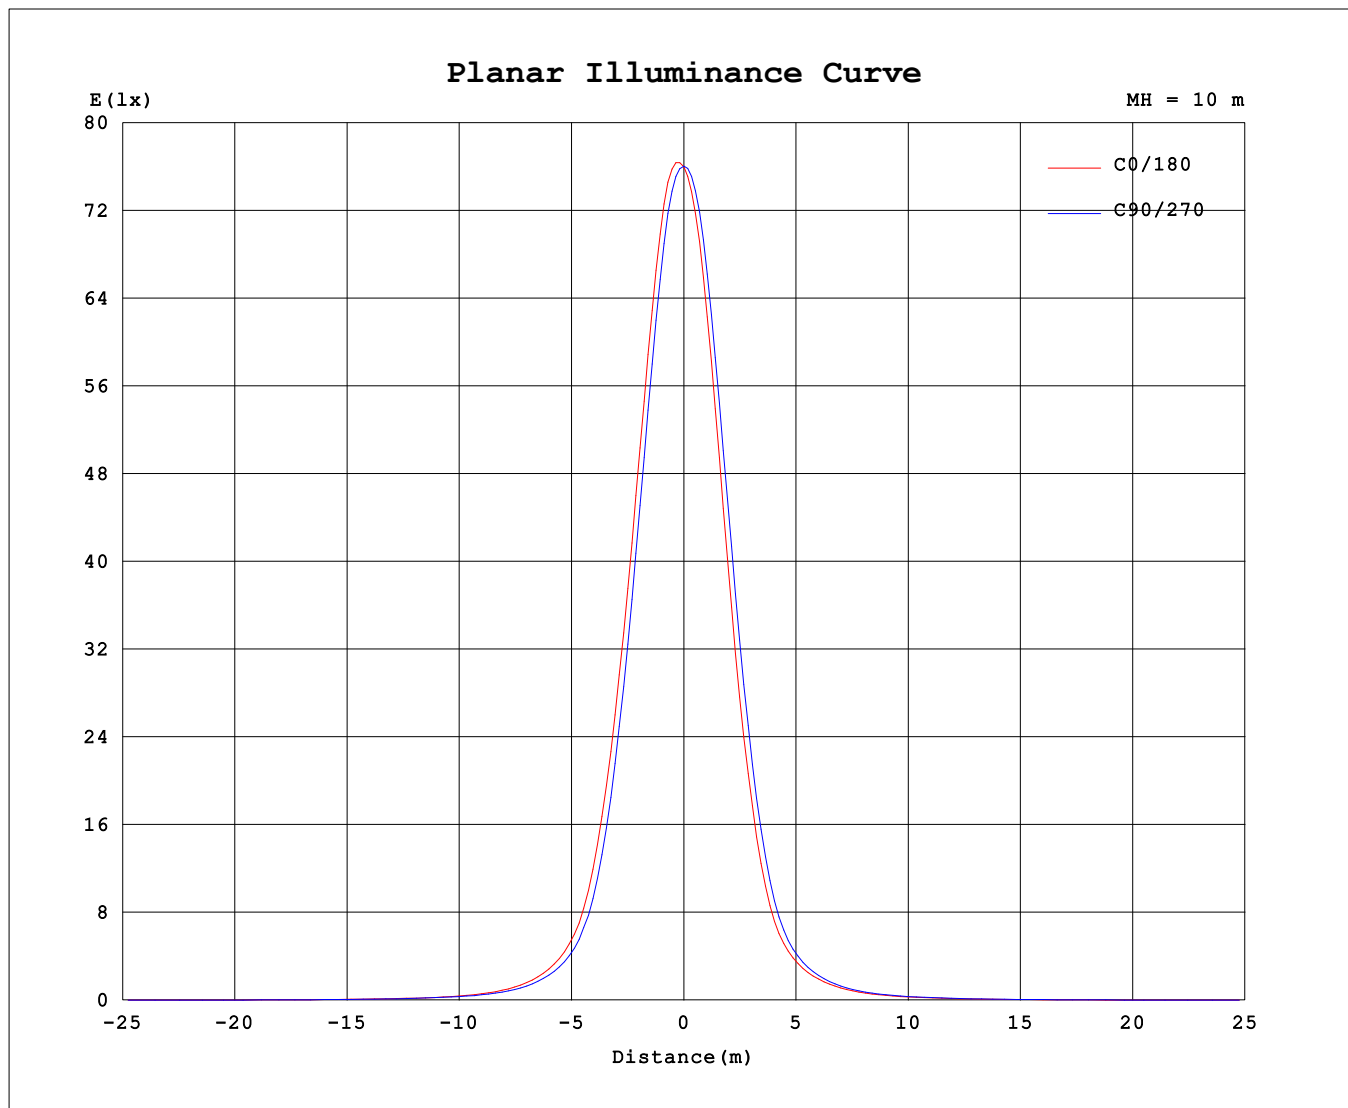

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	7600	7600	7600	7600	7600	7600	7600	7600
3.0	7612	7551	7402	7269	7206	7261	7405	7547
6.0	7104	6984	6676	6428	6337	6450	6726	6973
9.0	6114	5962	5582	5255	5135	5292	5647	5950
12.0	4917	4766	4353	3972	3832	4009	4419	4749
15.0	3718	3574	3170	2808	2664	2821	3193	3556
18.0	2637	2492	2149	1871	1733	1841	2138	2474
21.0	1747	1625	1364	1155	1060	1126	1338	1596
24.0	1102	1020	869.7	737.6	681.7	715.9	839.4	993.0
27.0	728.7	682.0	576.2	505.3	473.8	493.0	566.6	662.4
30.0	508.7	478.0	405.9	360.2	340.8	352.6	400.8	465.0
33.0	363.3	342.4	291.9	261.7	249.2	257.1	290.4	333.5
36.0	262.8	248.7	213.5	193.5	184.9	189.8	214.7	242.5
39.0	192.9	184.4	159.1	145.1	139.4	142.8	159.7	178.9
42.0	144.5	139.1	121.4	111.1	107.5	109.9	122.3	134.6
45.0	110.6	107.2	95.82	87.08	84.80	87.15	96.27	103.4
48.0	87.60	86.52	78.64	72.11	70.48	71.02	77.96	82.40
51.0	70.83	71.37	65.71	60.64	58.19	59.59	65.61	67.92
54.0	58.20	56.51	52.89	47.70	46.62	48.43	53.91	55.31
57.0	47.39	45.87	43.84	39.26	38.69	40.01	44.28	45.24
60.0	39.19	38.01	36.50	32.54	31.89	33.04	36.75	37.55
63.0	30.89	29.98	28.76	25.26	24.53	25.46	28.59	29.46
66.0	23.40	22.66	21.22	18.38	17.70	18.62	21.40	22.24
69.0	15.24	14.64	13.12	11.59	11.12	11.81	13.57	14.48
72.0	8.163	7.174	5.434	4.617	4.417	4.907	6.090	7.425
75.0	3.209	3.030	2.829	2.701	2.643	2.726	2.904	3.079
78.0	2.117	2.015	1.954	1.867	1.853	1.873	1.960	2.005
81.0	1.473	1.404	1.347	1.212	1.199	1.231	1.351	1.400
84.0	0.7269	0.5811	0.4061	0.2680	0.2818	0.2888	0.4906	0.6150
87.0	0.2068	0.1514	0.1626	0.1102	0.1214	0.1123	0.1751	0.1602
90.0	0.0797	0.0498	0.0832	0.0556	0.0601	0.0537	0.0697	0.0469

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: