


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2183.34x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.81 lm/W			
MODEL		Imax (cd)	2071	S/MH(C0/180)	0.89
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	0.94
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2183.3	η UP,DN(C0-180)	0.0,51.4
NOMINAL FLUX(lm)	2183.34	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	240.4	η down (%)	100.0	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

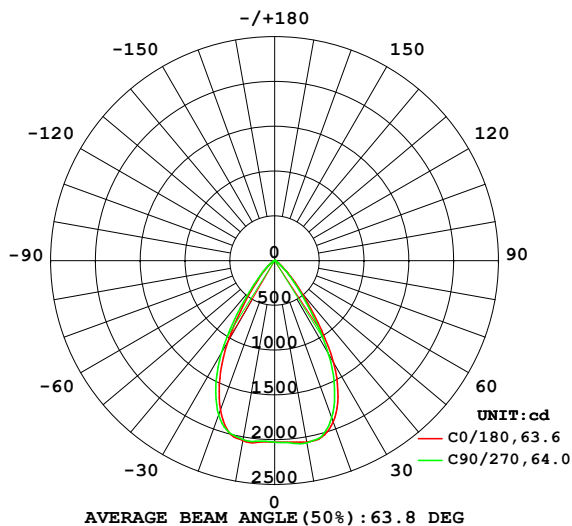

PLANAR ISOLUX DIAGRAM(UNIT:lx)

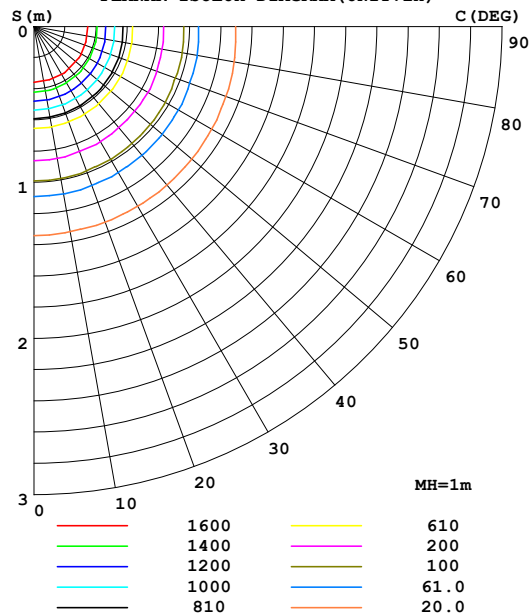

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2056	2071	2064	2052	2040	2039	2029	2043	0- 10	195.0	195.0	8.93,8.93
20	1912	1895	1866	1809	1772	1782	1830	1877	10- 20	559.5	754.4	34.6,34.6
30	1319	1290	1205	1108	1047	1089	1186	1262	20- 30	707.5	1462	67,67
40	482.3	460.9	413.3	360.2	332.8	342.6	398.6	444.5	30- 40	466.0	1928	88.3,88.3
50	139.5	131.7	115.3	100.6	93.86	95.59	108.8	123.8	40- 50	175.8	2104	96.4,96.4
60	36.15	35.92	33.02	29.05	26.35	27.55	32.14	33.09	50- 60	57.53	2161	99,99
70	9.841	9.621	8.915	8.584	8.009	8.044	8.713	9.232	60- 70	17.22	2179	99.8,99.8
80	1.821	1.813	1.749	1.671	1.644	1.656	1.732	1.772	70- 80	4.179	2183	100,100
90	0.0687	0.0495	0.0656	0.0527	0.0559	0.0514	0.0591	0.0498	80- 90	0.5955	2183	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2039.2 lm

%lum = 93.4%

%lamp = 93.4%

Conical surface Flux(120deg): 2161.3 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2183.34x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

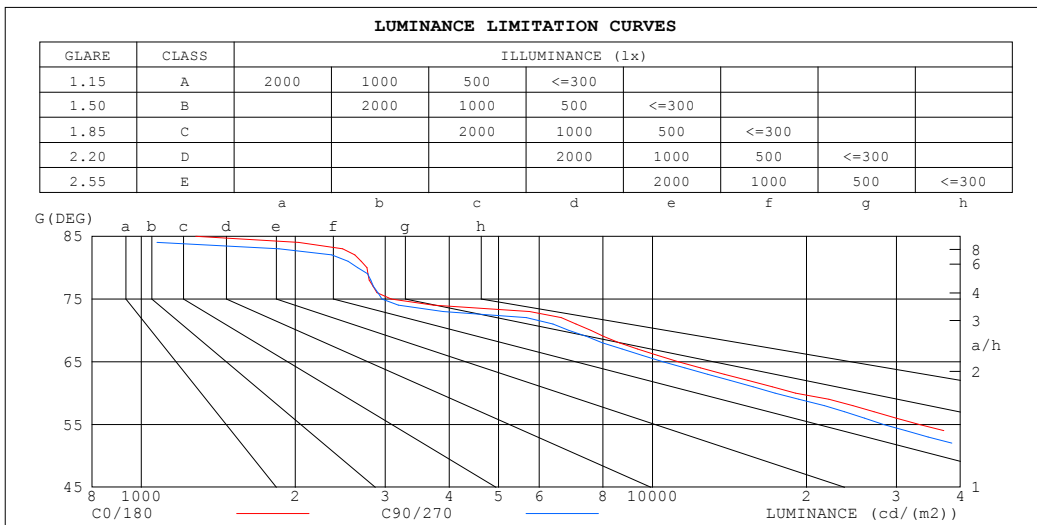


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2183.34x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93														
2.0	1.02	.98	.94	1.00	.97	.93	.97	.94	.91	.94	.92	.89	.91	.89	.87	.86														
3.0	.95	.90	.85	.93	.89	.85	.91	.87	.83	.88	.85	.82	.86	.83	.81	.79														
4.0	.88	.82	.78	.87	.82	.77	.85	.80	.77	.83	.79	.76	.81	.78	.75	.73														
5.0	.82	.76	.72	.81	.76	.71	.79	.74	.71	.78	.73	.70	.76	.72	.69	.68														
6.0	.77	.71	.66	.76	.70	.66	.74	.69	.65	.73	.68	.65	.72	.68	.64	.63														
7.0	.72	.66	.61	.71	.65	.61	.70	.65	.61	.69	.64	.60	.68	.63	.60	.59														
8.0	.67	.61	.57	.67	.61	.57	.66	.60	.57	.65	.60	.56	.64	.59	.56	.55														
9.0	.63	.57	.53	.63	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.51														
10.0	.60	.54	.50	.59	.54	.50	.59	.53	.50	.58	.53	.49	.57	.53	.49	.48														

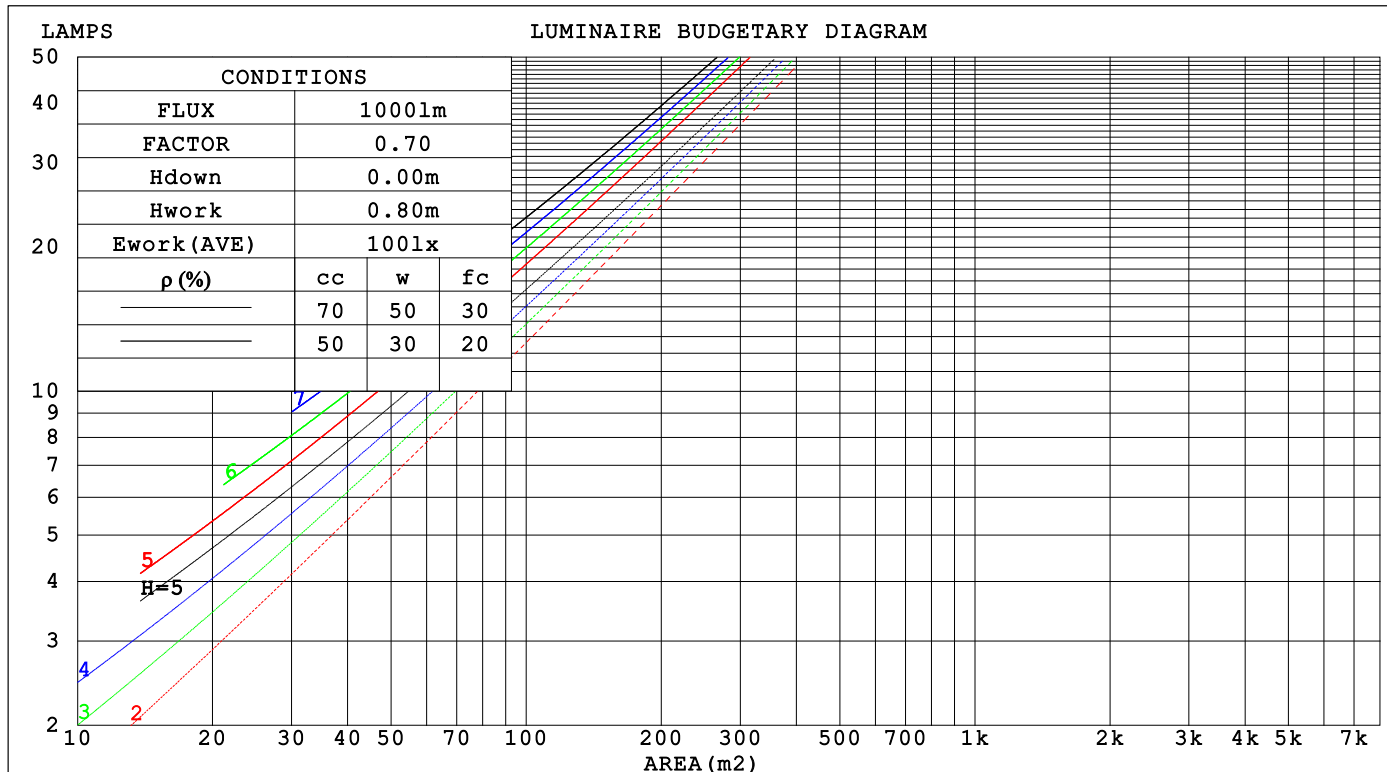

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2183.34x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 70mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.186	.106	.033	.179	.102	.032	.166	.095	.030	.155	.089	.029	.144	.083	.027		
2.0	.179	.098	.030	.173	.095	.029	.163	.090	.028	.153	.086	.027	.144	.081	.026		
3.0	.171	.091	.027	.166	.089	.027	.157	.085	.026	.148	.081	.025	.141	.078	.024		
4.0	.163	.085	.025	.159	.083	.025	.151	.080	.024	.143	.077	.023	.137	.074	.023		
5.0	.155	.079	.023	.152	.078	.023	.145	.075	.022	.138	.073	.022	.132	.071	.021		
6.0	.148	.074	.021	.145	.073	.021	.139	.071	.021	.133	.069	.020	.128	.067	.020		
7.0	.142	.070	.020	.139	.069	.020	.133	.067	.019	.128	.066	.019	.123	.064	.019		
8.0	.135	.066	.019	.133	.065	.018	.128	.064	.018	.123	.062	.018	.119	.061	.018		
9.0	.130	.063	.017	.127	.062	.017	.123	.061	.017	.119	.060	.017	.115	.058	.017		
10.0	.124	.060	.017	.122	.059	.016	.118	.058	.016	.114	.057	.016	.111	.056	.016		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016		
2.0	.157	.132	.112	.135	.114	.097	.092	.079	.067	.053	.046	.039	.017	.015	.013		
3.0	.145	.114	.088	.125	.098	.077	.086	.068	.054	.049	.040	.032	.016	.013	.010		
4.0	.136	.099	.071	.116	.086	.062	.080	.060	.044	.046	.035	.026	.015	.011	.008		
5.0	.127	.088	.058	.109	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007		
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006		
7.0	.114	.071	.041	.098	.062	.036	.068	.043	.025	.039	.025	.015	.013	.008	.005		
8.0	.108	.065	.035	.093	.056	.031	.064	.040	.022	.037	.023	.013	.012	.008	.004		
9.0	.103	.060	.030	.089	.052	.027	.062	.036	.019	.036	.022	.011	.012	.007	.004		
10.0	.099	.055	.027	.085	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz UTHDi:0.16% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2183.34x1 lm										
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.6	25.6	24.8	25.8	25.9	24.1	25.1	24.3	25.2	25.4
3H	24.4	25.4	24.7	25.6	25.8	23.9	24.9	24.2	25.1	25.3
4H	24.4	25.2	24.6	25.5	25.7	23.8	24.7	24.1	24.9	25.2
6H	24.3	25.1	24.6	25.3	25.6	23.8	24.6	24.1	24.8	25.1
8H	24.2	25.0	24.5	25.3	25.5	23.7	24.5	24.0	24.8	25.0
12H	24.2	24.9	24.5	25.2	25.5	23.7	24.4	24.0	24.7	25.0
4H 2H	24.4	25.2	24.7	25.5	25.7	23.9	24.7	24.1	25.0	25.2
3H	24.2	25.0	24.6	25.3	25.5	23.7	24.5	24.1	24.8	25.0
4H	24.2	24.8	24.5	25.1	25.5	23.7	24.3	24.0	24.6	24.9
6H	24.1	24.7	24.5	25.0	25.3	23.6	24.2	23.9	24.5	24.8
8H	24.0	24.6	24.4	24.9	25.3	23.5	24.1	23.9	24.4	24.8
12H	24.0	24.5	24.4	24.9	25.2	23.5	24.0	23.9	24.3	24.7
8H 4H	24.0	24.6	24.4	24.9	25.3	23.5	24.1	23.9	24.4	24.8
6H	23.9	24.4	24.4	24.8	25.2	23.4	23.9	23.9	24.3	24.7
8H	23.9	24.3	24.3	24.7	25.1	23.4	23.8	23.8	24.2	24.6
12H	23.8	24.2	24.3	24.6	25.1	23.3	23.7	23.8	24.1	24.6
12H 4H	24.0	24.5	24.4	24.9	25.2	23.5	24.0	23.9	24.3	24.7
6H	23.9	24.3	24.3	24.7	25.1	23.4	23.8	23.8	24.2	24.6
8H	23.8	24.2	24.3	24.6	25.1	23.3	23.7	23.8	24.1	24.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / - 6.8					+ 2.5 / - 6.8				
1.5H	+ 4.2 / - 5.1					+ 3.9 / - 4.7				
2.0H	+ 5.1 / - 6.1					+ 4.6 / - 5.6				

CIE Pub.117, 2183 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.7)
Area: 0.0038 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2183.34x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	81	90	85	81	77
1.00	97	91	87	96	91	87	95	91	86	82
1.25	102	96	92	101	95	92	99	94	91	87
1.50	105	99	96	103	99	95	101	97	94	90
2.00	108	103	100	106	102	99	103	100	98	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz UTHDi:0.16% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2183.34x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

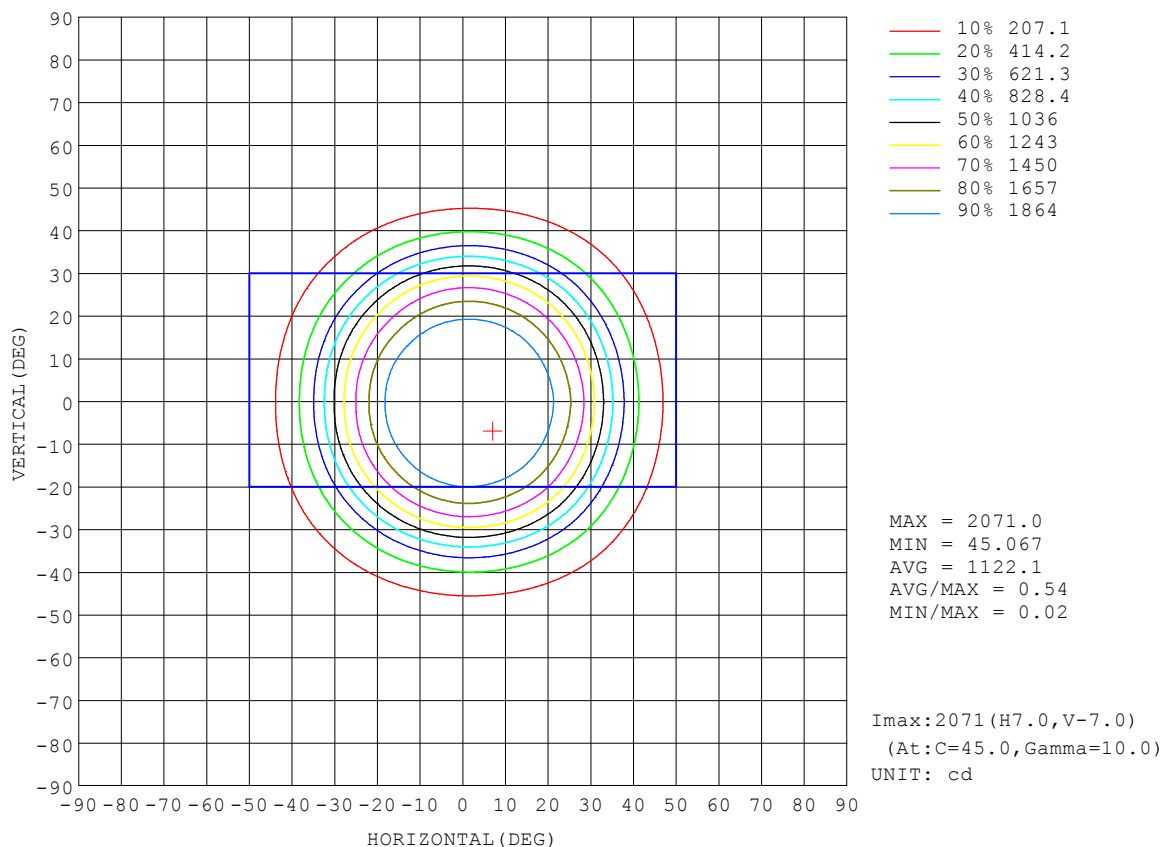


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.77% KDisp:0.9869		Lamp Flux:2183.34x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

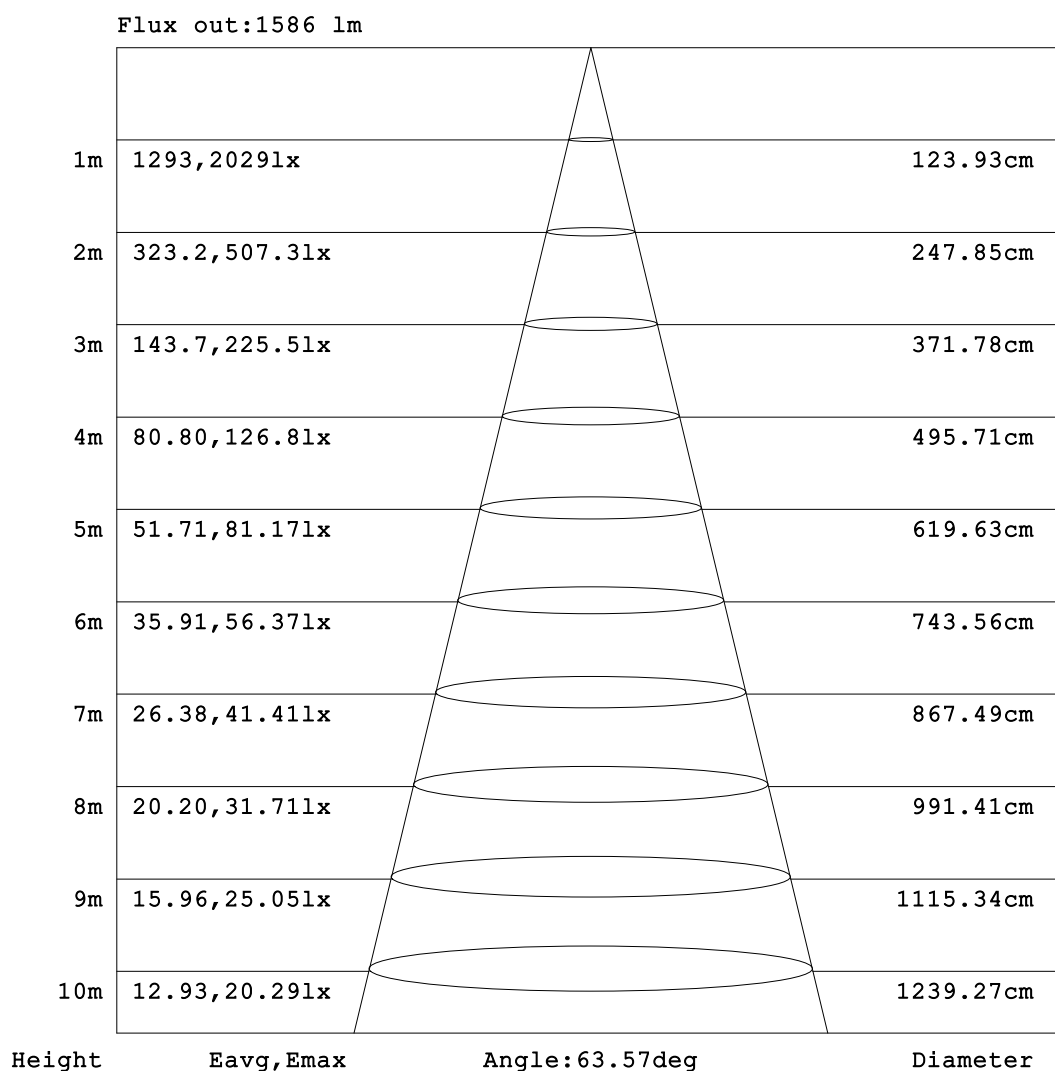


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.77% KDisp:0.9869		Lamp Flux:2183.34x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

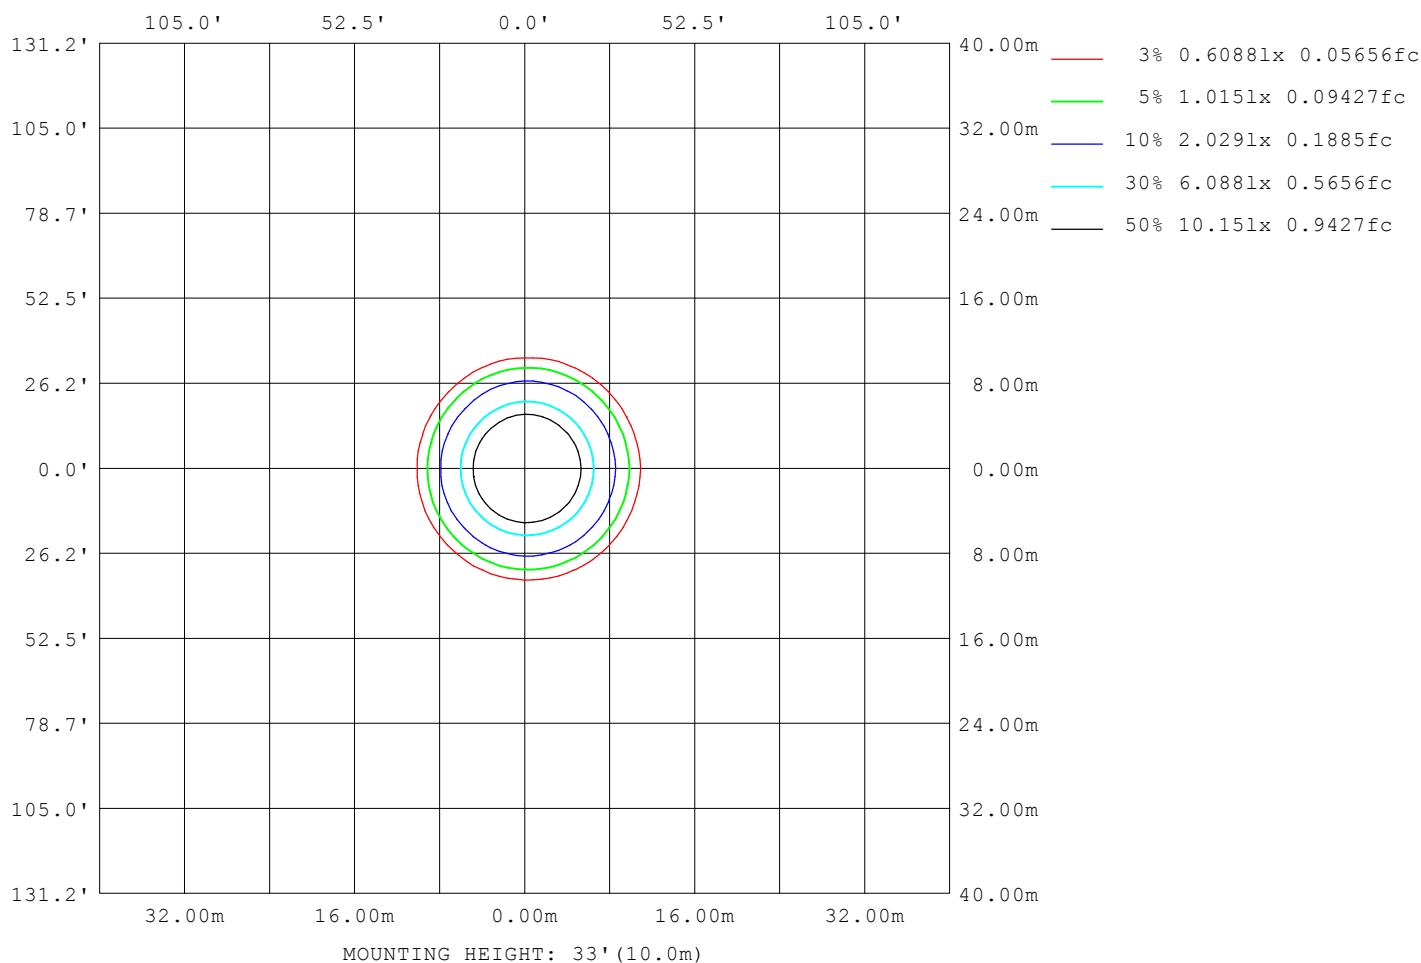

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0847A P:20.1W PF:0.9852 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2183.34x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 3000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9910
L_0~180 (75) av	3035
L_0~180 (85) av	872
L_90~270 (65) av	10265
L_90~270 (75) av	2922
L_90~270 (85) av	594
L_45 (65) av	9871
L_45 (75) av	2953
L_45 (85) av	670

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

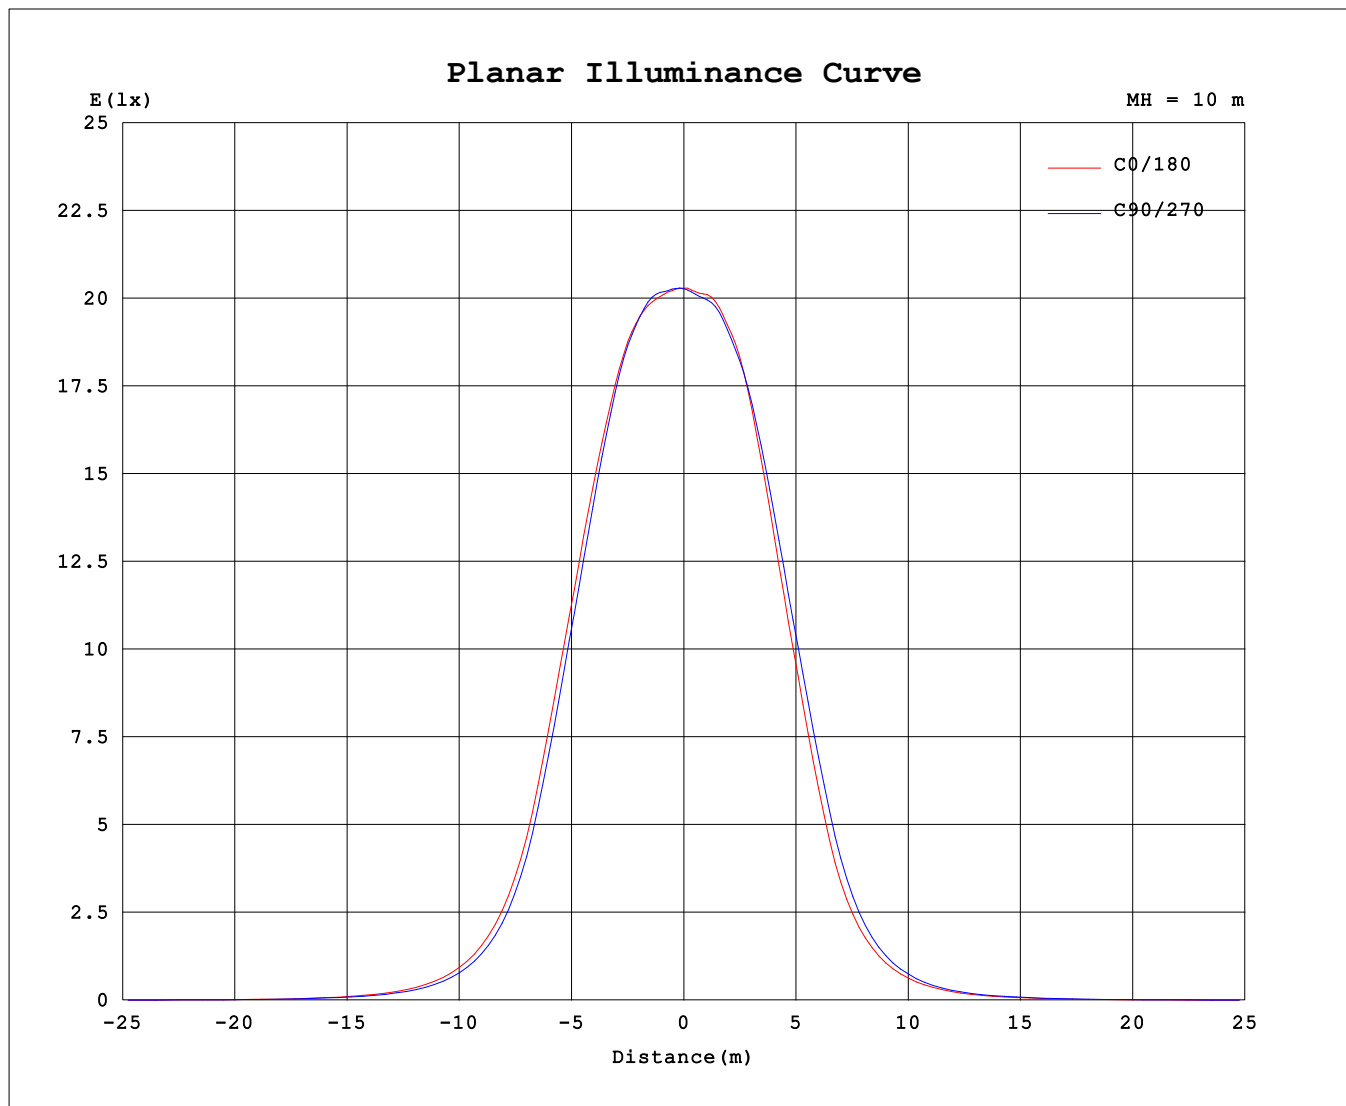

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-11-05

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	2028	2028	2028	2028	2028	2028	2028	2028
3.0	2028	2035	2035	2032	2025	2021	2021	2025
6.0	2037	2049	2051	2051	2042	2034	2029	2031
9.0	2053	2068	2065	2059	2047	2044	2034	2043
12.0	2058	2065	2055	2038	2027	2025	2012	2034
15.0	2040	2037	2030	1998	1984	1983	1984	2007
18.0	1978	1962	1946	1899	1871	1877	1907	1942
21.0	1875	1856	1819	1757	1715	1728	1784	1835
24.0	1735	1707	1650	1573	1519	1536	1621	1677
27.0	1547	1519	1450	1362	1305	1332	1423	1480
30.0	1319	1290	1205	1108	1047	1089	1186	1262
33.0	1035	1018	928.1	831.8	773.3	816.7	914.4	990.9
36.0	758.3	741.7	665.5	585.7	541.9	569.3	653.2	721.2
39.0	541.9	520.8	466.5	407.1	377.4	389.5	453.7	503.6
42.0	380.2	359.6	323.6	280.9	259.5	267.5	309.0	346.4
45.0	263.5	248.6	221.5	193.1	178.8	183.4	211.8	238.5
48.0	180.8	170.3	150.0	130.7	121.7	124.3	141.3	161.6
51.0	122.5	115.7	101.1	88.53	82.41	84.99	95.92	108.5
54.0	82.91	78.96	69.91	61.28	56.91	58.54	66.17	73.25
57.0	56.08	54.88	49.14	43.80	40.40	41.97	47.33	50.46
60.0	36.15	35.92	33.02	29.05	26.35	27.55	32.14	33.09
63.0	23.79	23.75	22.11	19.57	17.63	18.21	21.16	21.66
66.0	15.81	15.70	14.75	13.32	12.28	12.40	14.14	14.44
69.0	10.93	10.83	10.14	9.602	8.926	8.968	9.732	10.32
72.0	7.773	7.542	6.657	5.710	4.865	5.220	6.570	7.300
75.0	3.031	2.986	2.907	2.920	2.940	2.860	2.840	2.852
78.0	2.203	2.203	2.222	2.222	2.220	2.193	2.178	2.164
81.0	1.598	1.575	1.508	1.390	1.346	1.373	1.486	1.540
84.0	0.8050	0.7159	0.4261	0.2017	0.1938	0.2048	0.4133	0.6626
87.0	0.1619	0.1306	0.1240	0.0889	0.0887	0.0904	0.1282	0.1315
90.0	0.0687	0.0495	0.0656	0.0527	0.0559	0.0514	0.0591	0.0498

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-11-05

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: