


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2285.04x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.06 lm/W			
MODEL		I <sub>max</sub> (cd)	2183	S/MH(C0/180)	0.87
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	0.94
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2285.0	η UP,DN(C0-180)	0.0,52.1
NOMINAL FLUX(lm)	2285.04	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,47.9
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	240.42	η down(%)	100.0	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

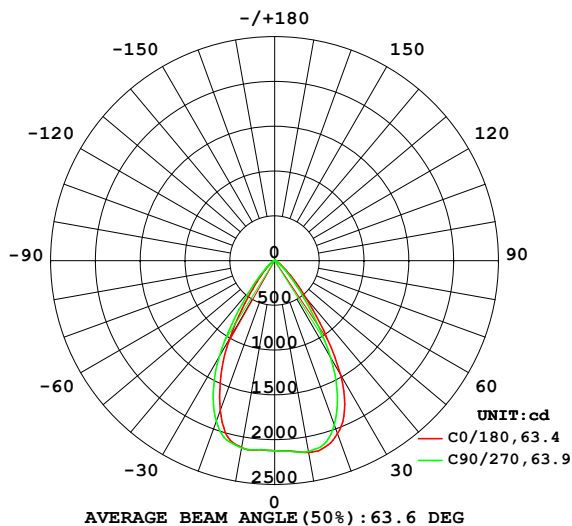

PLANAR ISOLUX DIAGRAM(UNIT:lx)

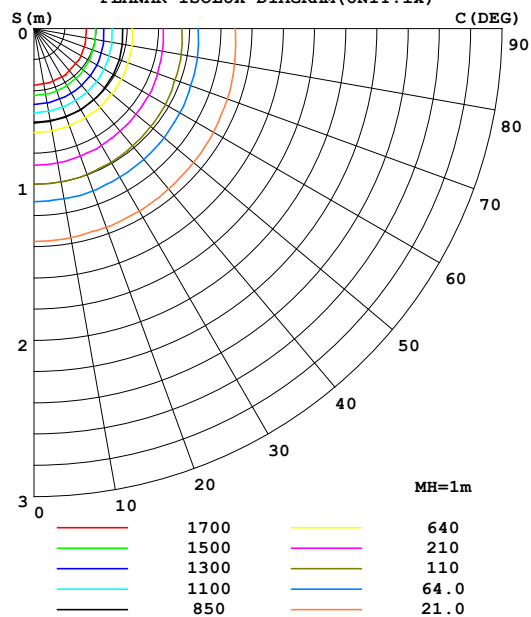

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	2173	2183	2163	2141	2119	2122	2123	2153	0- 10	204.2	204.2	8.94,8.94
20	2055	2024	1951	1840	1777	1811	1911	2008	10- 20	584.6	788.8	34.5,34.5
30	1472	1414	1256	1099	1014	1078	1239	1388	20- 30	739.2	1528	66.9,66.9
40	555.6	516.0	427.8	348.6	309.9	330.3	415.4	497.9	30- 40	488.7	2017	88.3,88.3
50	163.3	149.2	119.0	96.33	86.47	92.96	113.1	139.4	40- 50	185.0	2202	96.4,96.4
60	40.21	39.13	33.93	28.49	25.15	26.96	33.28	36.03	50- 60	60.41	2262	99,99
70	10.67	10.31	9.286	8.804	8.225	8.355	9.069	9.924	60- 70	17.94	2280	99.8,99.8
80	1.854	1.848	1.814	1.785	1.775	1.784	1.822	1.816	70- 80	4.385	2284	100,100
90	0.0741	0.0553	0.0688	0.0547	0.0578	0.0546	0.0604	0.0508	80- 90	0.6176	2285	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2133.7 lm

%lum = 93.4%

%lamp = 93.4%

Conical surface Flux(120deg): 2262.1 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2285.04x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

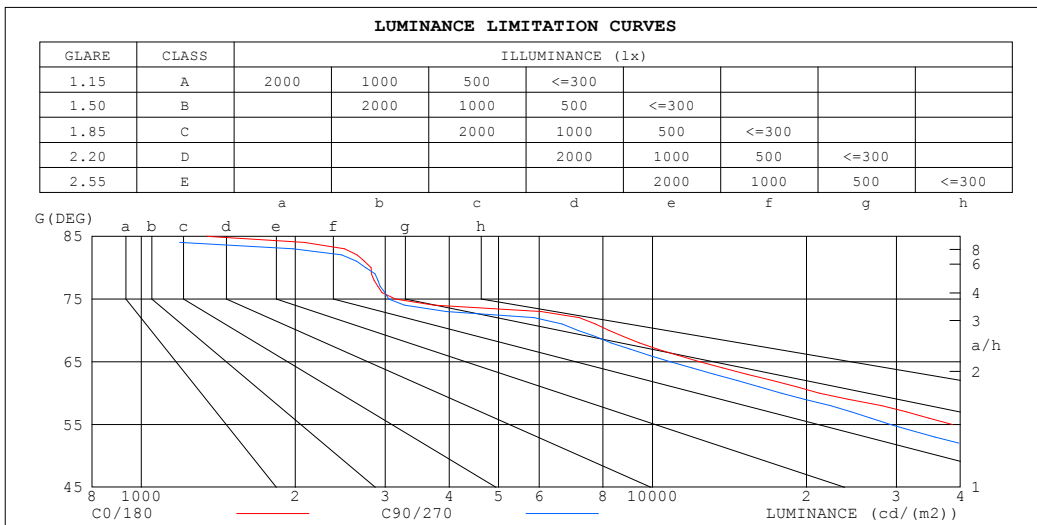


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2285.04x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

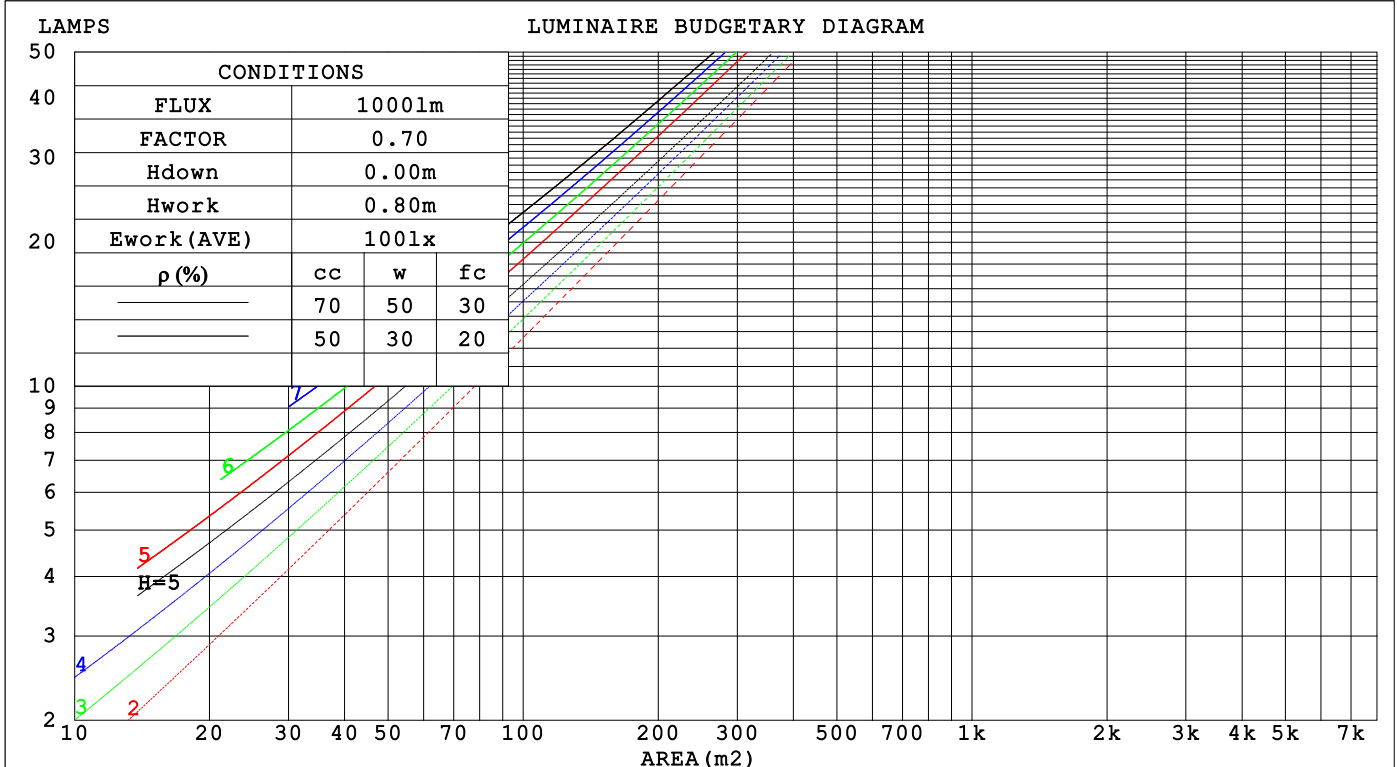

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2285.04x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 70mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.186	.106	.033	.179	.102	.032	.166	.095	.030	.155	.089	.029	.144	.083	.027		
2.0	.179	.098	.030	.173	.095	.029	.163	.090	.028	.153	.086	.027	.144	.081	.026		
3.0	.171	.091	.027	.166	.089	.027	.157	.085	.026	.149	.081	.025	.141	.078	.024		
4.0	.163	.085	.025	.159	.083	.025	.151	.080	.024	.144	.077	.023	.137	.074	.023		
5.0	.155	.079	.023	.152	.078	.023	.145	.075	.022	.138	.073	.022	.132	.071	.021		
6.0	.148	.074	.021	.145	.073	.021	.139	.071	.021	.133	.069	.020	.128	.067	.020		
7.0	.142	.070	.020	.139	.069	.020	.133	.067	.019	.128	.066	.019	.123	.064	.019		
8.0	.135	.066	.019	.133	.065	.018	.128	.064	.018	.123	.063	.018	.119	.061	.018		
9.0	.130	.063	.018	.127	.062	.017	.123	.061	.017	.119	.060	.017	.115	.058	.017		
10.0	.124	.060	.017	.122	.059	.016	.118	.058	.016	.114	.057	.016	.111	.056	.016		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016		
2.0	.157	.132	.112	.135	.114	.097	.092	.079	.067	.053	.046	.039	.017	.015	.013		
3.0	.145	.114	.088	.125	.098	.077	.086	.068	.054	.049	.040	.032	.016	.013	.010		
4.0	.136	.099	.071	.116	.086	.062	.080	.060	.044	.046	.035	.026	.015	.011	.008		
5.0	.127	.088	.058	.109	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007		
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006		
7.0	.114	.071	.041	.098	.062	.036	.068	.043	.025	.039	.025	.015	.013	.008	.005		
8.0	.108	.065	.035	.093	.056	.031	.064	.040	.022	.037	.023	.013	.012	.008	.004		
9.0	.103	.060	.030	.089	.052	.027	.062	.036	.019	.036	.022	.011	.012	.007	.004		
10.0	.099	.055	.027	.085	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz UTHDi:0.17% ITHDi:5.77% KDisp:0.9869Lamp Flux:2285.04x1 lm										
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.3	25.5	26.4	26.6	24.4	25.4	24.6	25.6	25.7
3H	25.1	26.0	25.4	26.2	26.5	24.2	25.2	24.5	25.4	25.6
4H	25.0	25.9	25.3	26.1	26.4	24.2	25.0	24.4	25.2	25.5
6H	24.9	25.8	25.3	26.0	26.3	24.1	24.9	24.4	25.1	25.4
8H	24.9	25.7	25.2	25.9	26.2	24.0	24.8	24.3	25.1	25.3
12H	24.9	25.6	25.2	25.9	26.2	24.0	24.7	24.3	25.0	25.3
4H 2H	25.0	25.9	25.3	26.1	26.4	24.2	25.1	24.5	25.3	25.5
3H	24.9	25.7	25.2	25.9	26.2	24.1	24.8	24.4	25.1	25.4
4H	24.8	25.5	25.2	25.8	26.1	24.0	24.6	24.3	24.9	25.3
6H	24.7	25.3	25.1	25.7	26.0	23.9	24.5	24.3	24.8	25.2
8H	24.7	25.2	25.1	25.6	26.0	23.8	24.4	24.2	24.7	25.1
12H	24.6	25.1	25.1	25.5	25.9	23.8	24.3	24.2	24.7	25.0
8H 4H	24.7	25.2	25.1	25.6	26.0	23.8	24.4	24.2	24.7	25.1
6H	24.6	25.0	25.0	25.4	25.9	23.7	24.2	24.2	24.6	25.0
8H	24.5	24.9	25.0	25.4	25.8	23.7	24.1	24.1	24.5	24.9
12H	24.5	24.8	25.0	25.3	25.7	23.6	24.0	24.1	24.4	24.9
12H 4H	24.6	25.1	25.1	25.5	25.9	23.8	24.3	24.2	24.7	25.0
6H	24.5	24.9	25.0	25.4	25.8	23.7	24.1	24.1	24.5	24.9
8H	24.5	24.8	25.0	25.3	25.7	23.6	24.0	24.1	24.4	24.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / - 6.8					+ 2.4 / - 7.0				
1.5H	+ 4.2 / - 5.1					+ 3.7 / - 4.6				
2.0H	+ 5.2 / - 6.6					+ 4.6 / - 5.7				

CIE Pub.117, 2285 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 2.9$ )  
Area: 0.0038 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2285.04x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	81	90	85	81	77
1.00	97	91	87	96	91	87	95	91	86	82
1.25	102	96	92	101	95	92	99	94	91	87
1.50	105	99	96	103	99	95	101	97	94	90
2.00	108	103	100	106	102	99	103	100	98	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz UTHDi:0.17% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2285.04x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

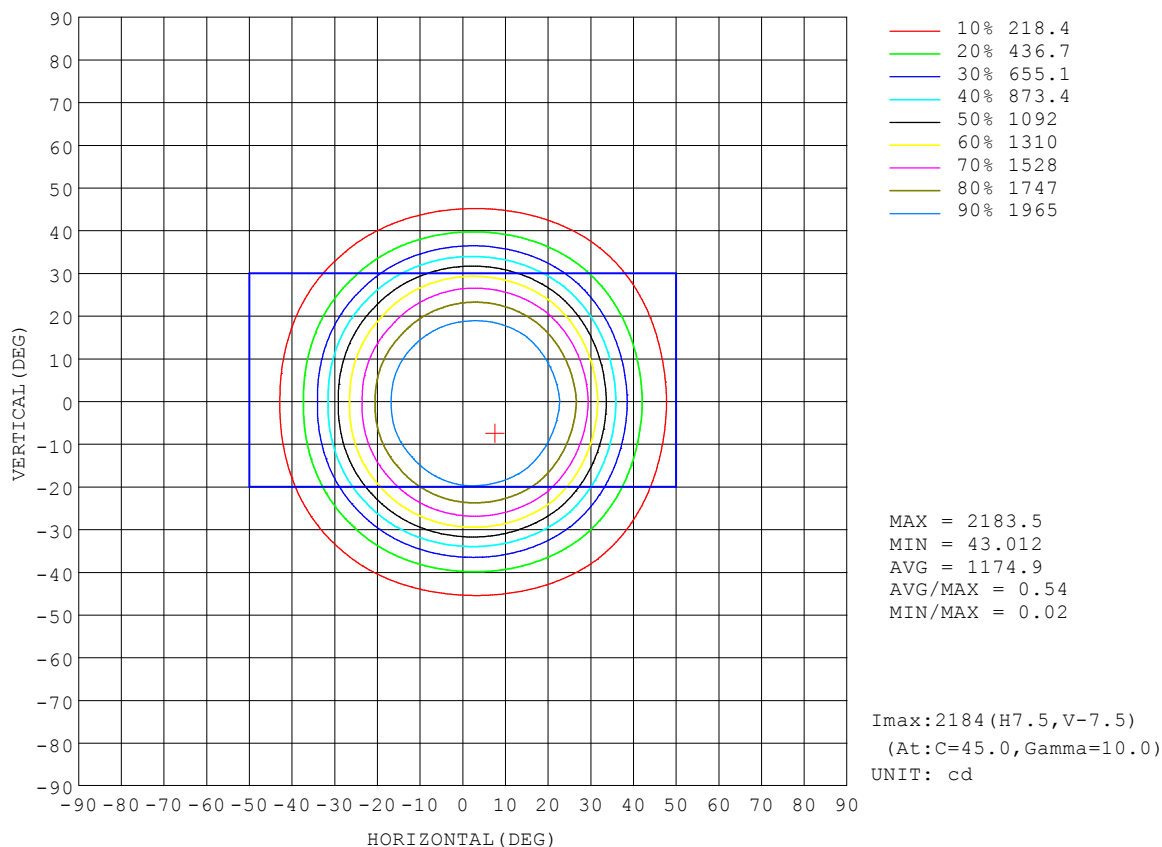


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.77% KDisp:0.9869		Lamp Flux:2285.04x1 lm
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

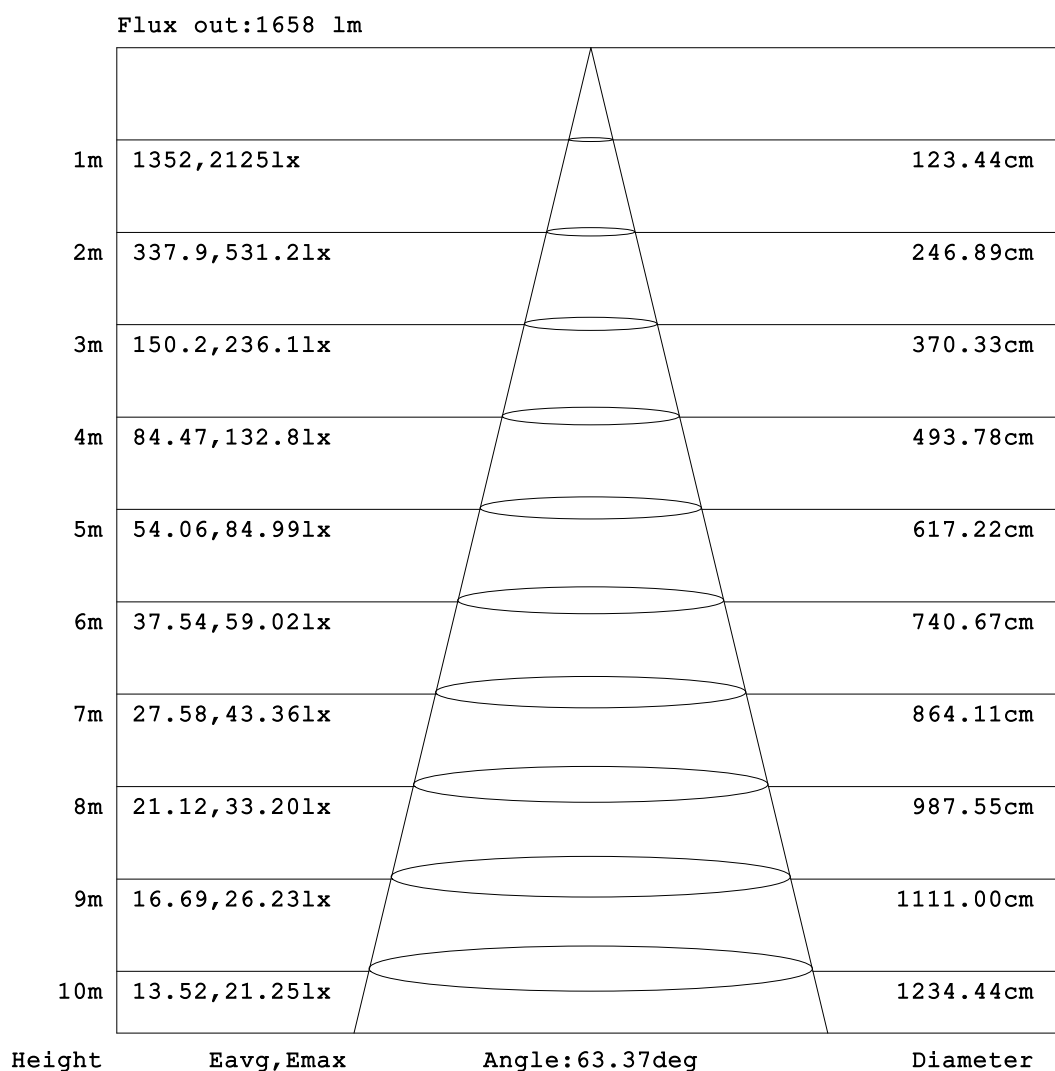


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2285.04x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

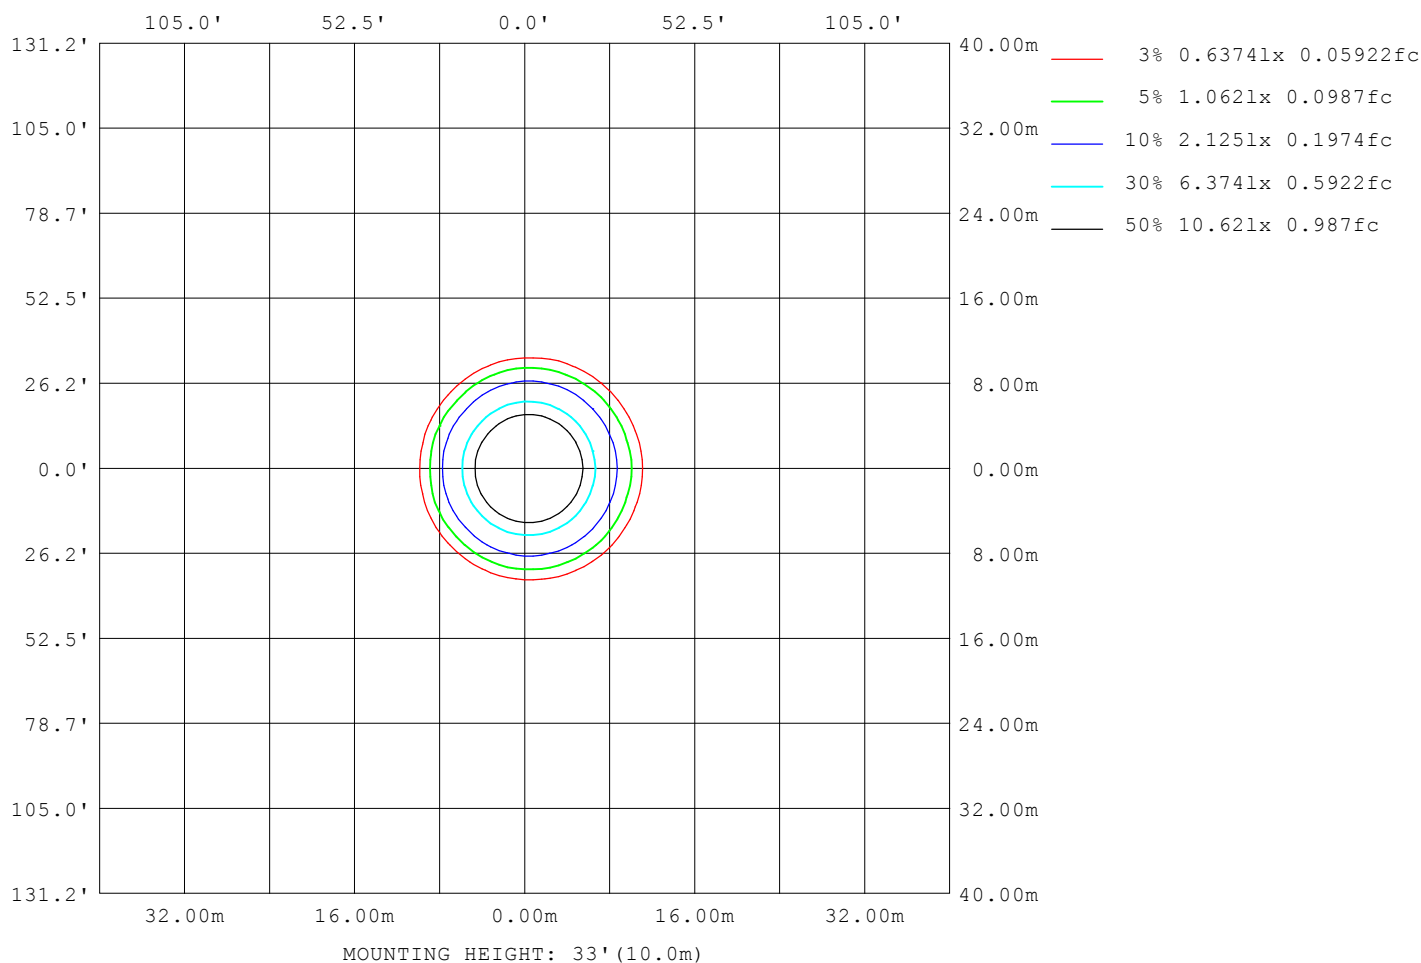

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.5V I:0.0846A P:20.0W PF:0.9851 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.77% KDisp:0.9869 Lamp Flux:2285.04x1 lm		
NAME: FUSION GT-TR01-AHD-020-COB-01SC 4000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10396
L_0~180 (75) av	3191
L_0~180 (85) av	911
L_90~270 (65) av	10583
L_90~270 (75) av	3050
L_90~270 (85) av	625
L_45 (65) av	10335
L_45 (75) av	3099
L_45 (85) av	698

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-11-06

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

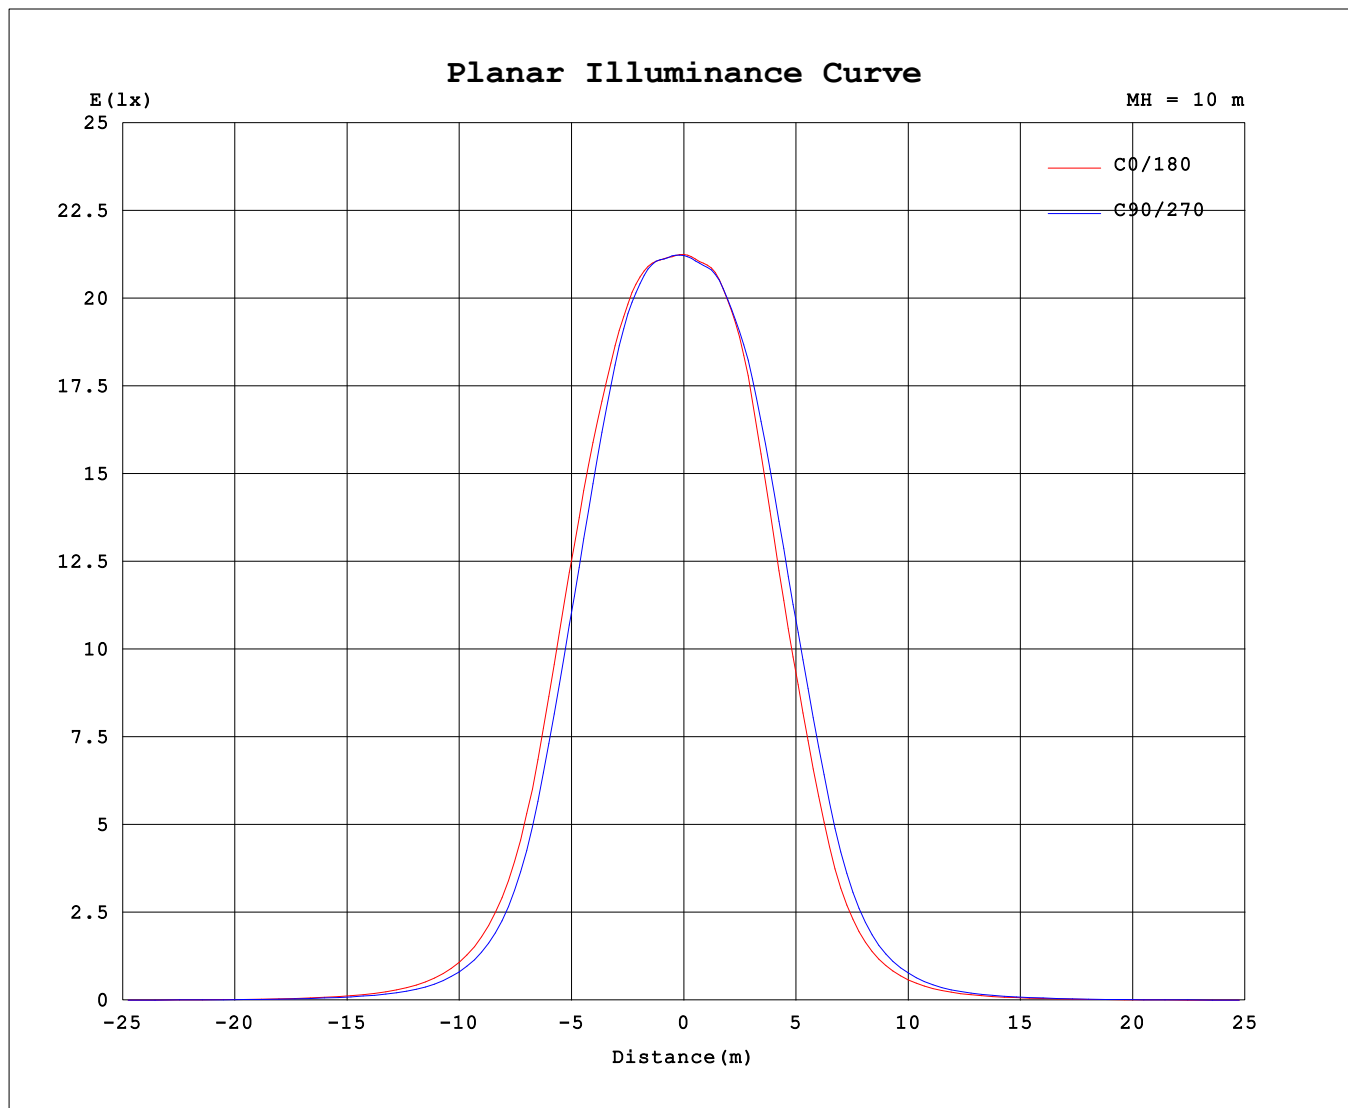

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-11-06

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	2122	2122	2122	2122	2122	2122	2122	2122
3.0	2125	2133	2130	2125	2118	2113	2116	2123
6.0	2142	2154	2146	2140	2127	2122	2124	2133
9.0	2167	2179	2163	2147	2128	2128	2129	2152
12.0	2177	2178	2154	2119	2096	2102	2105	2147
15.0	2159	2148	2124	2066	2037	2050	2073	2122
18.0	2107	2086	2036	1944	1898	1925	1993	2065
21.0	2025	1991	1902	1780	1711	1749	1861	1972
24.0	1903	1850	1725	1575	1493	1539	1690	1818
27.0	1721	1661	1513	1355	1269	1322	1483	1622
30.0	1472	1414	1256	1099	1014	1078	1239	1388
33.0	1161	1116	960.8	818.2	740.2	804.3	955.8	1093
36.0	860.3	819.9	691.7	572.2	512.4	556.5	683.1	801.0
39.0	622.0	580.9	483.2	394.5	352.2	376.6	472.6	562.6
42.0	439.5	404.3	335.0	270.8	240.2	256.6	321.4	388.9
45.0	306.4	280.8	229.2	185.1	164.3	175.1	220.0	268.4
48.0	211.2	192.9	154.7	124.7	111.9	118.7	147.0	182.2
51.0	143.3	131.1	104.4	84.77	76.08	81.52	99.80	122.0
54.0	96.04	88.66	71.88	59.02	53.00	56.49	68.77	82.02
57.0	64.75	61.23	50.62	42.46	37.97	40.73	49.15	56.07
60.0	40.21	39.13	33.93	28.49	25.15	26.96	33.28	36.03
63.0	26.36	25.86	22.78	19.43	17.07	17.98	21.80	23.47
66.0	17.32	16.89	15.24	13.35	12.17	12.46	14.57	15.56
69.0	11.93	11.59	10.54	9.780	9.081	9.242	10.11	10.96
72.0	8.432	8.024	6.889	5.932	5.054	5.405	6.762	7.794
75.0	3.085	3.041	2.996	3.093	3.193	3.124	3.003	2.933
78.0	2.251	2.240	2.295	2.366	2.409	2.395	2.305	2.231
81.0	1.622	1.601	1.569	1.489	1.444	1.482	1.557	1.576
84.0	0.8268	0.7476	0.4722	0.2213	0.2008	0.2006	0.3835	0.6652
87.0	0.1671	0.1428	0.1344	0.0962	0.0924	0.0877	0.1195	0.1323
90.0	0.0741	0.0553	0.0688	0.0547	0.0578	0.0546	0.0604	0.0508

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-11-06

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: