


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820 Lamp Flux:3343.29x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.36 lm/W			
MODEL		I _{max} (cd)	23361	S/MH(C0/180)	0.25
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.28
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3343.3	η UP,DN(C0-180)	0.0,50.9
NOMINAL FLUX(lm)	3343.29	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.1
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.15	η down(%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

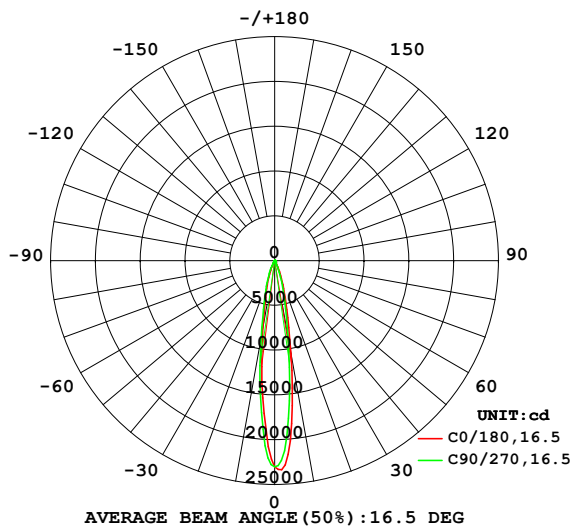

PLANAR ISOLUX DIAGRAM(UNIT:lx)

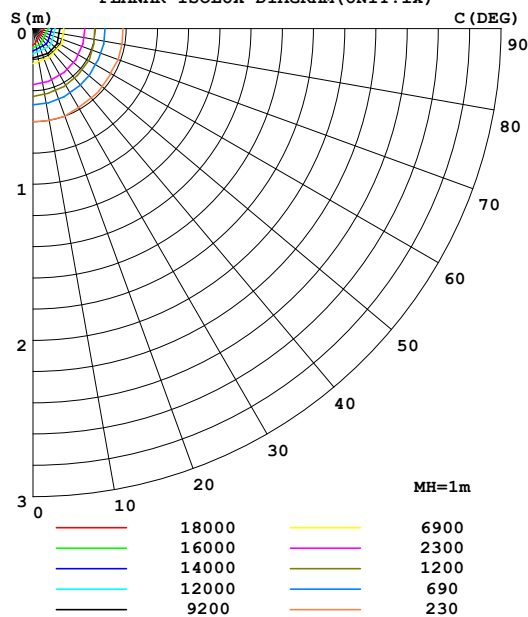

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1053	994.6	874.5	808.4	761.2	790.1	881.7	1003	0- 10	1390	1390	41.6,41.6
20	250.0	225.3	197.3	189.6	196.0	213.8	236.1	247.5	10- 20	1237	2627	78.6,78.6
30	40.80	35.82	31.98	31.04	31.54	36.79	42.16	42.71	20- 30	464.2	3091	92.5,92.5
40	12.25	11.31	10.91	11.17	10.62	11.13	12.49	13.01	30- 40	126.5	3218	96.2,96.2
50	6.067	5.430	5.679	5.858	5.690	5.436	6.122	6.327	40- 50	62.88	3280	98.1,98.1
60	3.439	2.870	3.089	3.041	2.936	2.783	3.360	3.486	50- 60	39.58	3320	99.3,99.3
70	1.106	0.9408	0.7960	0.6166	0.6087	0.6452	0.9056	1.068	60- 70	19.14	3339	99.9,99.9
80	0.1666	0.1595	0.1421	0.1171	0.1127	0.1216	0.1493	0.1592	70- 80	3.512	3343	100,100
90	0.0164	0.0080	0.0151	0.0094	0.0095	0.0086	0.0106	0.0078	80- 90	0.6627	3343	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3253 lm

%lum = 97.3%

%lamp = 97.3%

Conical surface Flux(120deg): 3320 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820 Lamp Flux:3343.29x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

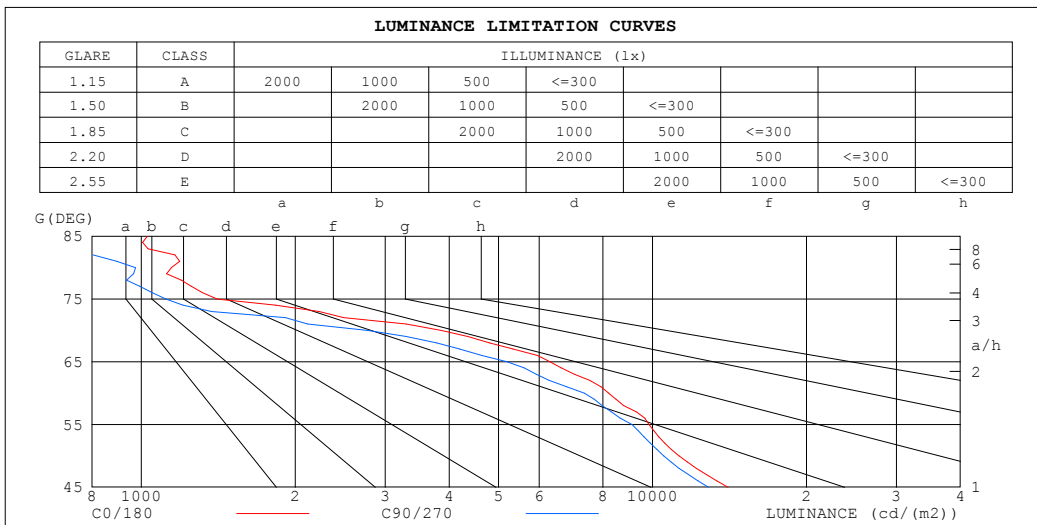


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820		
Lamp Flux:3343.29x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.00	.99	.98	.97
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	.00	.98	.97	.97	.96	.95	.93
3.0	1.03	.99	.96	1.02	.98	.96	.99	.96	.94	.97	.95	.93	.95	.93	.91	.90
4.0	.99	.95	.92	.98	.94	.91	.96	.93	.90	.94	.91	.89	.92	.90	.88	.87
5.0	.95	.91	.88	.95	.91	.88	.93	.90	.87	.91	.89	.86	.90	.88	.86	.85
6.0	.92	.88	.85	.92	.88	.85	.90	.87	.84	.89	.86	.84	.88	.85	.83	.82
7.0	.89	.85	.82	.89	.85	.82	.88	.84	.82	.87	.84	.81	.86	.83	.81	.80
8.0	.87	.83	.80	.86	.82	.80	.85	.82	.79	.85	.81	.79	.84	.81	.79	.78
9.0	.84	.80	.78	.84	.80	.78	.83	.80	.77	.82	.79	.77	.82	.79	.77	.76
10.0	.82	.78	.76	.82	.78	.76	.81	.78	.75	.81	.77	.75	.80	.77	.75	.74

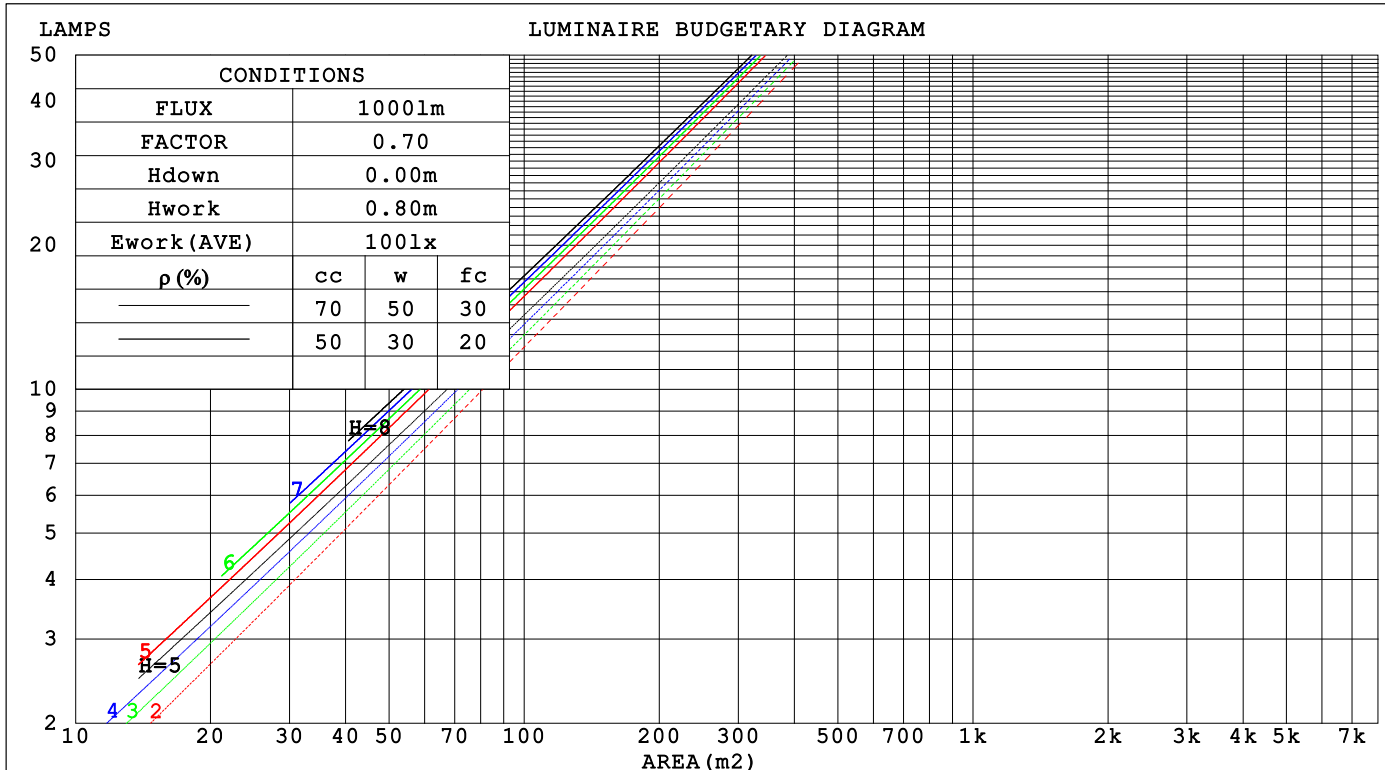

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820 Lamp Flux:3343.29x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.138	.078	.025	.131	.075	.024	.119	.068	.022	.107	.062	.020	.097	.056	.018	
2.0	.128	.070	.021	.122	.067	.021	.112	.062	.019	.103	.058	.018	.094	.053	.017	
3.0	.119	.063	.019	.114	.061	.018	.106	.057	.017	.098	.054	.016	.091	.050	.016	
4.0	.111	.058	.017	.107	.056	.017	.100	.053	.016	.094	.050	.015	.087	.047	.014	
5.0	.104	.053	.015	.101	.052	.015	.095	.050	.015	.089	.047	.014	.084	.045	.014	
6.0	.099	.049	.014	.096	.048	.014	.091	.046	.013	.086	.044	.013	.081	.043	.013	
7.0	.093	.046	.013	.091	.045	.013	.086	.044	.013	.082	.042	.012	.078	.041	.012	
8.0	.089	.043	.012	.087	.043	.012	.083	.041	.012	.079	.040	.012	.075	.039	.011	
9.0	.084	.041	.011	.083	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	
10.0	.081	.039	.011	.079	.038	.011	.076	.037	.010	.073	.036	.010	.070	.035	.010	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.168	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017		
2.0	.150	.133	.118	.129	.114	.102	.088	.079	.071	.051	.046	.042	.016	.015	.014		
3.0	.135	.113	.096	.116	.098	.083	.080	.068	.058	.046	.040	.034	.015	.013	.011		
4.0	.123	.098	.079	.105	.085	.069	.072	.059	.048	.042	.035	.029	.013	.011	.009		
5.0	.112	.086	.066	.096	.074	.057	.066	.052	.040	.038	.030	.024	.012	.010	.008		
6.0	.103	.076	.056	.089	.065	.049	.061	.046	.034	.036	.027	.020	.011	.009	.007		
7.0	.096	.067	.048	.082	.058	.041	.057	.041	.029	.033	.024	.017	.011	.008	.006		
8.0	.089	.061	.041	.077	.053	.036	.053	.037	.025	.031	.022	.015	.010	.007	.005		
9.0	.083	.055	.036	.072	.048	.031	.050	.033	.022	.029	.020	.013	.009	.006	.004		
10.0	.078	.050	.031	.067	.043	.027	.047	.031	.019	.027	.018	.012	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz												
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820 Lamp Flux:3343.29x1 lm												
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:						WEIGHT:						
SPEC.:						DIM.:			SERIAL No.:			
MFR.: Norming lighting						SUR.: 104mm			Shielding Angle:			
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise					
x = 2H y = 2H		12.9	13.6	13.1	13.7	13.9	12.4	13.0	12.6	13.2	13.3	
		3H	13.2	13.8	13.5	14.0	14.2	12.6	13.2	12.8	13.4	13.6
		4H	13.2	13.8	13.4	14.0	14.2	12.6	13.1	12.8	13.3	13.6
		6H	13.1	13.7	13.4	13.9	14.1	12.5	13.0	12.8	13.3	13.5
		8H	13.1	13.6	13.4	13.9	14.1	12.5	13.0	12.7	13.2	13.5
		12H	13.0	13.5	13.3	13.8	14.1	12.4	12.9	12.7	13.2	13.4
4H		2H	13.0	13.6	13.3	13.8	14.0	12.6	13.1	12.8	13.3	13.6
		3H	13.3	13.9	13.7	14.1	14.4	12.8	13.3	13.1	13.6	13.8
		4H	13.3	13.8	13.6	14.1	14.4	12.7	13.2	13.1	13.5	13.8
		6H	13.2	13.7	13.6	14.0	14.3	12.7	13.1	13.0	13.4	13.7
		8H	13.2	13.6	13.6	13.9	14.3	12.6	13.0	13.0	13.3	13.7
		12H	13.2	13.5	13.6	13.9	14.3	12.6	12.9	13.0	13.3	13.7
8H		4H	13.2	13.6	13.6	13.9	14.3	12.6	13.0	13.0	13.4	13.7
		6H	13.1	13.4	13.5	13.8	14.2	12.5	12.9	13.0	13.3	13.7
		8H	13.1	13.4	13.5	13.8	14.2	12.5	12.8	12.9	13.2	13.6
		12H	13.0	13.3	13.5	13.7	14.2	12.4	12.7	12.9	13.1	13.6
12H		4H	13.1	13.5	13.5	13.9	14.2	12.6	12.9	13.0	13.3	13.7
		6H	13.1	13.3	13.5	13.8	14.2	12.5	12.8	12.9	13.2	13.6
		8H	13.0	13.3	13.5	13.7	14.2	12.4	12.7	12.9	13.1	13.6
Variations with the observer position at spacings(CIE Pub.117):												
S = 1.0H		+ 1.2 / - 1.4					+ 1.0 / - 1.5					
1.5H		+ 2.0 / - 1.1					+ 1.5 / - 0.8					
2.0H		+ 1.6 / - 1.8					+ 1.6 / - 1.7					

CIE Pub.117, 3343 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.2$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820 Lamp Flux:3343.29x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	80	89	83	79	88	83	79	76
0.80	96	91	87	96	91	87	95	90	87	83
1.00	100	95	92	100	95	91	98	94	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	104	102	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	109	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz UTHDi:0.18% ITHDi:5.94% KDisp:0.9820 Lamp Flux:3343.29x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

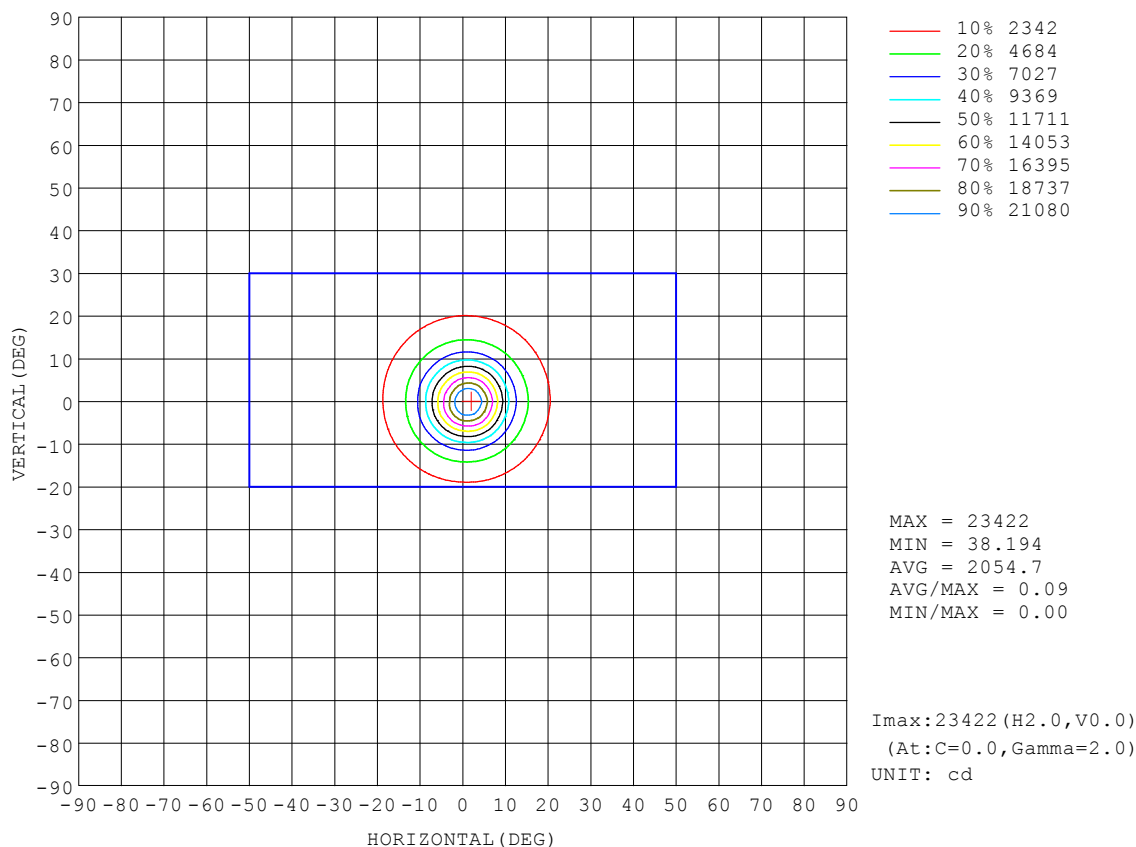


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820		Lamp Flux:3343.29x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

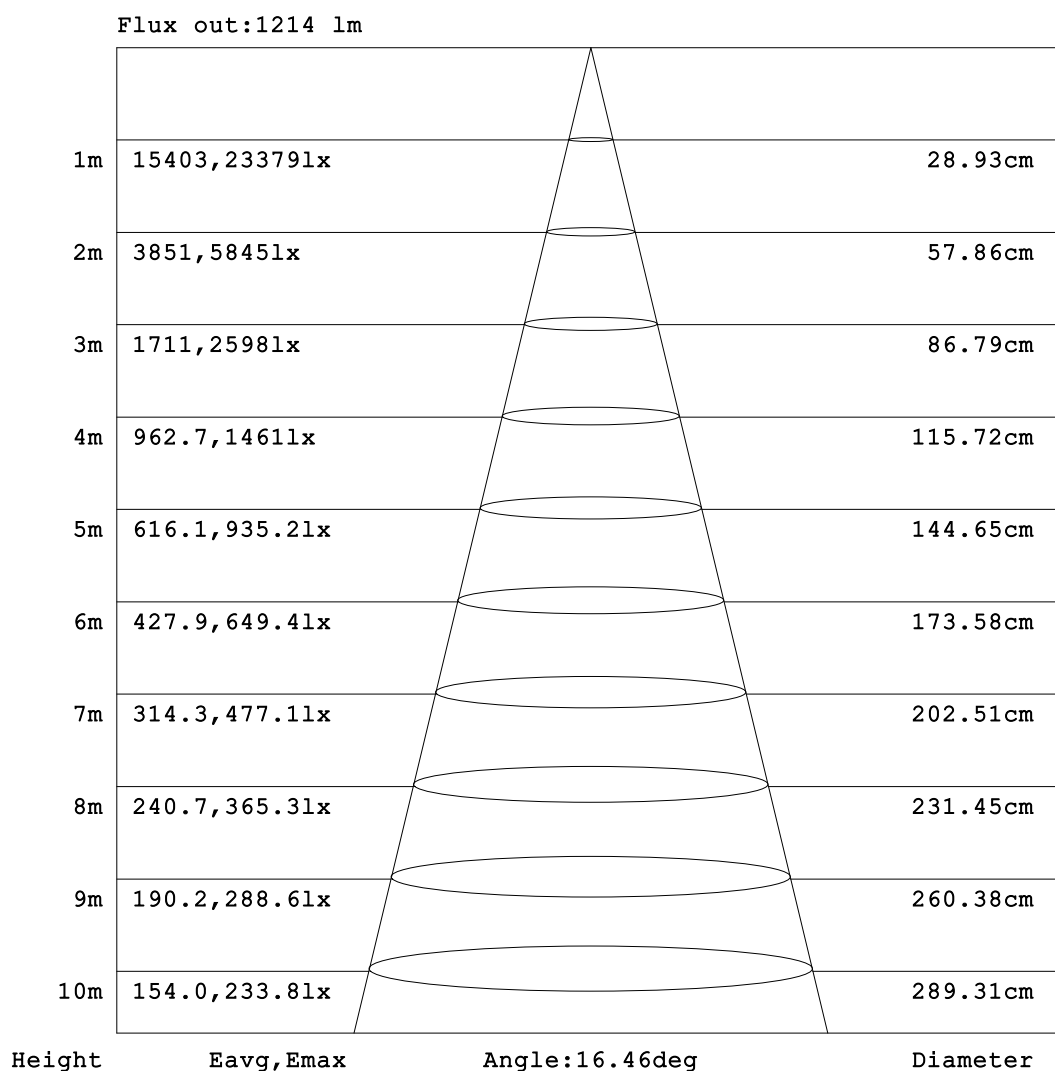


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820		Lamp Flux:3343.29x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

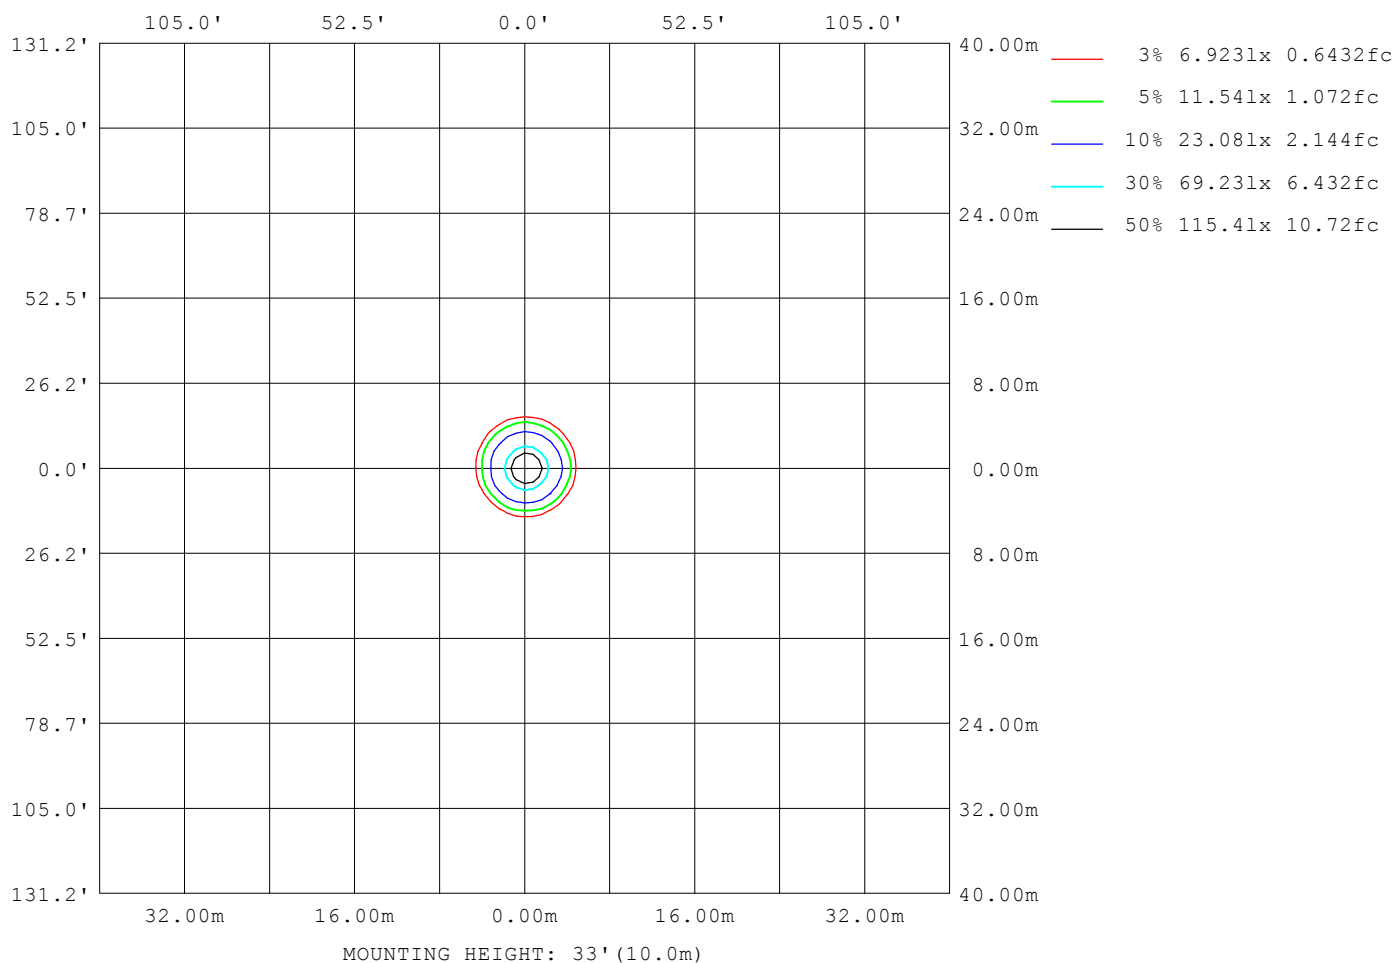

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.2V I:0.1275A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.94% KDisp:0.9820 Lamp Flux:3343.29x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5556
L_0~180 (75) av	1198
L_0~180 (85) av	801
L_90~270 (65) av	5586
L_90~270 (75) av	1148
L_90~270 (85) av	780
L_45 (65) av	5330
L_45 (75) av	1164
L_45 (85) av	709

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

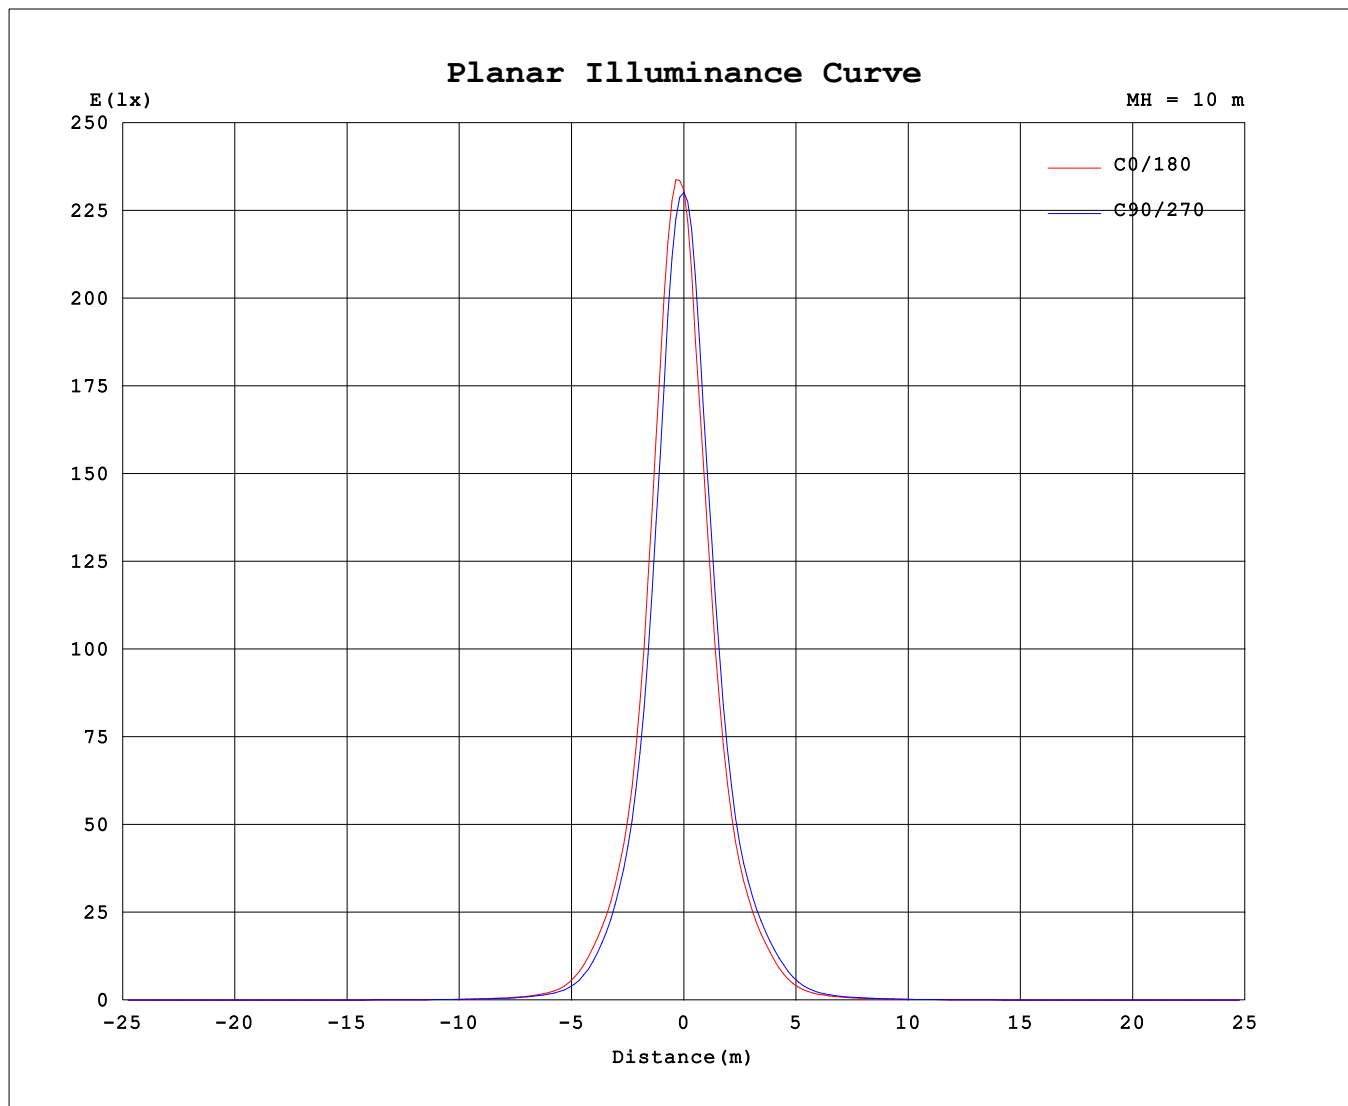

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	23017	23017	23017	23017	23017	23017	23017	23017
3.0	22824	22338	21255	19907	18811	19113	20701	22228
6.0	18286	17688	15746	14506	13674	13909	15324	17228
9.0	12429	11838	10222	9415	8858	9217	10264	11752
12.0	7640	7144	6405	5963	5618	5848	6516	7342
15.0	4914	4591	4155	3882	3753	3944	4322	4708
18.0	3269	3002	2687	2556	2551	2729	3017	3210
21.0	2178	1942	1669	1609	1683	1880	2071	2148
24.0	1323	1119	955.4	910.5	976.1	1166	1318	1336
27.0	724.8	613.6	518.6	504.2	534.3	651.0	747.9	753.9
30.0	408.0	358.2	319.8	310.4	315.4	367.9	421.6	427.1
33.0	263.4	236.8	217.9	216.2	213.8	236.6	266.7	274.8
36.0	183.2	167.4	156.9	157.3	152.2	164.7	185.8	193.0
39.0	134.4	123.9	118.7	121.0	115.4	121.8	136.7	142.6
42.0	103.3	95.23	94.09	95.81	91.35	94.73	105.5	109.9
45.0	83.19	75.48	76.46	78.07	75.04	75.47	84.27	88.04
48.0	68.30	61.43	63.35	65.27	63.14	61.48	69.04	71.62
51.0	57.42	51.20	53.91	55.66	54.14	51.20	57.90	59.72
54.0	49.53	43.66	46.26	47.68	45.84	43.36	49.62	51.16
57.0	42.41	35.40	37.96	38.99	37.52	34.90	40.54	42.37
60.0	34.39	28.70	30.89	30.41	29.36	27.83	33.60	34.86
63.0	26.74	21.94	22.61	22.81	22.55	21.37	25.56	27.05
66.0	20.28	16.69	15.82	15.32	14.94	14.51	18.41	20.35
69.0	13.06	10.91	9.937	8.849	8.071	9.134	11.41	12.99
72.0	6.434	5.716	4.963	3.632	3.272	3.966	5.456	6.183
75.0	3.049	2.788	2.429	2.222	2.160	2.252	2.565	2.865
78.0	2.084	1.883	1.635	1.524	1.519	1.512	1.736	1.918
81.0	1.557	1.391	1.176	0.9205	0.9043	0.9415	1.262	1.451
84.0	0.8801	0.7449	0.6834	0.5311	0.5357	0.5280	0.6982	0.7694
87.0	0.5048	0.3776	0.3420	0.1913	0.1865	0.2030	0.3576	0.3879
90.0	0.1641	0.0796	0.1510	0.0941	0.0945	0.0857	0.1060	0.0780

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: