


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.86% KDisp:0.9822 Lamp Flux:3202.79x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.41 lm/W			
MODEL		Imax (cd)	15344	S/MH(C0/180)	0.36
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.39
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3202.8	$\eta$ UP,DN(C0-180)	0.0,50.4
NOMINAL FLUX(lm)	3202.79	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,49.6
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.36	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

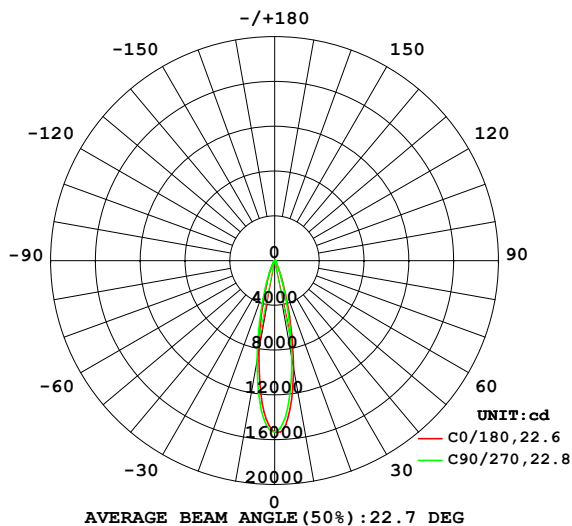

PLANAR ISOLUX DIAGRAM(UNIT:lx)

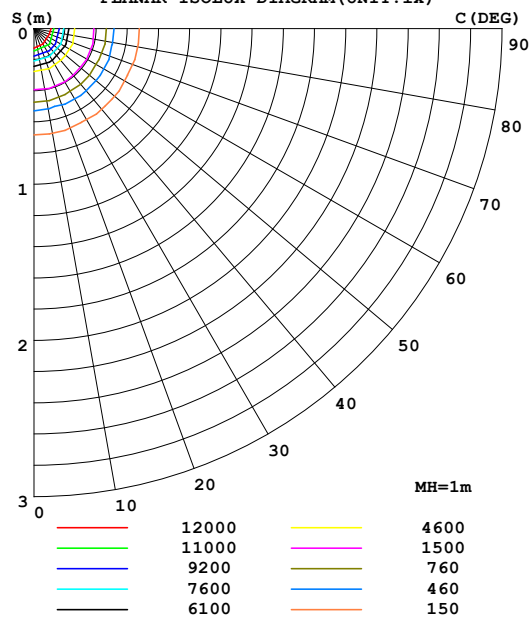

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	971.1	947.6	878.2	822.1	813.8	832.1	906.9	974.0	0- 10	1132	1132	35.3,35.3
20	228.8	224.5	205.1	195.9	194.8	198.3	218.5	236.5	10- 20	1312	2444	76.3,76.3
30	43.77	43.48	41.25	40.05	38.69	39.35	43.68	46.33	20- 30	460.1	2904	90.7,90.7
40	14.12	14.15	14.07	14.29	13.32	13.03	14.13	14.98	30- 40	150.3	3054	95.4,95.4
50	6.906	6.786	6.998	7.116	6.777	6.370	6.913	7.262	40- 50	75.66	3130	97.7,97.7
60	3.701	3.520	3.640	3.638	3.633	3.368	3.750	3.902	50- 60	45.81	3176	99.2,99.2
70	1.072	1.021	0.9237	0.7667	0.7503	0.8568	1.008	1.102	60- 70	22.59	3198	99.9,99.9
80	0.1530	0.1526	0.1471	0.1356	0.1394	0.1383	0.1529	0.1503	70- 80	3.781	3202	100,100
90	0.0122	0.0078	0.0136	0.0085	0.0087	0.0083	0.0099	0.0072	80- 90	0.6699	3203	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3097.1 lm

%lum = 96.7%

%lamp = 96.7%

Conical surface Flux(120deg): 3175.8 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.86% KDisp:0.9822 Lamp Flux:3202.79x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

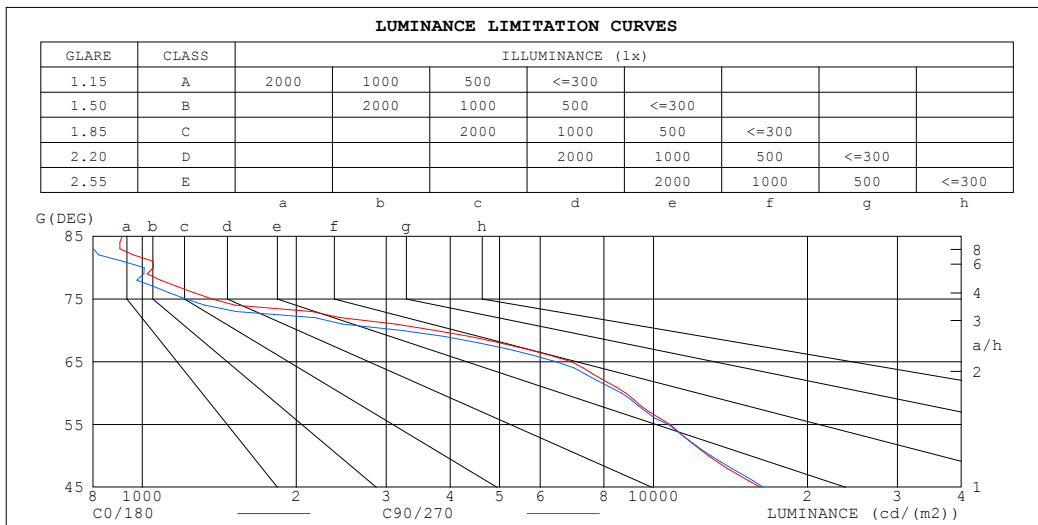


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.86% KDisp:0.9822 Lamp Flux:3202.79x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

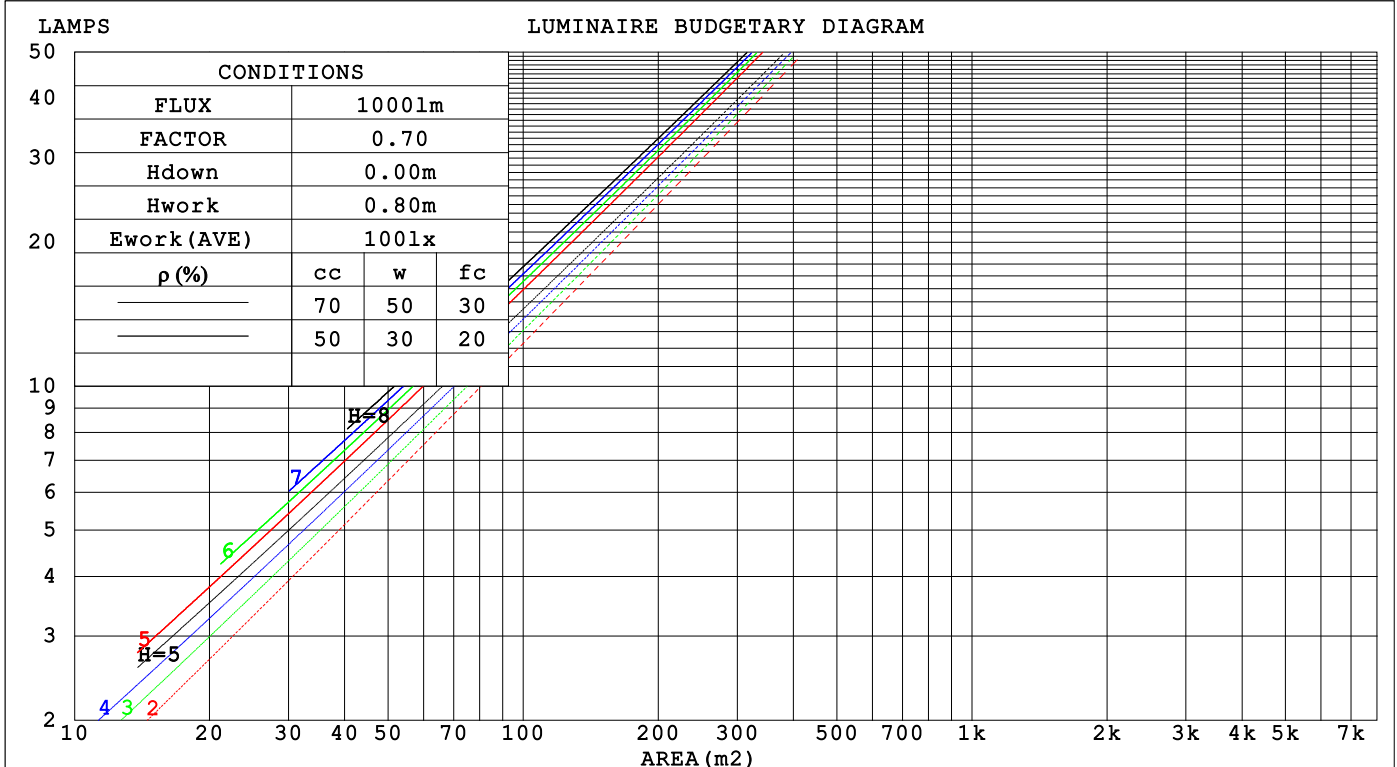

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.86% KDisp:0.9822 Lamp Flux:3202.79x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.143	.081	.026	.137	.078	.025	.124	.071	.023	.113	.065	.021	.102	.059	.019		
2.0	.134	.073	.022	.128	.071	.022	.118	.066	.020	.108	.061	.019	.100	.056	.018		
3.0	.125	.066	.020	.120	.064	.019	.112	.061	.018	.104	.057	.017	.096	.053	.017		
4.0	.117	.061	.018	.113	.059	.018	.106	.056	.017	.099	.053	.016	.093	.050	.015		
5.0	.110	.056	.016	.107	.055	.016	.101	.052	.015	.095	.050	.015	.090	.048	.014		
6.0	.104	.052	.015	.101	.051	.015	.096	.049	.014	.091	.047	.014	.086	.045	.013		
7.0	.099	.049	.014	.096	.048	.014	.092	.046	.013	.087	.045	.013	.083	.043	.013		
8.0	.094	.046	.013	.092	.045	.013	.088	.044	.013	.084	.042	.012	.080	.041	.012		
9.0	.090	.043	.012	.088	.043	.012	.084	.042	.012	.081	.040	.012	.077	.039	.011		
10.0	.086	.041	.011	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.169	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017		
2.0	.151	.133	.117	.129	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.013		
3.0	.137	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011		
4.0	.124	.098	.078	.107	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009		
5.0	.114	.086	.065	.098	.074	.057	.067	.052	.040	.039	.030	.024	.013	.010	.008		
6.0	.105	.076	.055	.090	.066	.048	.062	.046	.034	.036	.027	.020	.012	.009	.007		
7.0	.098	.068	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006		
8.0	.091	.061	.040	.078	.053	.035	.054	.037	.025	.032	.022	.015	.010	.007	.005		
9.0	.085	.055	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004		
10.0	.080	.051	.031	.069	.044	.027	.048	.031	.019	.028	.018	.011	.009	.006	.004		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz											
UTHDi:0.17% ITHDi:5.86% KDisp:0.9822 Lamp Flux:3202.79x1 lm											
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:						WEIGHT:					
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Norming lighting						SUR.: 104mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H		14.1	14.8	14.3	14.9	15.1	14.0	14.7	14.2	14.9	15.0
	3H	14.3	15.0	14.6	15.2	15.4	14.2	14.9	14.5	15.1	15.2
	4H	14.3	14.9	14.5	15.1	15.3	14.2	14.8	14.4	15.0	15.2
	6H	14.2	14.8	14.5	15.0	15.3	14.1	14.7	14.4	14.9	15.1
	8H	14.2	14.7	14.5	15.0	15.2	14.1	14.6	14.4	14.9	15.1
	12H	14.1	14.7	14.4	14.9	15.2	14.0	14.5	14.3	14.8	15.1
4H	2H	14.2	14.8	14.5	15.0	15.3	14.2	14.8	14.4	15.0	15.2
	3H	14.5	15.0	14.8	15.3	15.5	14.4	14.9	14.7	15.2	15.4
	4H	14.4	14.9	14.8	15.2	15.5	14.3	14.8	14.6	15.1	15.4
	6H	14.3	14.8	14.7	15.1	15.4	14.2	14.7	14.6	15.0	15.3
	8H	14.3	14.7	14.7	15.0	15.4	14.2	14.6	14.6	14.9	15.3
	12H	14.2	14.6	14.7	15.0	15.4	14.1	14.5	14.5	14.9	15.3
8H	4H	14.3	14.7	14.7	15.1	15.4	14.2	14.6	14.6	14.9	15.3
	6H	14.2	14.5	14.6	14.9	15.4	14.1	14.4	14.5	14.8	15.2
	8H	14.2	14.5	14.6	14.9	15.3	14.0	14.3	14.5	14.8	15.2
	12H	14.1	14.4	14.6	14.8	15.3	14.0	14.3	14.5	14.7	15.2
12H	4H	14.2	14.6	14.6	15.0	15.4	14.1	14.5	14.5	14.9	15.3
	6H	14.2	14.5	14.6	14.9	15.3	14.0	14.3	14.5	14.8	15.2
	8H	14.1	14.4	14.6	14.8	15.3	14.0	14.2	14.5	14.7	15.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.2 / - 1.7					+ 1.2 / - 1.8				
1.5H		+ 1.9 / - 1.1					+ 1.8 / - 1.1				
2.0H		+ 1.8 / - 1.5					+ 1.9 / - 1.6				

CIE Pub.117, 3203 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.0)  
Area: 0.0084 m2

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.86% KDisp:0.9822 Lamp Flux:3202.79x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 104mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz UTHDi:0.17% ITHDi:5.86% KDisp:0.9822 Lamp Flux:3202.79x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

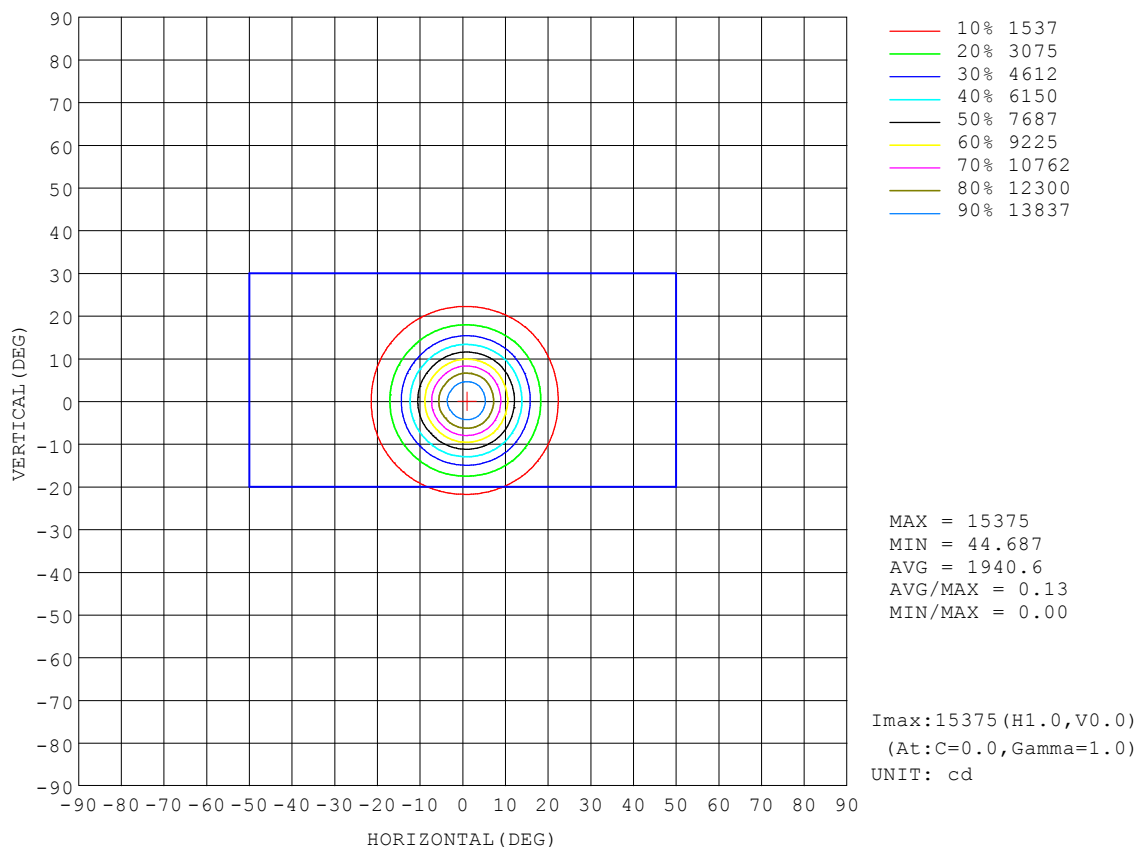


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.86% KDisp:0.9822		Lamp Flux:3202.79x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

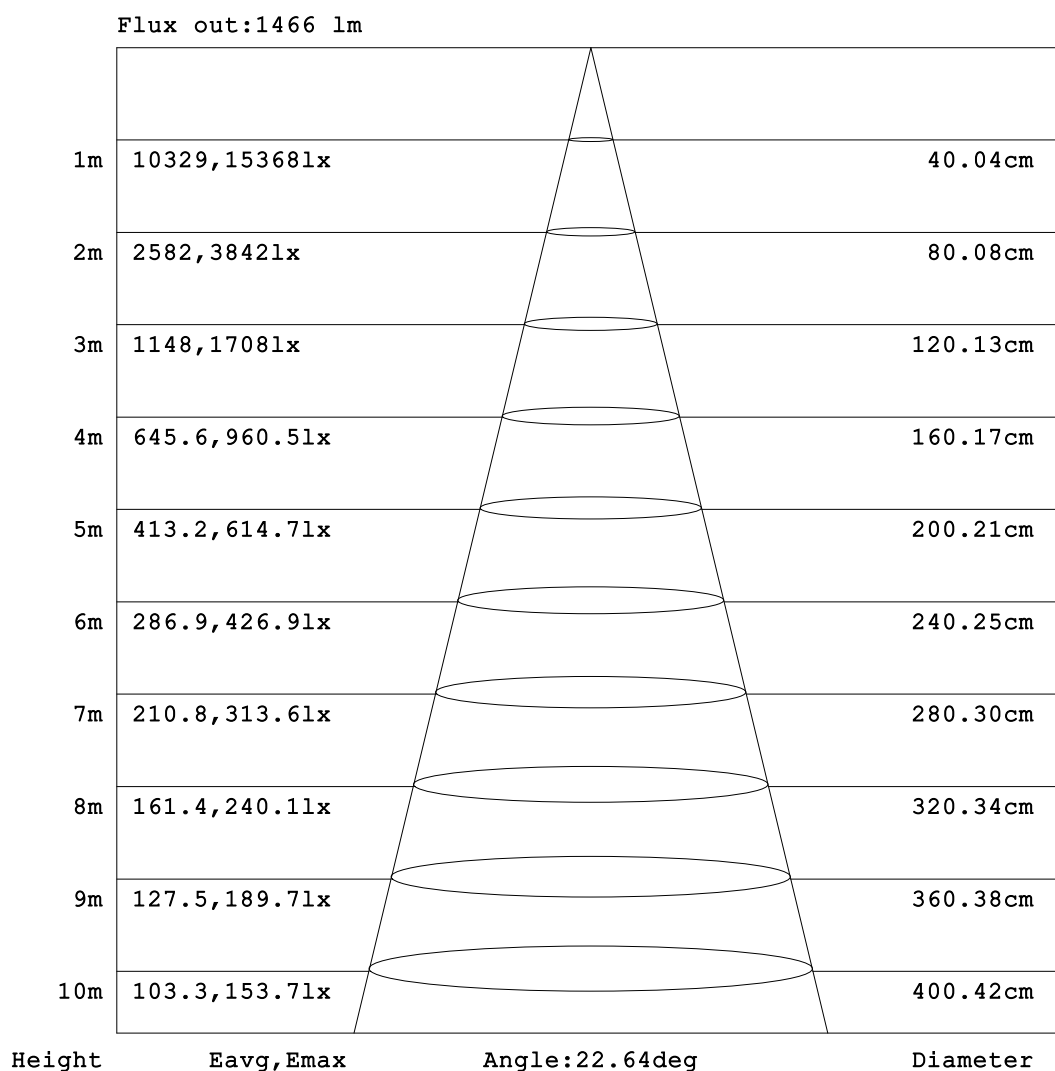


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.86% KDisp:0.9822		Lamp Flux:3202.79x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

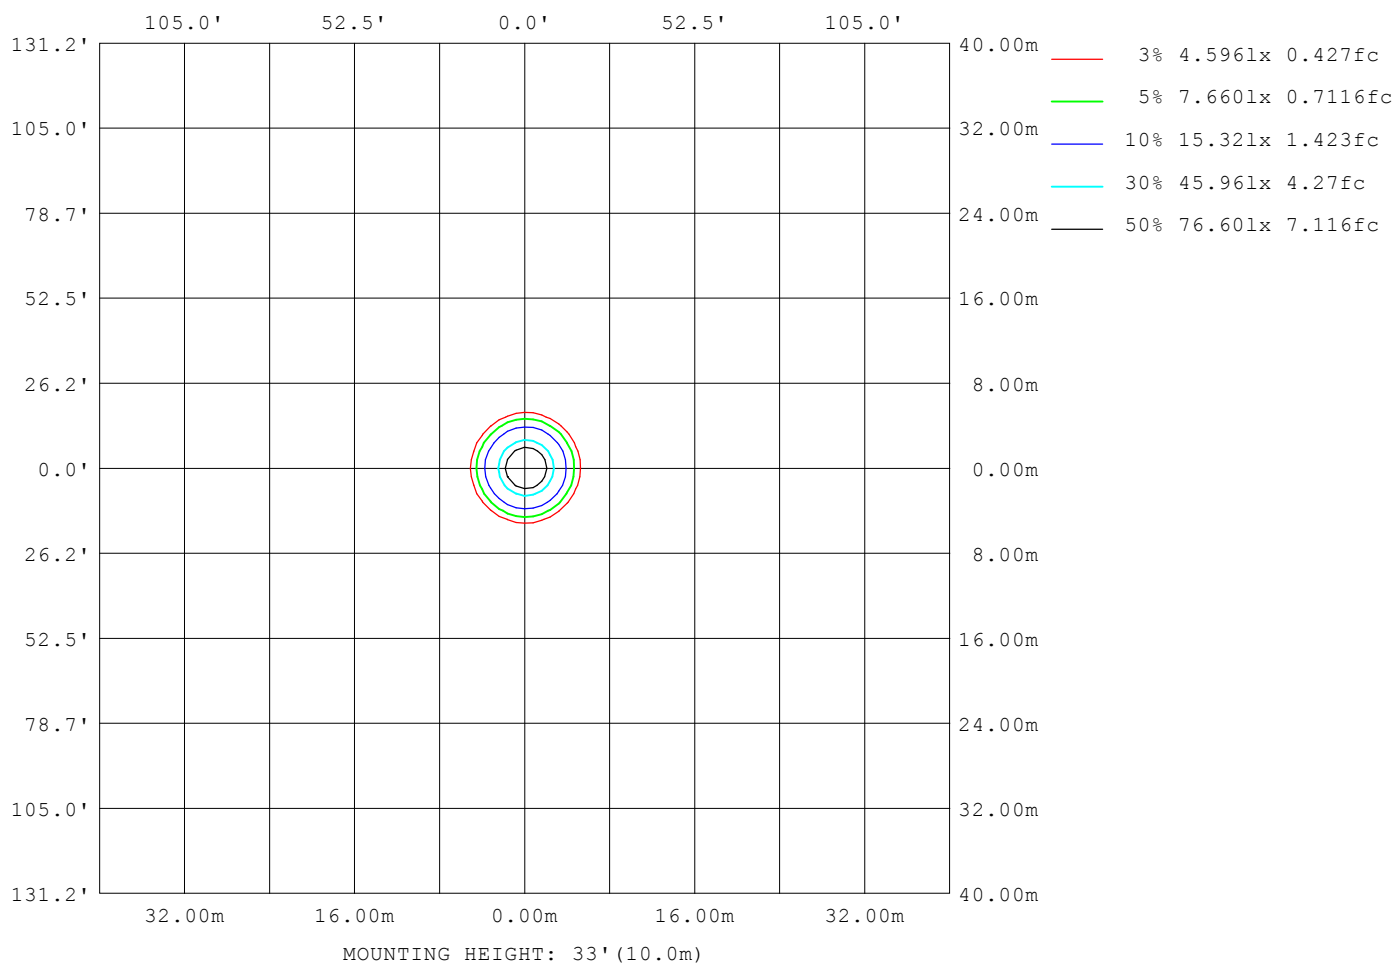

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.4V I:0.1277A P:30.1W PF:0.9806 Freq:49.99Hz UTHDi:0.17% ITHDi:5.86% KDisp:0.9822 Lamp Flux:3202.79x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6626
L_0~180 (75) av	1249
L_0~180 (85) av	807
L_90~270 (65) av	6651
L_90~270 (75) av	1256
L_90~270 (85) av	802
L_45 (65) av	6508
L_45 (75) av	1241
L_45 (85) av	733

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

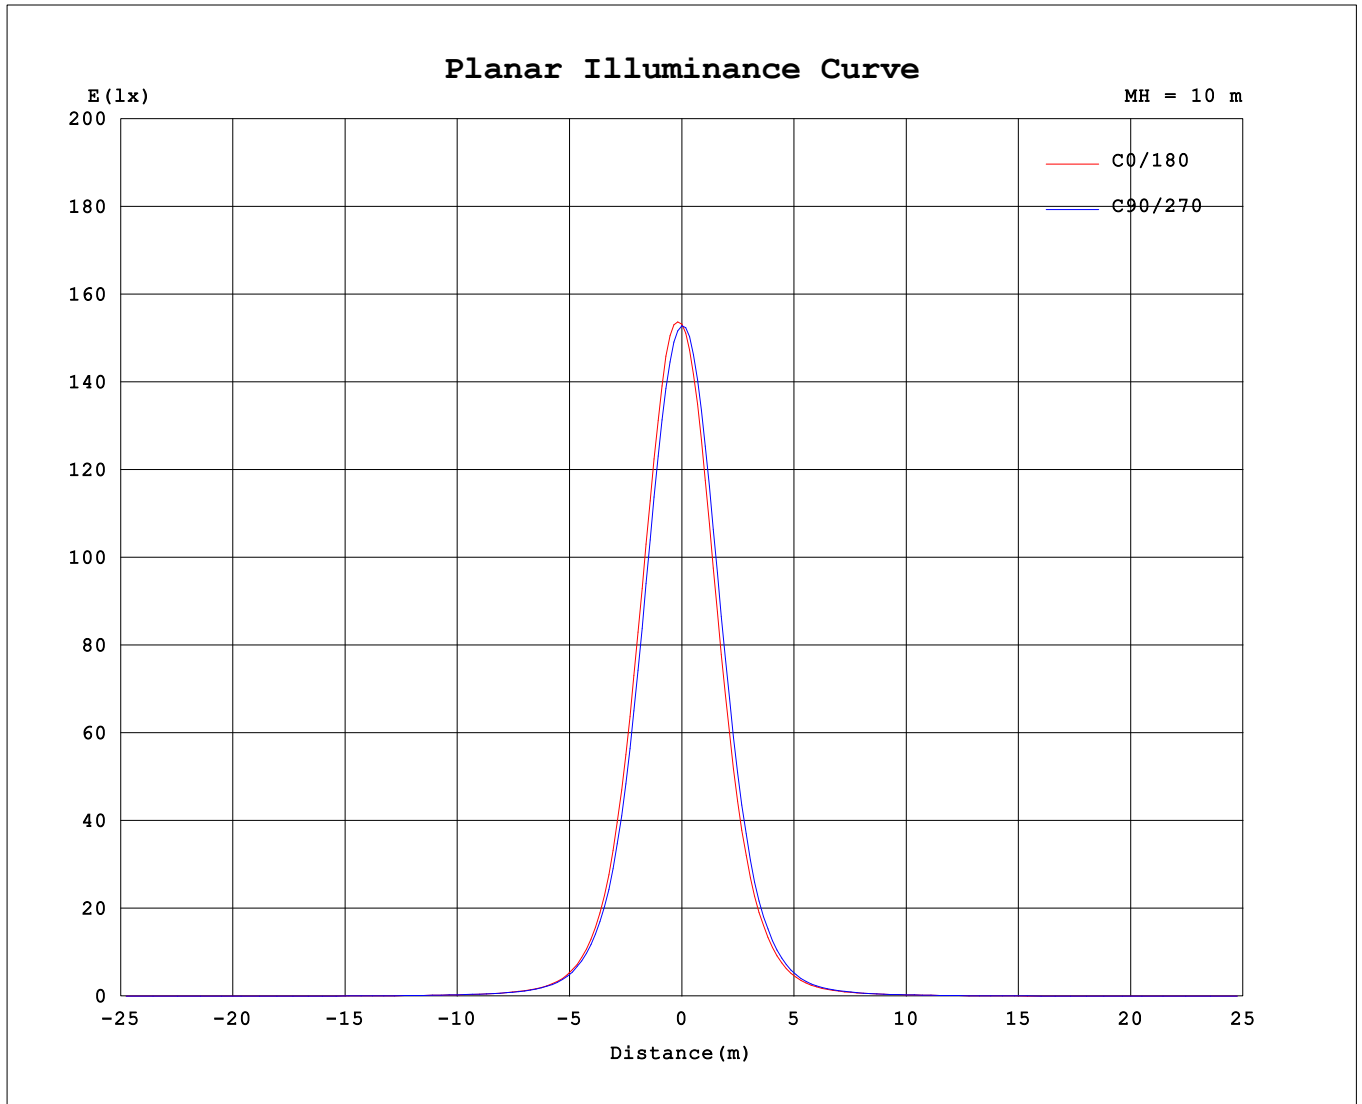

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	15289	15289	15289	15289	15289	15289	15289	15289
3.0	15088	14931	14520	14249	14209	14300	14687	15038
6.0	13313	13114	12519	12031	11932	12082	12752	13350
9.0	10679	10454	9767	9165	9071	9259	10028	10698
12.0	7798	7575	6956	6458	6391	6572	7245	7835
15.0	5206	5056	4567	4238	4193	4340	4838	5290
18.0	3216	3132	2834	2649	2643	2721	3022	3292
21.0	1930	1927	1744	1655	1641	1689	1887	2003
24.0	1157	1146	1062	1020	1002	1031	1145	1216
27.0	696.2	692.5	647.5	626.3	609.5	624.9	696.2	738.2
30.0	437.7	434.8	412.5	400.5	386.9	393.5	436.8	463.3
33.0	295.1	292.1	281.7	276.7	264.4	265.6	293.1	311.7
36.0	210.0	209.7	203.4	203.5	192.4	189.6	210.3	222.4
39.0	154.9	154.7	153.3	154.8	145.0	141.9	154.9	164.4
42.0	119.0	120.3	120.4	122.9	114.6	110.9	119.5	126.3
45.0	95.98	96.18	97.40	99.36	92.89	89.36	95.78	100.6
48.0	78.15	77.63	79.89	80.90	76.53	72.48	78.22	82.27
51.0	65.07	63.56	65.66	66.91	64.01	59.95	65.12	68.38
54.0	54.80	53.15	54.77	55.88	54.11	50.55	54.99	57.52
57.0	44.76	42.49	44.24	44.75	44.09	40.83	45.34	47.53
60.0	37.01	35.20	36.40	36.38	36.33	33.68	37.50	39.02
63.0	29.03	27.44	28.10	28.28	28.07	26.47	29.18	30.21
66.0	21.44	20.12	19.90	19.62	19.57	18.50	21.21	22.29
69.0	13.15	12.37	11.75	10.89	10.81	10.85	12.70	13.60
72.0	6.317	6.074	5.647	4.807	4.718	5.019	6.003	6.423
75.0	2.974	2.881	2.647	2.469	2.459	2.482	2.813	2.962
78.0	1.892	1.851	1.705	1.660	1.719	1.635	1.788	1.853
81.0	1.376	1.299	1.204	1.062	1.110	1.101	1.292	1.338
84.0	0.7923	0.7136	0.6967	0.5993	0.6449	0.6092	0.7306	0.7391
87.0	0.4234	0.3402	0.3327	0.2335	0.2611	0.2528	0.3681	0.3617
90.0	0.1221	0.0777	0.1360	0.0853	0.0869	0.0825	0.0990	0.0721

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: