


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822 Lamp Flux:3356.6lx1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.85 lm/W			
MODEL		Imax (cd)	16127	S/MH(C0/180)	0.37
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.40
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3356.6	$\eta$ UP,DN(C0-180)	0.0,48.6
NOMINAL FLUX(lm)	3356.61	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,51.4
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.21	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

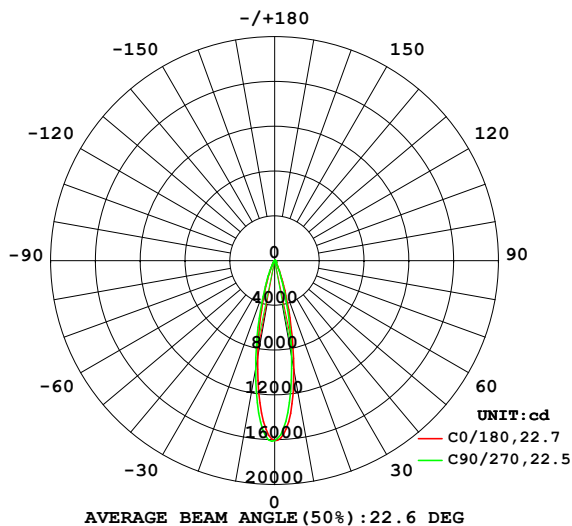

PLANAR ISOLUX DIAGRAM(UNIT:lx)

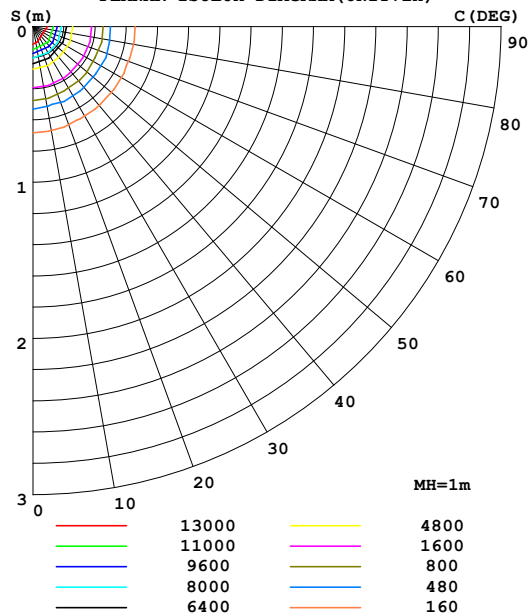

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	990.7	928.8	876.3	861.4	883.7	918.9	986.3	1019	0- 10	1185	1185	35.3,35.3
20	239.2	216.2	196.9	202.6	213.2	227.8	247.0	249.7	10- 20	1372	2558	76.2,76.2
30	46.34	41.47	38.41	40.35	42.67	46.88	50.24	48.71	20- 30	485.8	3043	90.7,90.7
40	15.56	14.21	13.59	13.78	13.85	14.39	15.73	16.15	30- 40	157.7	3201	95.4,95.4
50	7.727	7.012	6.959	6.940	6.845	6.712	7.571	8.045	40- 50	79.18	3280	97.7,97.7
60	4.022	3.695	3.707	3.713	3.652	3.478	3.972	4.194	50- 60	47.98	3328	99.2,99.2
70	1.195	1.115	0.9608	0.8063	0.7935	0.9101	1.075	1.204	60- 70	23.70	3352	99.9,99.9
80	0.1680	0.1687	0.1600	0.1411	0.1394	0.1363	0.1540	0.1595	70- 80	4.040	3356	100,100
90	0.0132	0.0081	0.0146	0.0093	0.0093	0.0086	0.0107	0.0076	80- 90	0.7045	3357	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3245.8 lm

%lum = 96.7%

%lamp = 96.7%

Conical surface Flux(120deg): 3328.2 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822 Lamp Flux:3356.61x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

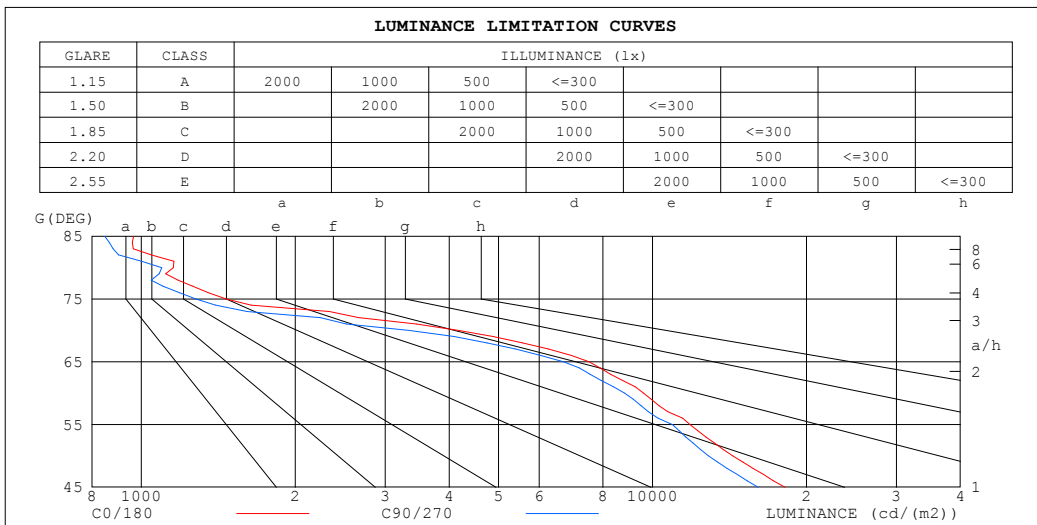


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822 Lamp Flux:3356.61x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

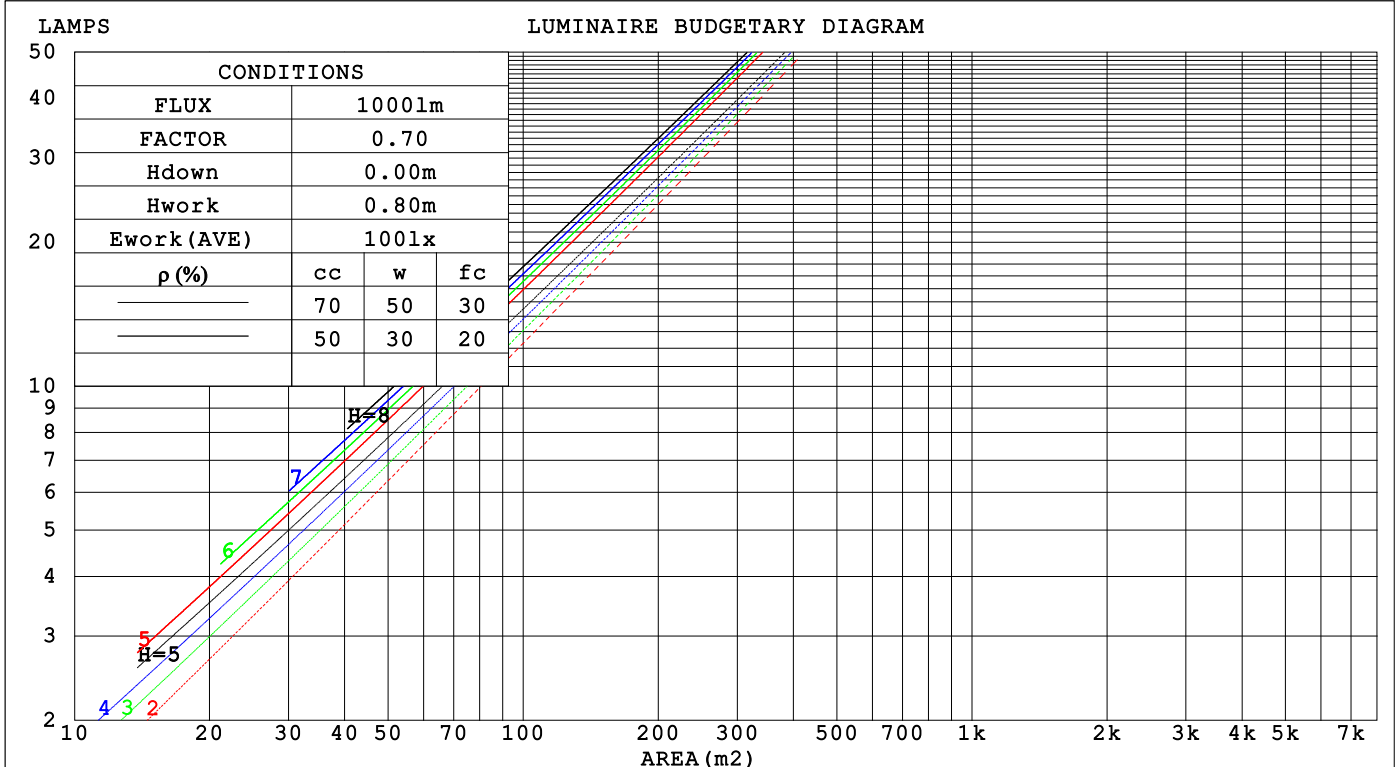

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822 Lamp Flux:3356.61x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.143	.082	.026	.137	.078	.025	.124	.071	.023	.113	.065	.021	.102	.059	.019	
2.0	.134	.073	.022	.128	.071	.022	.118	.066	.020	.109	.061	.019	.100	.056	.018	
3.0	.125	.066	.020	.120	.064	.019	.112	.061	.018	.104	.057	.017	.096	.053	.017	
4.0	.117	.061	.018	.113	.059	.018	.106	.056	.017	.099	.053	.016	.093	.051	.015	
5.0	.110	.056	.016	.107	.055	.016	.101	.052	.015	.095	.050	.015	.090	.048	.014	
6.0	.104	.052	.015	.101	.051	.015	.096	.049	.014	.091	.047	.014	.086	.045	.013	
7.0	.099	.049	.014	.096	.048	.014	.092	.046	.013	.087	.045	.013	.083	.043	.013	
8.0	.094	.046	.013	.092	.045	.013	.088	.044	.013	.084	.042	.012	.080	.041	.012	
9.0	.090	.043	.012	.088	.043	.012	.084	.042	.012	.081	.040	.012	.077	.039	.011	
10.0	.086	.041	.011	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.169	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017		
2.0	.151	.133	.117	.129	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.013		
3.0	.137	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011		
4.0	.124	.098	.078	.107	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009		
5.0	.114	.086	.065	.098	.074	.057	.067	.052	.040	.039	.030	.024	.013	.010	.008		
6.0	.105	.076	.055	.090	.066	.048	.062	.046	.034	.036	.027	.020	.012	.009	.007		
7.0	.098	.068	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006		
8.0	.091	.061	.040	.078	.053	.035	.054	.037	.025	.032	.022	.015	.010	.007	.005		
9.0	.085	.055	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004		
10.0	.080	.051	.031	.069	.044	.027	.048	.031	.019	.028	.018	.011	.009	.006	.004		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz											
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822 Lamp Flux:3356.6lx1 lm											
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:						WEIGHT:					
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Norming lighting						SUR.: 104mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H		14.4	15.0	14.6	15.2	15.3	13.9	14.6	14.1	14.7	14.9
	3H	14.6	15.3	14.9	15.4	15.6	14.1	14.7	14.3	14.9	15.1
	4H	14.6	15.2	14.8	15.4	15.6	14.0	14.7	14.3	14.9	15.1
	6H	14.5	15.1	14.8	15.3	15.5	14.0	14.6	14.3	14.8	15.0
	8H	14.5	15.0	14.7	15.3	15.5	13.9	14.5	14.2	14.7	15.0
	12H	14.4	14.9	14.7	15.2	15.5	13.9	14.4	14.2	14.7	15.0
4H	2H	14.5	15.1	14.7	15.3	15.5	14.1	14.7	14.3	14.9	15.1
	3H	14.8	15.3	15.1	15.6	15.8	14.3	14.8	14.6	15.1	15.4
	4H	14.7	15.2	15.0	15.5	15.8	14.2	14.7	14.6	15.0	15.3
	6H	14.6	15.1	15.0	15.4	15.7	14.2	14.6	14.5	14.9	15.3
	8H	14.6	15.0	15.0	15.3	15.7	14.1	14.5	14.5	14.9	15.2
	12H	14.5	14.9	14.9	15.3	15.7	14.1	14.4	14.5	14.8	15.2
8H	4H	14.6	15.0	15.0	15.3	15.7	14.1	14.5	14.5	14.9	15.2
	6H	14.5	14.8	14.9	15.2	15.6	14.0	14.4	14.5	14.8	15.2
	8H	14.4	14.7	14.9	15.2	15.6	14.0	14.3	14.4	14.7	15.1
	12H	14.4	14.6	14.9	15.1	15.6	13.9	14.2	14.4	14.6	15.1
12H	4H	14.5	14.9	14.9	15.3	15.7	14.1	14.4	14.5	14.8	15.2
	6H	14.4	14.7	14.9	15.2	15.6	14.0	14.3	14.4	14.7	15.1
	8H	14.4	14.6	14.9	15.1	15.6	13.9	14.2	14.4	14.6	15.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.3 / - 1.6					+ 1.1 / - 1.6				
1.5H		+ 1.9 / - 0.9					+ 1.5 / - 0.9				
2.0H		+ 1.9 / - 1.6					+ 1.7 / - 1.4				

CIE Pub.117, 3357 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.2)  
Area: 0.0084 m2

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822 Lamp Flux:3356.6lx1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 104mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822 Lamp Flux:3356.61x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

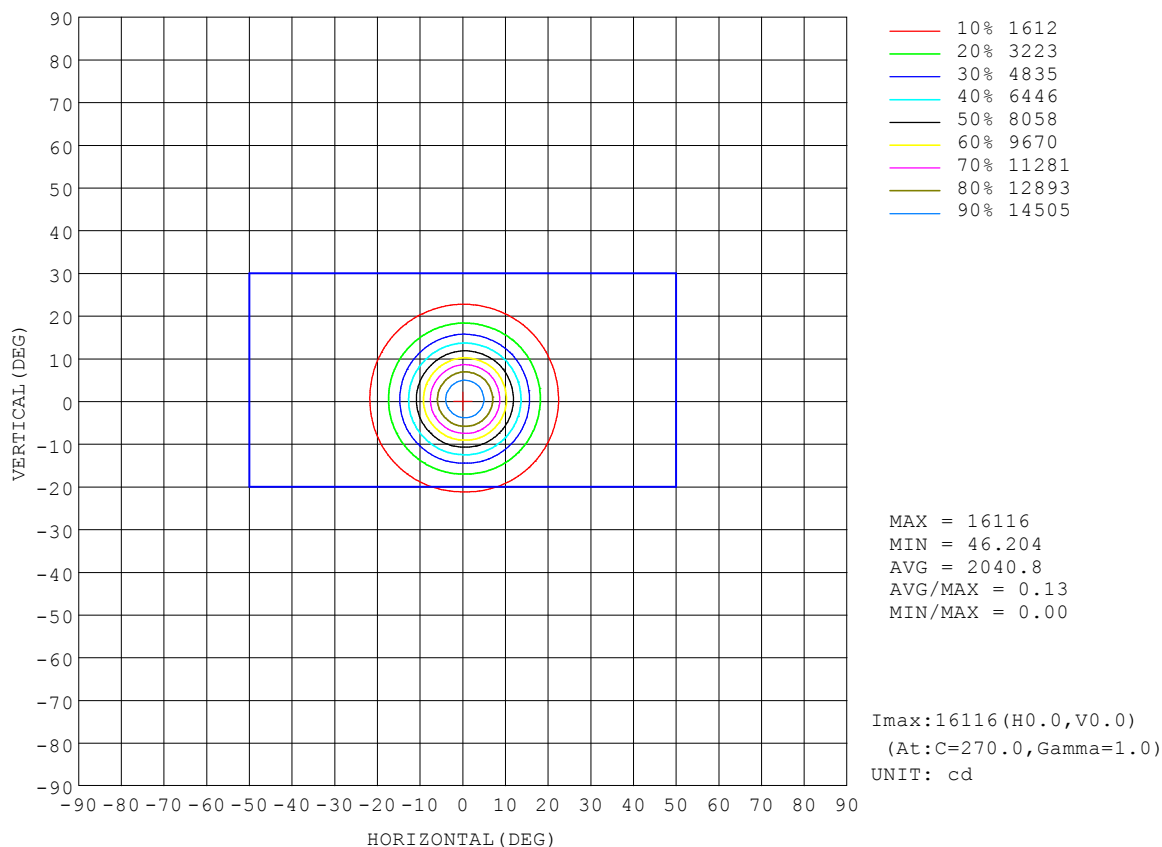


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822		Lamp Flux:3356.6lx1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

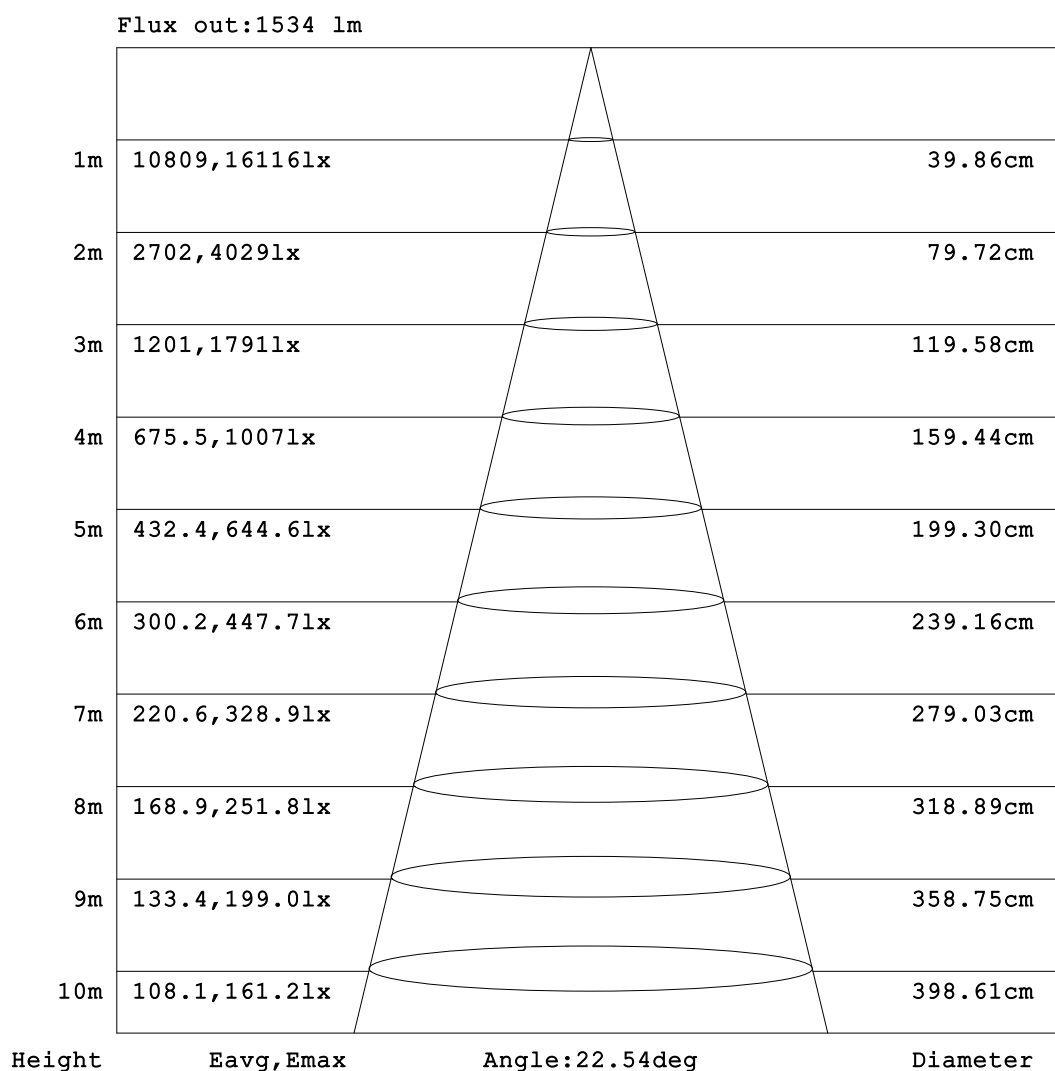


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.90% KDisp:0.9822		Lamp Flux:3356.61x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

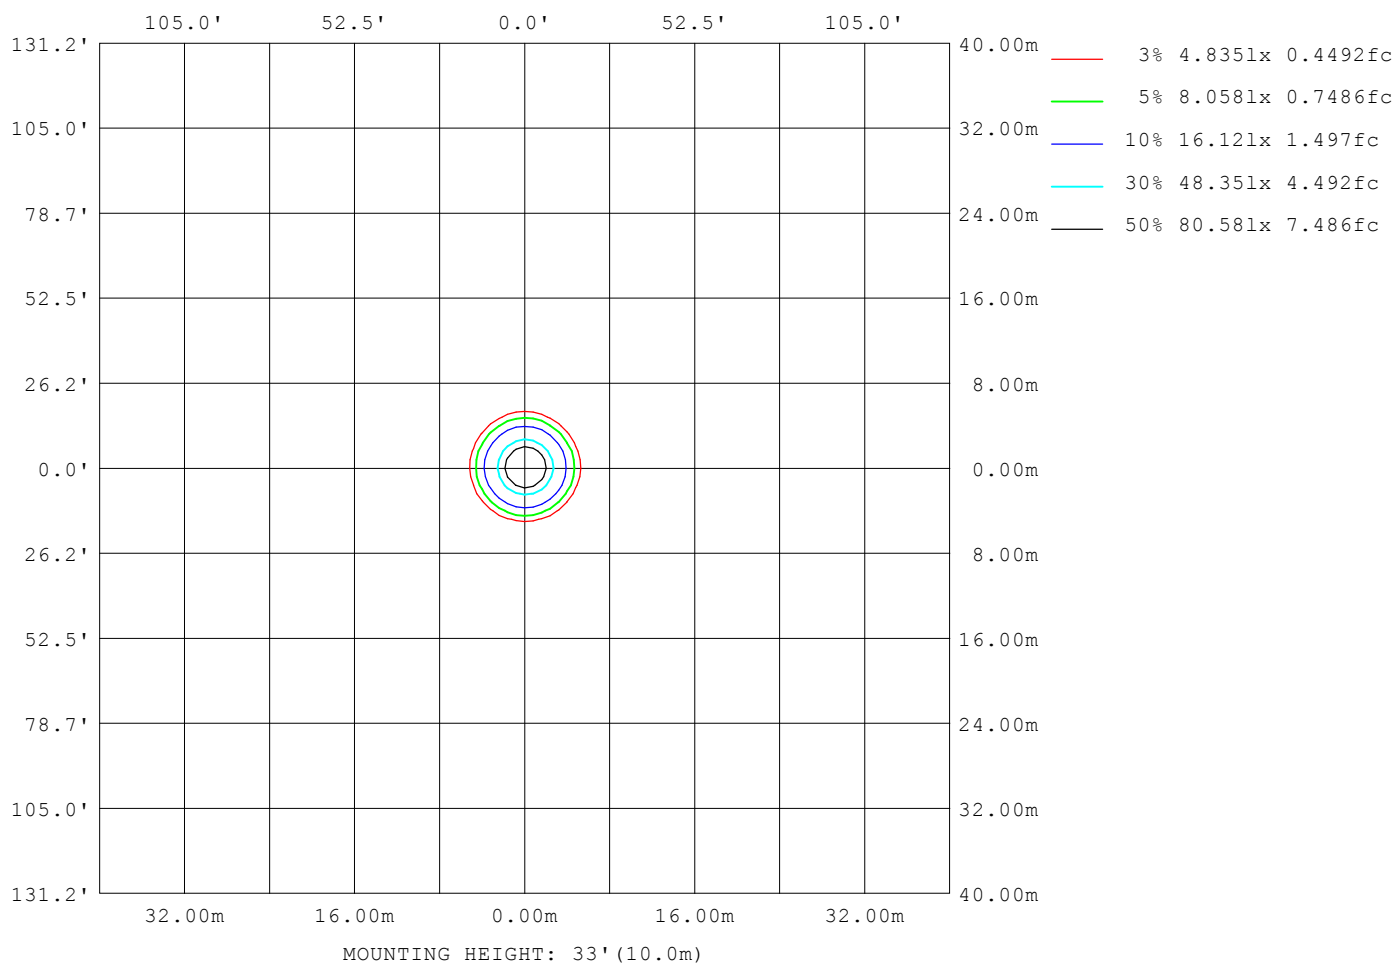

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LED Avg.L Report

Test:U:240.3V I:0.1274A P:30.0W PF:0.9803 Freq:49.99Hz UTHDi:0.17% ITHDi:5.90% KDisp:0.9822 Lamp Flux:3356.61x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6899
L_0~180 (75) av	1331
L_0~180 (85) av	844
L_90~270 (65) av	6982
L_90~270 (75) av	1329
L_90~270 (85) av	841
L_45 (65) av	6812
L_45 (75) av	1313
L_45 (85) av	772

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### Planar Illuminance Curve

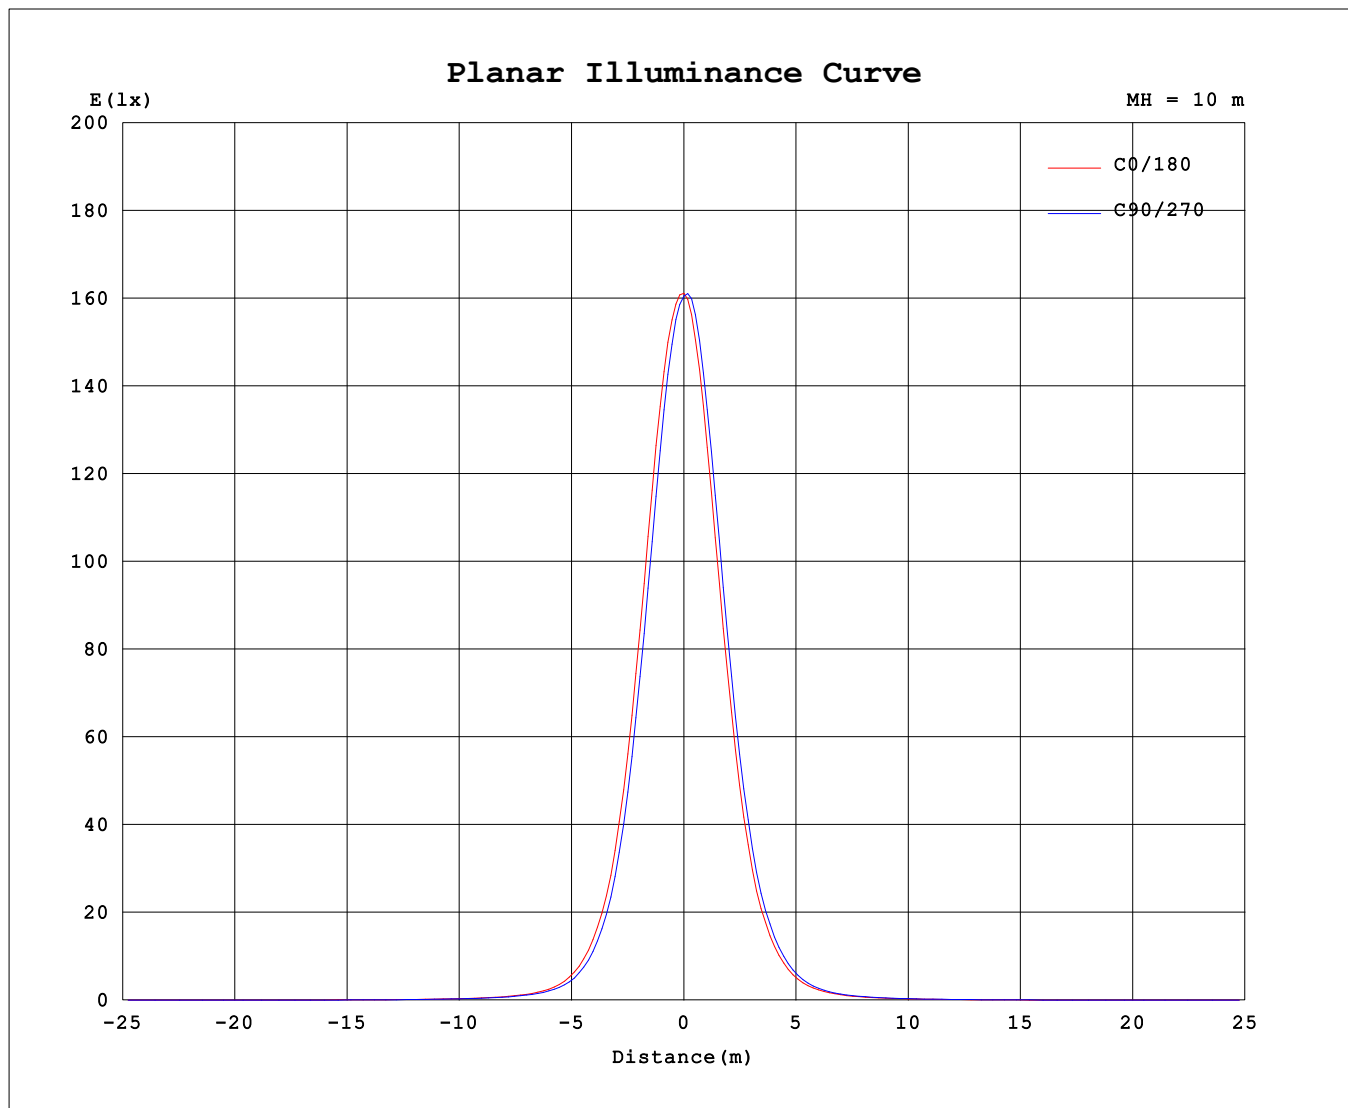

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	16063	16063	16063	16063	16063	16063	16063	16063
3.0	15524	15260	15028	15004	15068	15350	15706	15730
6.0	13717	13245	12742	12603	12768	13128	13696	13948
9.0	10930	10318	9760	9611	9828	10204	10880	11221
12.0	7927	7338	6886	6793	6992	7295	7901	8177
15.0	5307	4828	4461	4444	4621	4910	5352	5508
18.0	3305	2989	2739	2762	2888	3110	3392	3471
21.0	2040	1832	1664	1703	1802	1953	2139	2115
24.0	1234	1091	988.5	1035	1110	1225	1315	1281
27.0	742.0	655.6	598.4	631.4	676.3	751.8	804.2	775.3
30.0	463.4	414.7	384.1	403.5	426.7	468.8	502.4	487.1
33.0	312.3	282.0	265.5	276.3	287.8	310.6	333.5	328.1
36.0	225.3	205.0	193.2	199.9	204.3	217.0	234.3	235.2
39.0	170.1	155.1	147.3	150.3	151.6	158.3	172.5	176.3
42.0	133.0	121.3	116.9	117.7	117.4	120.8	133.1	137.3
45.0	107.5	98.15	95.61	95.04	94.03	95.96	106.1	111.1
48.0	88.13	79.96	78.69	78.17	77.20	76.91	86.16	91.53
51.0	72.48	65.75	65.71	65.48	64.63	62.90	71.17	75.46
54.0	60.30	54.77	55.73	55.29	54.67	52.59	59.66	62.83
57.0	48.86	44.46	44.94	45.31	44.88	42.54	48.10	50.89
60.0	40.22	36.95	37.07	37.13	36.52	34.78	39.72	41.94
63.0	31.48	28.95	28.83	28.82	28.27	27.30	31.07	32.48
66.0	23.61	21.75	20.65	19.93	19.36	18.89	22.43	24.00
69.0	14.63	13.58	12.32	11.32	10.94	11.31	13.40	14.82
72.0	6.886	6.452	5.814	5.165	5.094	5.692	6.515	6.981
75.0	3.178	3.001	2.786	2.590	2.608	2.668	2.994	3.160
78.0	2.055	1.967	1.827	1.764	1.752	1.618	1.867	1.997
81.0	1.516	1.443	1.317	1.123	1.113	1.094	1.295	1.415
84.0	0.8399	0.7717	0.7602	0.6445	0.6611	0.6200	0.7382	0.7678
87.0	0.4459	0.3609	0.3645	0.2552	0.2624	0.2634	0.3726	0.3756
90.0	0.1323	0.0812	0.1460	0.0929	0.0932	0.0860	0.1068	0.0765

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: