


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.88% KDisp:0.9822 Lamp Flux:3596.14x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 119.62 lm/W			
MODEL		I _{max} (cd)	8388	S/MH(C0/180)	0.55
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.58
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3596.1	η UP,DN(C0-180)	0.0,51.5
NOMINAL FLUX(lm)	3596.14	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	240.35	η down (%)	100.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

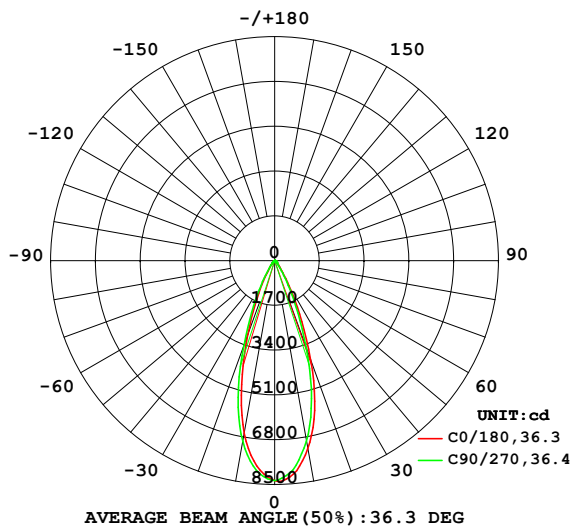

PLANAR ISOLUX DIAGRAM(UNIT:lx)

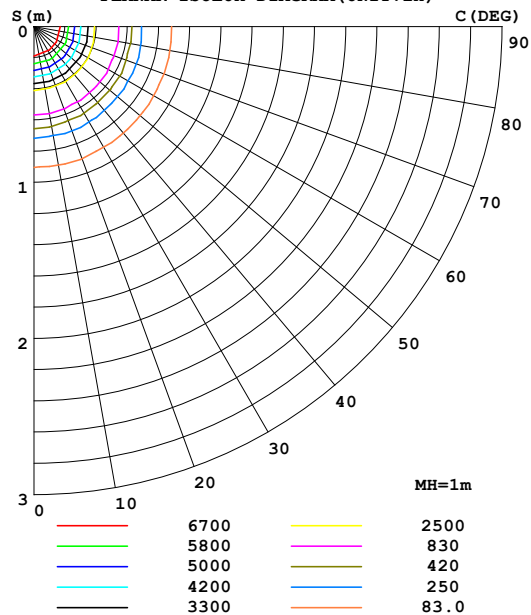

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	7255	7109	6961	6788	6661	6775	6977	7152	0- 10	728.9	728.9	20.3,20.3
20	3997	3856	3526	3207	2992	3111	3442	3775	10- 20	1457	2186	60.8,60.8
30	1113	1039	926.1	819.0	753.4	811.1	923.5	1021	20- 30	896.2	3082	85.7,85.7
40	250.0	231.9	220.2	211.3	197.8	202.6	225.6	238.8	30- 40	286.0	3368	93.7,93.7
50	112.2	105.2	108.0	105.7	100.5	94.06	105.1	110.5	40- 50	116.0	3484	96.9,96.9
60	62.44	55.69	56.71	55.41	52.04	49.18	56.18	61.00	50- 60	70.19	3554	98.8,98.8
70	20.49	18.68	15.94	12.05	9.560	10.35	15.33	18.94	60- 70	35.59	3590	99.8,99.8
80	2.469	2.414	2.302	2.048	1.953	2.028	2.370	2.455	70- 80	5.371	3595	100,100
90	0.1695	0.0896	0.1427	0.1050	0.1139	0.1001	0.1176	0.0902	80- 90	1.016	3596	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3434.2 lm

%lum = 95.5%

%lamp = 95.5%

Conical surface Flux(120deg): 3554.2 lm

%lum = 98.8%


%lamp = 98.8%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.88% KDisp:0.9822 Lamp Flux:3596.14x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

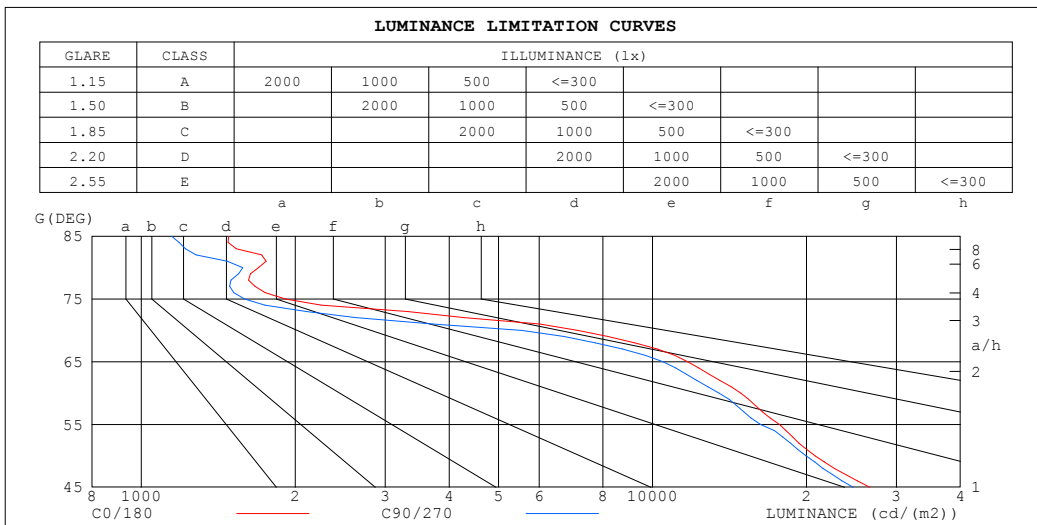


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.88% KDisp:0.9822 Lamp Flux:3596.14x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.09	1.07	1.10	1.08	1.06	1.05	1.04	1.02	1.02	1.01	.99	.98	.97	.97	.95														
2.0	1.05	1.01	.98	1.03	1.00	.97	1.00	.98	.95	.97	.95	.93	.95	.93	.91	.90														
3.0	.99	.95	.91	.98	.94	.91	.95	.92	.89	.93	.90	.88	.91	.88	.86	.85														
4.0	.94	.89	.85	.93	.88	.85	.91	.87	.84	.89	.86	.83	.87	.84	.82	.81														
5.0	.89	.84	.80	.88	.84	.80	.87	.83	.79	.85	.82	.79	.84	.81	.78	.77														
6.0	.85	.80	.76	.84	.79	.76	.83	.79	.75	.82	.78	.75	.80	.77	.74	.73														
7.0	.81	.76	.72	.81	.76	.72	.79	.75	.72	.78	.74	.72	.77	.74	.71	.70														
8.0	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.68	.74	.71	.68	.67														
9.0	.74	.69	.66	.74	.69	.66	.73	.69	.66	.72	.68	.66	.72	.68	.65	.64														
10.0	.72	.67	.63	.71	.66	.63	.70	.66	.63	.70	.66	.63	.69	.65	.63	.62														

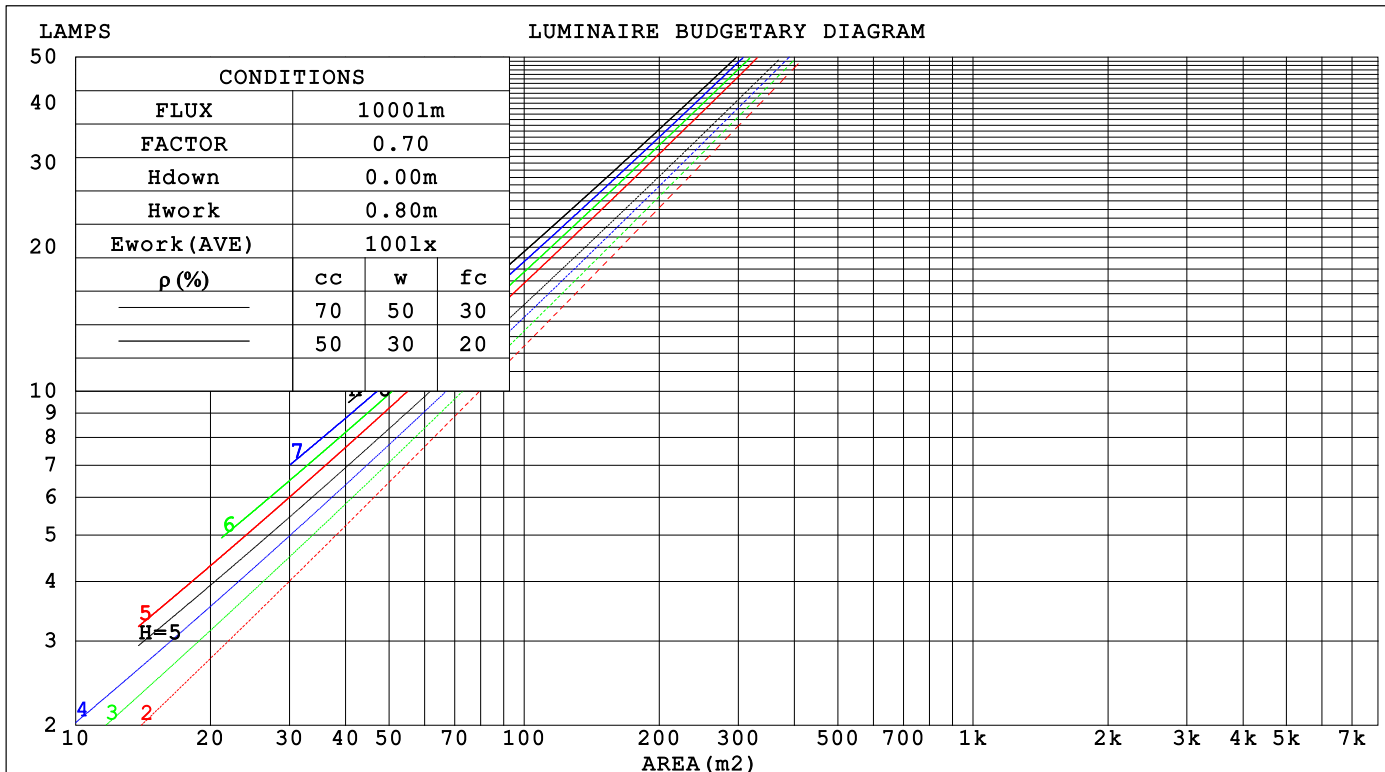

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.88% KDisp:0.9822 Lamp Flux:3596.14x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 104mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.161	.091	.029	.154	.088	.028	.141	.081	.026	.130	.075	.024	.119	.069	.022		
2.0	.152	.083	.026	.146	.081	.025	.136	.076	.023	.126	.071	.022	.117	.066	.021		
3.0	.143	.076	.023	.139	.074	.022	.130	.070	.021	.122	.067	.020	.114	.063	.020		
4.0	.135	.070	.021	.131	.069	.020	.124	.066	.020	.117	.063	.019	.110	.060	.018		
5.0	.128	.065	.019	.125	.064	.019	.118	.062	.018	.112	.059	.018	.107	.057	.017		
6.0	.122	.061	.017	.119	.060	.017	.113	.058	.017	.108	.056	.016	.103	.054	.016		
7.0	.116	.057	.016	.113	.056	.016	.108	.055	.016	.104	.053	.015	.099	.052	.015		
8.0	.111	.054	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015	.096	.049	.014		
9.0	.106	.051	.014	.104	.051	.014	.100	.049	.014	.096	.048	.014	.093	.047	.014		
10.0	.101	.049	.014	.100	.048	.013	.096	.047	.013	.093	.046	.013	.090	.045	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.154	.133	.115	.132	.114	.099	.090	.079	.069	.052	.046	.041	.017	.015	.013		
3.0	.140	.113	.092	.120	.098	.080	.082	.068	.056	.048	.040	.033	.015	.013	.011		
4.0	.129	.098	.075	.111	.085	.065	.076	.059	.046	.044	.035	.027	.014	.011	.009		
5.0	.119	.087	.062	.102	.075	.054	.071	.052	.038	.041	.031	.023	.013	.010	.007		
6.0	.111	.077	.052	.096	.067	.046	.066	.047	.032	.038	.027	.019	.012	.009	.006		
7.0	.104	.069	.045	.090	.060	.039	.062	.042	.027	.036	.025	.016	.012	.008	.005		
8.0	.098	.063	.038	.084	.054	.033	.058	.038	.024	.034	.022	.014	.011	.007	.005		
9.0	.093	.057	.033	.080	.050	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004		
10.0	.088	.053	.029	.076	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz UTHDi:0.16% ITHDi:5.88% KDisp:0.9822 Lamp Flux:3596.14x1 lm										
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 104mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.8	18.6	18.0	18.7	18.9	17.2	18.0	17.4	18.2	18.3
3H	18.0	18.7	18.2	18.9	19.1	17.4	18.1	17.6	18.3	18.5
4H	17.9	18.6	18.2	18.9	19.1	17.3	18.0	17.6	18.3	18.5
6H	17.9	18.5	18.1	18.8	19.0	17.2	17.9	17.5	18.2	18.4
8H	17.8	18.5	18.1	18.7	19.0	17.2	17.9	17.5	18.1	18.4
12H	17.8	18.4	18.1	18.7	18.9	17.2	17.8	17.5	18.0	18.3
4H 2H	17.8	18.5	18.1	18.7	19.0	17.3	18.0	17.6	18.2	18.5
3H	18.1	18.7	18.4	19.0	19.2	17.5	18.1	17.8	18.4	18.7
4H	18.0	18.6	18.3	18.9	19.2	17.4	18.0	17.8	18.3	18.6
6H	17.9	18.4	18.3	18.7	19.1	17.4	17.9	17.7	18.2	18.5
8H	17.9	18.3	18.3	18.7	19.1	17.3	17.8	17.7	18.1	18.5
12H	17.8	18.2	18.2	18.6	19.0	17.3	17.7	17.7	18.1	18.4
8H 4H	17.9	18.3	18.3	18.7	19.1	17.3	17.8	17.7	18.1	18.5
6H	17.8	18.2	18.2	18.6	19.0	17.2	17.6	17.7	18.0	18.4
8H	17.7	18.1	18.2	18.5	18.9	17.2	17.5	17.6	17.9	18.4
12H	17.7	18.0	18.2	18.4	18.9	17.1	17.4	17.6	17.9	18.3
12H 4H	17.8	18.2	18.2	18.6	19.0	17.3	17.7	17.7	18.1	18.5
6H	17.7	18.1	18.2	18.5	18.9	17.2	17.5	17.6	17.9	18.4
8H	17.7	18.0	18.2	18.4	18.9	17.1	17.4	17.6	17.9	18.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.7 / - 1.9					+ 1.3 / - 1.8				
1.5H	+ 2.8 / - 1.3					+ 2.1 / - 1.2				
2.0H	+ 1.8 / - 1.5					+ 1.7 / - 1.4				

CIE Pub.117, 3596 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.4$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.88% KDisp:0.9822 Lamp Flux:3596.14x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 104mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	81	77	87	81	77	86	81	77	74
0.80	95	89	85	94	89	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	95	102	98	94	100	96	93	89
1.50	106	101	98	105	101	97	103	99	96	92
2.00	109	104	101	107	103	101	104	101	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz UTHDi:0.16% ITHDi:5.88% KDisp:0.9822 Lamp Flux:3596.14x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

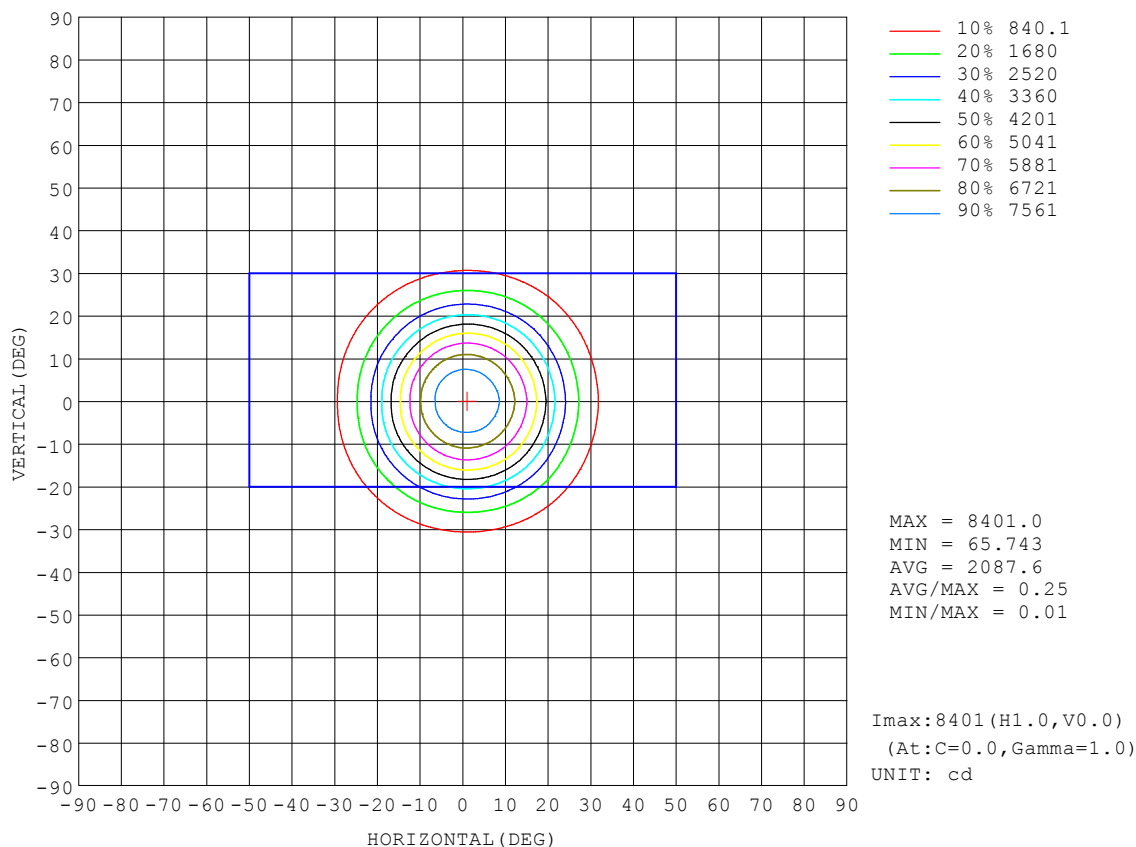


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.88% KDisp:0.9822		Lamp Flux:3596.14x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

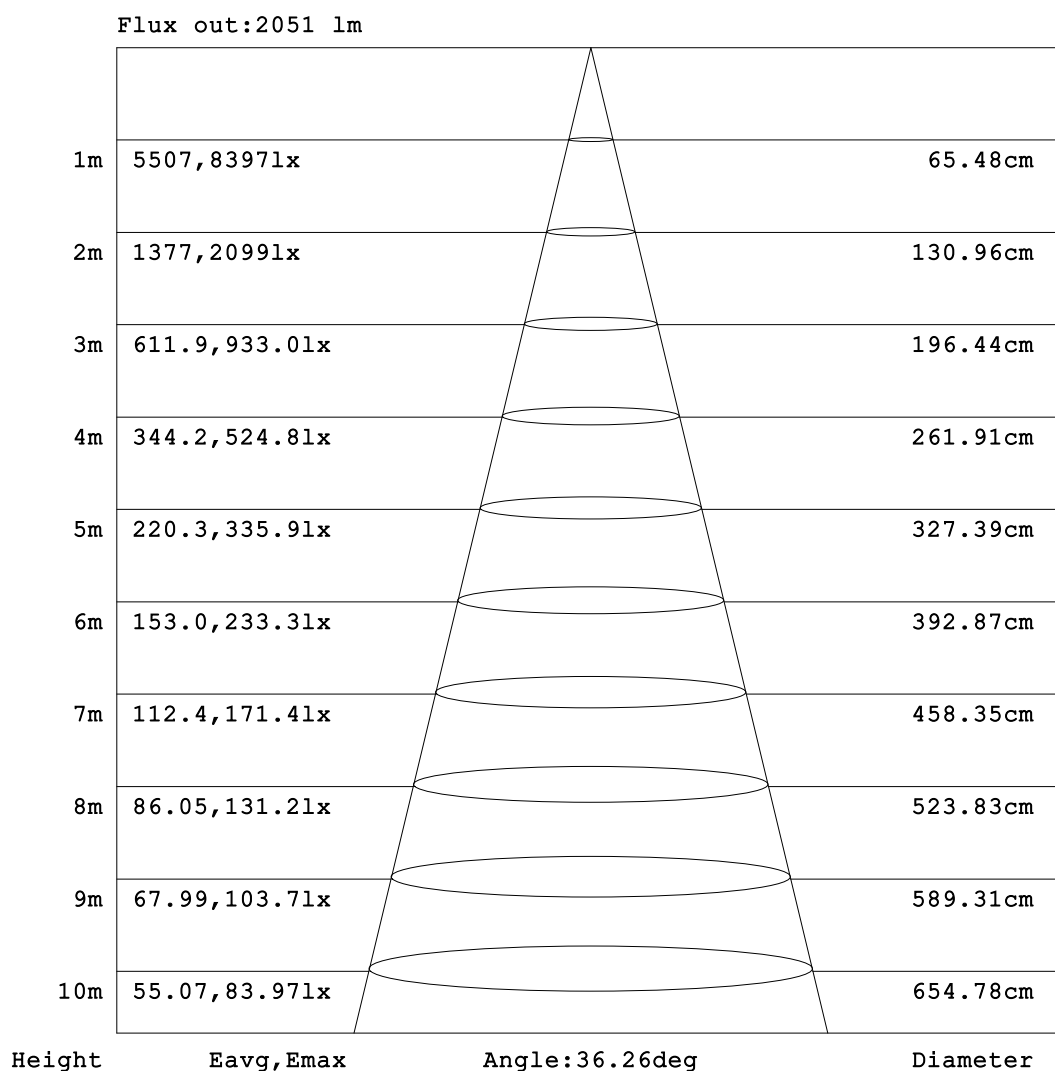


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.88% KDisp:0.9822		Lamp Flux:3596.14x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

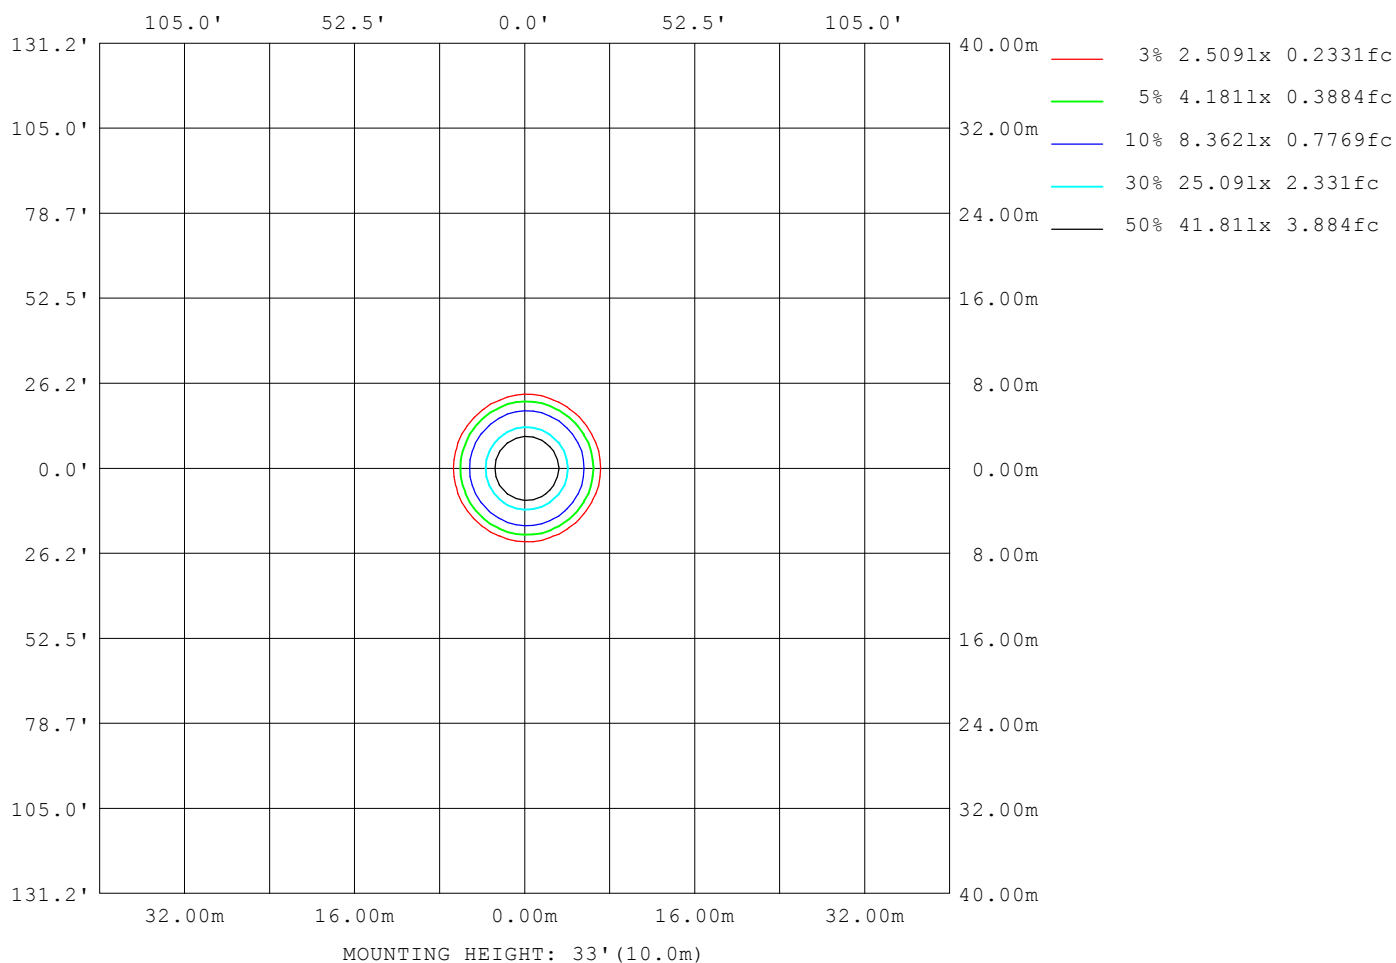

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.88% KDisp:0.9822 Lamp Flux:3596.14x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 36D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	10514
L_0~180 (75) av	1677
L_0~180 (85) av	1172
L_90~270 (65) av	10440
L_90~270 (75) av	1600
L_90~270 (85) av	1159
L_45 (65) av	10209
L_45 (75) av	1610
L_45 (85) av	1108

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

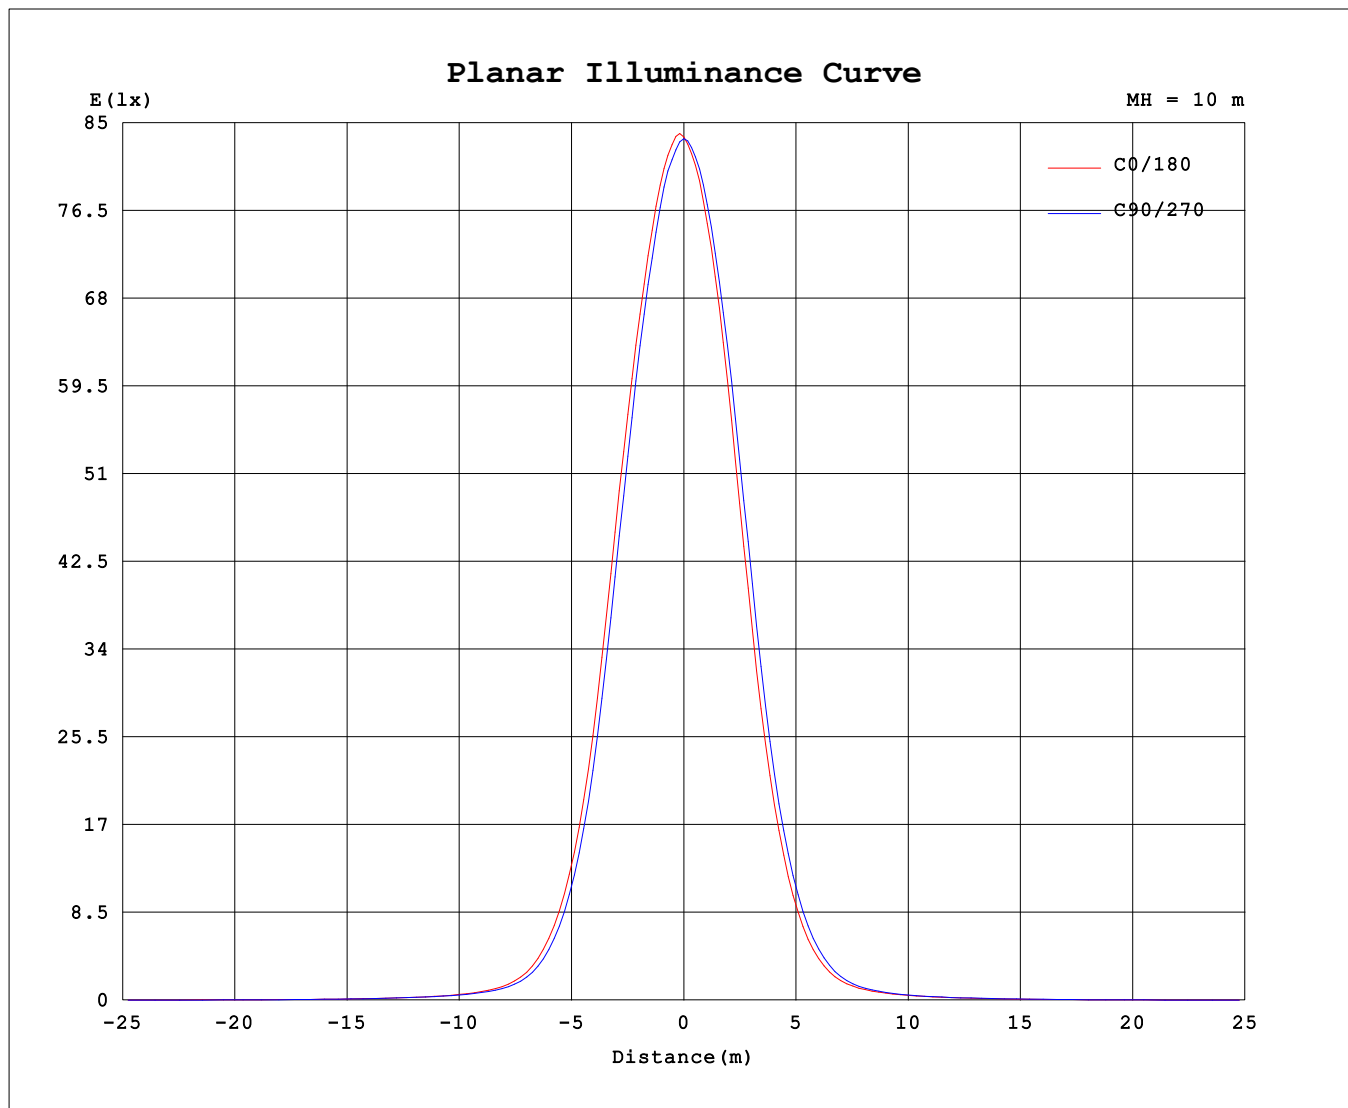

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	8350	8350	8350	8350	8350	8350	8350	8350
3.0	8311	8245	8179	8142	8109	8156	8207	8264
6.0	8016	7913	7809	7711	7639	7725	7839	7937
9.0	7474	7346	7197	7064	6950	7056	7223	7375
12.0	6772	6613	6412	6165	5997	6138	6411	6629
15.0	5887	5714	5423	5114	4873	5026	5370	5683
18.0	4796	4636	4307	3949	3705	3843	4218	4573
21.0	3593	3466	3148	2864	2669	2784	3082	3389
24.0	2544	2428	2182	1994	1842	1931	2155	2377
27.0	1723	1630	1448	1300	1207	1282	1446	1599
30.0	1113	1039	926.1	819.0	753.4	811.1	923.5	1021
33.0	686.5	627.3	559.2	500.8	466.5	501.6	574.4	631.3
36.0	424.1	386.5	349.5	321.4	303.1	321.6	362.1	394.0
39.0	280.4	258.8	243.0	229.8	219.1	224.2	248.0	266.2
42.0	204.3	190.4	184.1	178.0	167.0	168.4	185.8	197.7
45.0	158.0	147.5	146.6	143.5	134.5	132.3	145.9	154.2
48.0	127.4	119.2	121.1	118.9	112.5	106.7	118.8	124.9
51.0	105.7	99.16	101.8	99.75	94.61	88.38	98.92	104.3
54.0	89.96	82.96	85.55	83.42	77.82	73.39	83.12	88.71
57.0	74.90	66.60	69.01	68.10	64.38	60.63	68.63	73.46
60.0	62.44	55.69	56.71	55.41	52.04	49.18	56.18	61.00
63.0	49.13	44.00	44.43	43.47	40.84	38.78	44.08	47.88
66.0	37.74	33.97	33.10	30.93	28.53	27.46	32.71	36.36
69.0	24.60	22.47	20.23	17.41	15.29	15.94	19.58	22.99
72.0	11.11	9.420	6.832	5.559	4.885	4.979	6.389	10.35
75.0	4.157	3.885	3.465	3.169	3.133	3.117	3.490	3.828
78.0	2.824	2.756	2.615	2.582	2.615	2.549	2.709	2.769
81.0	2.303	2.192	1.937	1.573	1.492	1.549	1.989	2.241
84.0	1.296	1.168	1.041	0.8557	0.8311	0.8442	1.065	1.191
87.0	0.6925	0.5736	0.4716	0.2935	0.2600	0.2885	0.4832	0.5834
90.0	0.1695	0.0896	0.1427	0.1050	0.1139	0.1001	0.1176	0.0902

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: