


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.75% KDisp:0.9825 Lamp Flux:3377.64x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.97 lm/W			
MODEL		Imax (cd)	3542	S/MH(C0/180)	0.87
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.89
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3377.6	η UP,DN(C0-180)	0.0,49.6
NOMINAL FLUX(lm)	3377.64	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	240.37	η down (%)	100.0	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

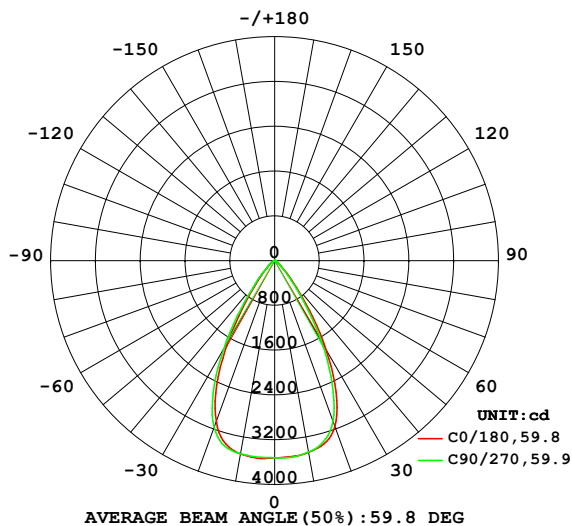

PLANAR ISOLUX DIAGRAM(UNIT:lx)

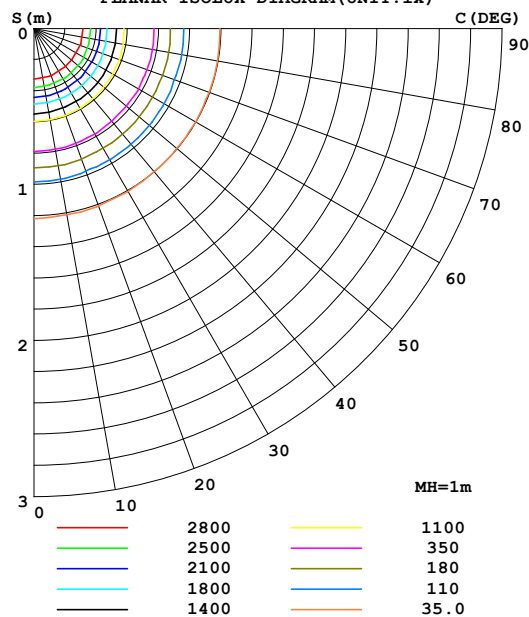

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3479	3467	3474	3495	3506	3517	3502	3489	0- 10	335.4	335.4	9.93,9.93
20	3152	3087	3056	3038	3052	3118	3167	3170	10- 20	947.2	1283	38,38
30	1849	1781	1683	1651	1658	1732	1828	1862	20- 30	1133	2415	71.5,71.5
40	545.7	514.2	478.5	466.1	466.1	498.7	547.6	556.8	30- 40	641.9	3057	90.5,90.5
50	145.1	134.4	131.0	133.4	131.7	136.6	150.5	152.6	40- 50	213.6	3271	96.8,96.8
60	51.56	43.65	41.04	40.41	38.44	39.92	46.11	52.11	50- 60	75.78	3347	99.1,99.1
70	14.76	13.79	12.08	10.08	8.916	11.10	13.70	14.75	60- 70	24.75	3372	99.8,99.8
80	2.974	2.806	2.471	2.088	1.902	2.110	2.545	2.779	70- 80	5.110	3377	100,100
90	0.1078	0.0793	0.1064	0.0862	0.0921	0.0854	0.0878	0.0769	80- 90	0.9971	3378	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3193.8 lm

%lum = 94.6%

%lamp = 94.6%

Conical surface Flux(120deg): 3346.8 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.75% KDisp:0.9825 Lamp Flux:3377.64x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

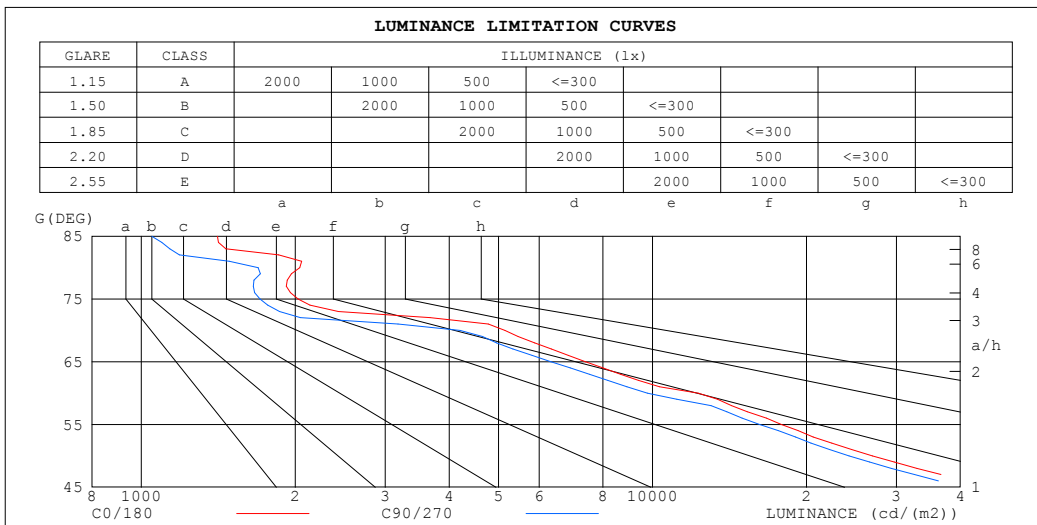


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.75% KDisp:0.9825 Lamp Flux:3377.64x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.94	.90	.86	.92	.88	.85	.89	.86	.83	.87	.84	.82	.80
4.0	.89	.84	.79	.88	.83	.79	.86	.81	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.83	.78	.73	.83	.77	.73	.81	.76	.72	.79	.75	.72	.78	.74	.71	.69
6.0	.78	.72	.68	.77	.72	.68	.76	.71	.67	.75	.70	.67	.73	.69	.66	.65
7.0	.74	.67	.63	.73	.67	.63	.72	.66	.63	.70	.66	.62	.69	.65	.62	.61
8.0	.69	.63	.59	.69	.63	.59	.68	.62	.59	.67	.62	.58	.66	.61	.58	.57
9.0	.65	.59	.55	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.53
10.0	.62	.56	.52	.61	.56	.52	.61	.55	.52	.60	.55	.52	.59	.55	.52	.50

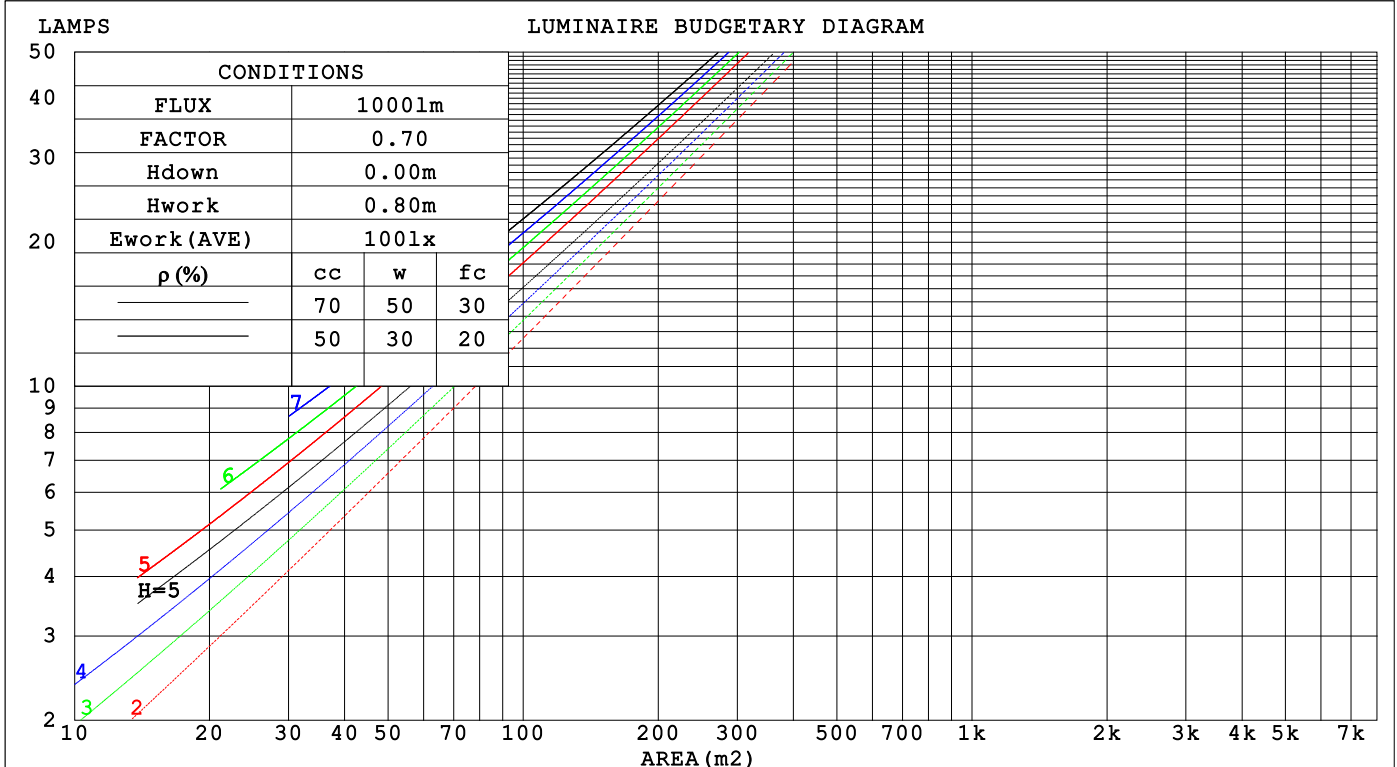

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.75% KDisp:0.9825 Lamp Flux:3377.64x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 104mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.181	.103	.033	.174	.099	.032	.161	.093	.030	.150	.086	.028	.139	.081	.026		
2.0	.174	.095	.029	.168	.092	.028	.157	.087	.027	.147	.083	.026	.138	.078	.025		
3.0	.166	.088	.026	.161	.086	.026	.152	.082	.025	.143	.078	.024	.135	.075	.023		
4.0	.158	.082	.024	.154	.080	.024	.146	.077	.023	.138	.074	.022	.132	.072	.022		
5.0	.150	.077	.022	.147	.075	.022	.140	.073	.021	.133	.070	.021	.127	.068	.020		
6.0	.143	.072	.021	.140	.071	.020	.134	.069	.020	.129	.067	.020	.123	.065	.019		
7.0	.137	.068	.019	.134	.067	.019	.129	.065	.019	.124	.063	.018	.119	.062	.018		
8.0	.131	.064	.018	.129	.063	.018	.124	.062	.018	.119	.060	.017	.115	.059	.017		
9.0	.126	.061	.017	.123	.060	.017	.119	.059	.017	.115	.058	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.111	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.147	.135	.124	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.062	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.126	.087	.059	.108	.076	.051	.074	.053	.036	.043	.031	.022	.014	.010	.007	
6.0	.118	.078	.049	.102	.068	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.042	.096	.061	.036	.067	.043	.026	.039	.025	.015	.013	.008	.005	
8.0	.106	.064	.036	.092	.056	.031	.063	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.101	.059	.031	.087	.051	.027	.061	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.097	.055	.027	.083	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz UTHDi:0.17% ITHDi:5.75% KDisp:0.9825 Lamp Flux:3377.64x1 lm										
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:						WEIGHT:				
SPEC.:						DIM.:			SERIAL No.:	
MFR.: Norming lighting						SUR.: 104mm			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.6	22.6	21.8	22.8	22.9	21.1	22.1	21.3	22.3	22.4
3H	21.5	22.4	21.8	22.6	22.8	21.0	21.9	21.2	22.1	22.3
4H	21.4	22.3	21.7	22.5	22.7	20.9	21.7	21.2	22.0	22.2
6H	21.3	22.1	21.6	22.4	22.6	20.8	21.6	21.1	21.8	22.1
8H	21.3	22.1	21.6	22.3	22.6	20.8	21.5	21.1	21.8	22.0
12H	21.2	22.0	21.6	22.2	22.5	20.7	21.5	21.0	21.7	22.0
4H 2H	21.4	22.3	21.7	22.5	22.7	20.9	21.8	21.2	22.0	22.2
3H	21.3	22.0	21.6	22.3	22.6	20.8	21.5	21.1	21.8	22.1
4H	21.2	21.9	21.6	22.2	22.5	20.7	21.4	21.1	21.7	22.0
6H	21.1	21.7	21.5	22.0	22.4	20.6	21.2	21.0	21.5	21.9
8H	21.1	21.6	21.5	22.0	22.3	20.6	21.1	21.0	21.5	21.8
12H	21.0	21.5	21.5	21.9	22.3	20.5	21.0	20.9	21.4	21.8
8H 4H	21.1	21.6	21.5	22.0	22.3	20.6	21.1	21.0	21.5	21.8
6H	21.0	21.4	21.4	21.8	22.2	20.5	20.9	20.9	21.3	21.7
8H	20.9	21.3	21.4	21.8	22.2	20.4	20.8	20.9	21.2	21.7
12H	20.9	21.2	21.4	21.7	22.1	20.4	20.7	20.9	21.2	21.6
12H 4H	21.0	21.5	21.4	21.9	22.3	20.5	21.0	20.9	21.4	21.8
6H	20.9	21.3	21.4	21.7	22.2	20.4	20.8	20.9	21.2	21.7
8H	20.9	21.2	21.4	21.7	22.1	20.4	20.7	20.9	21.2	21.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.0 / - 6.3					+ 2.7 / - 6.2				
1.5H	+ 4.8 / - 4.7					+ 4.4 / - 4.4				
2.0H	+ 4.8 / - 4.9					+ 4.4 / - 4.8				

CIE Pub.117, 3378 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.2$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.75% KDisp:0.9825 Lamp Flux:3377.64x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	88	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz UTHDi:0.17% ITHDi:5.75% KDisp:0.9825 Lamp Flux:3377.64x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

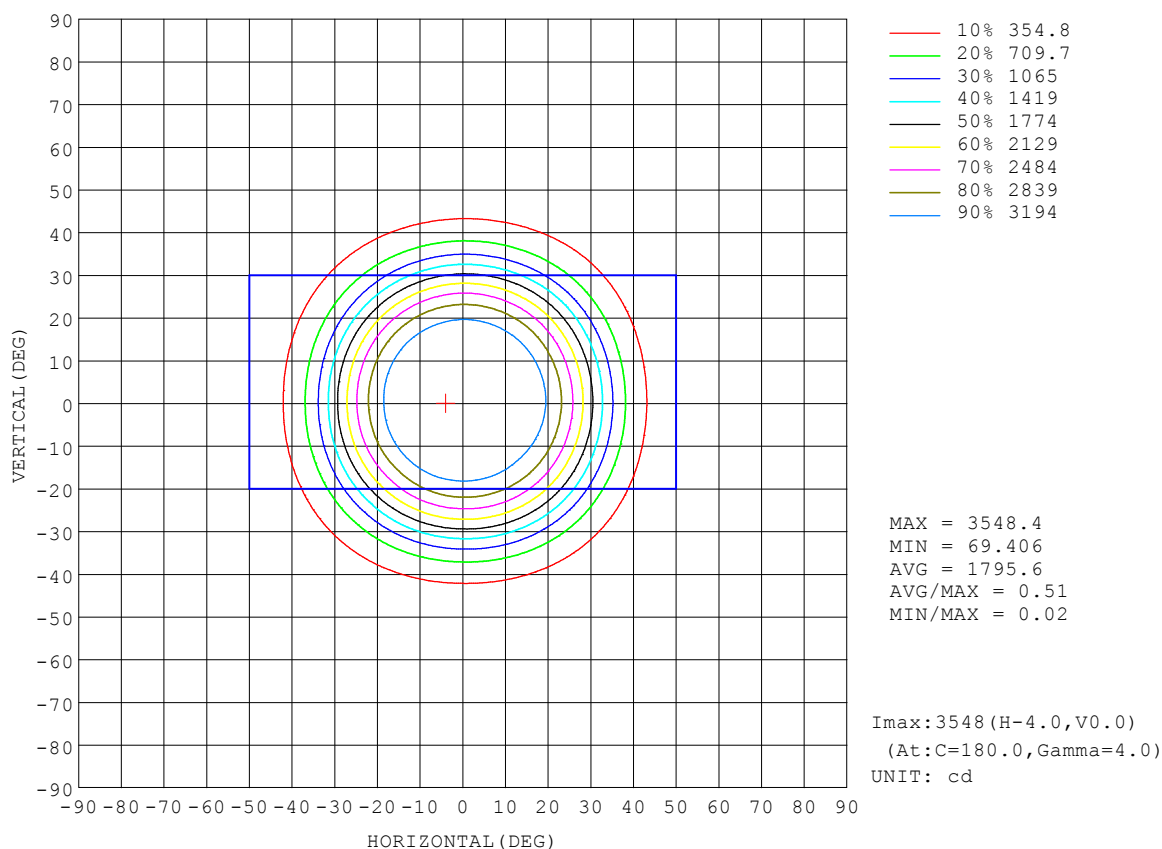


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.75% KDisp:0.9825		Lamp Flux:3377.64x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

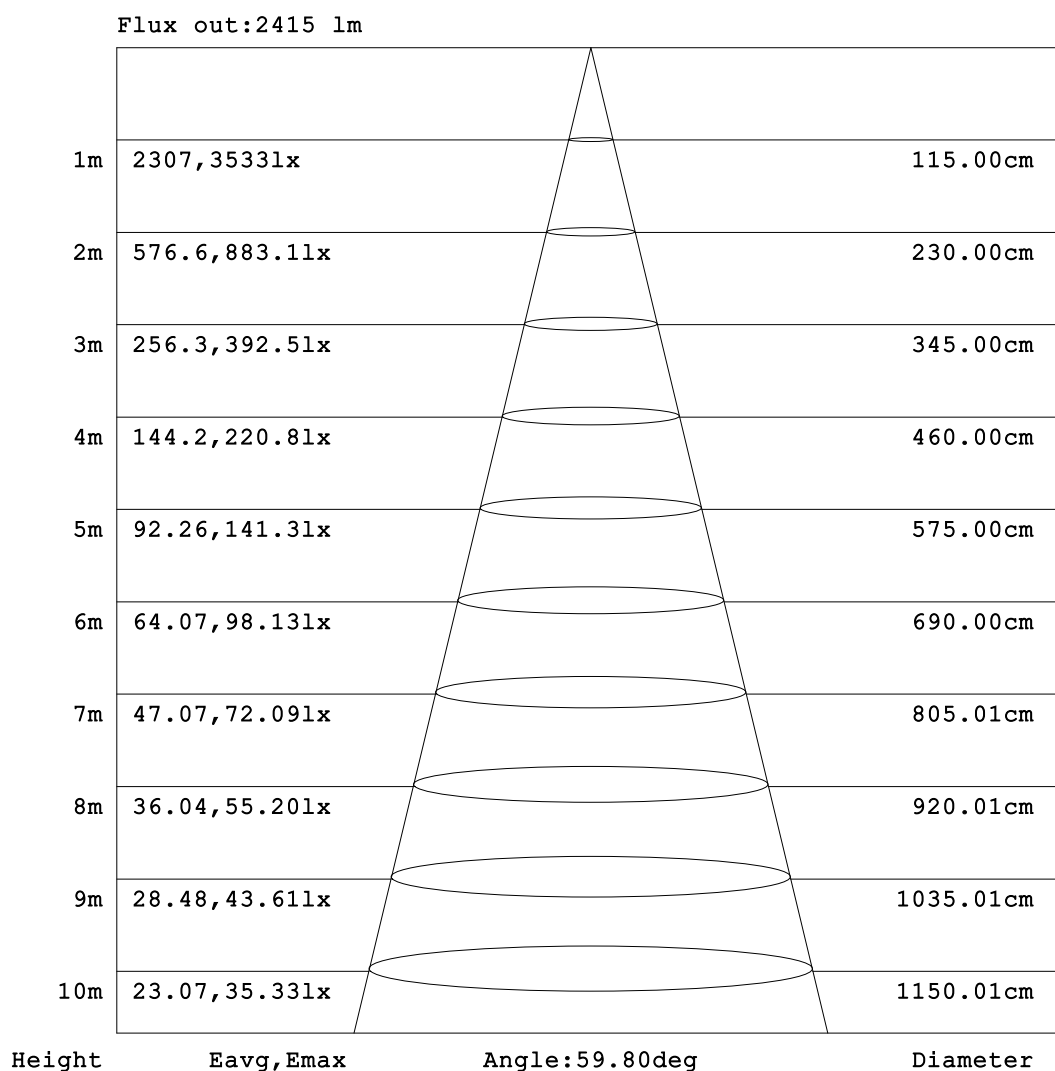


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.75% KDisp:0.9825		Lamp Flux:3377.64x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

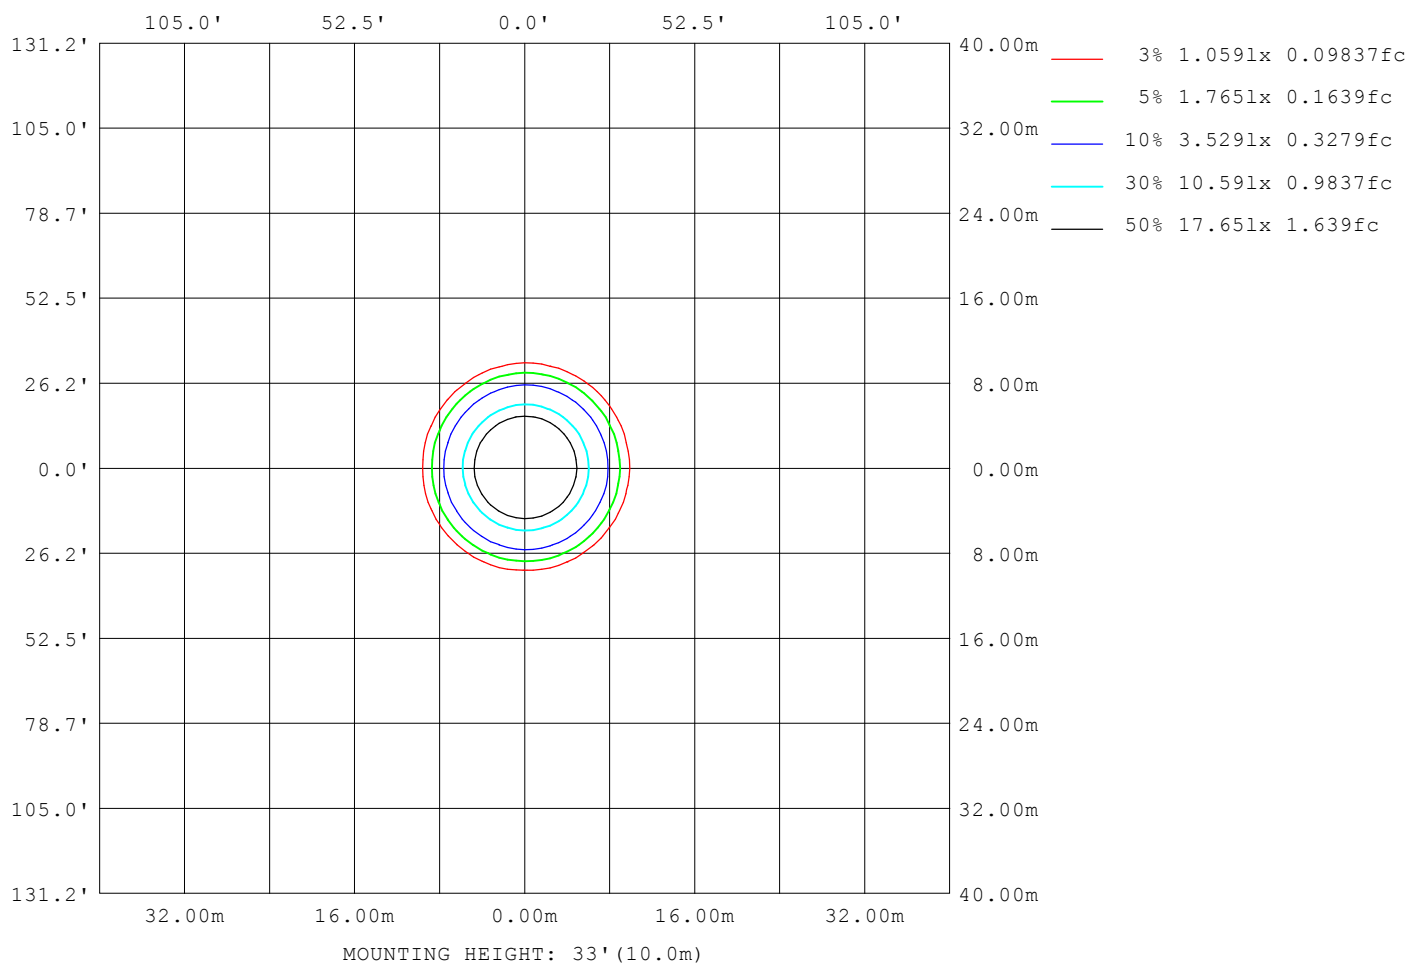

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1279A P:30.2W PF:0.9807 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.75% KDisp:0.9825 Lamp Flux:3377.64x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6674
L_0~180 (75) av	1770
L_0~180 (85) av	1099
L_90~270 (65) av	6701
L_90~270 (75) av	1743
L_90~270 (85) av	1067
L_45 (65) av	6625
L_45 (75) av	1748
L_45 (85) av	1049

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

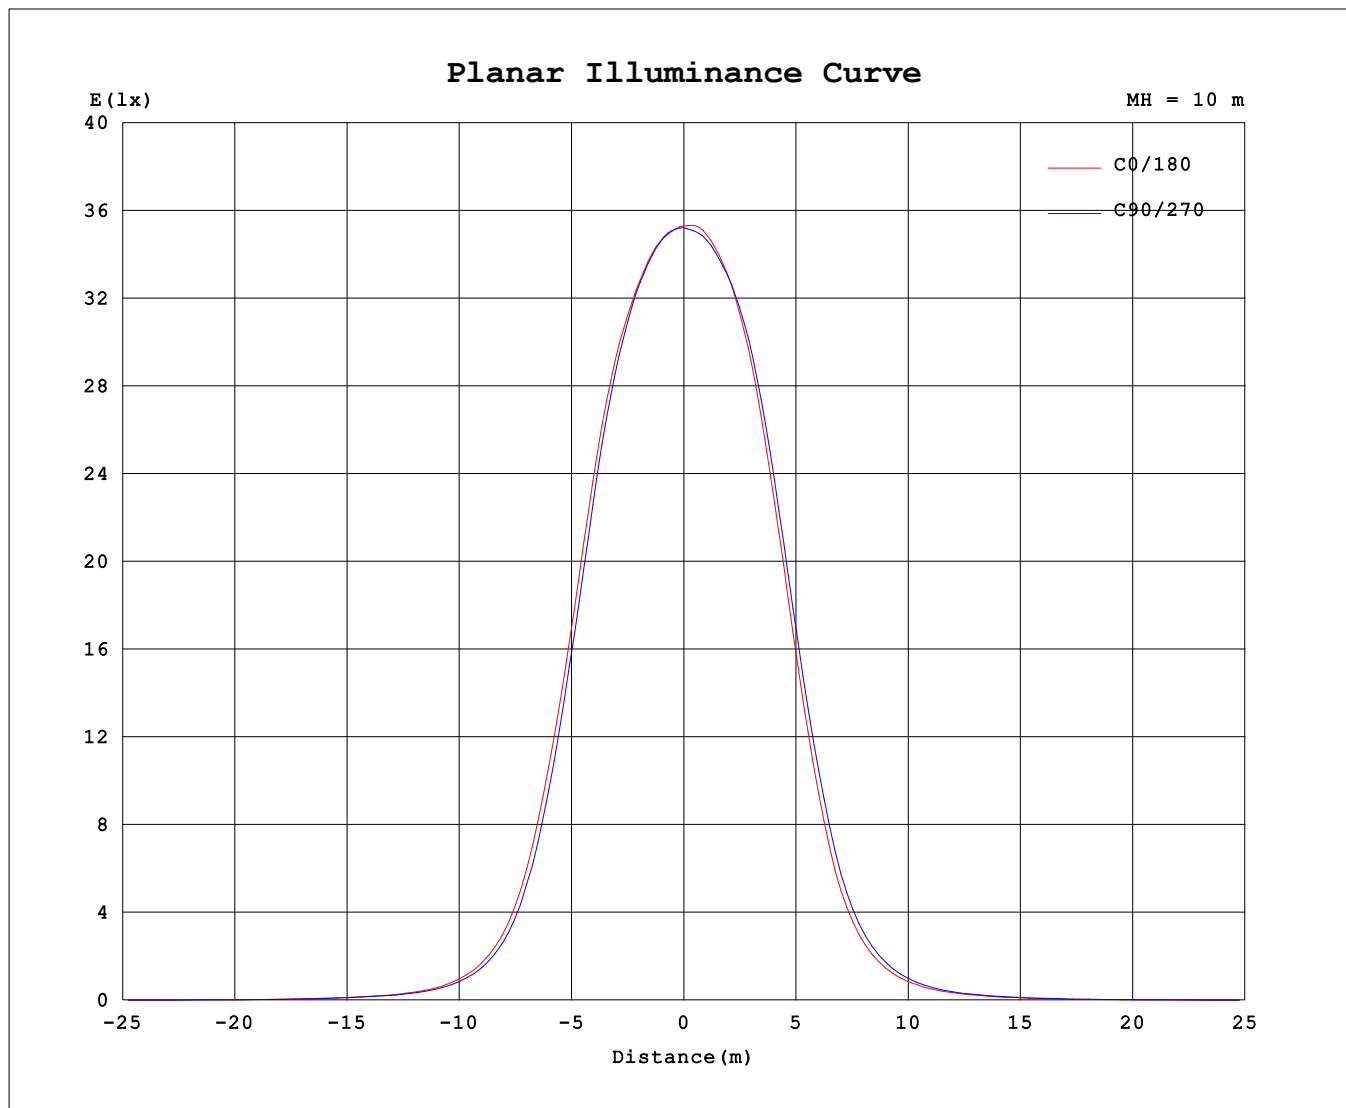

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	3523	3523	3523	3523	3523	3523	3523	3523
3.0	3515	3521	3526	3532	3539	3535	3521	3511
6.0	3510	3511	3518	3532	3538	3537	3522	3509
9.0	3491	3481	3487	3505	3516	3526	3508	3497
12.0	3450	3434	3443	3463	3476	3496	3488	3468
15.0	3393	3359	3355	3375	3388	3423	3434	3417
18.0	3281	3221	3208	3214	3228	3277	3309	3301
21.0	3066	2998	2956	2925	2951	3018	3079	3084
24.0	2730	2656	2578	2551	2595	2670	2737	2750
27.0	2305	2238	2151	2123	2142	2217	2304	2330
30.0	1849	1781	1683	1651	1658	1732	1828	1862
33.0	1382	1314	1222	1183	1182	1250	1347	1385
36.0	947.0	897.2	829.5	800.0	799.4	856.4	925.7	958.0
39.0	627.4	592.0	549.6	534.0	534.0	570.4	626.1	637.9
42.0	413.3	387.4	362.6	356.0	356.3	381.5	420.3	426.5
45.0	274.3	253.9	241.6	240.7	239.9	254.5	280.9	285.7
48.0	184.5	170.3	164.8	167.2	166.0	172.9	191.1	193.2
51.0	129.3	119.8	117.4	119.6	118.3	122.1	134.5	136.0
54.0	95.02	87.19	87.06	87.92	85.40	88.85	97.92	99.20
57.0	70.01	63.86	63.94	64.84	62.18	64.80	71.12	73.34
60.0	51.56	43.65	41.04	40.41	38.44	39.92	46.11	52.11
63.0	32.94	29.35	28.72	27.86	26.99	28.02	31.97	34.22
66.0	23.36	21.03	19.88	18.98	18.84	19.83	22.20	23.78
69.0	16.40	15.29	14.01	13.08	12.81	14.25	15.52	16.44
72.0	9.505	7.732	5.318	4.748	4.541	4.938	6.258	9.139
75.0	4.400	4.108	3.712	3.385	3.297	3.490	3.865	4.214
78.0	3.366	3.187	2.901	2.661	2.543	2.648	2.939	3.198
81.0	2.702	2.450	1.954	1.517	1.355	1.547	2.121	2.481
84.0	1.240	1.116	0.9628	0.8052	0.7515	0.7895	0.9814	1.131
87.0	0.6316	0.5230	0.4073	0.2765	0.2497	0.2922	0.4429	0.5435
90.0	0.1078	0.0793	0.1064	0.0862	0.0921	0.0854	0.0878	0.0769

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: