


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821 Lamp Flux:3386.54x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 112.57 lm/W
MODEL		Imax (cd)	3546	S/MH(C0/180)	0.87	
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.90	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3386.5	η UP,DN(C0-180)	0.0,49.6	
NOMINAL FLUX(lm)	3386.54	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.4	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	240.36	η down (%)	100.0	CIBSE SHR MAX	0.90	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

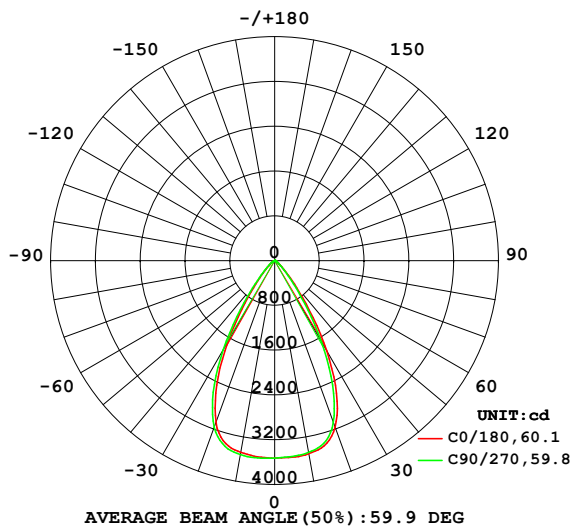

PLANAR ISOLUX DIAGRAM(UNIT:lx)

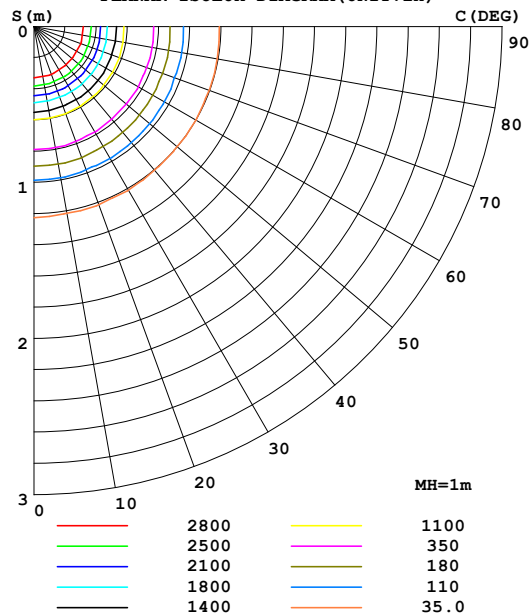

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3503	3482	3477	3479	3478	3499	3518	3519	0- 10	335.6	335.6	9.91,9.91
20	3161	3106	3070	3072	3072	3119	3166	3172	10- 20	950.2	1286	38,38
30	1865	1780	1674	1659	1673	1732	1843	1900	20- 30	1137	2423	71.5,71.5
40	551.3	517.7	472.1	461.8	466.4	498.7	548.3	564.6	30- 40	645.3	3068	90.6,90.6
50	147.9	136.7	128.4	128.6	126.6	132.8	148.9	155.5	40- 50	212.9	3281	96.9,96.9
60	48.06	42.56	40.78	39.60	38.12	38.49	44.81	48.47	50- 60	74.95	3356	99.1,99.1
70	14.33	13.70	12.51	11.12	10.10	11.43	13.20	14.00	60- 70	24.30	3381	99.8,99.8
80	2.655	2.640	2.503	2.269	2.113	2.195	2.420	2.512	70- 80	5.035	3386	100,100
90	0.1013	0.0774	0.1071	0.0841	0.0894	0.0806	0.0900	0.0757	80- 90	0.9673	3387	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3204.5 lm

%lum = 94.6%

%lamp = 94.6%

Conical surface Flux(120deg): 3356.2 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821 Lamp Flux:3386.54x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

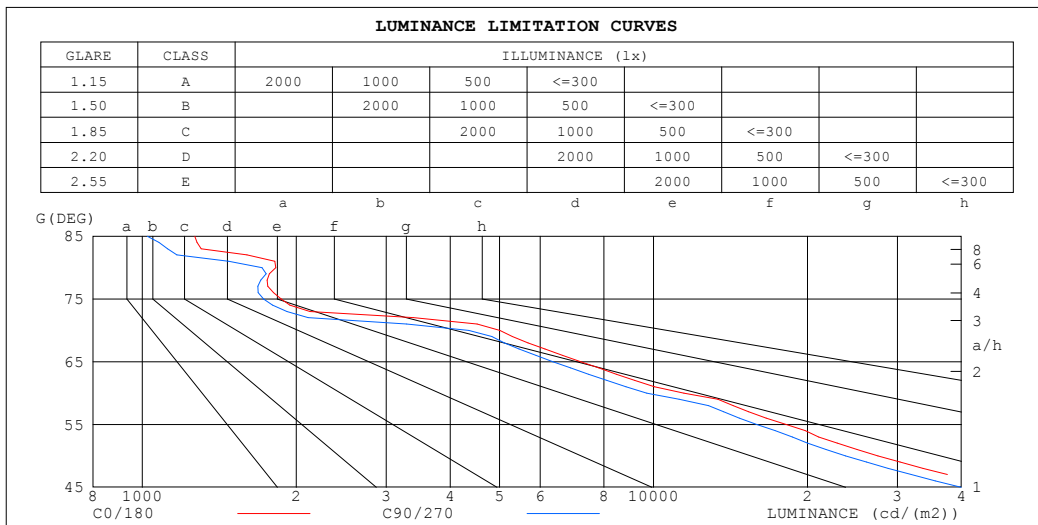


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821 Lamp Flux:3386.54x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93														
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.87														
3.0	.96	.91	.87	.94	.90	.86	.92	.88	.85	.89	.86	.83	.87	.84	.82	.80														
4.0	.89	.84	.79	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75														
5.0	.84	.78	.73	.83	.77	.73	.81	.76	.72	.79	.75	.72	.78	.74	.71	.69														
6.0	.78	.72	.68	.77	.72	.68	.76	.71	.67	.75	.70	.67	.73	.69	.66	.65														
7.0	.74	.67	.63	.73	.67	.63	.72	.66	.63	.70	.66	.62	.69	.65	.62	.61														
8.0	.69	.63	.59	.69	.63	.59	.68	.62	.59	.67	.62	.58	.66	.61	.58	.57														
9.0	.65	.59	.55	.65	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.53														
10.0	.62	.56	.52	.61	.56	.52	.61	.55	.52	.60	.55	.52	.59	.55	.52	.50														

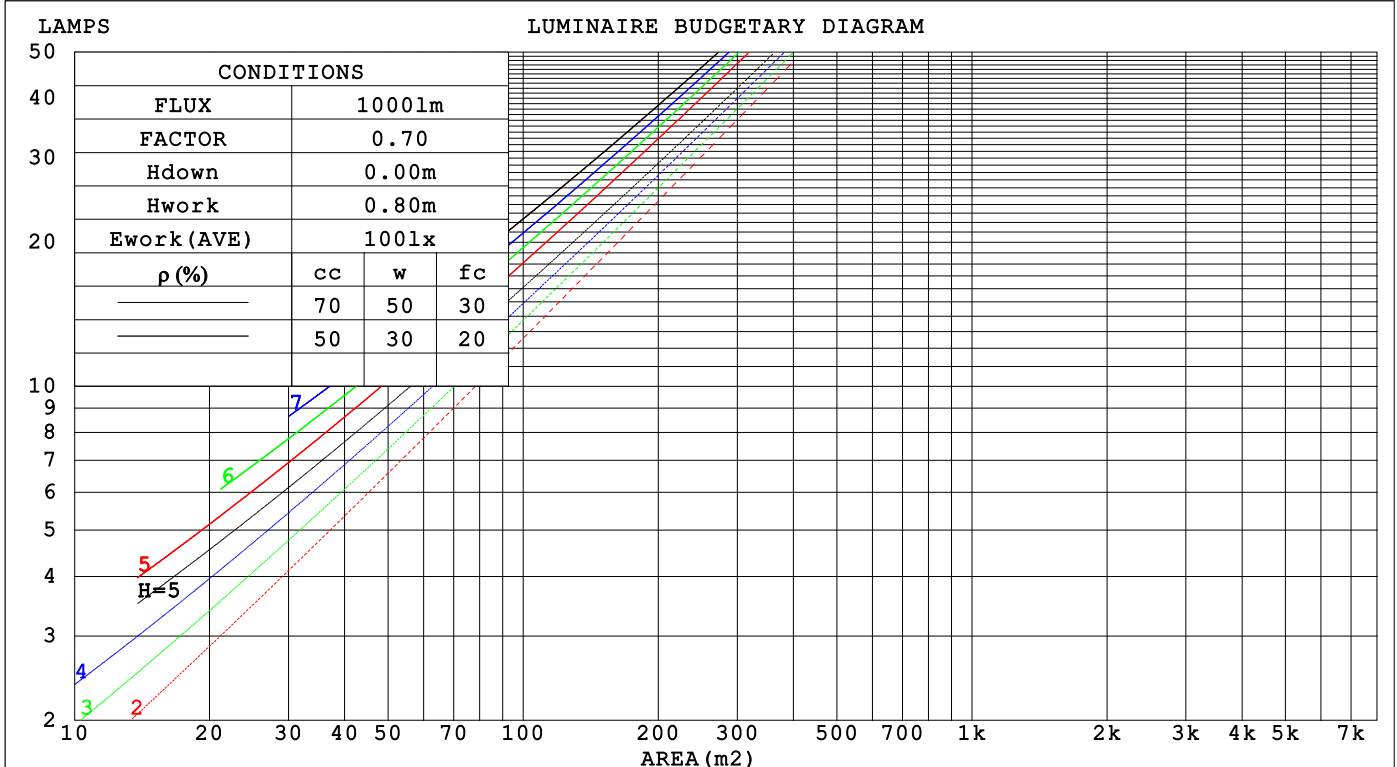

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821 Lamp Flux:3386.54x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 104mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.181	.103	.033	.174	.099	.032	.161	.093	.030	.150	.086	.028	.139	.081	.026		
2.0	.173	.095	.029	.168	.092	.028	.157	.087	.027	.147	.083	.026	.138	.078	.025		
3.0	.165	.088	.026	.161	.086	.026	.152	.082	.025	.143	.078	.024	.135	.075	.023		
4.0	.158	.082	.024	.153	.080	.024	.146	.077	.023	.138	.074	.022	.132	.071	.022		
5.0	.150	.077	.022	.147	.075	.022	.140	.073	.021	.133	.070	.021	.127	.068	.020		
6.0	.143	.072	.021	.140	.071	.020	.134	.069	.020	.128	.067	.020	.123	.065	.019		
7.0	.137	.068	.019	.134	.067	.019	.129	.065	.019	.124	.063	.018	.119	.062	.018		
8.0	.131	.064	.018	.129	.063	.018	.124	.062	.018	.119	.060	.017	.115	.059	.017		
9.0	.125	.061	.017	.123	.060	.017	.119	.059	.017	.115	.058	.016	.111	.056	.016		
10.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.111	.055	.016	.107	.054	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.171	.157	.145	.147	.135	.124	.100	.093	.086	.058	.054	.050	.018	.017	.016		
2.0	.156	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013		
3.0	.144	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010		
4.0	.134	.099	.072	.115	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009		
5.0	.126	.087	.059	.108	.076	.051	.074	.053	.036	.043	.031	.022	.014	.010	.007		
6.0	.118	.078	.049	.102	.068	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006		
7.0	.112	.071	.042	.096	.061	.036	.067	.043	.026	.039	.025	.015	.013	.008	.005		
8.0	.106	.064	.036	.092	.056	.031	.063	.039	.022	.037	.023	.013	.012	.008	.004		
9.0	.101	.059	.031	.087	.051	.027	.060	.036	.019	.035	.021	.011	.011	.007	.004		
10.0	.097	.055	.027	.083	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz											
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821 Lamp Flux:3386.54x1 lm											
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:						WEIGHT:					
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Norming lighting						SUR.: 104mm			Shielding Angle:		
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		21.6	22.6	21.9	22.8	23.0	21.1	22.0	21.3	22.2	22.4
	3H	21.5	22.4	21.8	22.6	22.8	20.9	21.8	21.2	22.0	22.2
	4H	21.4	22.3	21.7	22.5	22.7	20.9	21.7	21.1	21.9	22.1
	6H	21.4	22.1	21.7	22.4	22.6	20.8	21.6	21.1	21.8	22.1
	8H	21.3	22.1	21.6	22.3	22.6	20.7	21.5	21.0	21.7	22.0
	12H	21.3	22.0	21.6	22.3	22.5	20.7	21.4	21.0	21.7	22.0
4H	2H	21.4	22.3	21.7	22.5	22.7	20.9	21.7	21.2	21.9	22.2
	3H	21.3	22.1	21.7	22.3	22.6	20.8	21.5	21.1	21.8	22.0
	4H	21.2	21.9	21.6	22.2	22.5	20.7	21.3	21.0	21.6	21.9
	6H	21.2	21.7	21.5	22.1	22.4	20.6	21.2	21.0	21.5	21.8
	8H	21.1	21.6	21.5	22.0	22.4	20.5	21.1	20.9	21.4	21.8
	12H	21.1	21.5	21.5	21.9	22.3	20.5	21.0	20.9	21.3	21.7
8H	4H	21.1	21.6	21.5	22.0	22.4	20.5	21.1	20.9	21.4	21.8
	6H	21.0	21.5	21.4	21.8	22.3	20.4	20.9	20.9	21.3	21.7
	8H	21.0	21.4	21.4	21.8	22.2	20.4	20.8	20.8	21.2	21.6
	12H	20.9	21.2	21.4	21.7	22.2	20.3	20.7	20.8	21.1	21.6
12H	4H	21.1	21.5	21.5	21.9	22.3	20.5	21.0	20.9	21.3	21.7
	6H	21.0	21.4	21.4	21.8	22.2	20.4	20.8	20.8	21.2	21.6
	8H	20.9	21.2	21.4	21.7	22.2	20.3	20.7	20.8	21.1	21.6
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 3.0 / - 6.3					+ 2.7 / - 6.2				
1.5H		+ 4.7 / - 4.8					+ 4.3 / - 4.4				
2.0H		+ 4.8 / - 5.1					+ 4.3 / - 4.8				

CIE Pub.117, 3387 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.2$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821 Lamp Flux:3386.54x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821		Lamp Flux:3386.54x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

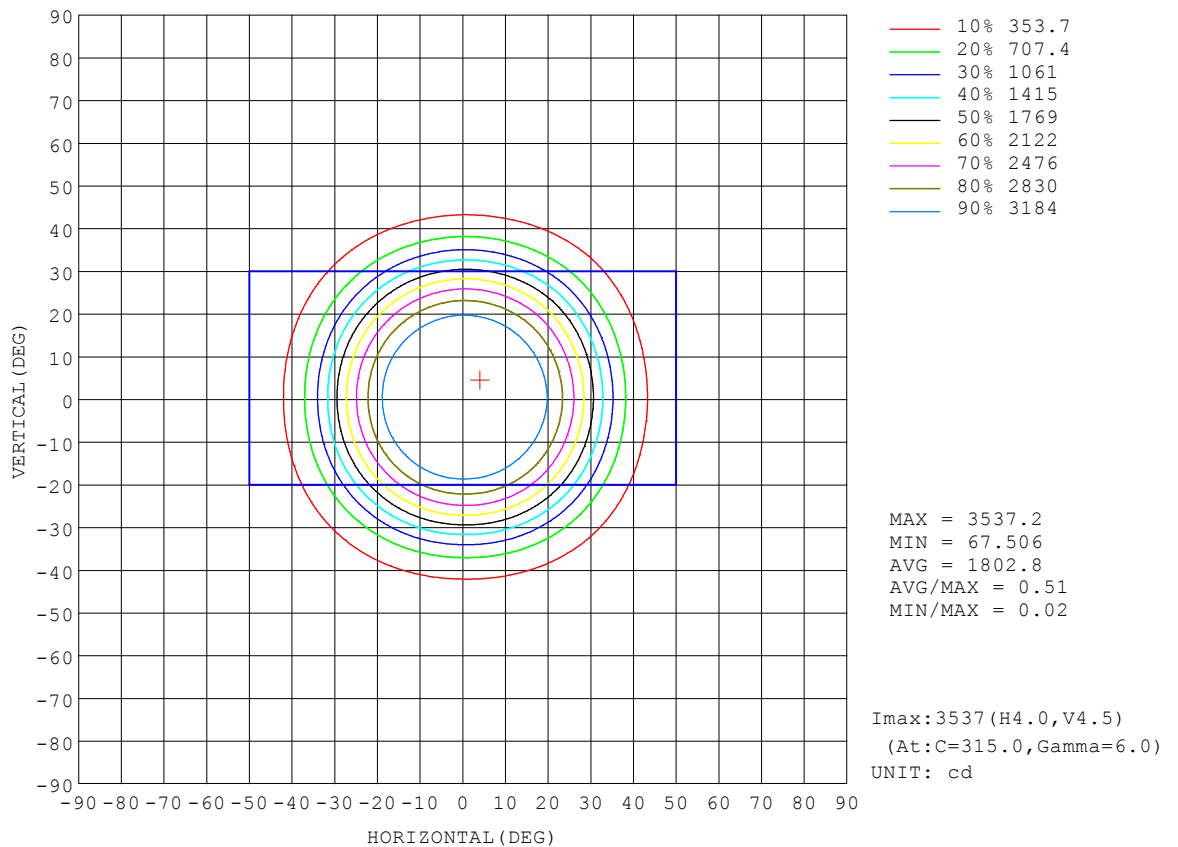


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821		Lamp Flux:3386.54x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

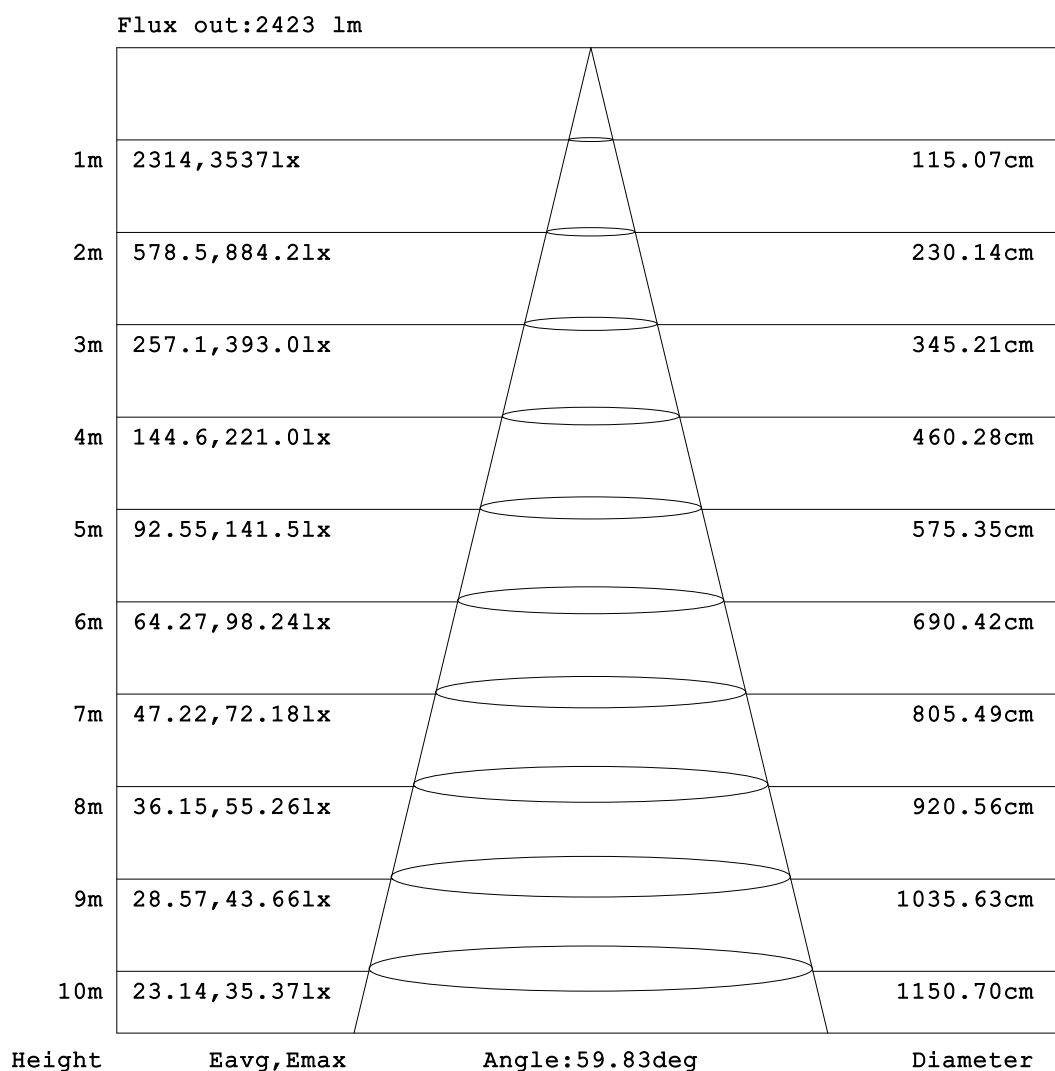


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821		Lamp Flux:3386.54x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

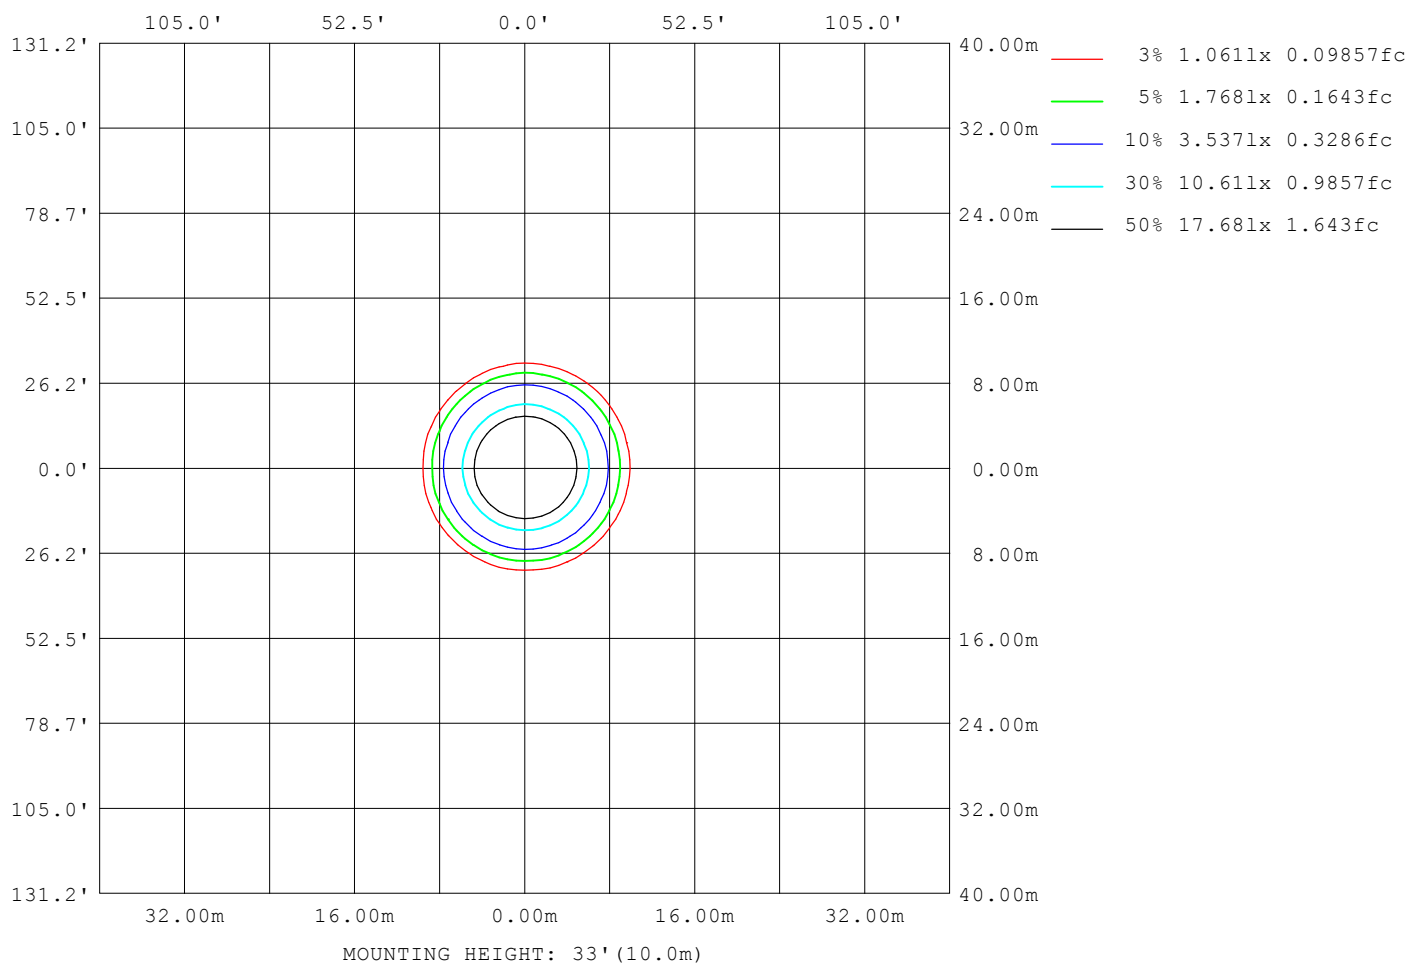

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1276A P:30.1W PF:0.9805 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.78% KDisp:0.9821 Lamp Flux:3386.54x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 60D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6615
L_0~180 (75) av	1717
L_0~180 (85) av	1055
L_90~270 (65) av	6556
L_90~270 (75) av	1722
L_90~270 (85) av	1055
L_45 (65) av	6505
L_45 (75) av	1716
L_45 (85) av	1024

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

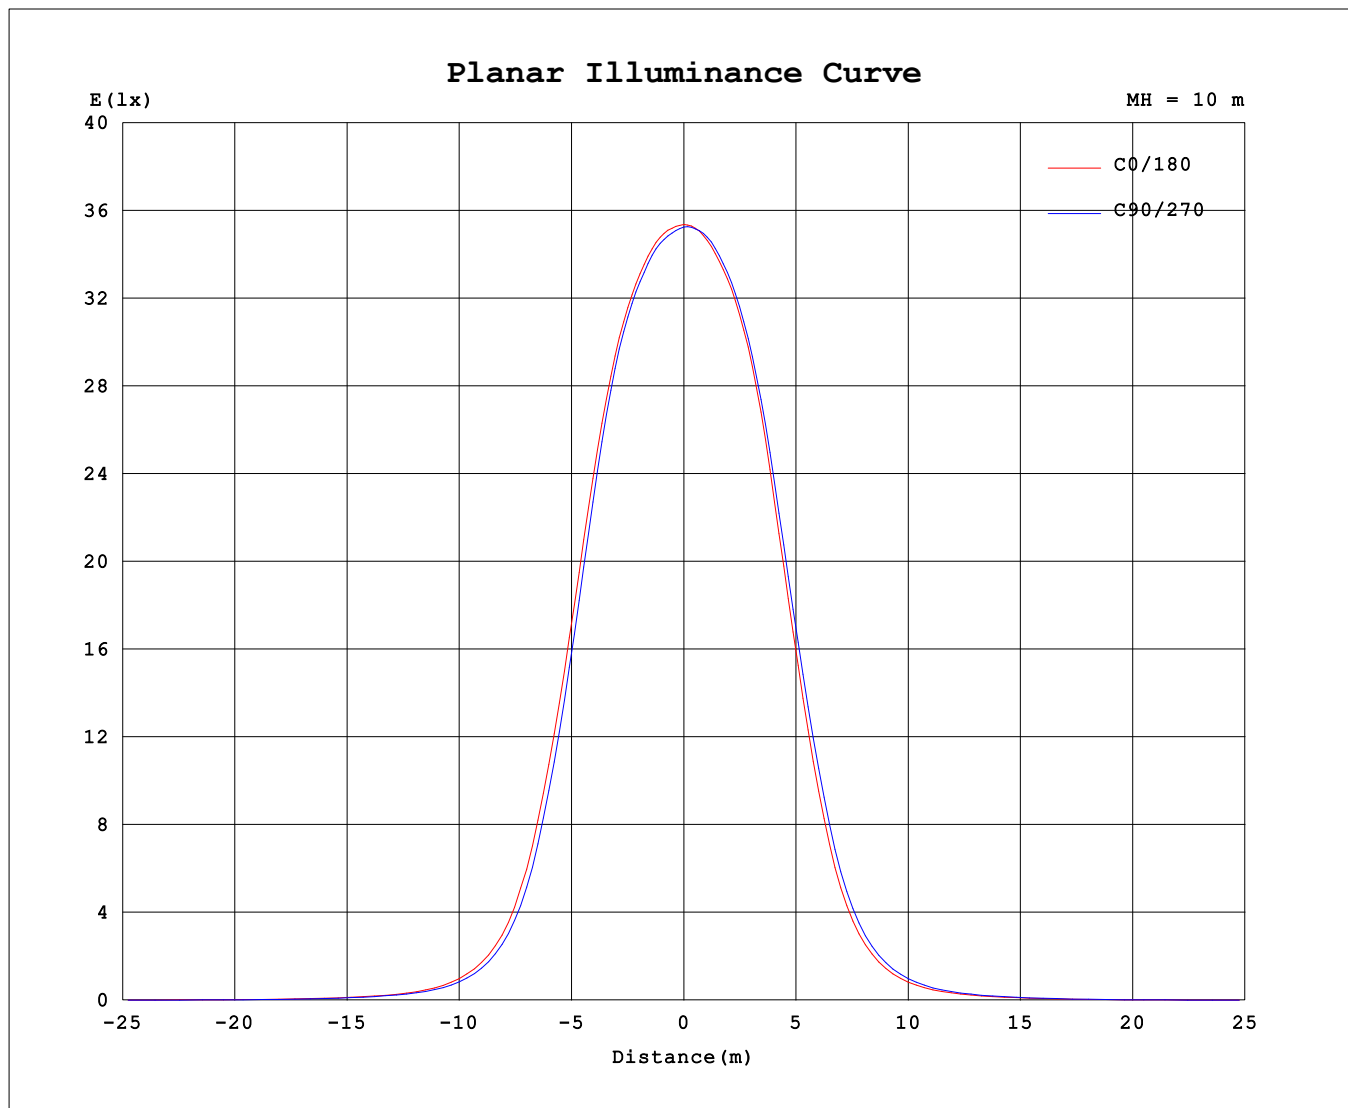

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	3528	3528	3528	3528	3528	3528	3528	3528
3.0	3524	3516	3515	3523	3524	3529	3533	3537
6.0	3526	3510	3510	3517	3513	3522	3539	3546
9.0	3512	3492	3489	3490	3485	3507	3526	3530
12.0	3481	3459	3453	3453	3456	3482	3497	3492
15.0	3423	3393	3384	3387	3382	3404	3434	3430
18.0	3298	3250	3235	3240	3235	3269	3304	3302
21.0	3075	3018	2968	2965	2964	3014	3072	3088
24.0	2746	2682	2593	2574	2590	2652	2726	2759
27.0	2330	2251	2146	2130	2153	2214	2309	2363
30.0	1865	1780	1674	1659	1673	1732	1843	1900
33.0	1388	1308	1210	1195	1203	1260	1360	1410
36.0	964.5	888.2	814.8	802.6	811.5	867.4	937.1	969.5
39.0	631.6	592.2	541.9	530.4	537.2	572.5	628.1	645.9
42.0	419.7	392.3	358.1	350.7	352.6	377.7	417.7	431.1
45.0	279.9	259.2	237.7	234.4	233.5	249.3	278.6	289.1
48.0	188.6	174.0	161.8	161.7	159.4	168.6	189.3	197.0
51.0	131.9	121.8	115.0	115.3	113.6	118.2	132.7	138.6
54.0	97.52	88.44	85.51	85.12	83.28	86.43	96.84	100.5
57.0	70.04	63.86	62.75	62.49	61.52	62.85	70.28	72.95
60.0	48.06	42.56	40.78	39.60	38.12	38.49	44.81	48.47
63.0	32.18	29.11	28.48	28.01	27.12	26.97	30.64	32.79
66.0	22.64	20.85	20.13	19.69	19.15	19.09	21.16	22.67
69.0	15.90	15.27	14.55	13.93	13.32	13.96	14.82	15.58
72.0	8.776	6.970	5.484	5.036	4.713	4.918	6.245	8.483
75.0	4.056	3.925	3.757	3.584	3.411	3.463	3.733	3.952
78.0	3.055	3.030	2.977	2.880	2.735	2.665	2.783	2.946
81.0	2.378	2.259	1.940	1.603	1.499	1.665	2.047	2.236
84.0	1.120	1.042	0.9464	0.8303	0.8020	0.8299	0.9784	1.058
87.0	0.5594	0.4669	0.3924	0.2930	0.2833	0.3277	0.4504	0.5035
90.0	0.1013	0.0774	0.1071	0.0841	0.0894	0.0806	0.0900	0.0757

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: