


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.85% KDisp:0.9849 Lamp Flux:3597.18x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.25 lm/W			
MODEL		I _{max} (cd)	25067	S/MH(C0/180)	0.26
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	0.28
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3597.2	η UP,DN(C0-180)	0.0,50.8
NOMINAL FLUX(lm)	3597.18	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.07	η down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

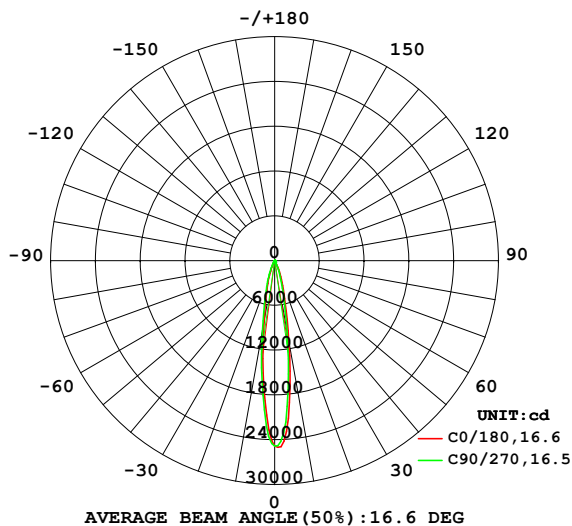

PLANAR ISOLUX DIAGRAM(UNIT:lx)

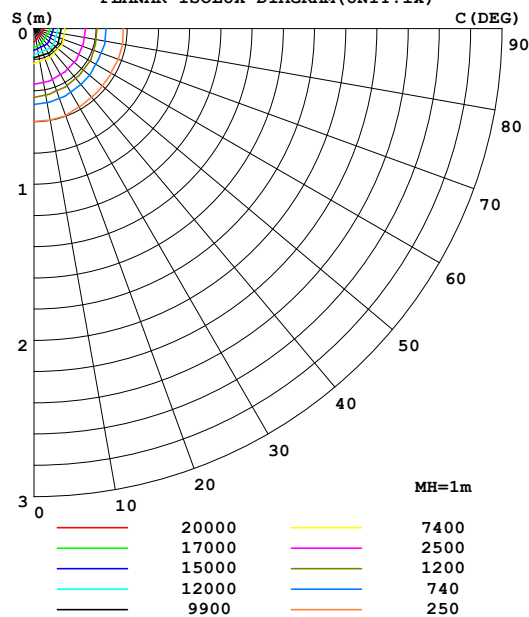

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1099	1058	967.9	894.7	838.7	860.9	950.9	1057	0- 10	1498	1498	41.7,41.7
20	267.6	236.7	212.5	206.9	207.0	231.9	257.1	268.0	10- 20	1338	2836	78.8,78.8
30	42.60	37.23	34.03	33.10	32.85	37.55	45.74	46.59	20- 30	493.7	3330	92.6,92.6
40	12.76	11.88	11.70	12.07	11.39	11.66	13.20	13.76	30- 40	134.0	3464	96.3,96.3
50	6.322	5.697	6.110	6.370	6.160	5.738	6.436	6.612	40- 50	66.60	3530	98.1,98.1
60	3.591	2.995	3.365	3.396	3.214	2.962	3.500	3.629	50- 60	42.05	3572	99.3,99.3
70	1.118	0.9648	0.8645	0.6921	0.6671	0.6926	0.9225	1.076	60- 70	20.33	3593	99.9,99.9
80	0.1733	0.1670	0.1553	0.1338	0.1262	0.1315	0.1590	0.1669	70- 80	3.692	3596	100,100
90	0.0152	0.0086	0.0163	0.0102	0.0103	0.0093	0.0113	0.0082	80- 90	0.7051	3597	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3501.3 lm

%lum = 97.3%

%lamp = 97.3%

Conical surface Flux(120deg): 3572.5 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.85% KDisp:0.9849 Lamp Flux:3597.18x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

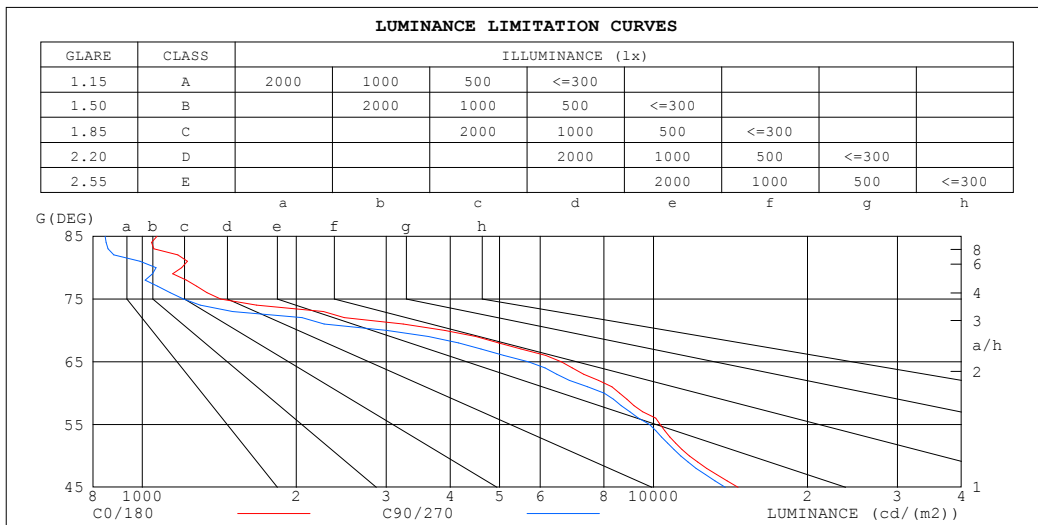


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-30

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.85% KDisp:0.9849		
Lamp Flux:3597.18x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.13	1.11	1.09	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.02	1.01	.00	.99	.98	.97														
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	.00	.98	.97	.97	.96	.95	.93														
3.0	1.03	.99	.96	1.02	.98	.96	.99	.96	.94	.97	.95	.93	.95	.93	.91	.90														
4.0	.99	.95	.92	.98	.94	.91	.96	.93	.90	.94	.92	.89	.92	.90	.88	.87														
5.0	.95	.91	.88	.95	.91	.88	.93	.90	.87	.91	.89	.86	.90	.88	.86	.85														
6.0	.92	.88	.85	.92	.88	.85	.90	.87	.84	.89	.86	.84	.88	.85	.83	.82														
7.0	.89	.85	.82	.89	.85	.82	.88	.84	.82	.87	.84	.81	.86	.83	.81	.80														
8.0	.87	.83	.80	.86	.83	.80	.85	.82	.80	.85	.82	.79	.84	.81	.79	.78														
9.0	.85	.81	.78	.84	.80	.78	.83	.80	.77	.83	.79	.77	.82	.79	.77	.76														
10.0	.82	.78	.76	.82	.78	.76	.81	.78	.76	.81	.78	.75	.80	.77	.75	.74														

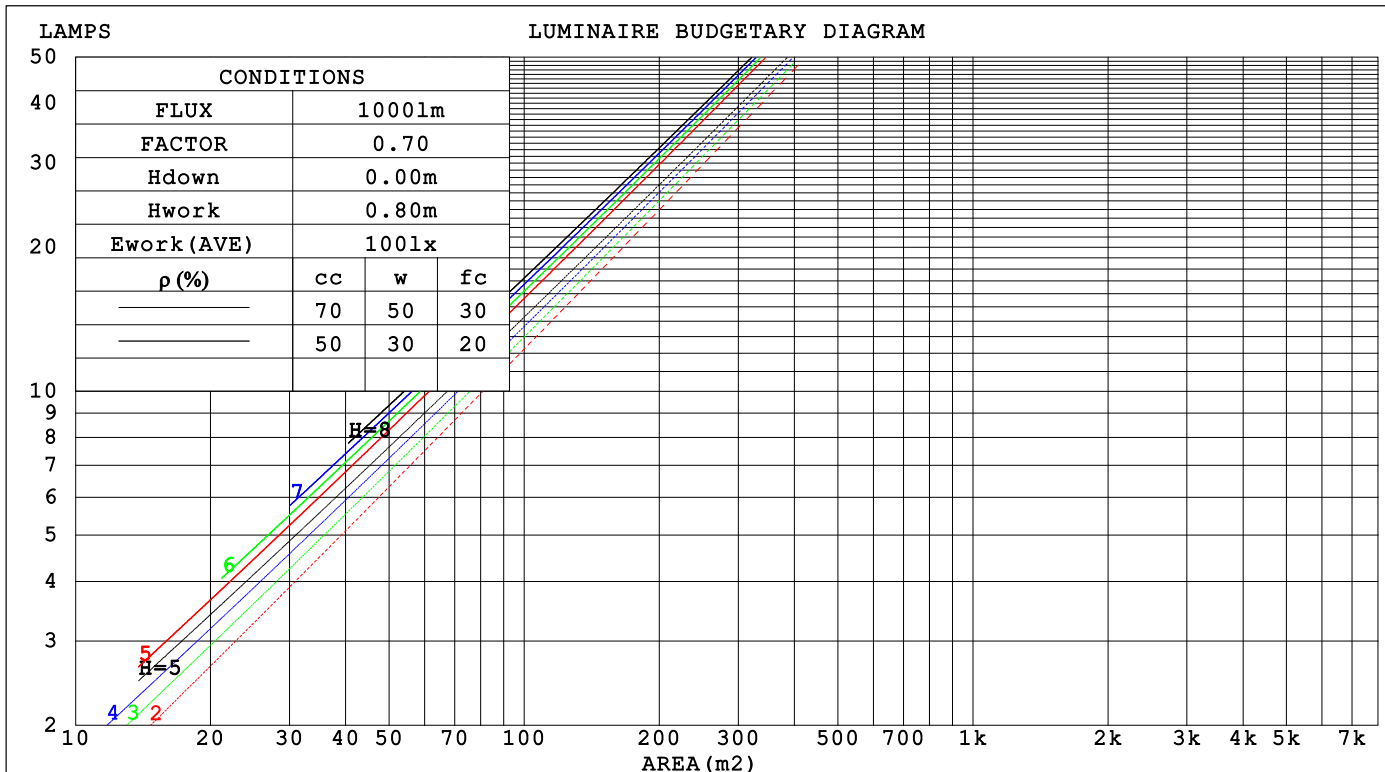

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.85% KDisp:0.9849 Lamp Flux:3597.18x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.137	.078	.025	.131	.075	.024	.118	.068	.022	.107	.062	.020	.096	.056	.018		
2.0	.128	.070	.021	.122	.067	.021	.112	.062	.019	.102	.057	.018	.094	.053	.017		
3.0	.119	.063	.019	.114	.061	.018	.106	.057	.017	.098	.054	.016	.090	.050	.016		
4.0	.111	.058	.017	.107	.056	.017	.100	.053	.016	.093	.050	.015	.087	.047	.014		
5.0	.104	.053	.015	.101	.052	.015	.095	.049	.015	.089	.047	.014	.084	.045	.013		
6.0	.098	.049	.014	.096	.048	.014	.090	.046	.013	.085	.044	.013	.081	.043	.013		
7.0	.093	.046	.013	.091	.045	.013	.086	.044	.013	.082	.042	.012	.078	.040	.012		
8.0	.088	.043	.012	.086	.042	.012	.082	.041	.012	.079	.040	.011	.075	.039	.011		
9.0	.084	.041	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	.072	.037	.011		
10.0	.080	.039	.011	.079	.038	.011	.076	.037	.010	.073	.036	.010	.070	.035	.010		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.168	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017		
2.0	.150	.133	.118	.129	.114	.102	.088	.079	.071	.051	.046	.042	.016	.015	.014		
3.0	.135	.113	.096	.116	.098	.083	.080	.068	.058	.046	.040	.034	.015	.013	.011		
4.0	.123	.098	.079	.105	.085	.069	.072	.059	.048	.042	.035	.029	.013	.011	.009		
5.0	.112	.086	.066	.096	.074	.057	.066	.052	.040	.038	.030	.024	.012	.010	.008		
6.0	.103	.076	.056	.089	.065	.049	.061	.046	.034	.036	.027	.020	.011	.009	.007		
7.0	.095	.067	.048	.082	.058	.042	.057	.041	.029	.033	.024	.018	.011	.008	.006		
8.0	.089	.061	.041	.076	.053	.036	.053	.037	.025	.031	.022	.015	.010	.007	.005		
9.0	.083	.055	.036	.072	.048	.031	.050	.033	.022	.029	.020	.013	.009	.006	.004		
10.0	.078	.050	.031	.067	.043	.027	.047	.031	.019	.027	.018	.012	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz UTHDi:0.18% ITHDi:5.85% KDisp:0.9849 Lamp Flux:3597.18x1 lm										
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 104mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.0	13.6	13.2	13.8	13.9	12.6	13.2	12.8	13.4	13.5
3H	13.3	13.9	13.5	14.0	14.2	12.8	13.4	13.0	13.6	13.8
4H	13.2	13.8	13.5	14.0	14.2	12.7	13.3	13.0	13.5	13.7
6H	13.2	13.7	13.4	13.9	14.2	12.7	13.2	13.0	13.5	13.7
8H	13.1	13.6	13.4	13.9	14.1	12.6	13.2	12.9	13.4	13.7
12H	13.1	13.6	13.4	13.8	14.1	12.6	13.1	12.9	13.4	13.6
4H 2H	13.1	13.6	13.3	13.9	14.1	12.7	13.3	13.0	13.5	13.7
3H	13.4	13.9	13.7	14.2	14.4	13.0	13.5	13.3	13.7	14.0
4H	13.3	13.8	13.7	14.1	14.4	12.9	13.4	13.2	13.7	14.0
6H	13.3	13.7	13.6	14.0	14.4	12.8	13.2	13.2	13.6	13.9
8H	13.2	13.6	13.6	14.0	14.3	12.8	13.2	13.2	13.5	13.9
12H	13.2	13.5	13.6	13.9	14.3	12.7	13.1	13.1	13.5	13.8
8H 4H	13.2	13.6	13.6	14.0	14.3	12.8	13.2	13.2	13.5	13.9
6H	13.1	13.5	13.6	13.9	14.3	12.7	13.0	13.1	13.4	13.8
8H	13.1	13.4	13.5	13.8	14.2	12.7	13.0	13.1	13.4	13.8
12H	13.1	13.3	13.5	13.7	14.2	12.6	12.9	13.1	13.3	13.8
12H 4H	13.2	13.5	13.6	13.9	14.3	12.7	13.1	13.1	13.5	13.8
6H	13.1	13.4	13.5	13.8	14.2	12.7	12.9	13.1	13.4	13.8
8H	13.0	13.3	13.5	13.7	14.2	12.6	12.9	13.1	13.3	13.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 1.5					+ 1.0 / - 1.4				
1.5H	+ 2.0 / - 1.0					+ 1.6 / - 0.9				
2.0H	+ 1.7 / - 1.7					+ 1.6 / - 1.8				

CIE Pub.117, 3597 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.4$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.85% KDisp:0.9849 Lamp Flux:3597.18x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D 35WPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 104mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	80	89	83	80	88	83	79	76
0.80	96	91	87	96	91	87	95	90	87	83
1.00	100	95	92	100	95	91	98	94	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	104	102	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz UTHDi:0.18% ITHDi:5.85% KDisp:0.9849 Lamp Flux:3597.18x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

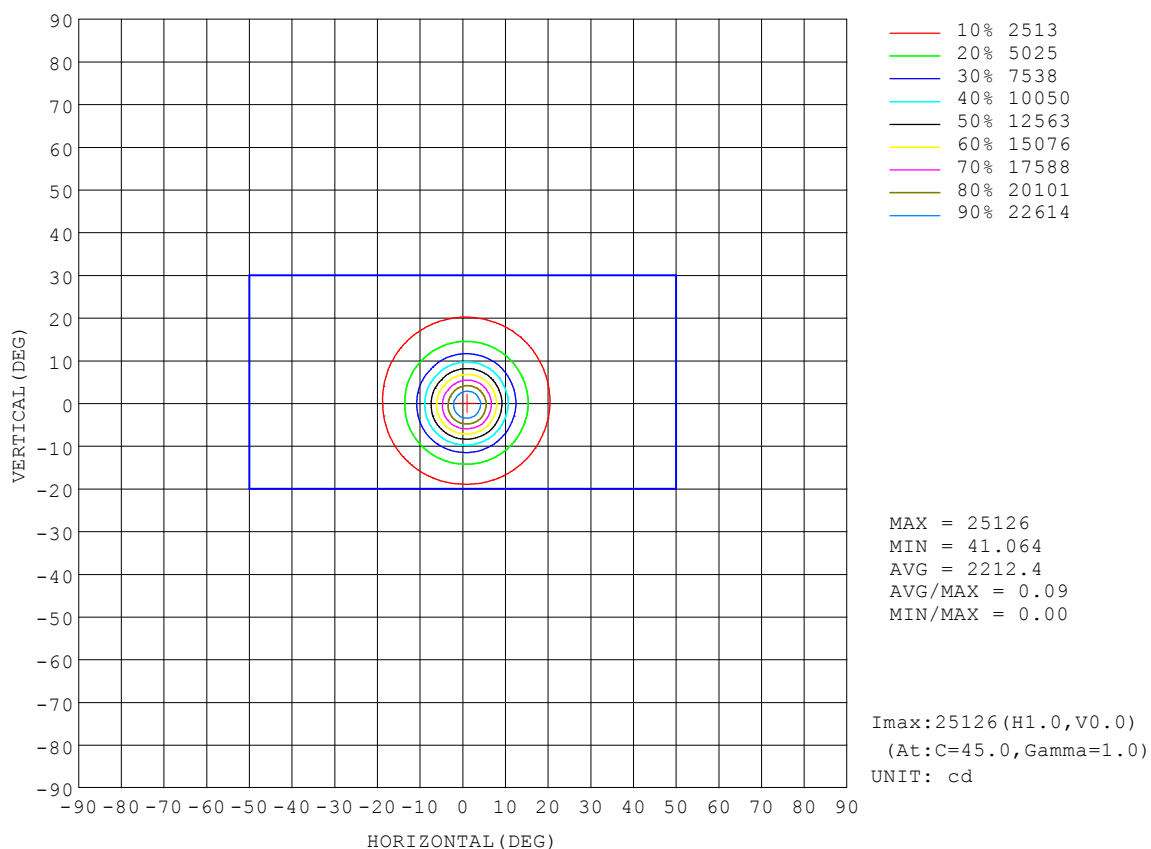


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.85% KDisp:0.9849		Lamp Flux:3597.18x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D 350PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

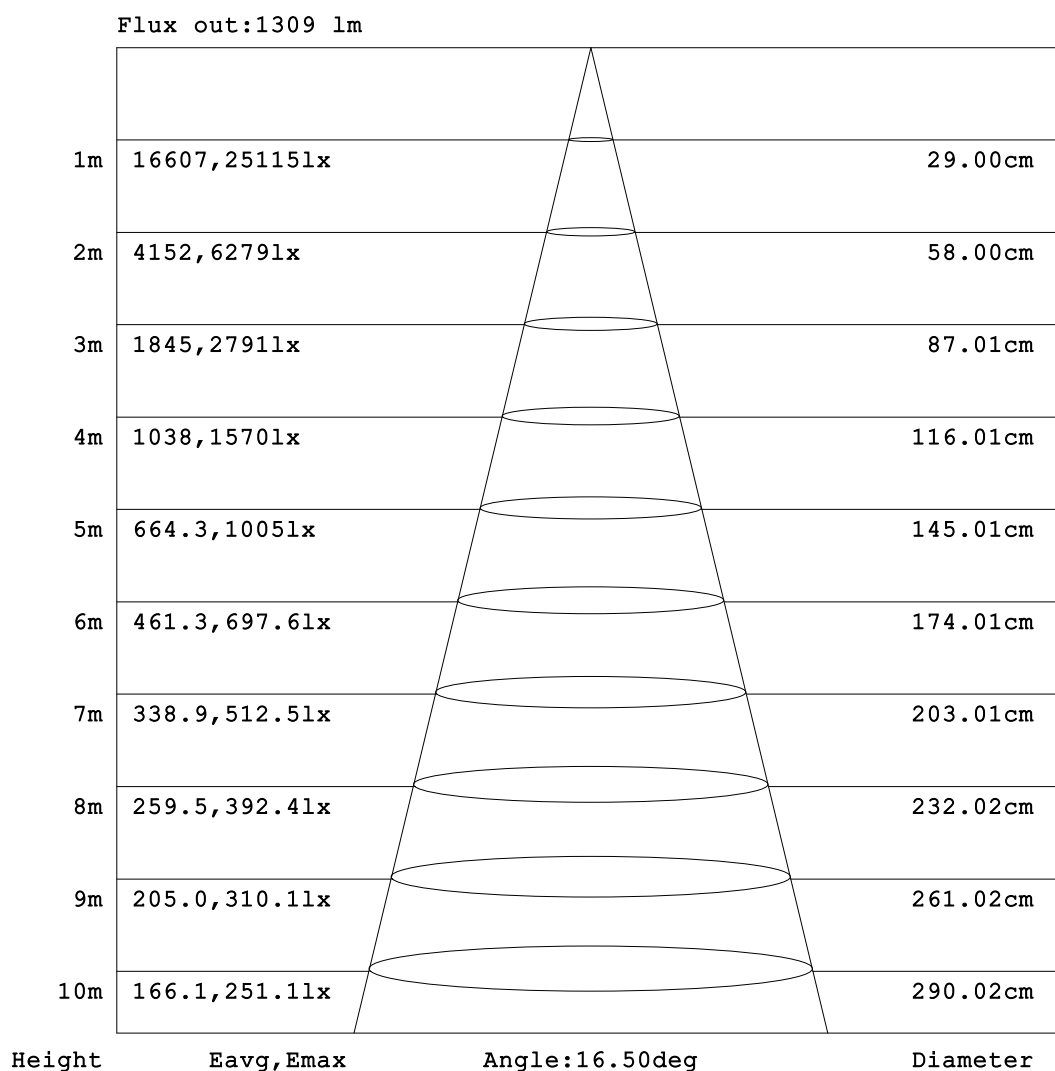


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.85% KDisp:0.9849		Lamp Flux:3597.18x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

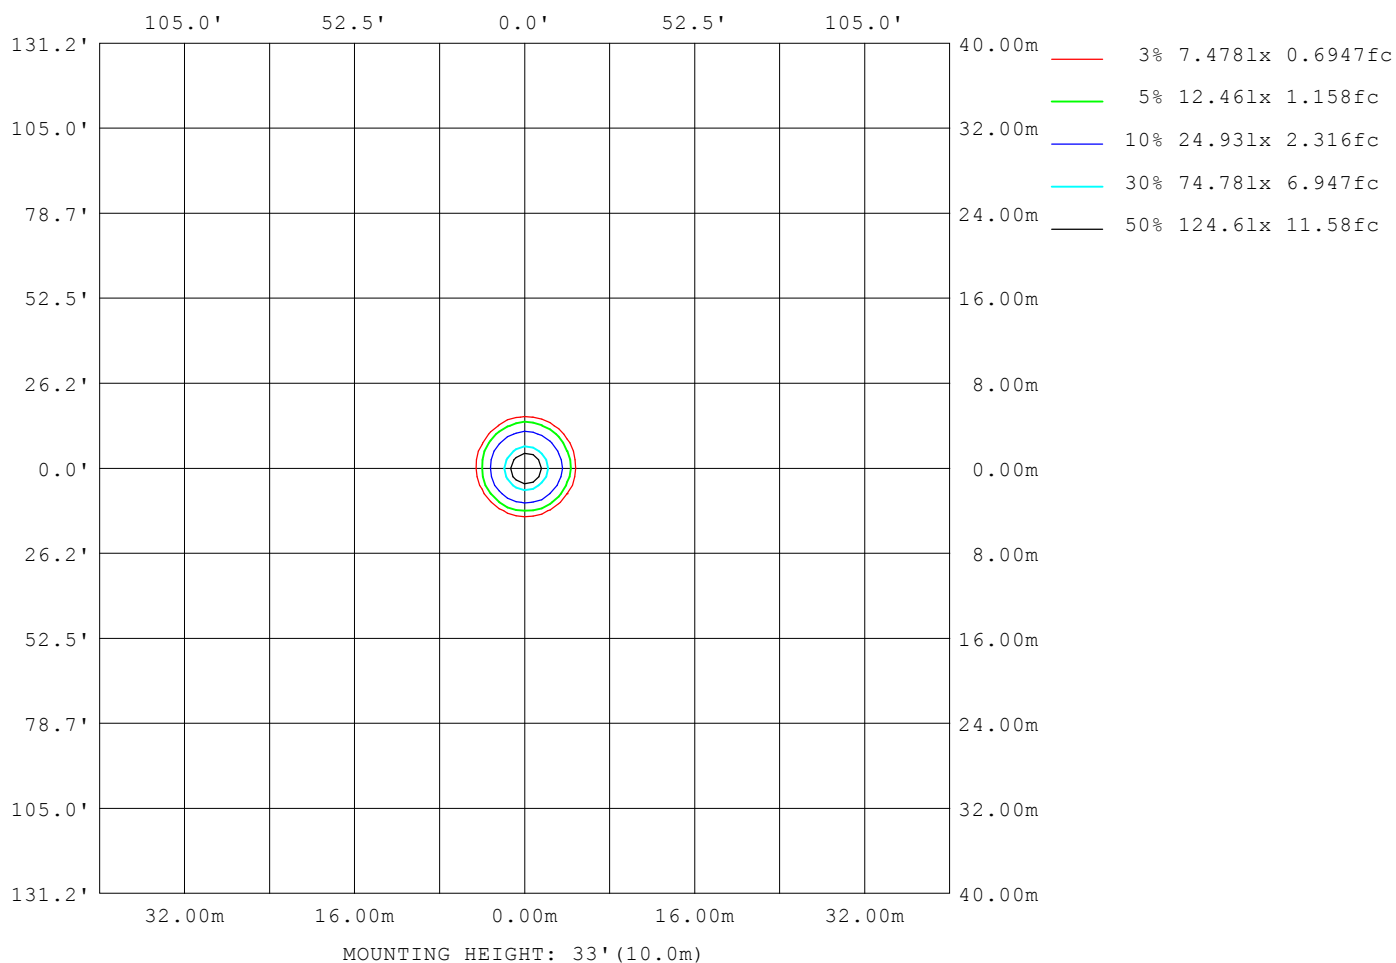

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.2V I:0.1489A P:35.2W PF:0.9834 Freq:49.99Hz		
UTHDi:0.18% ITHDi:5.85% KDisp:0.9849 Lamp Flux:3597.18x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 2700K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5982
L_0~180 (75) av	1256
L_0~180 (85) av	854
L_90~270 (65) av	5924
L_90~270 (75) av	1224
L_90~270 (85) av	836
L_45 (65) av	5667
L_45 (75) av	1233
L_45 (85) av	758

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

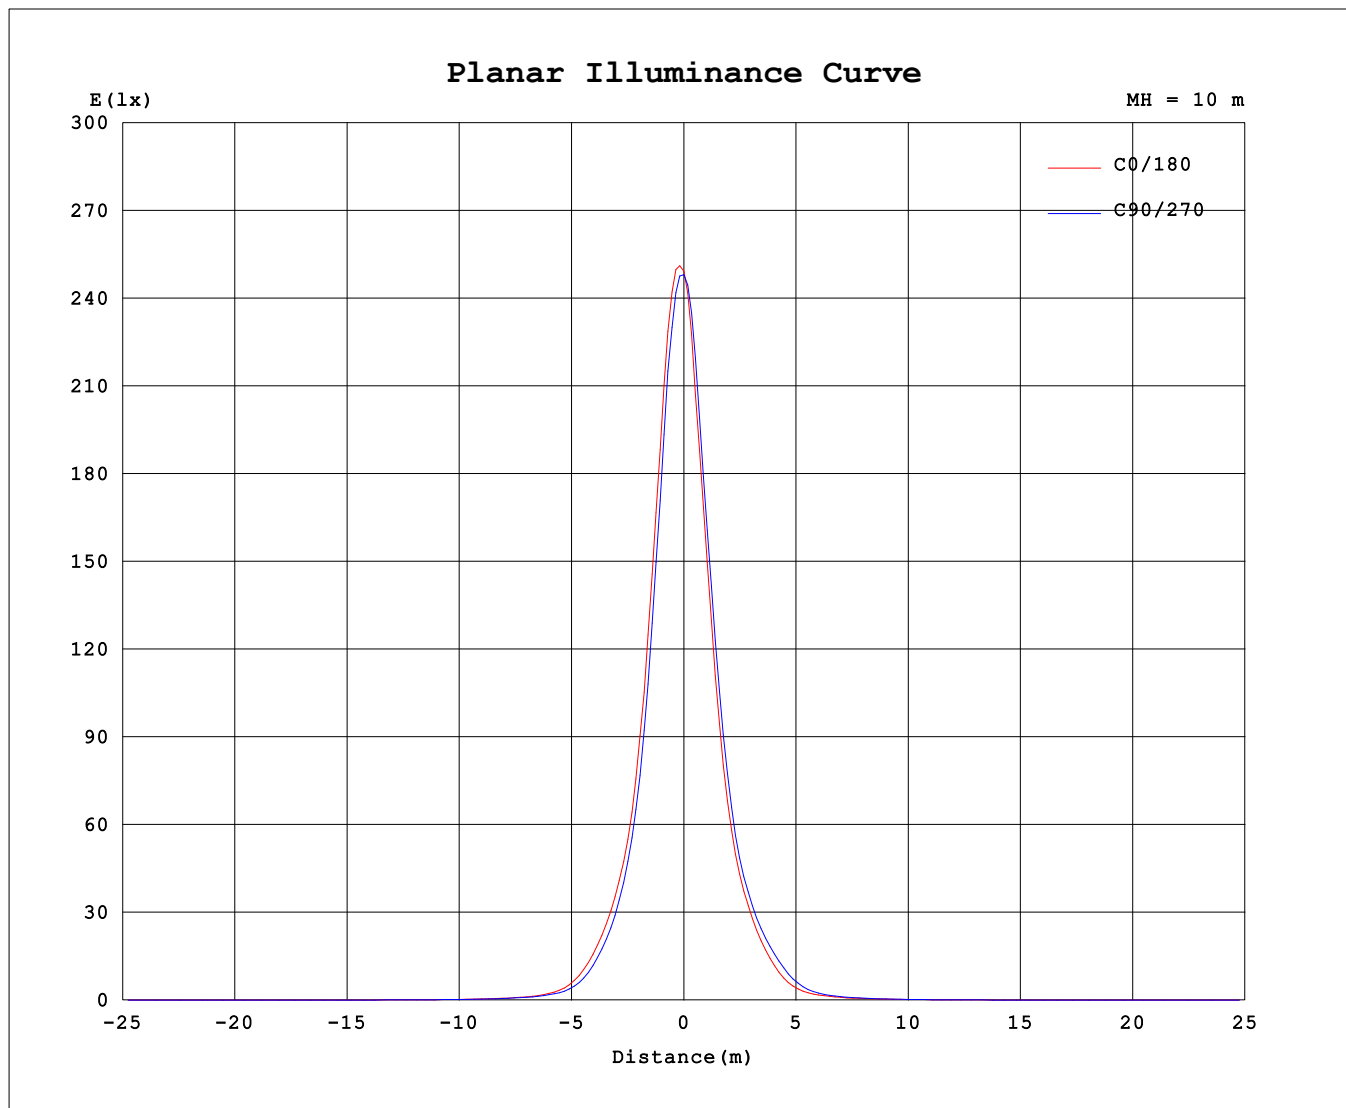

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-30

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	24824	24824	24824	24824	24824	24824	24824	24824
3.0	24220	24024	23114	21996	20715	20768	22070	23561
6.0	19063	18936	17377	16134	15154	15082	16353	18052
9.0	12913	12609	11229	10465	9806	9921	10996	12290
12.0	8057	7612	6967	6584	6191	6416	7066	7821
15.0	5241	4933	4477	4235	4128	4342	4695	5057
18.0	3536	3218	2879	2766	2782	3018	3282	3460
21.0	2305	2029	1797	1758	1763	2009	2265	2351
24.0	1374	1154	1000	977.8	998.4	1200	1460	1491
27.0	751.9	630.2	549.0	530.8	542.3	654.6	821.1	834.0
30.0	426.0	372.3	340.3	331.0	328.5	375.5	457.4	465.9
33.0	275.0	248.7	233.1	230.1	223.4	244.8	287.9	295.8
36.0	191.1	175.9	168.0	169.7	162.0	171.6	198.4	205.9
39.0	140.0	130.2	127.1	130.7	123.6	127.5	144.9	151.0
42.0	107.5	99.93	100.1	103.7	98.17	98.54	111.3	115.8
45.0	86.56	79.19	82.14	84.68	80.87	79.39	88.71	92.34
48.0	71.12	64.45	68.17	70.88	68.23	64.85	72.60	74.87
51.0	59.85	53.74	58.03	60.54	58.65	54.10	60.86	62.44
54.0	51.74	45.79	49.88	52.13	50.22	45.92	52.12	53.48
57.0	43.40	36.86	41.14	42.86	40.80	37.03	42.42	43.89
60.0	35.91	29.95	33.65	33.96	32.14	29.62	35.00	36.29
63.0	27.74	22.74	24.70	25.35	24.55	22.70	26.60	28.01
66.0	20.94	17.16	17.40	17.21	16.36	15.47	19.15	20.70
69.0	13.46	11.23	10.94	10.06	9.239	9.820	11.75	13.20
72.0	6.417	5.880	5.331	4.366	3.709	4.314	5.754	6.409
75.0	3.081	2.885	2.620	2.459	2.382	2.432	2.703	2.946
78.0	2.120	1.968	1.770	1.672	1.663	1.644	1.863	1.989
81.0	1.602	1.450	1.301	1.039	0.9988	1.010	1.318	1.500
84.0	0.9119	0.7891	0.7469	0.5913	0.5921	0.5697	0.7324	0.7963
87.0	0.5143	0.3976	0.3792	0.2307	0.2184	0.2194	0.3693	0.3971
90.0	0.1523	0.0855	0.1630	0.1019	0.1027	0.0931	0.1129	0.0816

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-30

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: