


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.71% KDisp:0.9850		Lamp Flux:3549.21x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 101.21 lm/W
MODEL		Imax (cd)	24899	S/MH(C0/180)	0.24	
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	0.29	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3549.2	η UP,DN(C0-180)	0.0,50.9	
NOMINAL FLUX(lm)	3549.21	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	240.33	η down (%)	100.0	CIBSE SHR MAX	0.30	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

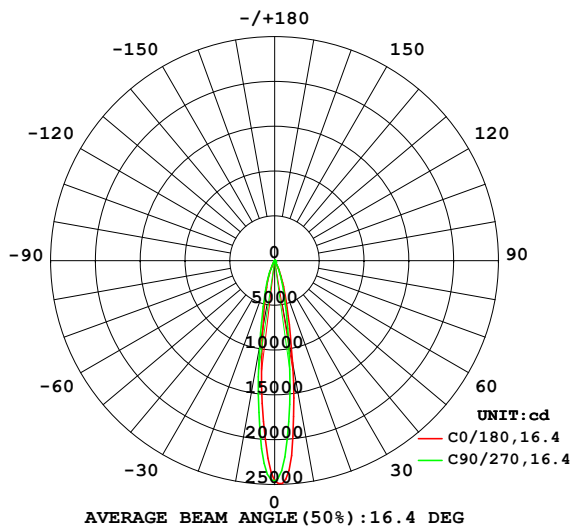

PLANAR ISOLUX DIAGRAM(UNIT:lx)

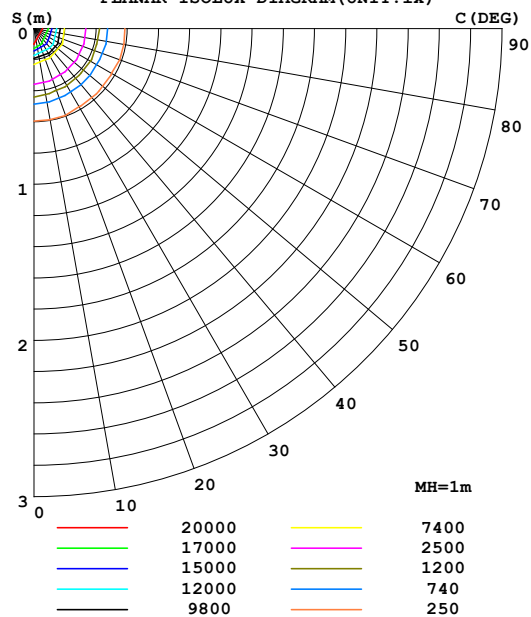

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1159	1047	898.9	815.6	778.5	830.7	961.1	1117	0- 10	1475	1475	41.6,41.6
20	264.8	237.7	227.7	206.9	211.8	219.1	244.6	252.9	10- 20	1327	2802	78.9,78.9
30	41.24	37.86	37.21	34.23	34.17	35.33	40.49	41.60	20- 30	485.8	3288	92.6,92.6
40	12.98	12.27	12.05	11.61	11.26	11.07	12.26	12.88	30- 40	130.9	3418	96.3,96.3
50	6.583	6.057	6.187	6.014	5.709	5.347	6.120	6.450	40- 50	65.31	3484	98.2,98.2
60	3.713	3.233	3.359	3.201	2.992	2.763	3.321	3.608	50- 60	41.19	3525	99.3,99.3
70	1.156	1.020	0.8609	0.6461	0.6322	0.6593	0.8946	1.075	60- 70	19.91	3545	99.9,99.9
80	0.1660	0.1591	0.1519	0.1289	0.1238	0.1304	0.1527	0.1538	70- 80	3.639	3549	100,100
90	0.0163	0.0085	0.0160	0.0098	0.0101	0.0092	0.0111	0.0079	80- 90	0.6857	3549	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3455.3 lm

%lum = 97.4%

%lamp = 97.4%

Conical surface Flux(120deg): 3525 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.71% KDisp:0.9850 Lamp Flux:3549.21x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

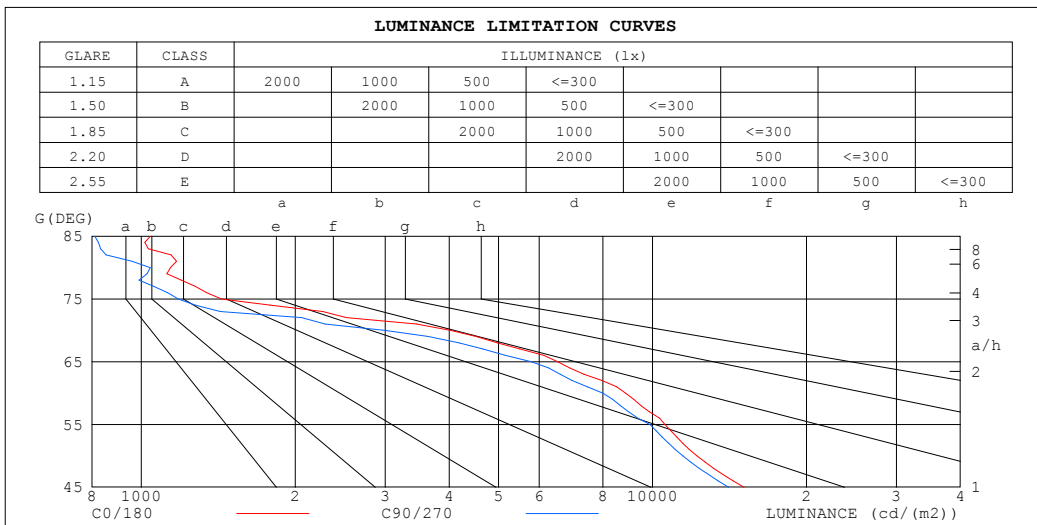


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.71% KDisp:0.9850 Lamp Flux:3549.21x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.13	1.11	1.09	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.02	1.01	.00	.99	.98	.97														
2.0	1.08	1.05	1.02	1.06	1.03	1.01	1.03	1.01	.99	.00	.98	.97	.97	.96	.95	.93														
3.0	1.03	.99	.96	1.02	.98	.96	.99	.96	.94	.97	.95	.93	.95	.93	.91	.90														
4.0	.99	.95	.92	.98	.94	.91	.96	.93	.90	.94	.92	.89	.92	.90	.88	.87														
5.0	.95	.91	.88	.95	.91	.88	.93	.90	.87	.91	.89	.87	.90	.88	.86	.85														
6.0	.92	.88	.85	.92	.88	.85	.90	.87	.84	.89	.86	.84	.88	.85	.83	.82														
7.0	.89	.85	.82	.89	.85	.82	.88	.84	.82	.87	.84	.81	.86	.83	.81	.80														
8.0	.87	.83	.80	.86	.83	.80	.85	.82	.80	.85	.82	.79	.84	.81	.79	.78														
9.0	.85	.81	.78	.84	.80	.78	.83	.80	.77	.83	.79	.77	.82	.79	.77	.76														
10.0	.82	.78	.76	.82	.78	.76	.81	.78	.76	.81	.78	.75	.80	.77	.75	.74														

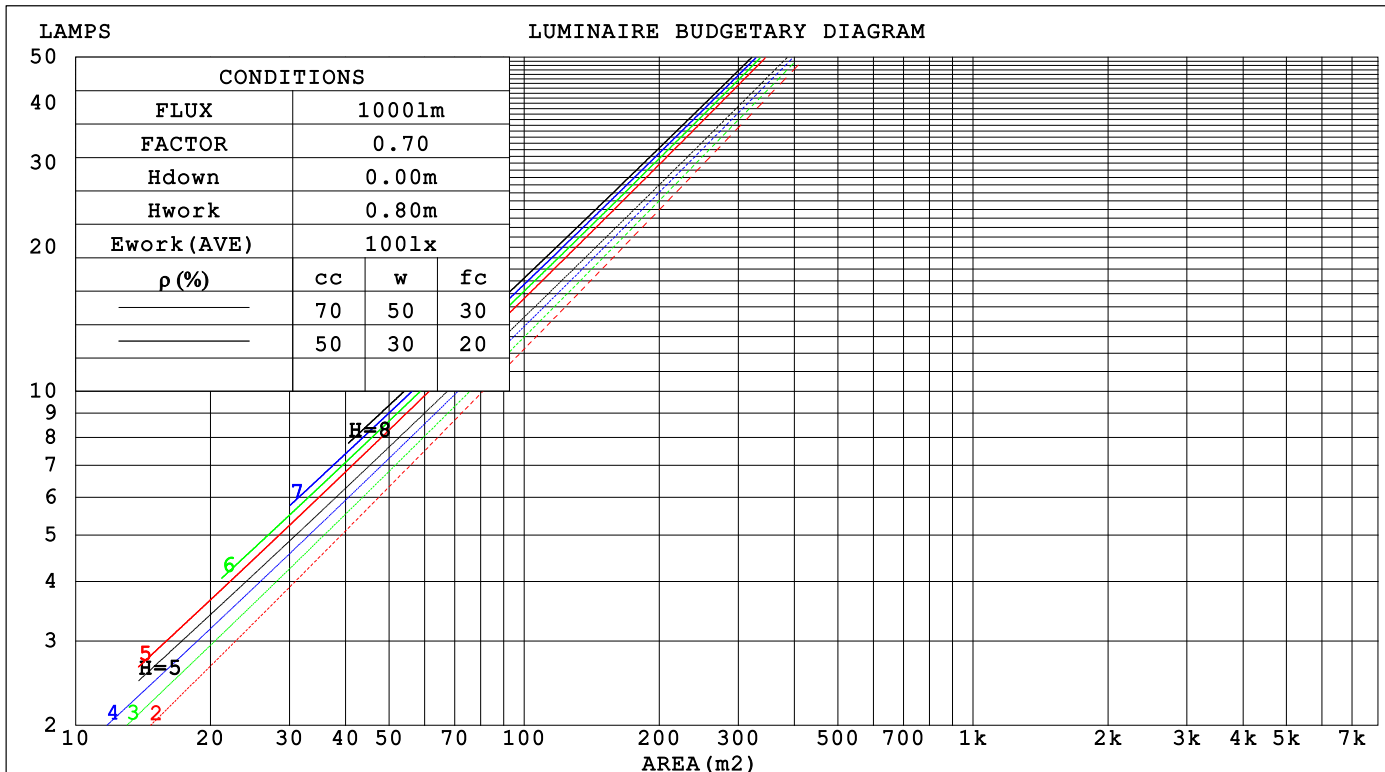

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.71% KDisp:0.9850 Lamp Flux:3549.21x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.137	.078	.025	.131	.075	.024	.118	.068	.022	.107	.062	.020	.096	.056	.018		
2.0	.127	.070	.021	.122	.067	.021	.112	.062	.019	.102	.057	.018	.094	.053	.017		
3.0	.119	.063	.019	.114	.061	.018	.106	.057	.017	.098	.054	.016	.090	.050	.015		
4.0	.111	.058	.017	.107	.056	.017	.100	.053	.016	.093	.050	.015	.087	.047	.014		
5.0	.104	.053	.015	.101	.052	.015	.095	.049	.015	.089	.047	.014	.084	.045	.013		
6.0	.098	.049	.014	.096	.048	.014	.090	.046	.013	.085	.044	.013	.081	.043	.013		
7.0	.093	.046	.013	.091	.045	.013	.086	.044	.013	.082	.042	.012	.078	.040	.012		
8.0	.088	.043	.012	.086	.042	.012	.082	.041	.012	.079	.040	.011	.075	.039	.011		
9.0	.084	.041	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	.072	.037	.011		
10.0	.080	.039	.011	.079	.038	.011	.076	.037	.010	.073	.036	.010	.070	.035	.010		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.168	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017		
2.0	.150	.133	.118	.129	.114	.102	.088	.079	.071	.051	.046	.042	.016	.015	.014		
3.0	.135	.113	.096	.116	.098	.083	.080	.068	.058	.046	.040	.034	.015	.013	.011		
4.0	.123	.098	.079	.105	.085	.069	.072	.059	.048	.042	.035	.029	.013	.011	.009		
5.0	.112	.086	.066	.096	.074	.057	.066	.052	.040	.038	.030	.024	.012	.010	.008		
6.0	.103	.076	.056	.089	.065	.049	.061	.046	.034	.035	.027	.020	.011	.009	.007		
7.0	.095	.067	.048	.082	.058	.042	.057	.041	.029	.033	.024	.018	.011	.008	.006		
8.0	.089	.061	.041	.076	.053	.036	.053	.037	.025	.031	.022	.015	.010	.007	.005		
9.0	.083	.055	.036	.072	.048	.031	.050	.033	.022	.029	.020	.013	.009	.006	.004		
10.0	.078	.050	.031	.067	.043	.027	.047	.031	.019	.027	.018	.012	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz UTHDi:0.16% ITHDi:5.71% KDisp:0.9850 Lamp Flux:3549.21x1 lm										
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 104mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.2	13.8	13.4	14.0	14.1	12.9	13.5	13.1	13.7	13.8
3H	13.5	14.1	13.7	14.3	14.5	13.1	13.7	13.3	13.9	14.1
4H	13.4	14.0	13.7	14.2	14.4	13.0	13.6	13.3	13.8	14.0
6H	13.4	13.9	13.7	14.2	14.4	13.0	13.5	13.2	13.7	14.0
8H	13.3	13.9	13.6	14.1	14.4	12.9	13.4	13.2	13.7	13.9
12H	13.3	13.8	13.6	14.1	14.3	12.9	13.4	13.2	13.6	13.9
4H 2H	13.3	13.9	13.6	14.1	14.3	13.0	13.6	13.3	13.8	14.0
3H	13.6	14.1	13.9	14.4	14.7	13.3	13.8	13.6	14.0	14.3
4H	13.6	14.1	13.9	14.3	14.6	13.2	13.7	13.5	14.0	14.3
6H	13.5	13.9	13.9	14.3	14.6	13.1	13.5	13.5	13.9	14.2
8H	13.5	13.9	13.9	14.2	14.6	13.1	13.5	13.5	13.8	14.2
12H	13.4	13.8	13.8	14.1	14.5	13.0	13.4	13.4	13.7	14.1
8H 4H	13.5	13.8	13.8	14.2	14.6	13.1	13.5	13.5	13.8	14.2
6H	13.4	13.7	13.8	14.1	14.5	13.0	13.3	13.4	13.7	14.1
8H	13.3	13.6	13.8	14.0	14.5	12.9	13.2	13.4	13.6	14.1
12H	13.3	13.5	13.8	14.0	14.4	12.9	13.1	13.4	13.6	14.0
12H 4H	13.4	13.8	13.8	14.1	14.5	13.0	13.4	13.4	13.7	14.1
6H	13.3	13.6	13.8	14.0	14.5	12.9	13.2	13.4	13.6	14.1
8H	13.3	13.5	13.7	14.0	14.4	12.9	13.1	13.4	13.6	14.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.1 / - 1.4					+ 1.1 / - 1.5				
1.5H	+ 1.8 / - 1.0					+ 1.6 / - 0.9				
2.0H	+ 1.6 / - 1.8					+ 1.6 / - 1.7				

CIE Pub.117, 3549 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.4$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.71% KDisp:0.9850 Lamp Flux:3549.2lx1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 104mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	80	89	83	80	88	83	79	76
0.80	96	91	87	96	91	87	95	90	87	83
1.00	100	95	92	100	95	91	98	95	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	104	102	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz UTHDi:0.16% ITHDi:5.71% KDisp:0.9850 Lamp Flux:3549.21x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

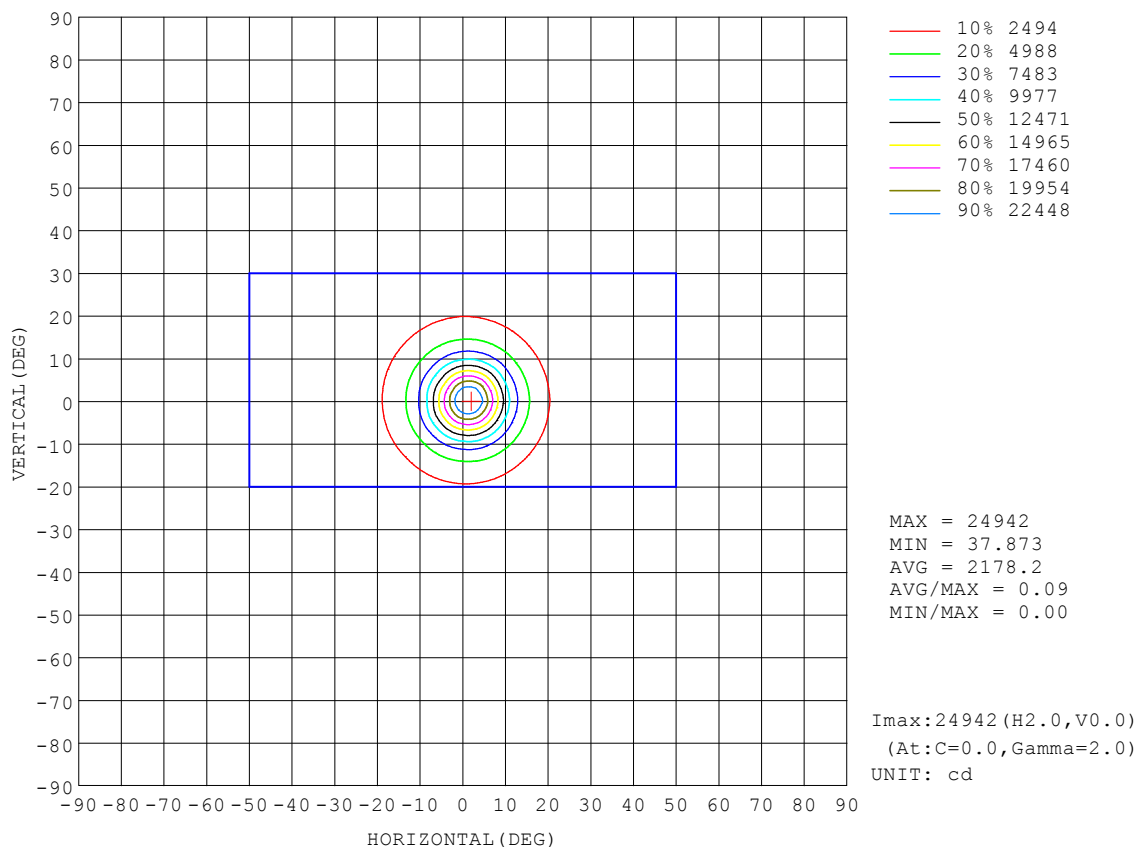


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.71% KDisp:0.9850		Lamp Flux:3549.2lx1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

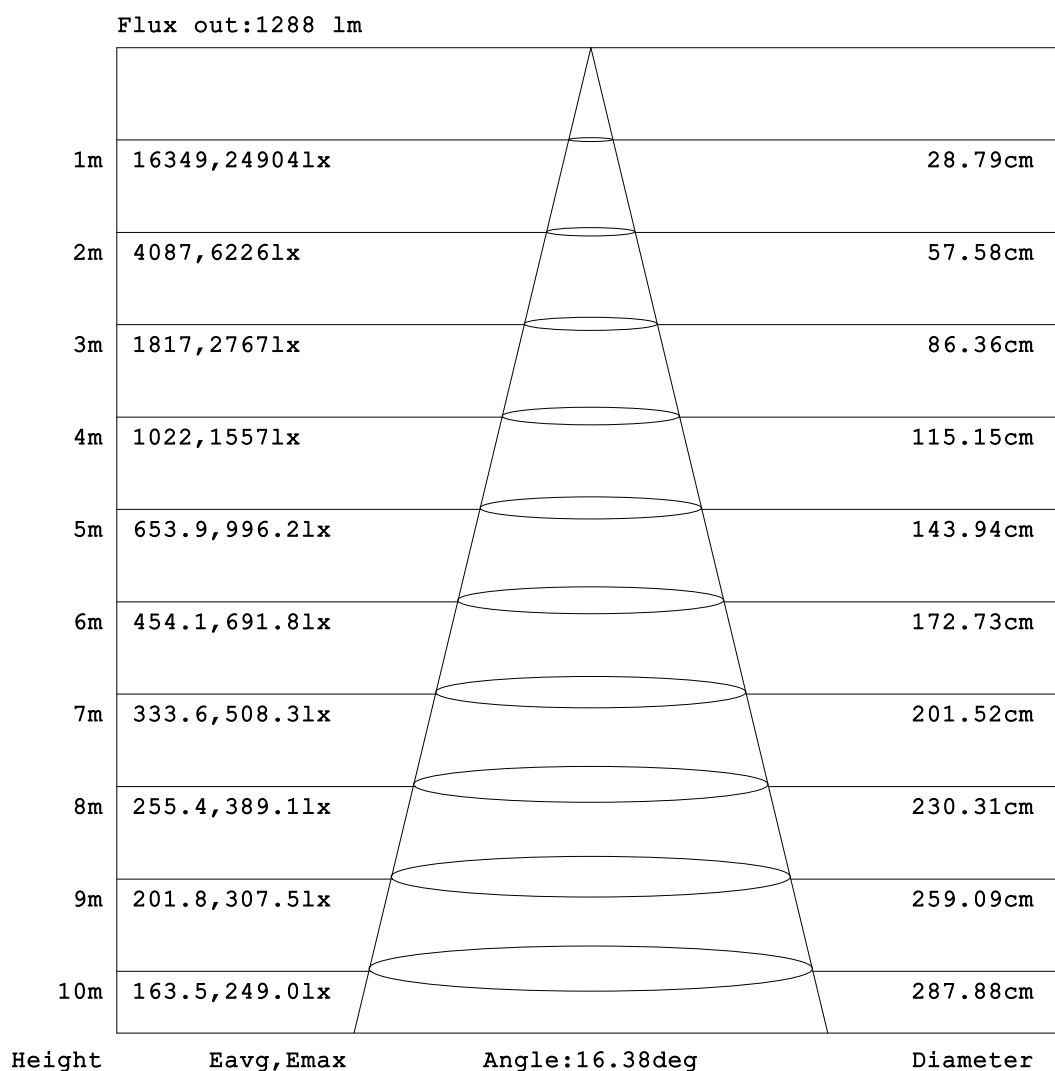


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.71% KDisp:0.9850		Lamp Flux:3549.2lx1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

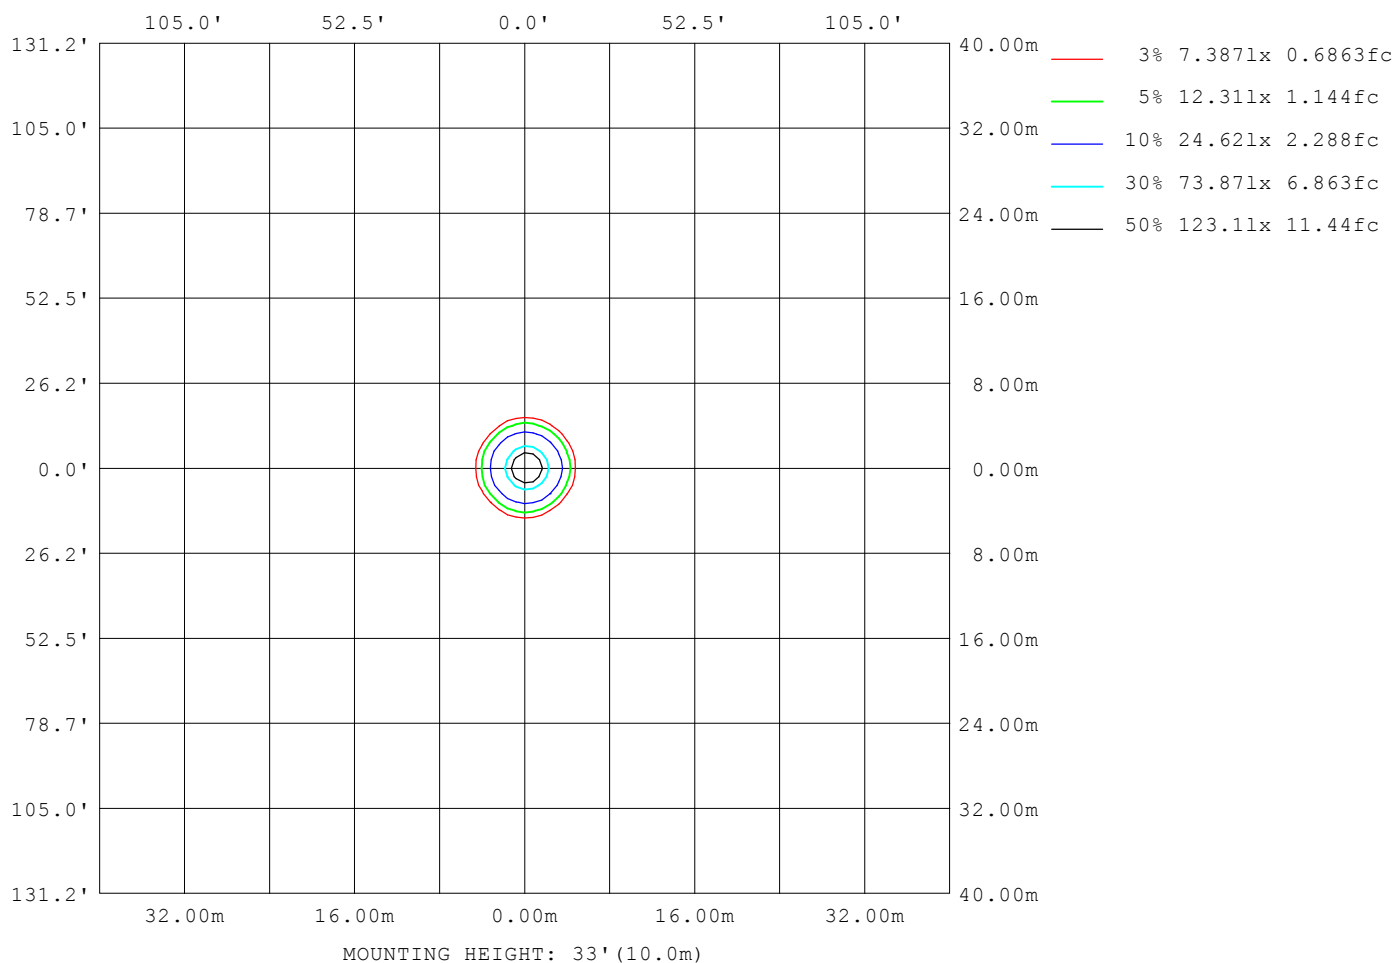

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1482A P:35.1W PF:0.9840 Freq:49.99Hz		
UTHDi:0.16% ITHDi:5.71% KDisp:0.9850		Lamp Flux:3549.21x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 3000K RA90 15D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5743
L_0~180 (75) av	1239
L_0~180 (85) av	828
L_90~270 (65) av	5861
L_90~270 (75) av	1199
L_90~270 (85) av	821
L_45 (65) av	5539
L_45 (75) av	1205
L_45 (85) av	737

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

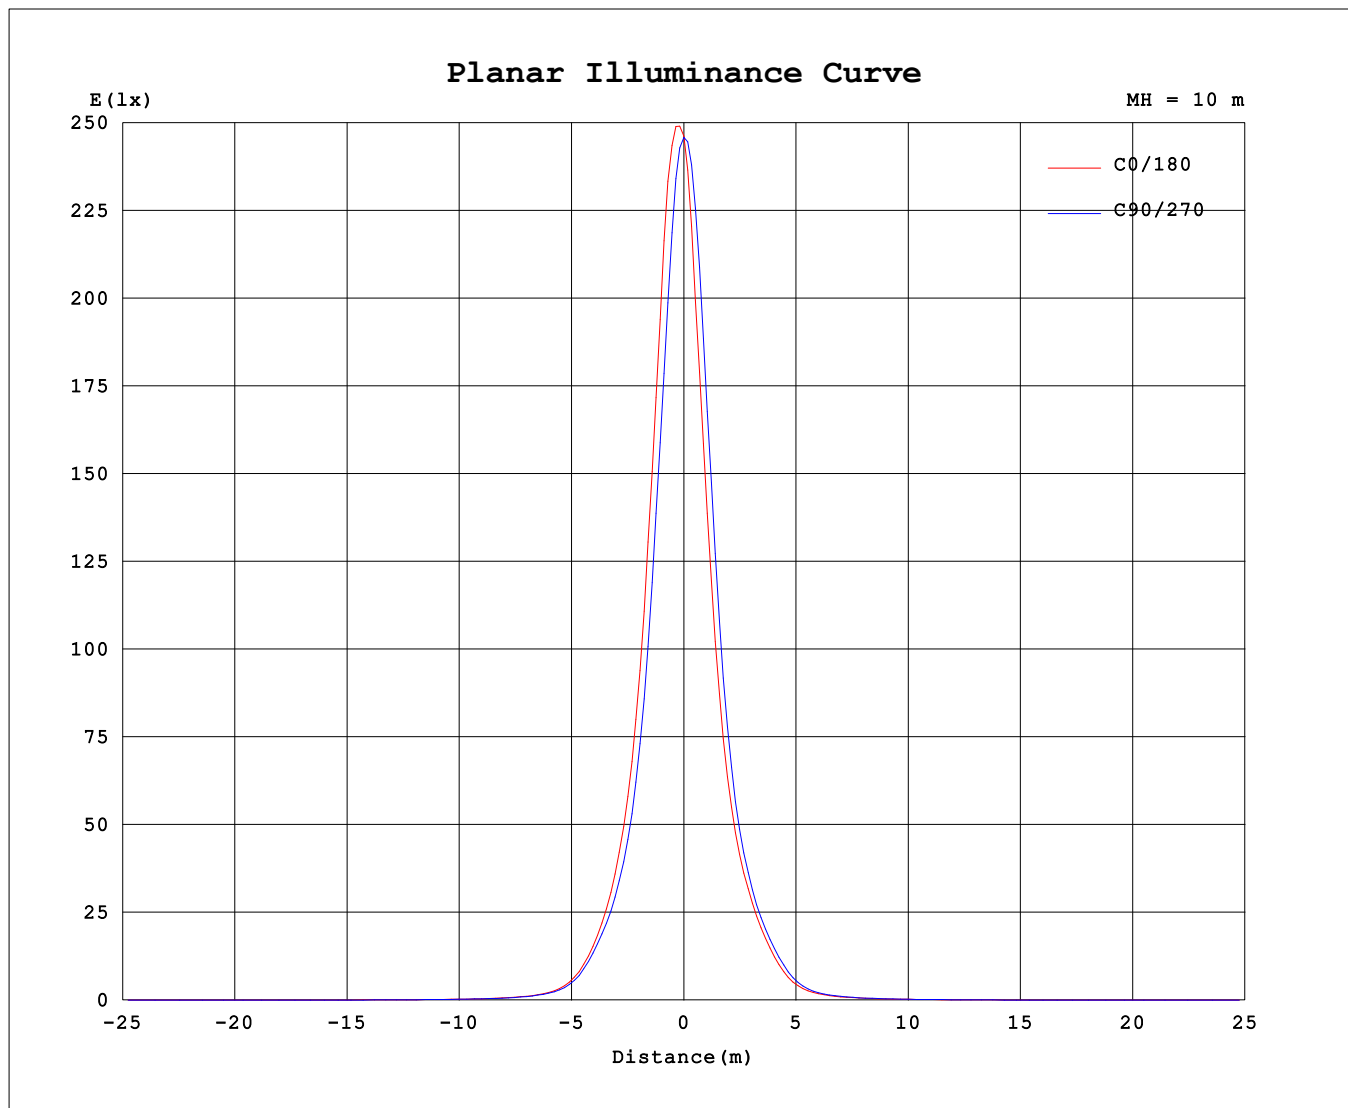

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	24580	24580	24580	24580	24580	24580	24580	24580
3.0	24415	23506	21952	20575	19968	20792	22654	24162
6.0	19687	18114	16142	14740	14080	14791	17056	19319
9.0	13531	12317	10463	9521	9060	9779	11227	13111
12.0	8538	7695	6636	6018	5862	6210	7087	8242
15.0	5482	4927	4378	4031	4020	4209	4662	5202
18.0	3562	3233	2952	2715	2786	2909	3167	3372
21.0	2269	2031	1978	1784	1824	1864	2139	2183
24.0	1341	1159	1173	1041	1069	1080	1319	1310
27.0	731.0	647.6	637.3	574.7	581.7	601.5	720.9	727.4
30.0	412.4	378.6	372.1	342.3	341.7	353.3	404.9	416.0
33.0	268.4	251.3	247.4	230.9	227.4	232.7	261.0	271.6
36.0	189.5	179.5	175.2	166.6	162.9	163.5	181.9	191.1
39.0	141.4	134.0	131.3	126.1	122.6	121.1	134.3	141.0
42.0	110.6	104.0	102.7	99.37	96.13	94.21	103.8	109.0
45.0	89.50	83.21	83.67	80.79	77.39	74.73	83.23	88.27
48.0	73.86	68.38	69.33	67.19	63.87	60.48	68.66	72.53
51.0	62.31	57.16	58.57	57.09	54.24	50.52	58.08	61.16
54.0	53.54	48.46	50.13	49.29	46.41	43.20	50.05	52.51
57.0	45.01	39.47	41.06	39.88	37.49	34.38	40.41	43.64
60.0	37.13	32.33	33.59	32.01	29.92	27.63	33.21	36.08
63.0	27.94	24.20	25.17	24.22	23.10	21.18	25.47	27.00
66.0	20.92	18.21	17.62	16.41	15.36	14.33	18.23	20.17
69.0	13.58	11.84	10.97	9.175	8.063	9.056	11.41	12.98
72.0	6.524	6.027	5.346	3.884	3.410	4.112	5.571	6.100
75.0	3.116	2.909	2.570	2.341	2.273	2.369	2.645	2.857
78.0	2.088	1.923	1.728	1.710	1.680	1.630	1.772	1.902
81.0	1.538	1.412	1.259	0.9948	0.9734	1.003	1.283	1.406
84.0	0.8906	0.7654	0.7234	0.5643	0.5762	0.5652	0.7339	0.7724
87.0	0.5130	0.3851	0.3579	0.2129	0.2067	0.2214	0.3743	0.3944
90.0	0.1626	0.0853	0.1603	0.0977	0.1014	0.0918	0.1111	0.0787

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: