


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850 Lamp Flux:3738.23x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.97 lm/W			
MODEL		Imax (cd)	17987	S/MH(C0/180)	0.35
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	0.38
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3738.2	$\eta$ UP,DN(C0-180)	0.0,51.2
NOMINAL FLUX(lm)	3738.23	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,48.8
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.29	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

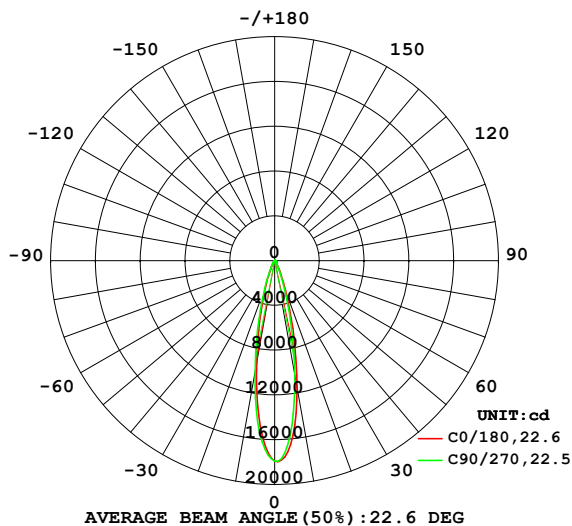

PLANAR ISOLUX DIAGRAM(UNIT:lx)

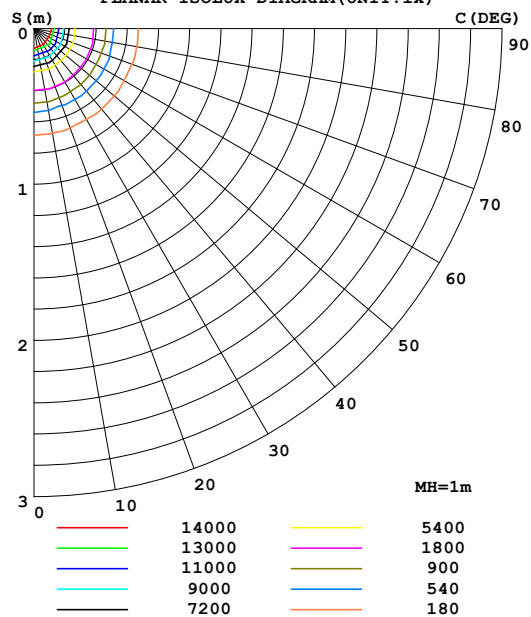

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1152	1127	1044	970.9	935.8	954.8	1019	1102	0- 10	1318	1318	35.2,35.2
20	285.2	269.3	240.7	219.3	221.0	229.7	253.4	270.6	10- 20	1529	2847	76.2,76.2
30	54.40	51.79	47.61	44.82	45.55	47.65	51.39	52.68	20- 30	540.6	3387	90.6,90.6
40	17.10	16.51	15.91	15.53	15.64	16.06	17.24	17.39	30- 40	176.2	3564	95.3,95.3
50	8.417	7.783	7.843	7.807	7.939	7.716	8.574	8.735	40- 50	88.77	3652	97.7,97.7
60	4.627	4.186	4.156	4.013	4.051	3.934	4.519	4.713	50- 60	53.88	3706	99.1,99.1
70	1.504	1.294	1.059	0.8275	0.8172	0.9644	1.205	1.424	60- 70	26.64	3733	99.9,99.9
80	0.1990	0.1915	0.1688	0.1425	0.1390	0.1509	0.1814	0.1877	70- 80	4.584	3737	100,100
90	0.0174	0.0092	0.0164	0.0103	0.0110	0.0094	0.0114	0.0084	80- 90	0.7991	3738	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3613.8 lm

%lum = 96.7%

%lamp = 96.7%

Conical surface Flux(120deg): 3706.2 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850 Lamp Flux:3738.23x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

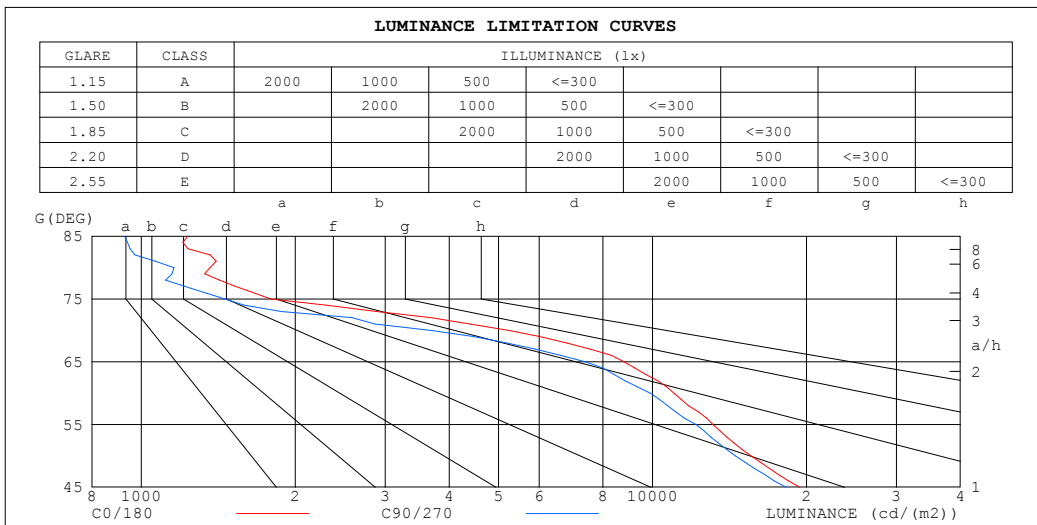

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1233	927
80	1364	1158
75	1794	1458
70	5234	3687
65	8791	7382
60	11013	9900
55	13127	12167
50	15584	14533
45	19413	18270


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850 Lamp Flux:3738.23x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

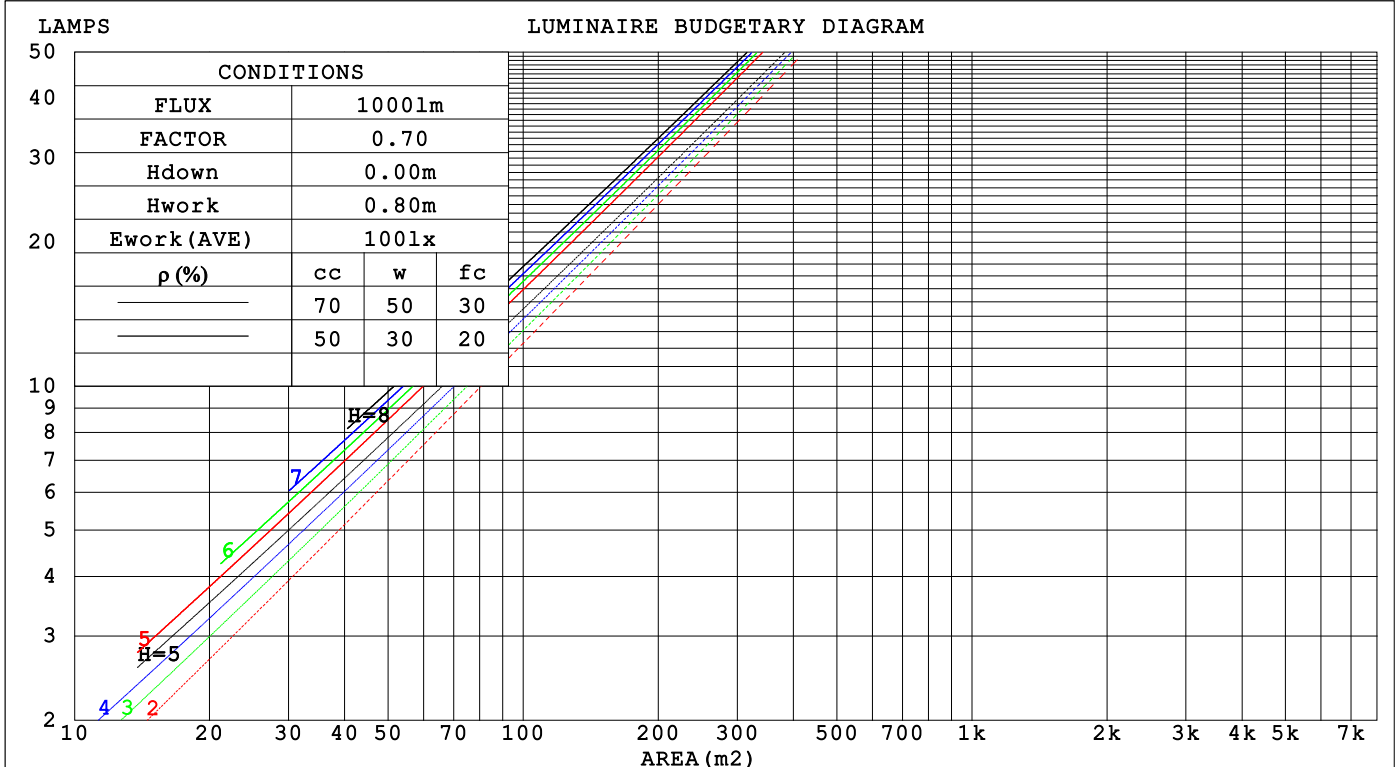

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850 Lamp Flux:3738.23x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.143	.082	.026	.137	.078	.025	.124	.071	.023	.113	.065	.021	.102	.059	.019		
2.0	.134	.073	.023	.128	.071	.022	.118	.066	.020	.109	.061	.019	.100	.056	.018		
3.0	.125	.067	.020	.120	.065	.019	.112	.061	.018	.104	.057	.017	.097	.053	.017		
4.0	.117	.061	.018	.113	.059	.018	.106	.056	.017	.099	.053	.016	.093	.051	.015		
5.0	.110	.056	.016	.107	.055	.016	.101	.053	.015	.095	.050	.015	.090	.048	.014		
6.0	.104	.052	.015	.101	.051	.015	.096	.049	.014	.091	.047	.014	.086	.045	.014		
7.0	.099	.049	.014	.096	.048	.014	.092	.046	.013	.087	.045	.013	.083	.043	.013		
8.0	.094	.046	.013	.092	.045	.013	.088	.044	.013	.084	.043	.012	.080	.041	.012		
9.0	.090	.043	.012	.088	.043	.012	.084	.042	.012	.081	.040	.012	.078	.039	.011		
10.0	.086	.041	.011	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.151	.133	.117	.129	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.124	.098	.078	.107	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009	
5.0	.114	.086	.065	.098	.074	.057	.067	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.105	.076	.055	.090	.066	.048	.062	.046	.034	.036	.027	.020	.012	.009	.007	
7.0	.098	.068	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.091	.061	.040	.078	.053	.035	.054	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.085	.055	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.081	.051	.031	.069	.044	.027	.048	.031	.019	.028	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz UTHDi:0.17% ITHDi:5.61% KDisp:0.9850 Lamp Flux:3738.23x1 lm										
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:								WEIGHT:		
SPEC.:				DIM.:				SERIAL No.:		
MFR.: Norming lighting				SUR.: 104mm				Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.8	15.5	15.0	15.7	15.8	14.5	15.2	14.7	15.3	15.5
3H	15.1	15.8	15.4	16.0	16.2	14.7	15.3	14.9	15.5	15.7
4H	15.1	15.7	15.4	15.9	16.1	14.6	15.2	14.9	15.4	15.7
6H	15.0	15.6	15.3	15.8	16.1	14.5	15.1	14.8	15.4	15.6
8H	15.0	15.6	15.3	15.8	16.0	14.5	15.1	14.8	15.3	15.6
12H	15.0	15.5	15.3	15.7	16.0	14.5	15.0	14.8	15.3	15.5
4H 2H	15.0	15.6	15.2	15.8	16.0	14.6	15.3	14.9	15.5	15.7
3H	15.3	15.8	15.6	16.1	16.4	14.9	15.4	15.2	15.7	15.9
4H	15.2	15.7	15.6	16.0	16.3	14.8	15.3	15.1	15.6	15.9
6H	15.2	15.6	15.5	15.9	16.3	14.7	15.2	15.1	15.5	15.8
8H	15.1	15.5	15.5	15.9	16.2	14.7	15.1	15.1	15.4	15.8
12H	15.1	15.4	15.5	15.8	16.2	14.6	15.0	15.0	15.4	15.7
8H 4H	15.1	15.5	15.5	15.9	16.2	14.7	15.1	15.1	15.4	15.8
6H	15.0	15.4	15.5	15.8	16.2	14.6	14.9	15.0	15.3	15.7
8H	15.0	15.3	15.4	15.7	16.1	14.5	14.8	15.0	15.3	15.7
12H	14.9	15.2	15.4	15.6	16.1	14.5	14.7	15.0	15.2	15.7
12H 4H	15.1	15.4	15.5	15.8	16.2	14.6	15.0	15.0	15.4	15.8
6H	15.0	15.3	15.4	15.7	16.1	14.5	14.8	15.0	15.3	15.7
8H	14.9	15.2	15.4	15.6	16.1	14.5	14.7	15.0	15.2	15.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 1.5					+ 1.1 / - 1.7				
1.5H	+ 2.0 / - 0.9					+ 1.8 / - 1.0				
2.0H	+ 1.7 / - 1.5					+ 1.7 / - 1.4				

CIE Pub.117, 3738 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.6)  
Area: 0.0084 m2

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850 Lamp Flux:3738.23x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 104mm		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	82	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850 Lamp Flux:3738.23x1 lm		
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

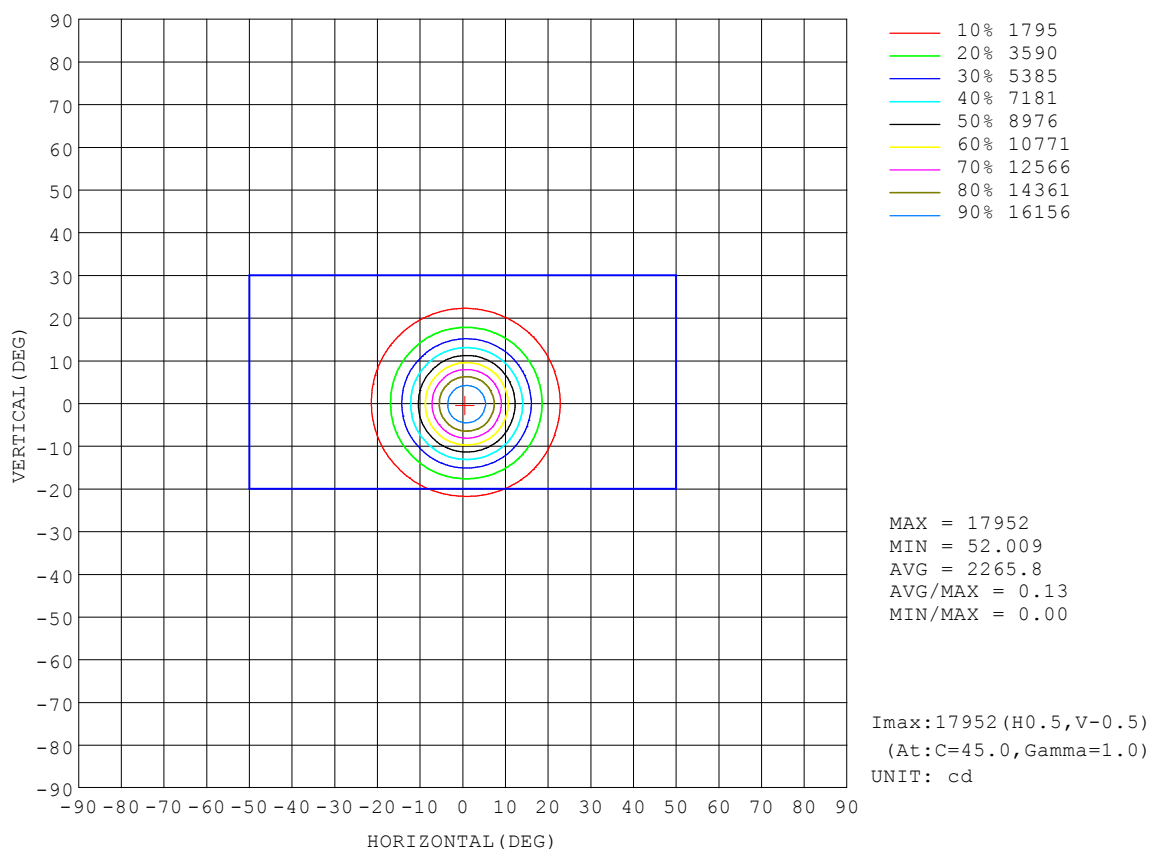


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850		Lamp Flux:3738.23x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

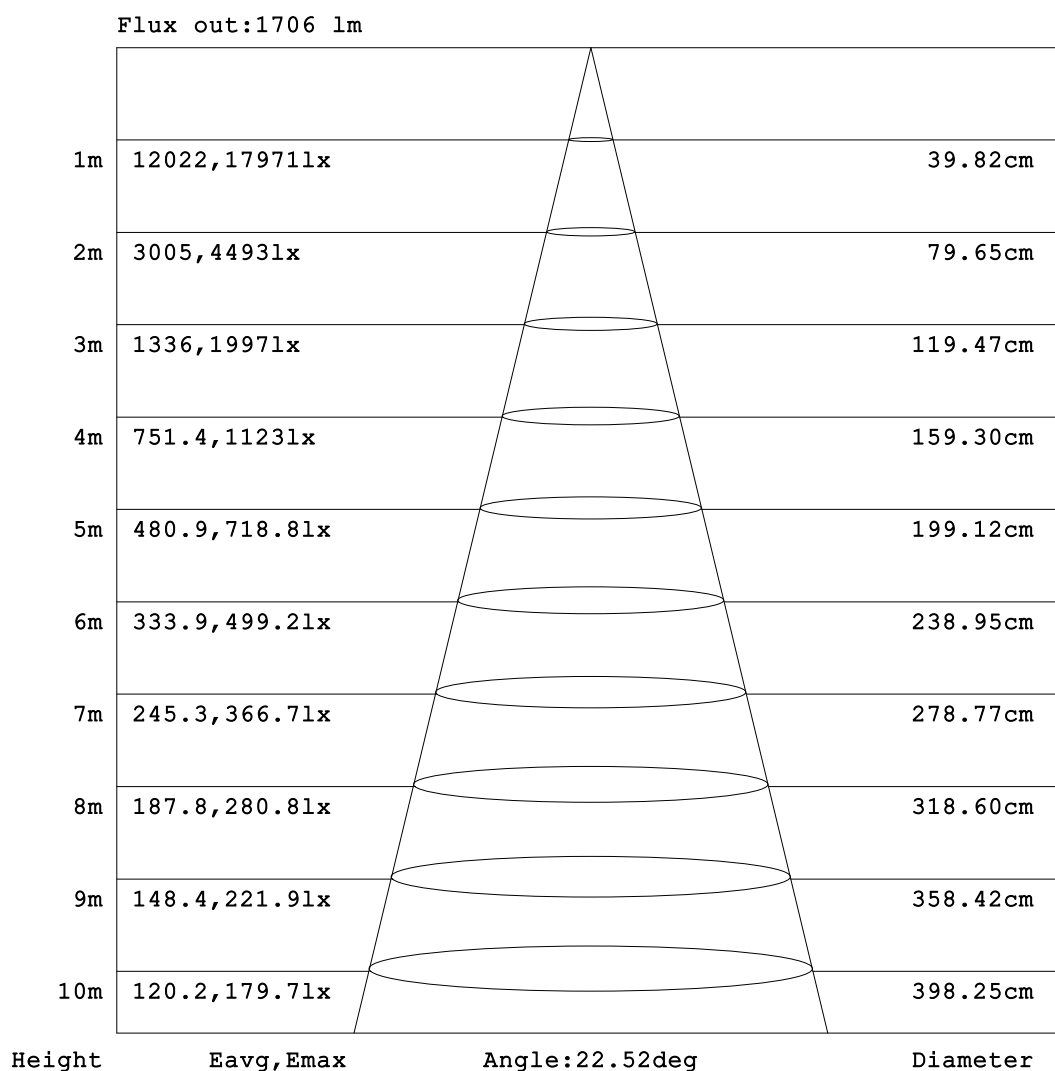


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850		Lamp Flux:3738.23x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

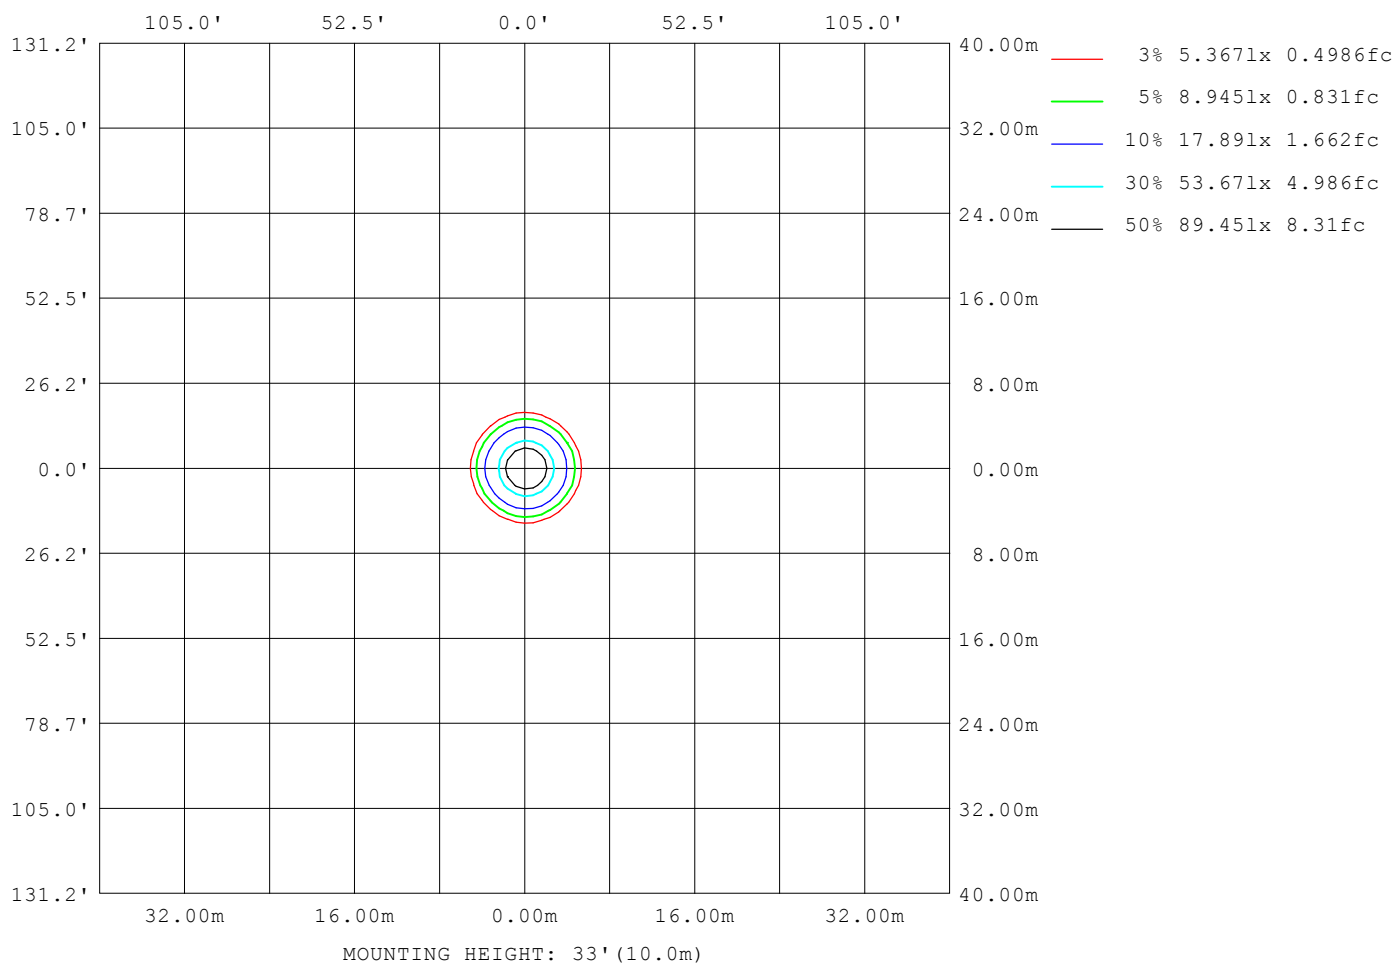

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LED Avg.L Report

Test:U:240.3V I:0.1478A P:34.9W PF:0.9838 Freq:49.99Hz		
UTHDi:0.17% ITHDi:5.61% KDisp:0.9850		Lamp Flux:3738.23x1 lm
NAME: FUSION GT-TR02-AHD-035-COB-01SC 4000K RA90 24D TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7783
L_0~180 (75) av	1526
L_0~180 (85) av	966
L_90~270 (65) av	7842
L_90~270 (75) av	1470
L_90~270 (85) av	944
L_45 (65) av	7596
L_45 (75) av	1486
L_45 (85) av	870

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

### Planar Illuminance Curve

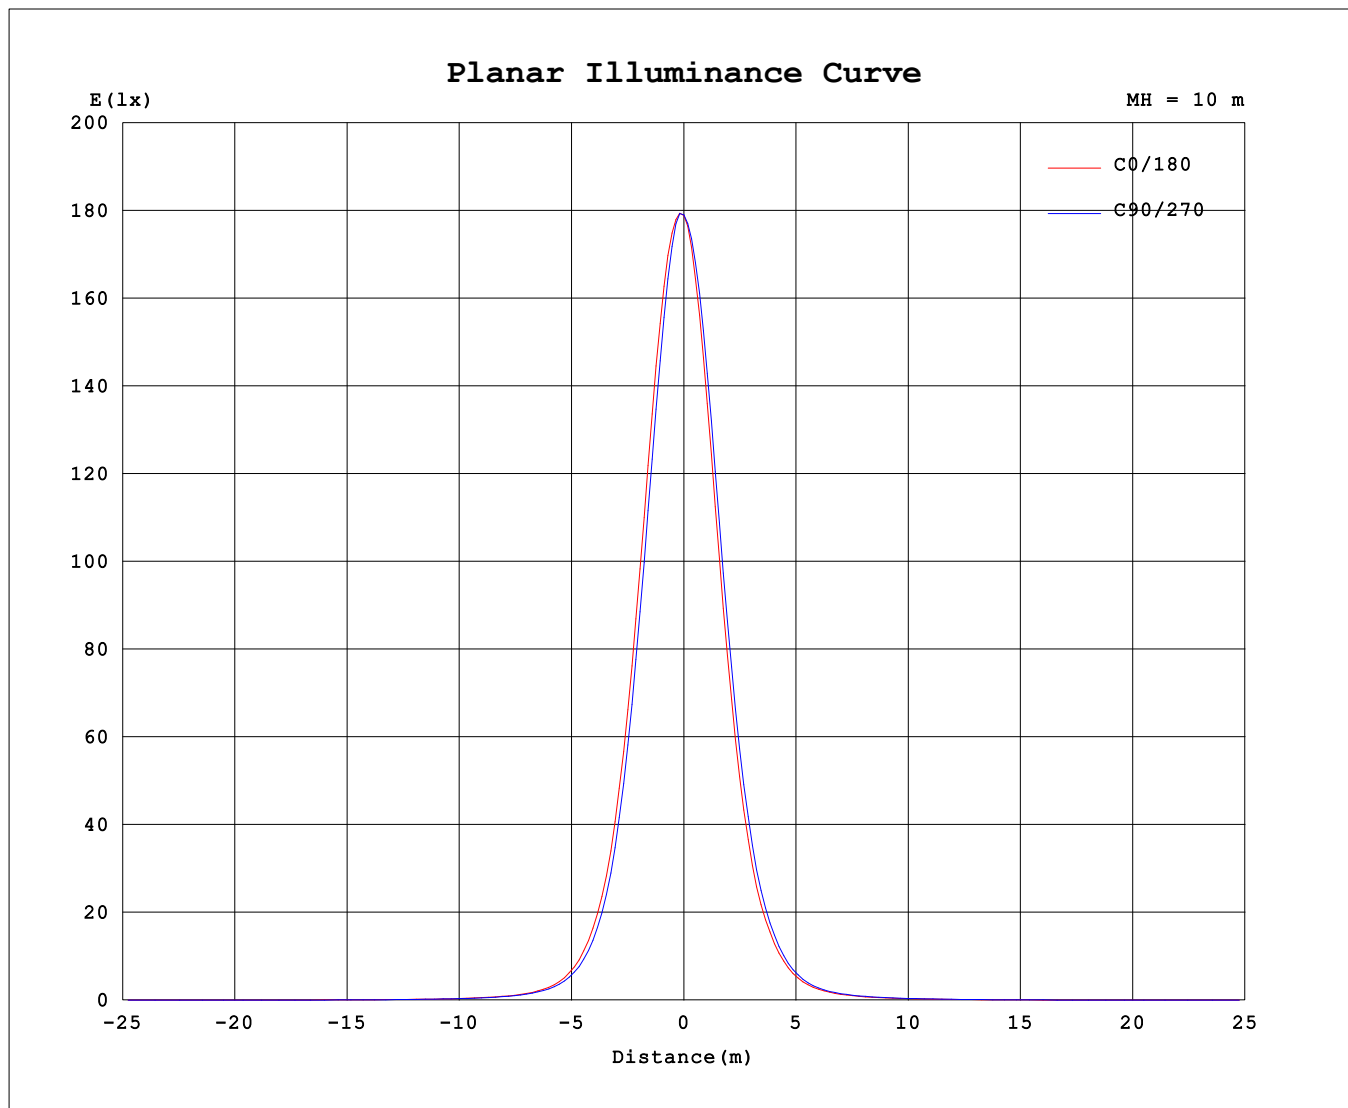

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	17894	17894	17894	17894	17894	17894	17894	17894
3.0	17563	17530	17244	16832	16526	16569	16877	17244
6.0	15692	15498	14810	14136	13826	13982	14525	15219
9.0	12653	12402	11578	10832	10458	10646	11291	12125
12.0	9292	9058	8298	7617	7338	7513	8119	8832
15.0	6299	6078	5482	4953	4811	4956	5454	5931
18.0	3959	3766	3371	3047	3007	3132	3458	3741
21.0	2428	2280	2037	1886	1915	1967	2162	2292
24.0	1477	1374	1226	1132	1171	1222	1334	1383
27.0	897.4	827.9	746.3	694.0	714.5	752.4	817.4	852.1
30.0	544.0	517.9	476.1	448.2	455.5	476.5	513.9	526.8
33.0	359.7	346.4	325.8	309.2	311.4	323.2	346.1	353.5
36.0	253.8	245.0	233.7	225.7	226.8	233.4	249.3	253.6
39.0	187.6	181.2	173.9	168.8	170.2	175.1	188.2	189.8
42.0	144.2	138.7	135.1	133.1	134.9	137.1	147.6	148.5
45.0	115.3	110.1	108.5	107.5	109.6	109.3	119.4	119.9
48.0	95.20	88.76	88.89	88.21	90.03	88.45	97.59	98.38
51.0	79.21	73.08	73.79	73.50	74.82	72.34	80.54	82.30
54.0	66.86	61.14	62.13	61.81	62.44	60.12	67.39	69.52
57.0	56.24	50.58	50.72	49.83	50.58	48.27	54.59	56.95
60.0	46.27	41.86	41.56	40.13	40.51	39.34	45.19	47.13
63.0	36.93	32.80	32.01	31.35	31.16	30.70	35.18	37.07
66.0	28.40	24.80	22.57	20.98	20.64	21.02	25.85	28.05
69.0	18.09	15.49	13.42	11.53	10.74	11.99	15.41	17.53
72.0	9.557	7.601	6.698	5.102	4.438	5.328	7.132	8.686
75.0	3.900	3.623	3.167	2.835	2.736	2.841	3.225	3.625
78.0	2.488	2.330	1.948	1.877	1.889	1.887	2.112	2.313
81.0	1.842	1.659	1.398	1.130	1.109	1.173	1.535	1.725
84.0	1.058	0.9084	0.8243	0.6503	0.6553	0.6570	0.8582	0.9361
87.0	0.6020	0.4547	0.3974	0.2358	0.2251	0.2436	0.4339	0.4728
90.0	0.1739	0.0917	0.1638	0.1031	0.1102	0.0935	0.1143	0.0835

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: