


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz		
UTHDi:0.16% ITHDi:4.22% KDisp:0.9893 Lamp Flux:4031.13x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.47 lm/W			
MODEL		Imax (cd)	12522	S/MH(C0/180)	0.51
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	0.51
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	4031.1	$\eta$ UP,DN(C0-180)	0.0,50.2
NOMINAL FLUX(lm)	4031.13	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,49.8
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	240.32	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

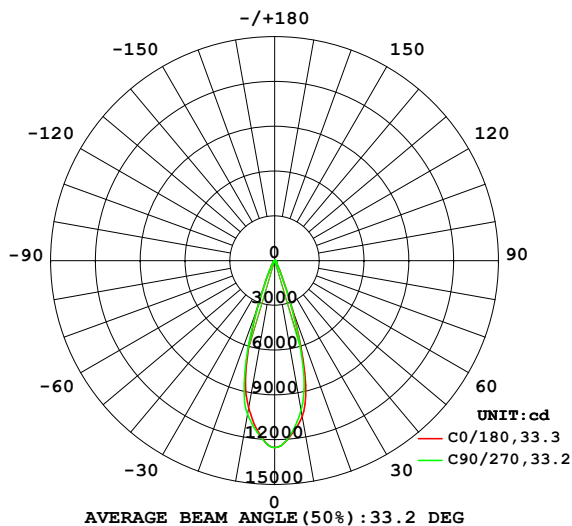

PLANAR ISOLUX DIAGRAM(UNIT:lx)

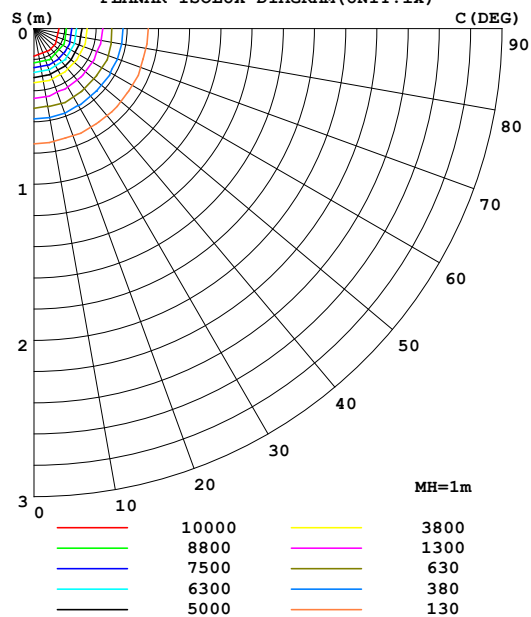

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1062	1057	1020	1016	1003	1018	1048	1036	0- 10	1076	1076	26.7,26.7
20	352.9	351.5	333.7	350.8	351.1	348.6	357.0	332.1	10- 20	1968	3044	75.5,75.5
30	55.60	53.83	50.60	51.37	53.24	52.93	55.50	52.93	20- 30	635.5	3680	91.3,91.3
40	15.68	15.62	15.89	16.15	15.86	15.45	15.79	15.48	30- 40	184.4	3864	95.9,95.9
50	7.605	7.614	7.702	7.835	7.790	7.674	7.853	7.798	40- 50	86.06	3950	98,98
60	3.477	3.550	3.554	3.596	3.543	3.490	3.619	3.530	50- 60	49.07	3999	99.2,99.2
70	1.385	1.397	1.440	1.444	1.419	1.421	1.423	1.371	60- 70	23.84	4023	99.8,99.8
80	0.2133	0.2112	0.2294	0.2357	0.2393	0.2186	0.2113	0.2057	70- 80	7.100	4030	100,100
90	0.0167	0.0113	0.0172	0.0175	0.0187	0.0114	0.0129	0.0109	80- 90	0.9240	4031	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3912.4 lm

%lum = 97.1%

%lamp = 97.1%

Conical surface Flux(120deg): 3999.3 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz		
UTHDi:0.16% ITHDi:4.22% KDisp:0.9893 Lamp Flux:4031.13x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

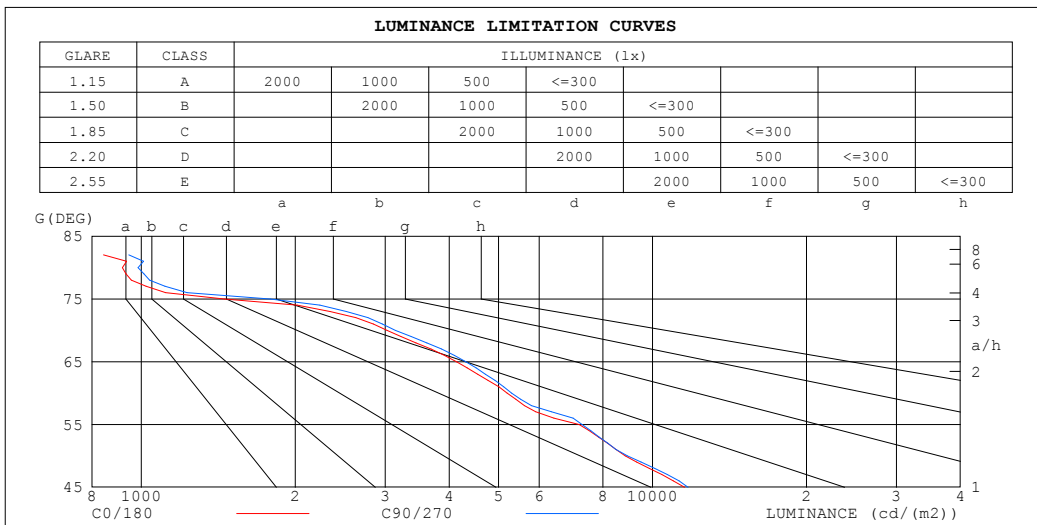


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz		
UTHDi:0.16% ITHDi:4.22% KDisp:0.9893 Lamp Flux:4031.13x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

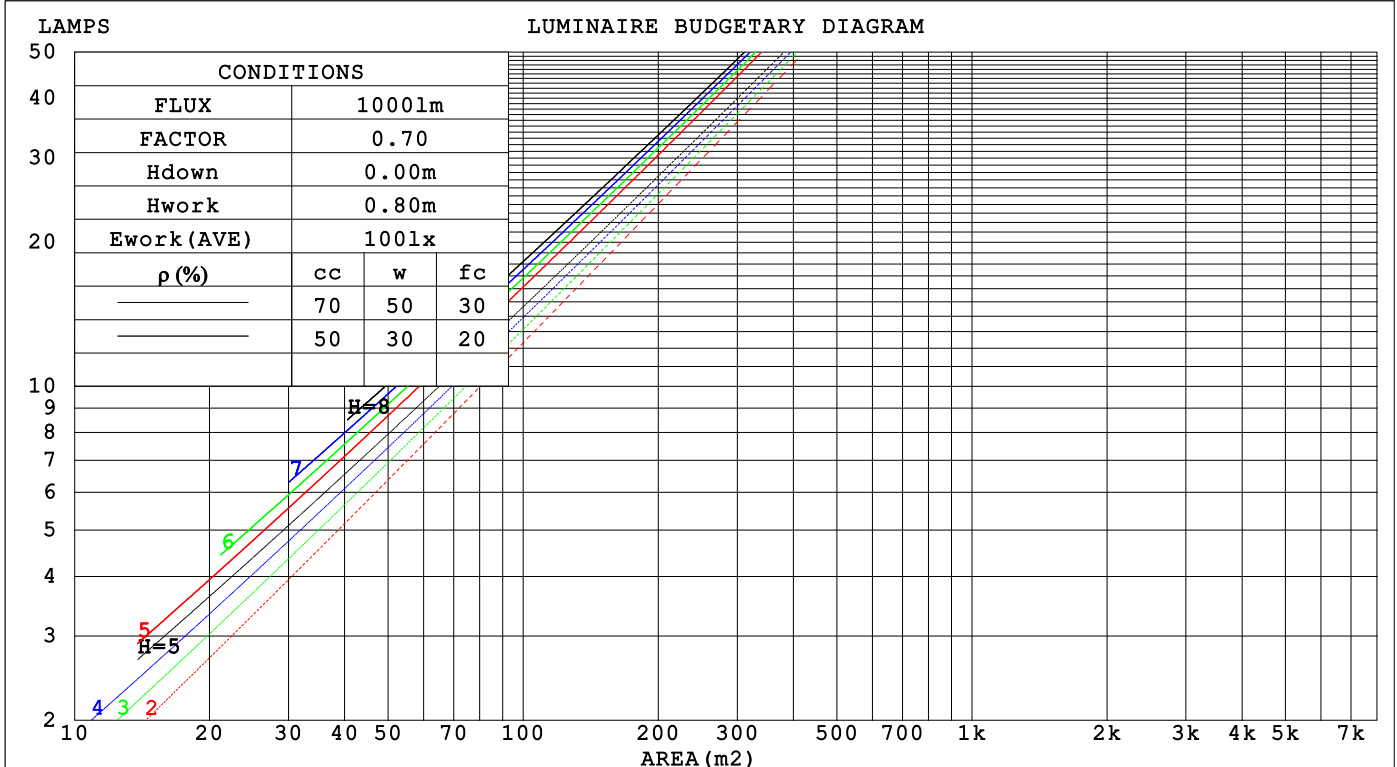

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz		
UTHDi:0.16% ITHDi:4.22% KDisp:0.9893 Lamp Flux:4031.13x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 131mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.148	.084	.027	.141	.080	.026	.129	.074	.024	.117	.068	.022	.107	.062	.020		
2.0	.138	.076	.023	.133	.073	.022	.122	.068	.021	.113	.063	.020	.104	.059	.019		
3.0	.129	.069	.021	.125	.067	.020	.116	.063	.019	.108	.059	.018	.101	.056	.017		
4.0	.121	.063	.019	.118	.062	.018	.110	.058	.017	.103	.056	.017	.097	.053	.016		
5.0	.115	.058	.017	.111	.057	.017	.105	.055	.016	.099	.052	.016	.094	.050	.015		
6.0	.109	.054	.016	.106	.053	.015	.100	.051	.015	.095	.049	.015	.090	.048	.014		
7.0	.103	.051	.014	.101	.050	.014	.096	.049	.014	.092	.047	.014	.087	.045	.013		
8.0	.098	.048	.014	.096	.047	.013	.092	.046	.013	.088	.045	.013	.084	.043	.013		
9.0	.094	.046	.013	.092	.045	.013	.088	.044	.012	.085	.043	.012	.082	.041	.012		
10.0	.090	.043	.012	.088	.043	.012	.085	.042	.012	.082	.041	.012	.079	.040	.011		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.077	.108	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.064	.099	.074	.056	.068	.052	.040	.040	.031	.023	.013	.010	.008	
6.0	.107	.076	.054	.092	.066	.047	.063	.046	.033	.037	.027	.020	.012	.009	.007	
7.0	.099	.068	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.093	.061	.040	.080	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.087	.056	.035	.075	.049	.030	.052	.034	.021	.030	.020	.013	.010	.007	.004	
10.0	.083	.051	.030	.071	.045	.027	.049	.031	.019	.029	.019	.011	.009	.006	.004	

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz UTHDi:0.16% ITHDi:4.22% KDisp:0.9893 Lamp Flux:4031.13x1 lm										
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:								WEIGHT:		
SPEC.:				DIM.:				SERIAL No.:		
MFR.: Norming lighting				SUR.: 131mm				Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.4	13.2	12.6	13.3	13.5	12.4	13.1	12.6	13.2	13.4
3H	12.7	13.3	12.9	13.5	13.7	12.6	13.3	12.9	13.5	13.7
4H	12.7	13.3	12.9	13.5	13.7	12.6	13.3	12.9	13.5	13.7
6H	12.6	13.2	12.9	13.4	13.7	12.6	13.2	12.9	13.4	13.7
8H	12.6	13.1	12.9	13.4	13.6	12.6	13.1	12.8	13.4	13.6
12H	12.5	13.1	12.8	13.3	13.6	12.5	13.1	12.8	13.3	13.6
4H 2H	12.5	13.2	12.8	13.4	13.6	12.5	13.1	12.7	13.3	13.5
3H	12.8	13.4	13.1	13.6	13.9	12.8	13.4	13.1	13.6	13.9
4H	12.8	13.3	13.2	13.6	13.9	12.8	13.3	13.2	13.6	13.9
6H	12.8	13.2	13.1	13.5	13.9	12.8	13.2	13.1	13.5	13.9
8H	12.7	13.1	13.1	13.5	13.9	12.7	13.1	13.1	13.5	13.8
12H	12.7	13.1	13.1	13.4	13.8	12.7	13.0	13.1	13.4	13.8
8H 4H	12.7	13.2	13.1	13.5	13.9	12.7	13.1	13.1	13.5	13.9
6H	12.7	13.0	13.1	13.4	13.8	12.7	13.0	13.1	13.4	13.8
8H	12.6	12.9	13.1	13.3	13.8	12.6	12.9	13.1	13.3	13.8
12H	12.6	12.8	13.0	13.3	13.7	12.6	12.8	13.0	13.3	13.7
12H 4H	12.7	13.1	13.1	13.4	13.8	12.7	13.1	13.1	13.4	13.8
6H	12.6	12.9	13.1	13.3	13.8	12.6	12.9	13.0	13.3	13.8
8H	12.6	12.8	13.0	13.3	13.7	12.6	12.8	13.0	13.3	13.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.5 / - 2.0					+ 1.3 / - 1.7				
1.5H	+ 2.1 / - 1.0					+ 1.9 / - 1.0				
2.0H	+ 2.2 / - 2.0					+ 2.2 / - 2.0				

CIE Pub.117, 4031 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 4.8$ )  
Area: 0.0134 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz		
UTHDi:0.16% ITHDi:4.22% KDisp:0.9893 Lamp Flux:4031.13x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	96	90	87	94	90	87	83
1.00	100	95	91	99	95	91	98	94	91	87
1.25	104	99	96	103	99	95	101	97	95	91
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	96
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	109	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz UTHDi:0.16% ITHDi:4.22% KDisp:0.9893 Lamp Flux:4031.13x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

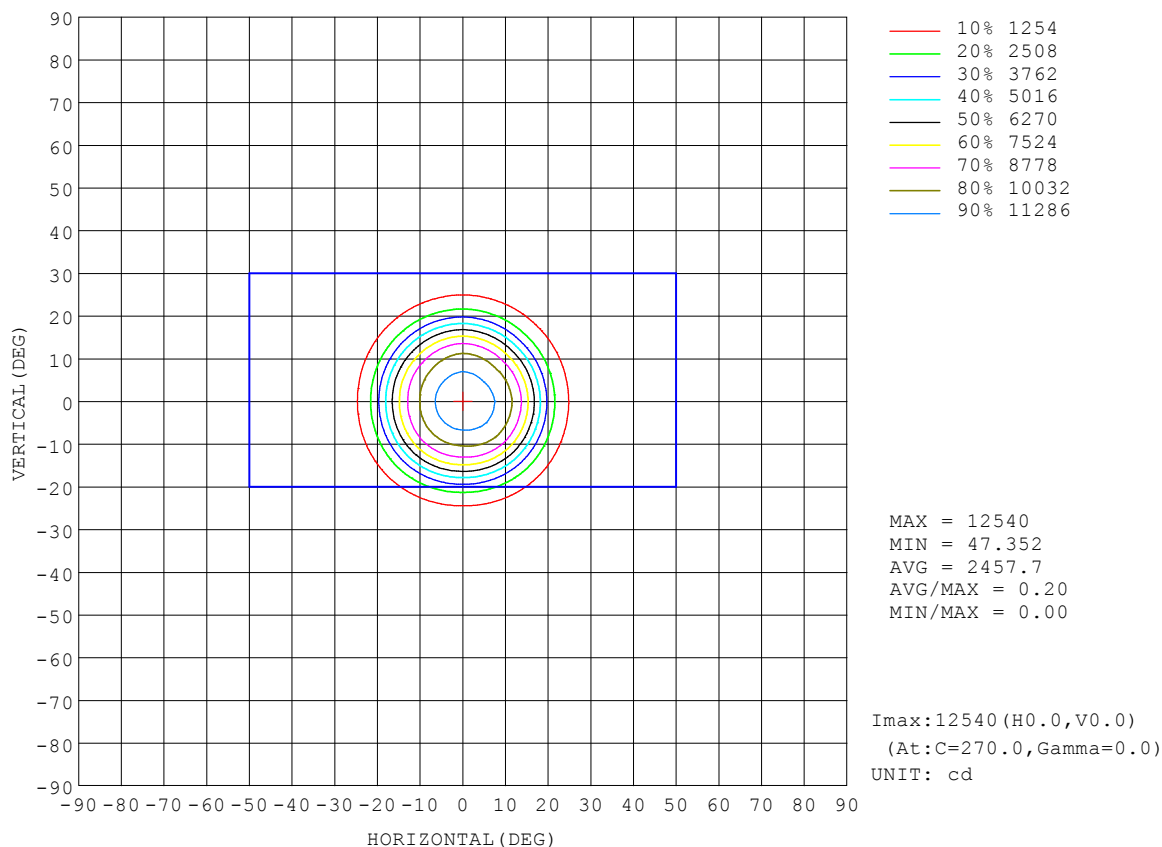


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz		
UTHDi:0.16% ITHDi:4.22% KDisp:0.9893		Lamp Flux:4031.13x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

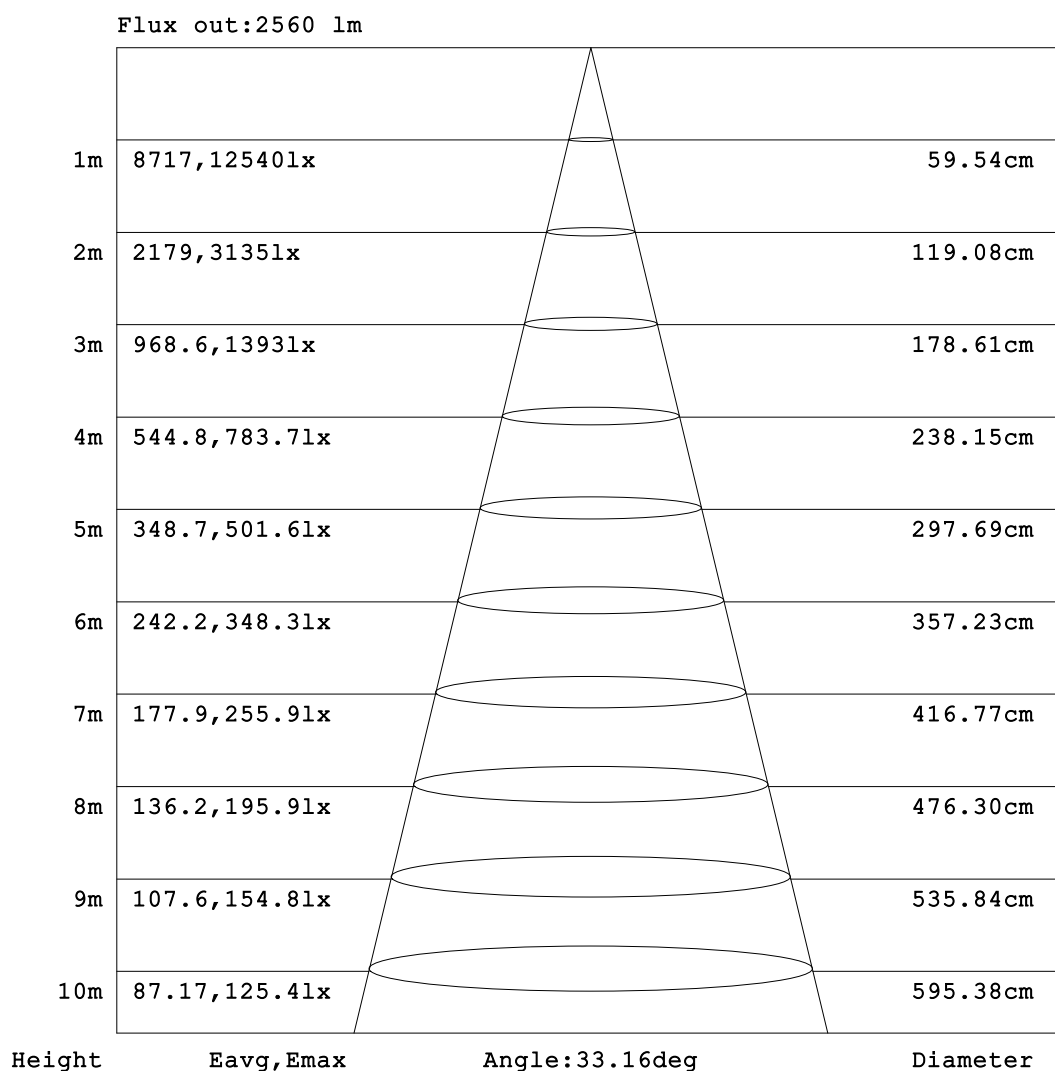


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz		
UTHDi:0.16% ITHDi:4.22% KDisp:0.9893		Lamp Flux:4031.13x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

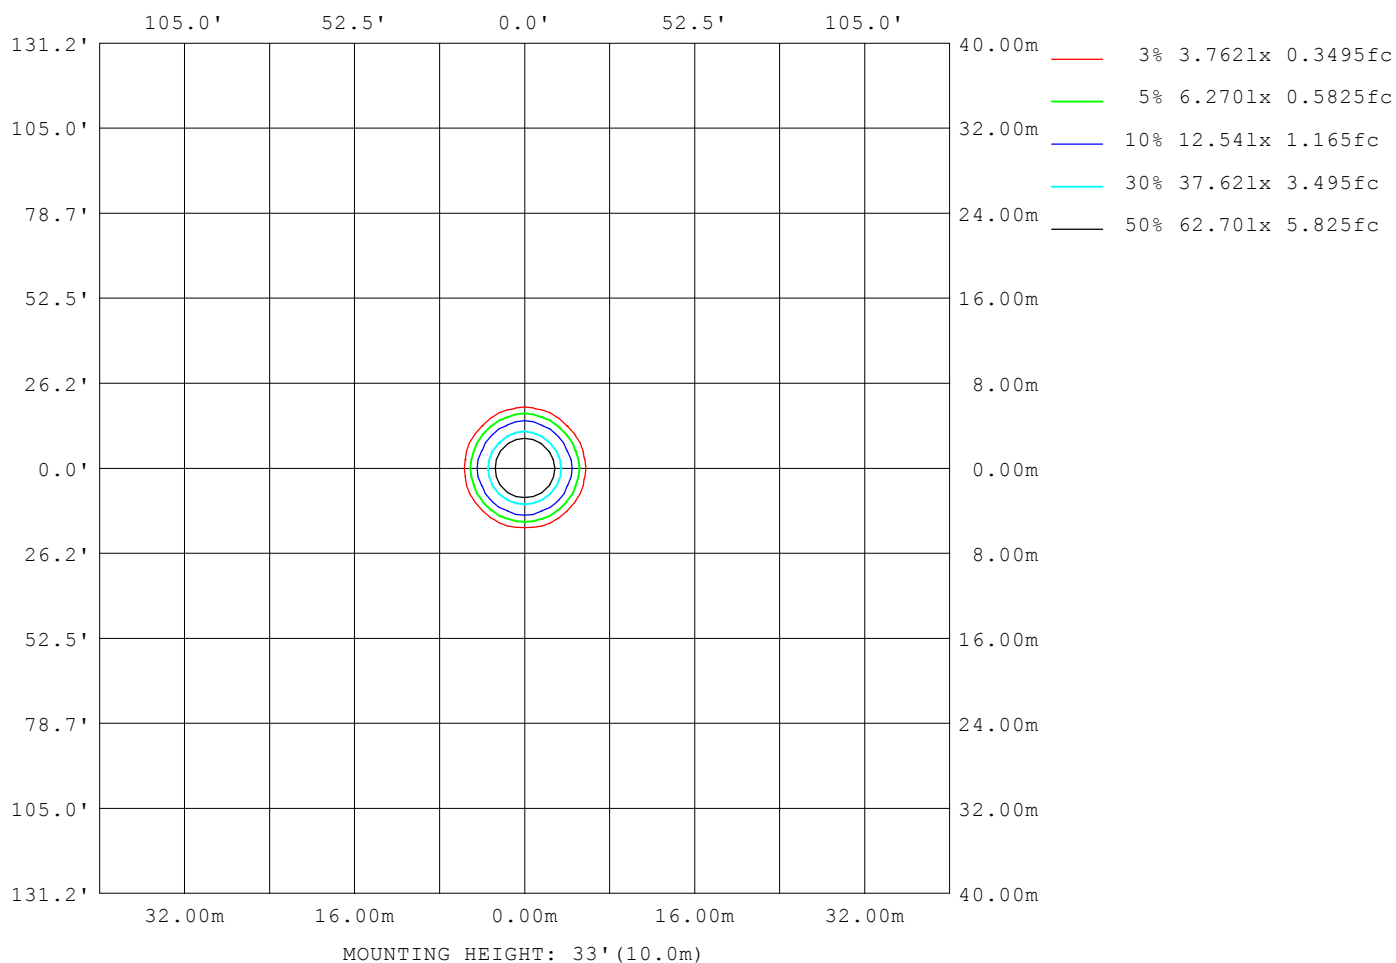

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-28

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

### LED Avg.L Report

Test:U:240.4V I:0.1672A P:39.7W PF:0.9883 Freq:49.99Hz		
UTHDi:0.16% ITHDi:4.22% KDisp:0.9893 Lamp Flux:4031.13x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4184
L_0~180 (75) av	1628
L_0~180 (85) av	552
L_90~270 (65) av	4271
L_90~270 (75) av	1701
L_90~270 (85) av	527
L_45 (65) av	4205
L_45 (75) av	1661
L_45 (85) av	488

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

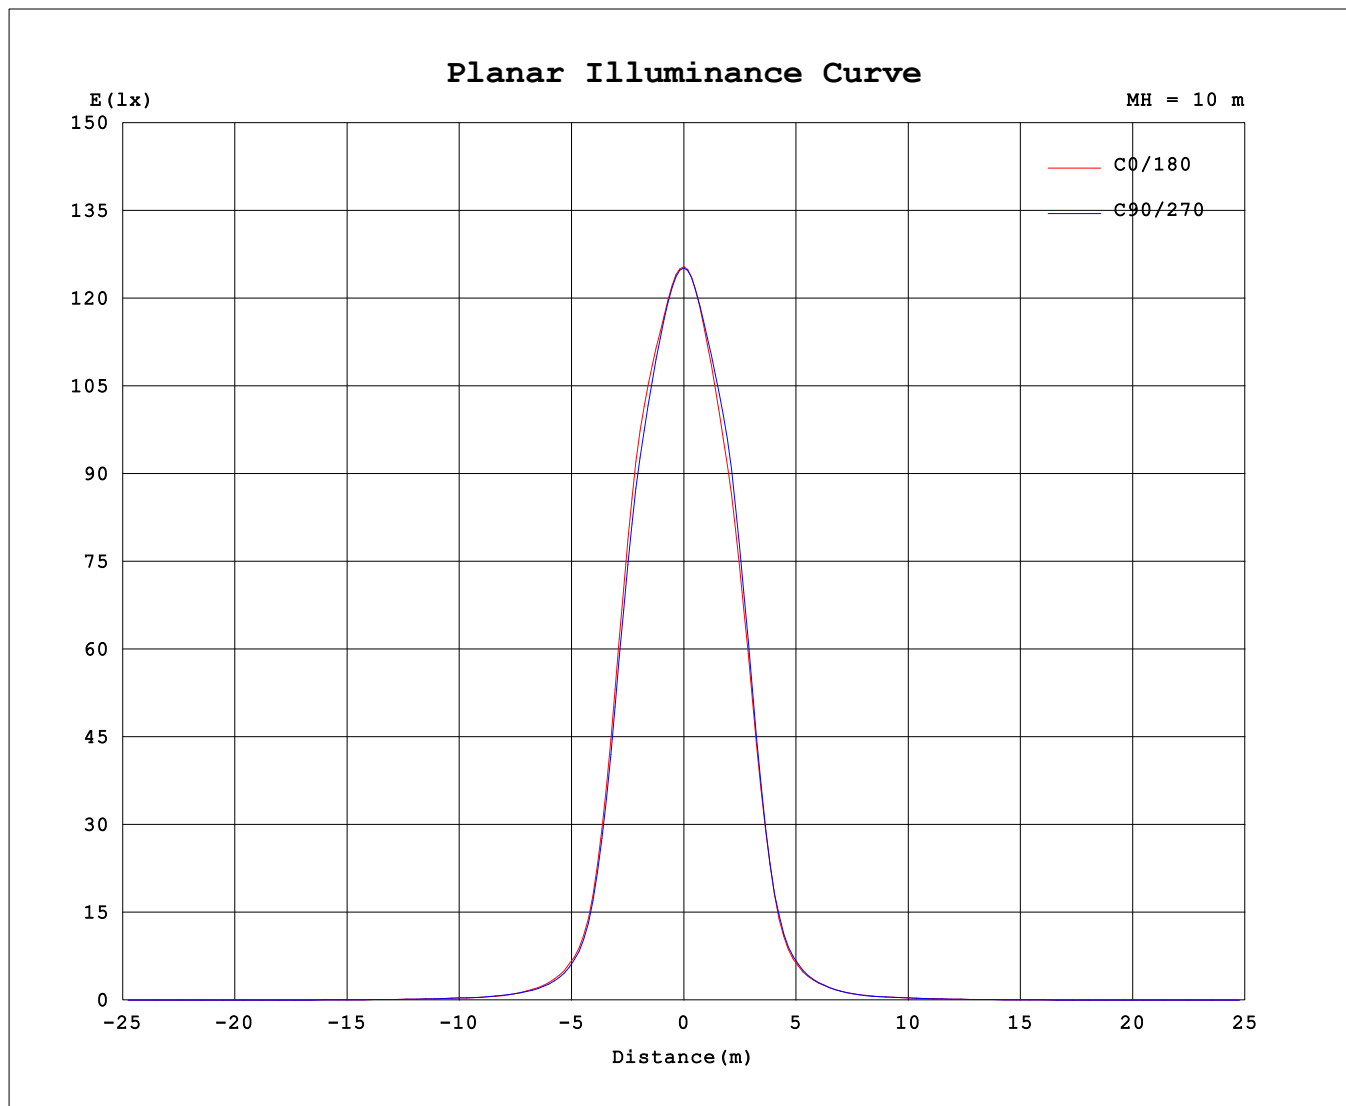

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	12522	12522	12522	12522	12522	12522	12522	12522
3.0	12252	12270	12233	12218	12184	12178	12203	12202
6.0	11598	11606	11503	11453	11389	11408	11524	11482
9.0	10894	10868	10554	10493	10393	10501	10757	10642
12.0	9823	9753	9357	9384	9217	9366	9696	9544
15.0	7801	7742	7407	7579	7401	7467	7741	7523
18.0	5174	5143	4885	5101	5052	5066	5216	4925
21.0	2845	2829	2689	2843	2850	2810	2873	2658
24.0	1460	1439	1367	1427	1428	1424	1491	1388
27.0	882.5	842.6	801.0	817.0	828.5	842.8	876.4	837.6
30.0	556.0	538.3	506.0	513.7	532.4	529.3	555.0	529.3
33.0	368.5	357.8	341.3	350.1	365.7	359.1	371.2	355.0
36.0	252.8	247.0	245.1	250.0	247.8	243.7	246.1	237.1
39.0	173.7	173.3	177.8	180.7	176.0	170.6	173.3	169.7
42.0	132.2	131.9	133.0	135.5	134.7	131.9	134.8	132.5
45.0	109.3	109.6	111.2	112.4	112.9	110.1	111.2	110.0
48.0	88.20	88.95	90.62	91.73	91.61	89.56	90.69	89.71
51.0	71.48	71.15	71.56	72.86	72.50	71.98	73.82	73.29
54.0	59.12	58.92	59.68	60.59	60.24	59.53	61.00	60.45
57.0	43.04	44.88	46.26	46.92	45.23	44.07	44.79	43.76
60.0	34.77	35.50	35.54	35.96	35.43	34.90	36.19	35.30
63.0	27.65	28.10	28.68	28.64	28.27	27.95	28.43	27.77
66.0	21.32	21.68	22.35	22.25	21.95	21.85	21.84	21.25
69.0	15.43	15.67	16.21	16.24	15.92	15.89	15.82	15.30
72.0	10.86	11.09	11.50	11.53	11.34	11.32	11.28	10.76
75.0	5.044	5.623	6.208	6.400	6.245	6.078	5.589	4.940
78.0	2.658	2.726	2.892	2.994	2.972	2.798	2.711	2.596
81.0	1.957	1.942	2.119	2.161	2.223	2.028	1.961	1.889
84.0	0.7198	0.6733	0.7687	0.7916	0.8641	0.7235	0.7460	0.6697
87.0	0.3322	0.2757	0.3595	0.3626	0.3853	0.3139	0.3492	0.2720
90.0	0.1665	0.1134	0.1720	0.1750	0.1874	0.1140	0.1286	0.1091

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: