


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893 Lamp Flux:3944.99x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.46 lm/W
MODEL		Imax (cd)	12206	S/MH (C0/180)	0.49	
NOMINAL POWER(W)	40	LOR (%)	100.0	S/MH (C90/270)	0.50	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3945.0	$\eta$ UP,DN (C0-180)	0.0,53.1	
NOMINAL FLUX(lm)	3944.99	CIE CLASS	DIRECT	$\eta$ UP,DN (C180-360)	0.0,46.9	
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.19	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

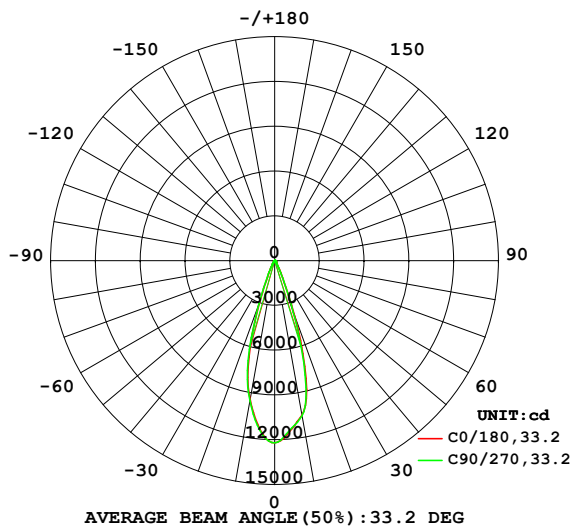

PLANAR ISOLUX DIAGRAM (UNIT:lx)

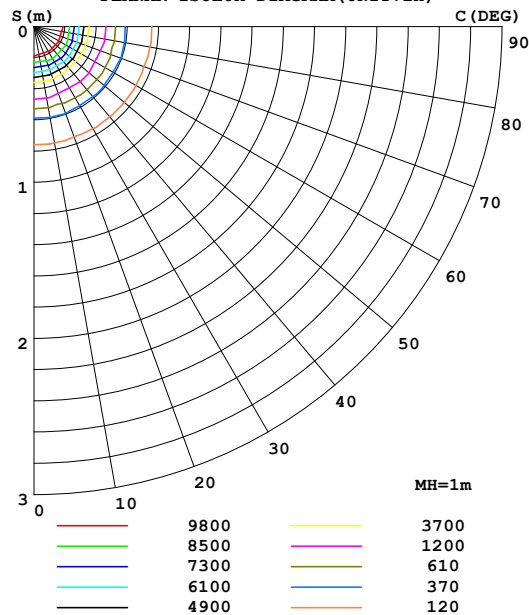

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1052	1071	1057	1022	949.6	923.1	954.3	1007	0- 10	1047	1047	26.5,26.5
20	394.0	399.0	369.5	340.8	288.6	276.0	307.5	352.5	10- 20	1927	2974	75.4,75.4
30	57.61	60.82	57.15	54.98	45.47	42.09	46.66	53.80	20- 30	626.3	3600	91.3,91.3
40	16.22	16.39	15.92	15.58	14.43	14.05	14.90	15.73	30- 40	181.1	3781	95.9,95.9
50	7.877	7.934	7.748	7.765	7.383	7.067	7.269	7.594	40- 50	84.23	3866	98,98
60	3.617	3.680	3.600	3.554	3.409	3.237	3.320	3.433	50- 60	48.19	3914	99.2,99.2
70	1.448	1.455	1.453	1.394	1.331	1.249	1.301	1.406	60- 70	23.34	3937	99.8,99.8
80	0.2273	0.2255	0.2159	0.2068	0.2126	0.2039	0.2121	0.2176	70- 80	6.928	3944	100,100
90	0.0199	0.0189	0.0173	0.0115	0.0126	0.0110	0.0129	0.0109	80- 90	0.8992	3945	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3828.6 lm

%lum = 97.1%

%lamp = 97.1%

Conical surface Flux(120deg): 3913.8 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893 Lamp Flux:3944.99x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

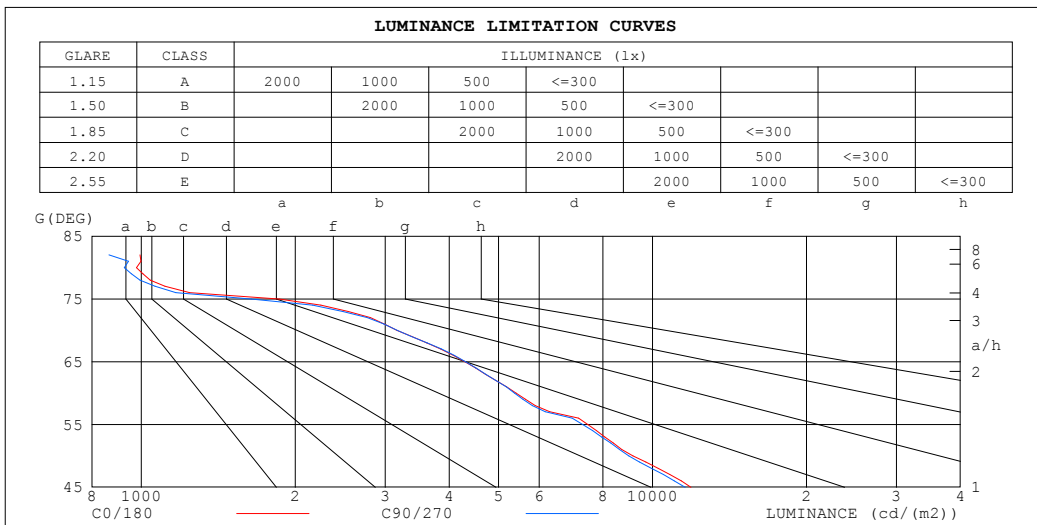


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893 Lamp Flux:3944.99x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 4TYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

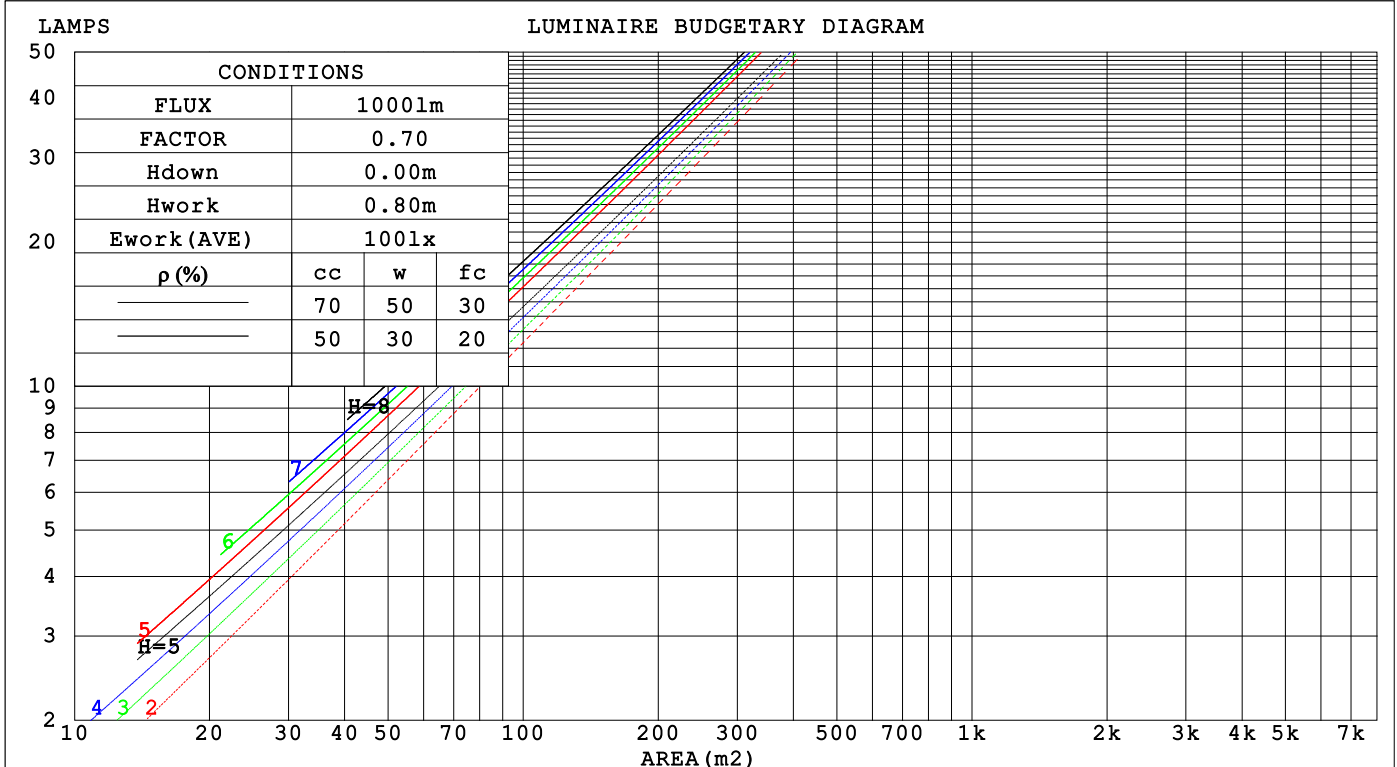

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893		
Lamp Flux:3944.99x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
DIM.:		
SUR.: 131mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.148	.084	.027	.141	.081	.026	.129	.074	.024	.117	.068	.022	.107	.062	.020		
2.0	.138	.076	.023	.133	.073	.023	.122	.068	.021	.113	.063	.020	.104	.059	.019		
3.0	.129	.069	.021	.125	.067	.020	.116	.063	.019	.108	.059	.018	.101	.056	.017		
4.0	.122	.063	.019	.118	.062	.018	.110	.059	.017	.104	.056	.017	.097	.053	.016		
5.0	.115	.058	.017	.111	.057	.017	.105	.055	.016	.099	.052	.016	.094	.050	.015		
6.0	.109	.055	.016	.106	.053	.015	.100	.051	.015	.095	.050	.015	.091	.048	.014		
7.0	.103	.051	.014	.101	.050	.014	.096	.049	.014	.092	.047	.014	.088	.045	.013		
8.0	.099	.048	.014	.096	.047	.013	.092	.046	.013	.088	.045	.013	.085	.043	.013		
9.0	.094	.046	.013	.092	.045	.013	.089	.044	.012	.085	.043	.012	.082	.042	.012		
10.0	.090	.043	.012	.089	.043	.012	.085	.042	.012	.082	.041	.012	.079	.040	.011		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016		
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013		
3.0	.137	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011		
4.0	.125	.098	.077	.108	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.115	.086	.064	.099	.074	.056	.068	.052	.040	.040	.031	.023	.013	.010	.008		
6.0	.107	.076	.054	.092	.066	.047	.063	.046	.033	.037	.027	.020	.012	.009	.007		
7.0	.099	.068	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006		
8.0	.093	.061	.040	.080	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005		
9.0	.088	.056	.035	.075	.049	.030	.052	.034	.021	.030	.020	.013	.010	.007	.004		
10.0	.083	.051	.030	.071	.045	.026	.049	.031	.019	.029	.019	.011	.009	.006	.004		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz UTHDi:0.18% ITHDi:4.27% KDisp:0.9893Lamp Flux:3944.99x1 lm											
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:						WEIGHT:					
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 131mm		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	12.8	13.5	13.0	13.7	13.8	12.7	13.5	12.9	13.6	13.8	
	3H	13.0	13.7	13.3	13.9	14.1	13.0	13.6	13.2	13.8	14.0
	4H	13.0	13.7	13.3	13.9	14.1	13.0	13.6	13.2	13.8	14.0
	6H	13.0	13.6	13.3	13.8	14.0	12.9	13.5	13.2	13.7	14.0
	8H	12.9	13.5	13.2	13.8	14.0	12.9	13.5	13.2	13.7	14.0
	12H	12.9	13.4	13.2	13.7	14.0	12.8	13.4	13.1	13.7	13.9
4H	2H	12.9	13.5	13.1	13.7	13.9	12.8	13.5	13.1	13.7	13.9
	3H	13.2	13.7	13.5	14.0	14.3	13.1	13.7	13.4	14.0	14.2
	4H	13.2	13.7	13.5	14.0	14.3	13.1	13.7	13.5	13.9	14.2
	6H	13.1	13.6	13.5	13.9	14.2	13.1	13.5	13.4	13.9	14.2
	8H	13.1	13.5	13.5	13.9	14.2	13.0	13.5	13.4	13.8	14.2
	12H	13.0	13.4	13.4	13.8	14.2	13.0	13.4	13.4	13.7	14.1
8H	4H	13.1	13.5	13.5	13.9	14.2	13.1	13.5	13.4	13.8	14.2
	6H	13.0	13.4	13.5	13.8	14.2	13.0	13.3	13.4	13.7	14.1
	8H	13.0	13.3	13.4	13.7	14.2	12.9	13.2	13.4	13.7	14.1
	12H	12.9	13.2	13.4	13.6	14.1	12.9	13.2	13.4	13.6	14.1
12H	4H	13.0	13.4	13.4	13.8	14.2	13.0	13.4	13.4	13.8	14.1
	6H	13.0	13.3	13.4	13.7	14.1	12.9	13.2	13.4	13.7	14.1
	8H	12.9	13.2	13.4	13.6	14.1	12.9	13.2	13.4	13.6	14.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 1.4 / - 1.8					+ 1.4 / - 1.9					
1.5H	+ 2.0 / - 1.0					+ 1.9 / - 1.0					
2.0H	+ 2.2 / - 2.0					+ 2.1 / - 2.0					

CIE Pub.117, 3945 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 4.8$ )  
Area: 0.0134 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893 Lamp Flux:3944.99x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	95	90	87	94	90	87	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	99	95	101	97	95	91
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	96
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	109	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893 Lamp Flux:3944.99x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

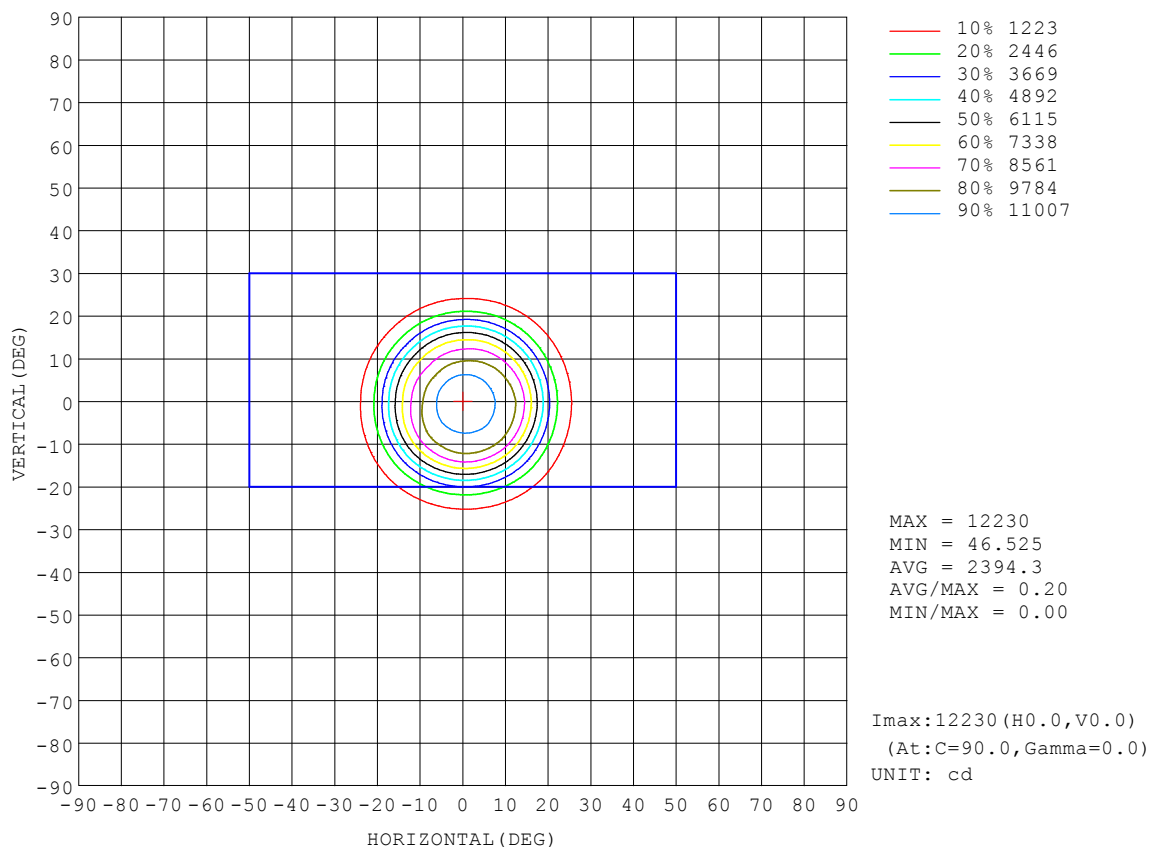


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893		Lamp Flux:3944.99x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

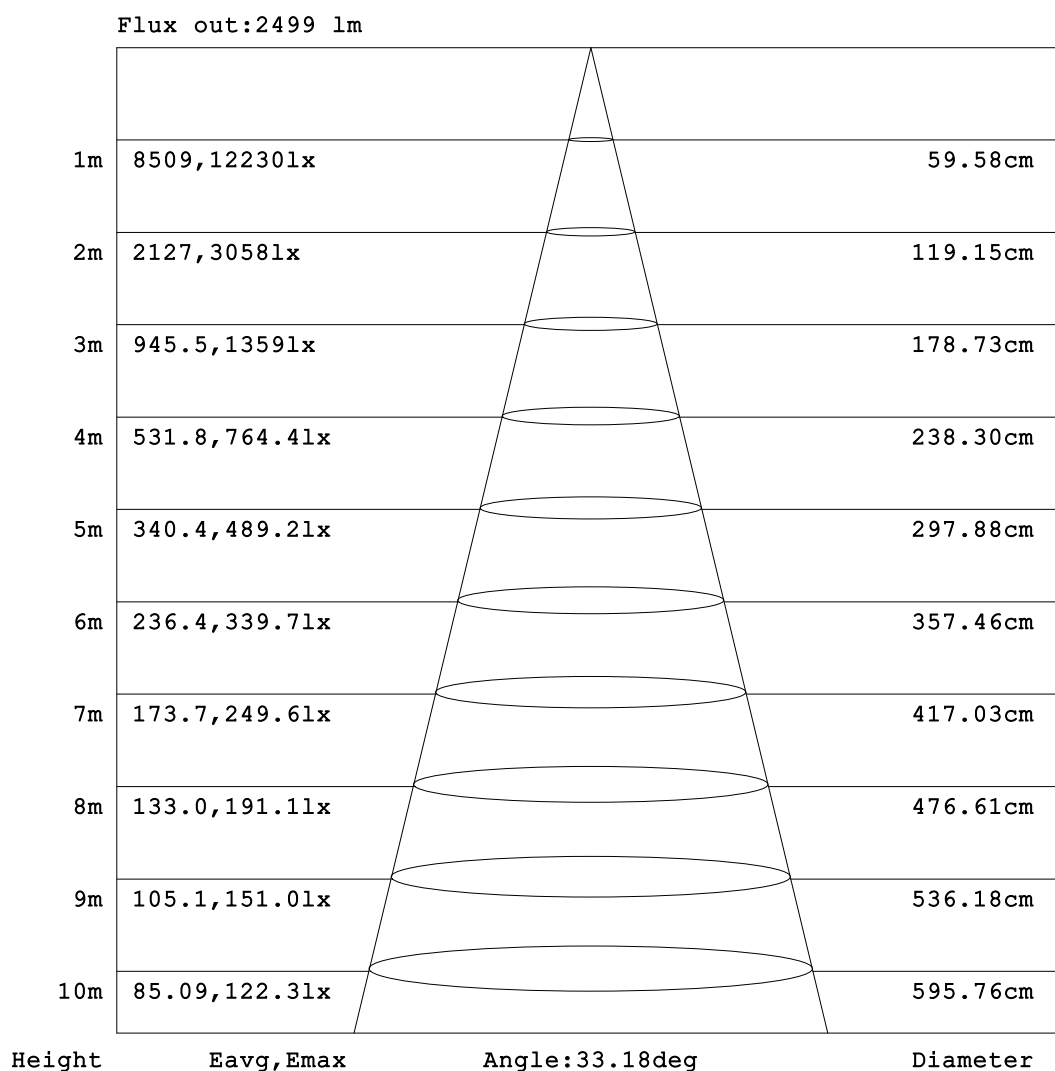


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893		Lamp Flux:3944.99x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

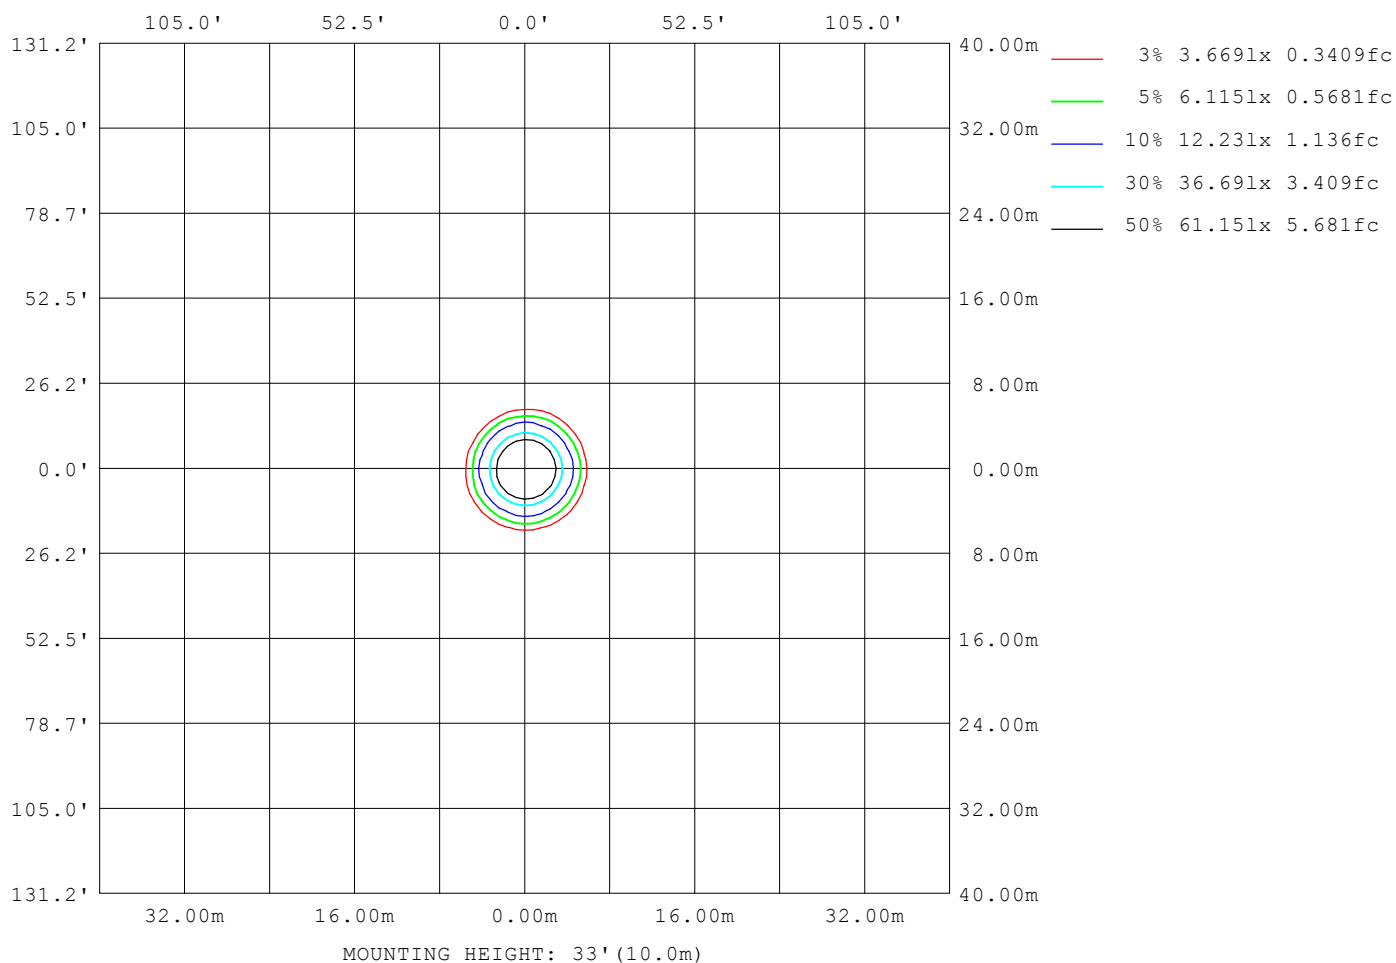

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LED Avg.L Report

Test:U:240.3V I:0.1687A P:40.1W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:4.27% KDisp:0.9893 Lamp Flux:3944.99x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 36D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4150
L_0~180 (75) av	1632
L_0~180 (85) av	526
L_90~270 (65) av	4121
L_90~270 (75) av	1615
L_90~270 (85) av	514
L_45 (65) av	4119
L_45 (75) av	1622
L_45 (85) av	483

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

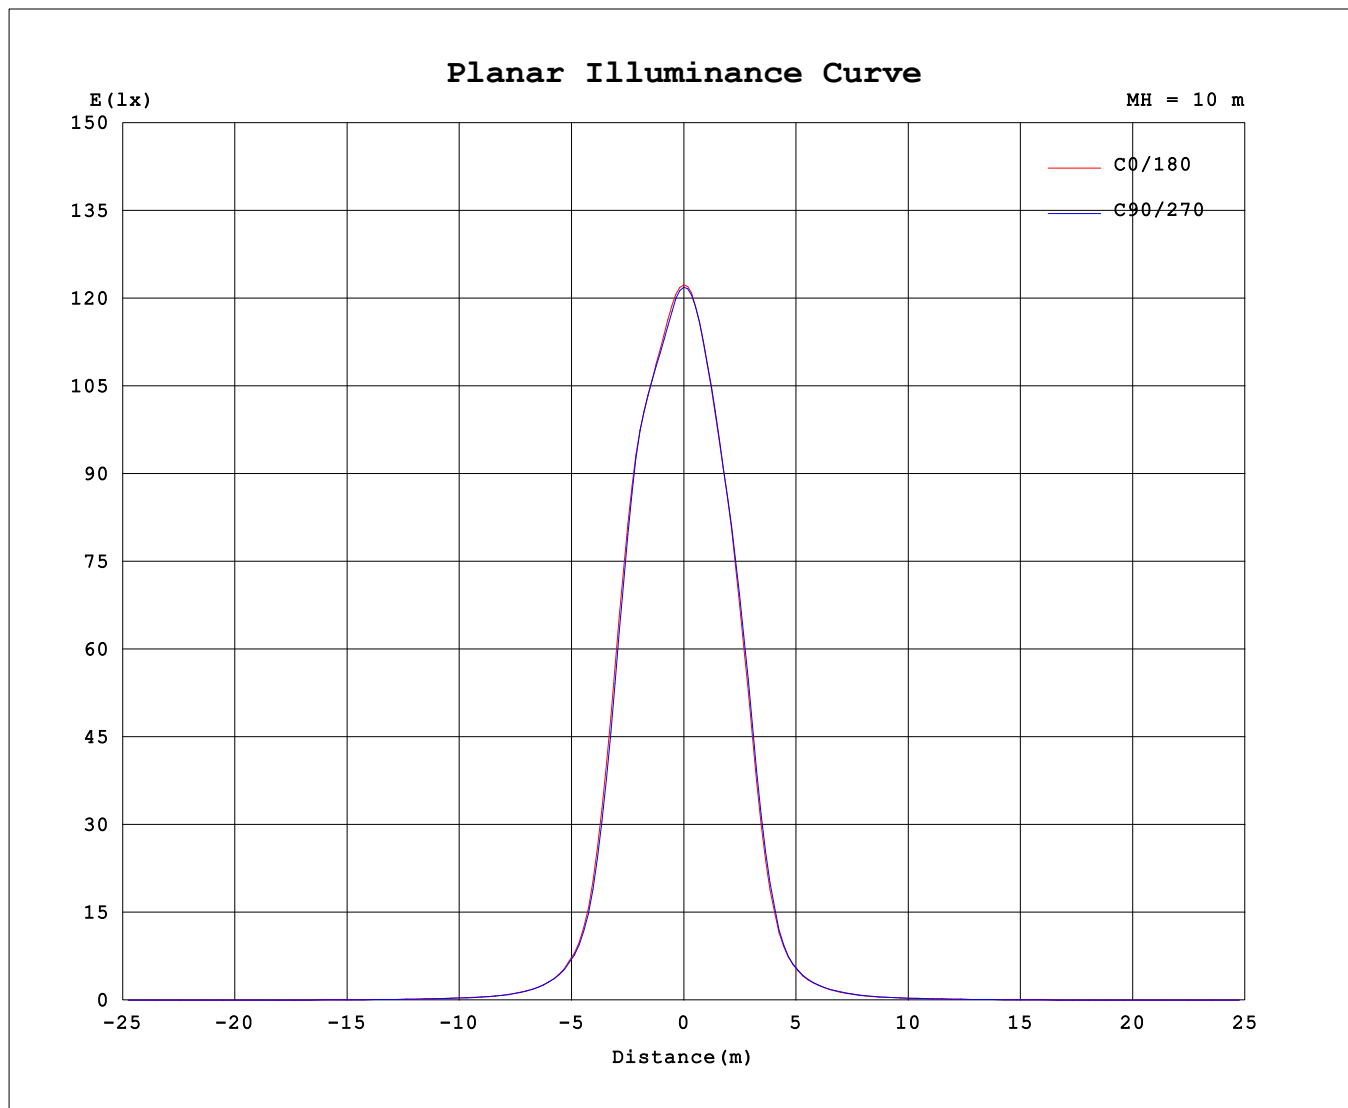

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	12206	12206	12206	12206	12206	12206	12206	12206
3.0	11910	11876	11838	11876	11892	11908	11925	11936
6.0	11294	11279	11261	11236	11022	10966	11085	11259
9.0	10707	10857	10754	10490	9887	9699	9960	10383
12.0	9942	10134	9907	9440	8590	8316	8672	9303
15.0	8178	8292	7941	7495	6686	6542	6925	7531
18.0	5630	5619	5330	5026	4340	4155	4574	5125
21.0	3202	3261	2996	2713	2314	2226	2473	2839
24.0	1629	1687	1549	1409	1199	1109	1238	1430
27.0	950.5	980.7	920.1	848.7	707.2	650.1	722.6	858.2
30.0	576.1	608.2	571.5	549.8	454.7	420.9	466.6	538.0
33.0	375.8	398.7	376.5	365.1	312.4	298.8	324.3	360.2
36.0	259.0	266.7	256.9	237.4	220.7	216.9	234.0	251.1
39.0	180.5	181.6	176.8	170.5	158.1	154.5	166.0	175.7
42.0	136.4	138.7	134.3	133.8	123.8	120.0	126.1	131.9
45.0	112.4	115.5	109.9	110.9	103.4	101.3	104.8	109.4
48.0	91.81	92.51	89.42	89.70	84.81	82.08	85.46	89.33
51.0	73.27	74.35	72.79	72.81	69.53	66.54	67.63	70.43
54.0	61.04	62.18	60.20	59.86	57.86	55.35	56.10	58.34
57.0	45.83	46.13	45.09	44.12	42.26	40.27	42.33	43.95
60.0	36.17	36.80	36.00	35.54	34.09	32.37	33.20	34.33
63.0	28.60	29.14	28.75	27.93	27.00	25.60	26.36	27.64
66.0	22.19	22.52	22.36	21.44	20.68	19.52	20.29	21.63
69.0	16.20	16.26	16.22	15.54	14.88	14.00	14.63	15.78
72.0	11.60	11.63	11.47	10.99	10.45	9.798	10.36	11.26
75.0	6.445	6.245	5.701	5.079	4.876	4.904	5.503	6.273
78.0	2.892	2.857	2.771	2.630	2.602	2.545	2.696	2.782
81.0	2.088	2.094	1.981	1.897	1.937	1.883	1.950	2.000
84.0	0.8086	0.7641	0.7078	0.6558	0.7119	0.6804	0.7648	0.7245
87.0	0.4023	0.3518	0.3369	0.2602	0.2800	0.2764	0.3617	0.3159
90.0	0.1995	0.1886	0.1734	0.1154	0.1260	0.1095	0.1293	0.1087

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: