


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz		
UTHDi:0.17% ITHDi:4.22% KDisp:0.9893 Lamp Flux:3953.38x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.76 lm/W
MODEL		I <sub>max</sub> (cd)	4974	S/MH(C0/180)	0.83	
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	0.82	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3953.4	η UP,DN(C0-180)	0.0,50.5	
NOMINAL FLUX(lm)	3953.38	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	240.22	η down (%)	100.0	CIBSE SHR MAX	0.85	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

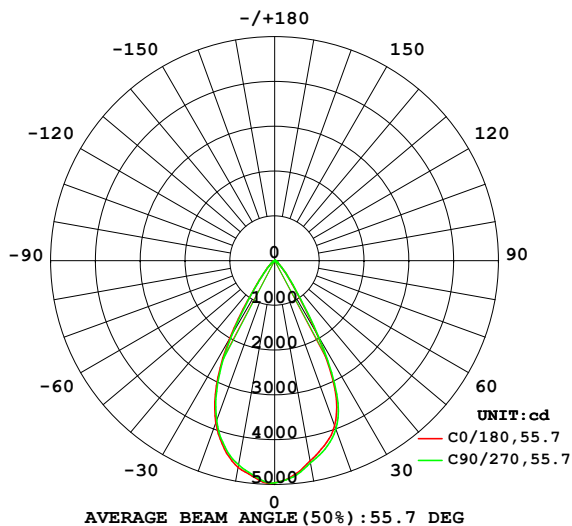

PLANAR ISOLUX DIAGRAM(UNIT:lx)

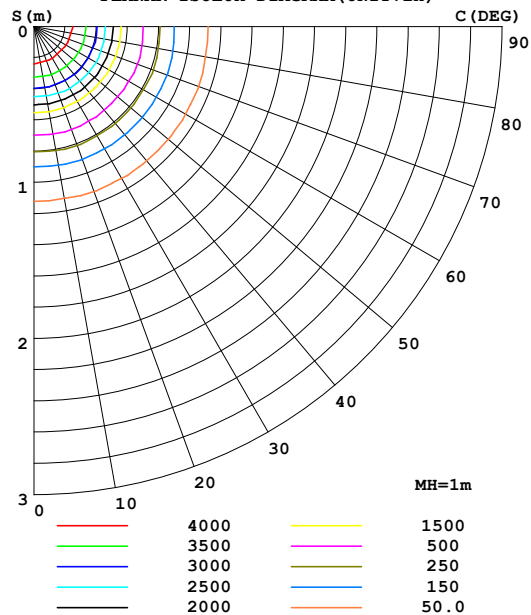

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	4546	4514	4587	4672	4690	4653	4633	4634	0- 10	455.2	455.2	11.5,11.5
20	3923	3984	4004	3876	3847	3798	3798	3871	10- 20	1207	1662	42,42
30	1896	1980	1981	1938	2000	1940	1905	1950	20- 30	1388	3050	77.1,77.1
40	454.3	469.7	464.9	432.5	417.9	414.7	411.5	438.5	30- 40	608.1	3658	92.5,92.5
50	133.6	137.6	131.0	120.5	118.4	112.5	113.9	127.1	40- 50	189.6	3847	97.3,97.3
60	49.42	51.10	50.64	47.79	48.67	46.45	45.51	49.59	50- 60	69.53	3917	99.1,99.1
70	12.60	13.52	14.27	14.77	15.70	14.56	13.49	13.61	60- 70	28.30	3945	99.8,99.8
80	2.228	2.309	2.570	2.926	2.965	2.727	2.500	2.363	70- 80	7.075	3952	100,100
90	0.1446	0.1092	0.1401	0.2001	0.1254	0.1054	0.1170	0.1088	80- 90	1.047	3953	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3777.9 lm

%lum = 95.6%

%lamp = 95.6%

Conical surface Flux(120deg): 3917 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz		
UTHDi:0.17% ITHDi:4.22% KDisp:0.9893 Lamp Flux:3953.38x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

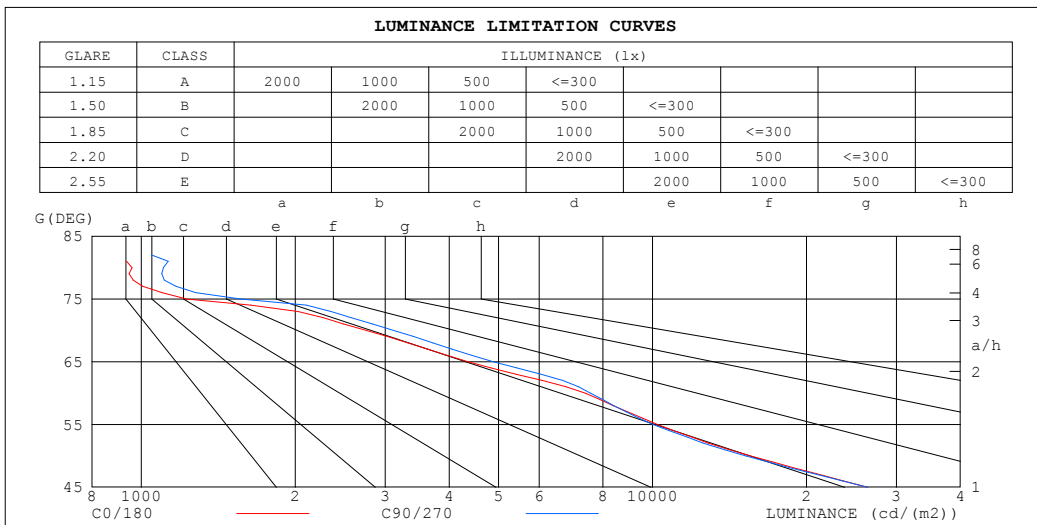


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz		
UTHDi:0.17% ITHDi:4.22% KDisp:0.9893 Lamp Flux:3953.38x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 4TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 131mm		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

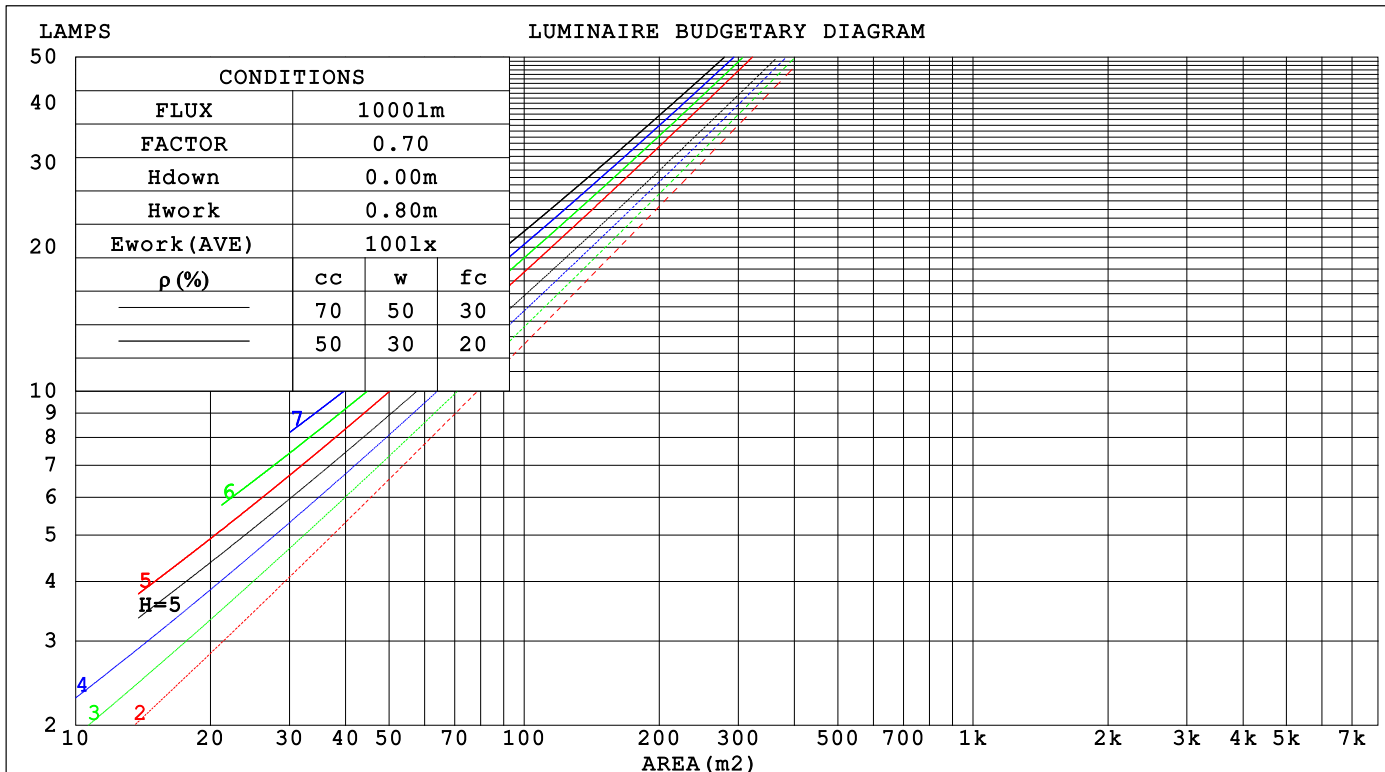

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz		
UTHDi:0.17% ITHDi:4.22% KDisp:0.9893 Lamp Flux:3953.38x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D TYPE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 131mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.175	.100	.032	.169	.096	.031	.156	.089	.029	.144	.083	.027	.134	.078	.025		
2.0	.168	.092	.028	.162	.089	.027	.151	.084	.026	.142	.079	.025	.133	.075	.024		
3.0	.159	.085	.025	.155	.083	.025	.146	.079	.024	.137	.075	.023	.129	.072	.022		
4.0	.152	.079	.023	.147	.077	.023	.140	.074	.022	.133	.071	.021	.126	.068	.021		
5.0	.144	.074	.021	.141	.072	.021	.134	.070	.021	.128	.067	.020	.122	.065	.020		
6.0	.138	.069	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018		
7.0	.132	.065	.018	.129	.064	.018	.124	.062	.018	.119	.061	.018	.114	.059	.017		
8.0	.126	.062	.017	.123	.061	.017	.119	.059	.017	.114	.058	.017	.110	.057	.016		
9.0	.121	.058	.016	.118	.058	.016	.114	.056	.016	.110	.055	.016	.107	.054	.016		
10.0	.116	.056	.015	.114	.055	.015	.110	.054	.015	.106	.053	.015	.103	.052	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016		
2.0	.156	.133	.113	.133	.114	.098	.091	.079	.068	.053	.046	.040	.017	.015	.013		
3.0	.143	.114	.090	.123	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011		
4.0	.133	.099	.073	.114	.085	.063	.078	.060	.045	.045	.035	.026	.015	.011	.009		
5.0	.124	.087	.060	.107	.075	.052	.073	.053	.037	.043	.031	.022	.014	.010	.007		
6.0	.117	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006		
7.0	.110	.070	.042	.095	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005		
8.0	.104	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004		
9.0	.099	.059	.031	.085	.051	.027	.059	.036	.020	.034	.021	.012	.011	.007	.004		
10.0	.095	.054	.028	.082	.047	.024	.057	.033	.017	.033	.020	.010	.011	.006	.003		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz UTHDi:0.17% ITHDi:4.22% KDisp:0.9893 Lamp Flux:3953.38x1 lm										
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 40WPE:						WEIGHT:				
SPEC.:						DIM.:			SERIAL No.:	
MFR.: Norming lighting						SUR.: 131mm			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.7	19.6	18.9	19.8	20.0	18.8	19.8	19.1	19.9	20.1
3H	18.6	19.4	18.8	19.6	19.8	18.7	19.6	19.0	19.8	20.0
4H	18.5	19.3	18.8	19.5	19.8	18.7	19.5	18.9	19.7	19.9
6H	18.4	19.2	18.7	19.4	19.7	18.6	19.3	18.9	19.6	19.8
8H	18.4	19.1	18.7	19.4	19.6	18.5	19.3	18.9	19.5	19.8
12H	18.3	19.0	18.7	19.3	19.6	18.5	19.2	18.8	19.5	19.7
4H 2H	18.5	19.3	18.8	19.6	19.8	18.7	19.5	18.9	19.7	19.9
3H	18.4	19.1	18.8	19.4	19.7	18.6	19.3	18.9	19.5	19.8
4H	18.4	19.0	18.7	19.3	19.6	18.5	19.1	18.9	19.4	19.7
6H	18.3	18.8	18.6	19.2	19.5	18.4	19.0	18.8	19.3	19.7
8H	18.2	18.7	18.6	19.1	19.5	18.4	18.9	18.8	19.2	19.6
12H	18.2	18.6	18.6	19.0	19.4	18.3	18.8	18.7	19.2	19.6
8H 4H	18.2	18.7	18.6	19.1	19.5	18.4	18.9	18.8	19.2	19.6
6H	18.1	18.5	18.6	18.9	19.4	18.3	18.7	18.7	19.1	19.5
8H	18.1	18.4	18.5	18.9	19.3	18.2	18.6	18.7	19.0	19.5
12H	18.0	18.3	18.5	18.8	19.3	18.2	18.5	18.6	18.9	19.4
12H 4H	18.2	18.6	18.6	19.0	19.4	18.3	18.8	18.7	19.2	19.6
6H	18.1	18.4	18.5	18.9	19.3	18.2	18.6	18.7	19.0	19.5
8H	18.0	18.3	18.5	18.8	19.3	18.2	18.5	18.6	18.9	19.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.5 / - 5.3					+ 2.6 / - 5.3				
1.5H	+ 4.0 / - 4.0					+ 4.1 / - 4.1				
2.0H	+ 4.3 / - 4.1					+ 4.3 / - 3.9				

CIE Pub.117, 3953 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 4.8$ )  
Area: 0.0134 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz		
UTHDi:0.17% ITHDi:4.22% KDisp:0.9893 Lamp Flux:3953.38x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 40WPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	77	86	80	76	86	80	76	73
0.80	94	88	85	94	88	85	92	87	84	80
1.00	99	93	90	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	101	95
3.00	112	108	106	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	107	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz UTHDi:0.17% ITHDi:4.22% KDisp:0.9893 Lamp Flux:3953.38x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

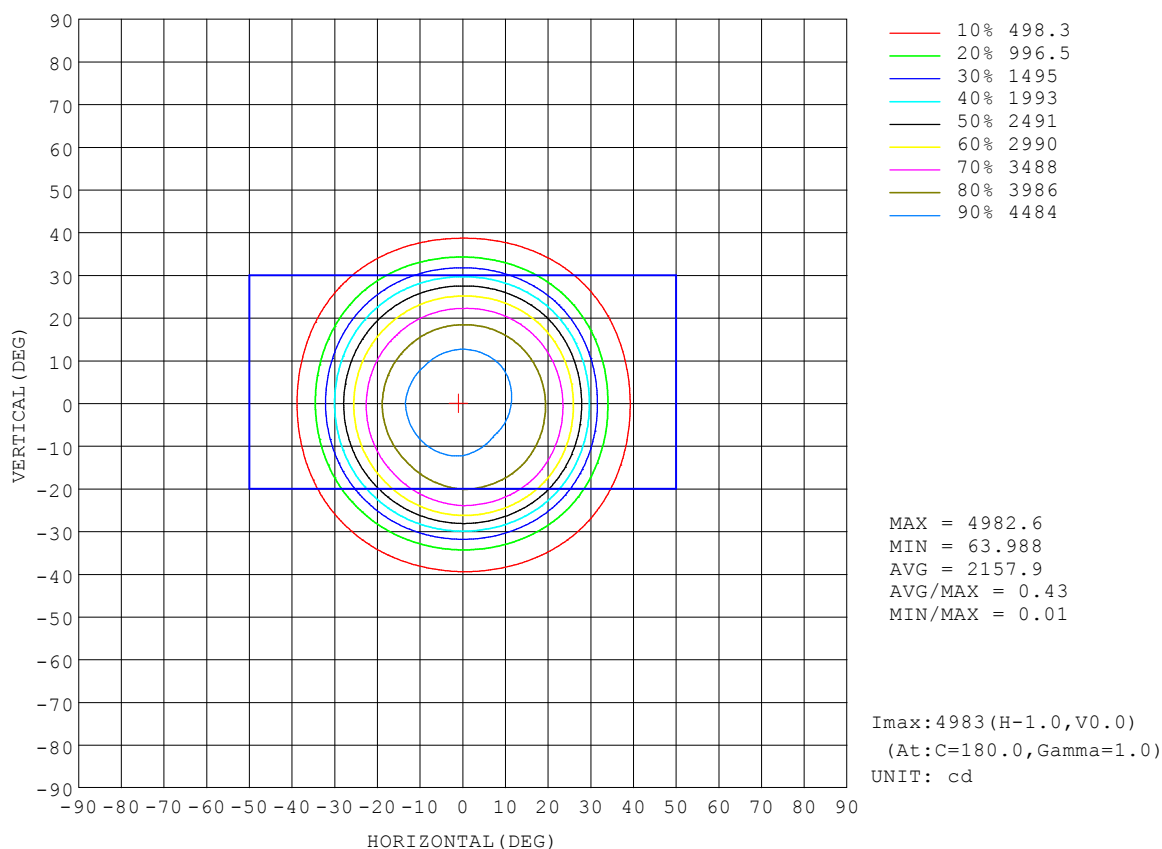


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz		
UTHDi:0.17% ITHDi:4.22% KDisp:0.9893		Lamp Flux:3953.38x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

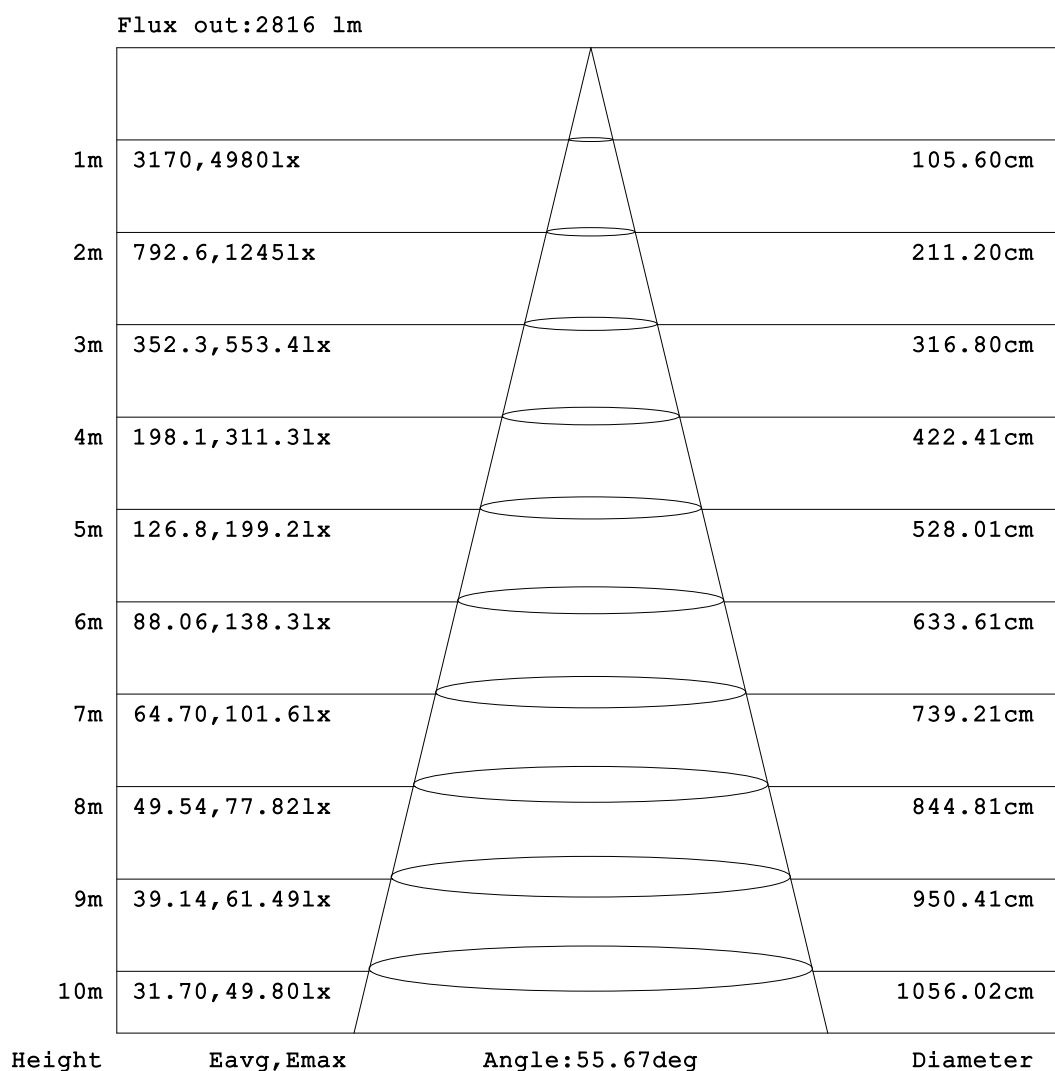


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz		
UTHDi:0.17% ITHDi:4.22% KDisp:0.9893		Lamp Flux:3953.38x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 40WPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

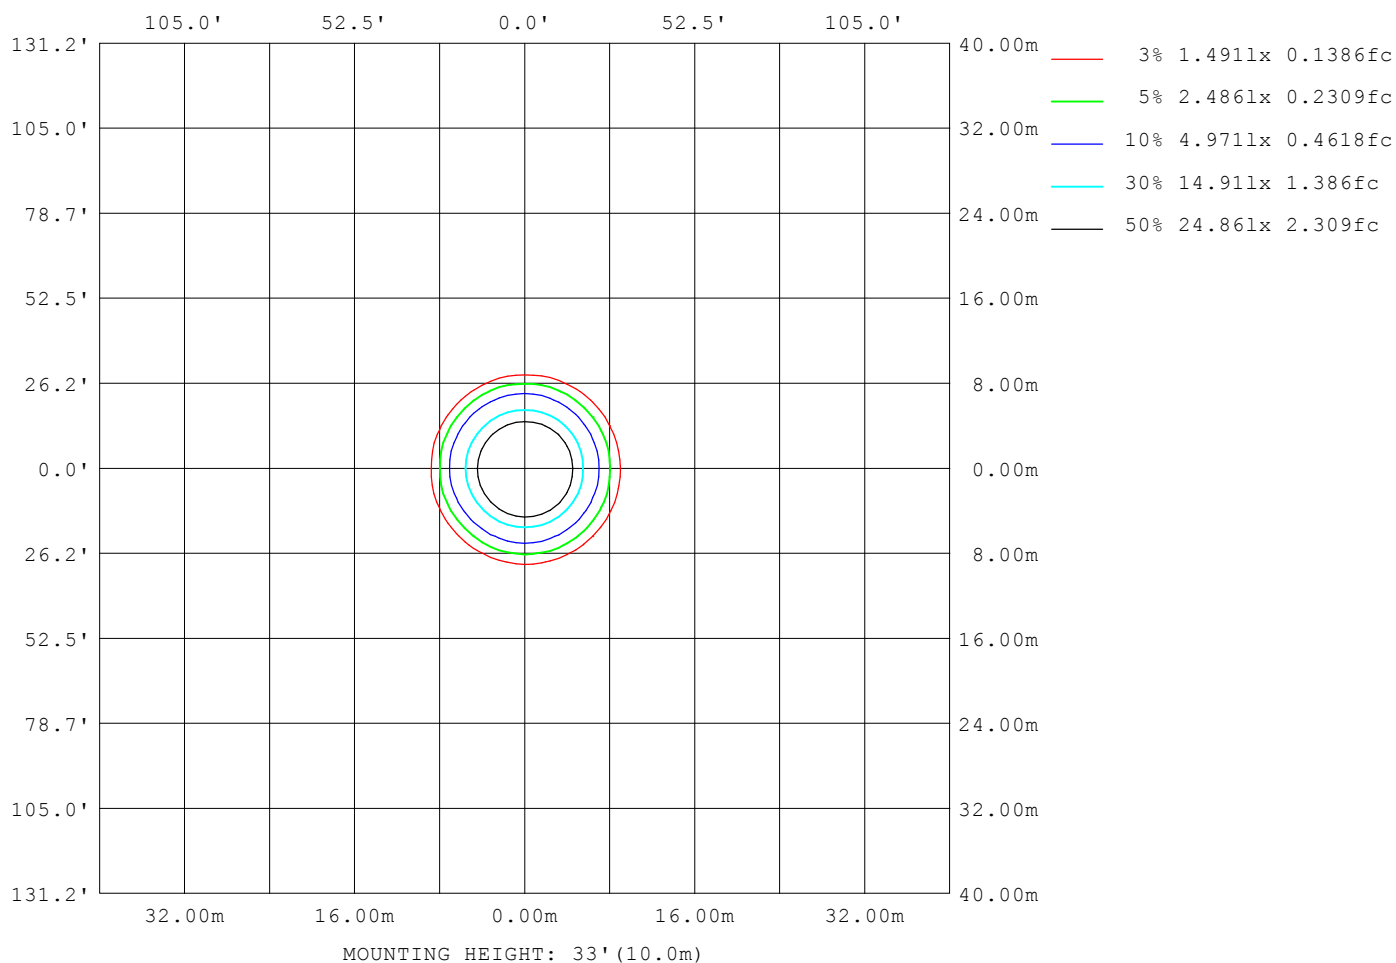

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.3V I:0.1686A P:40.0W PF:0.9884 Freq:49.99Hz		
UTHDi:0.17% ITHDi:4.22% KDisp:0.9893 Lamp Flux:3953.38x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 40WPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4786
L_0~180 (75) av	1703
L_0~180 (85) av	562
L_90~270 (65) av	4683
L_90~270 (75) av	1571
L_90~270 (85) av	542
L_45 (65) av	4760
L_45 (75) av	1639
L_45 (85) av	560

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

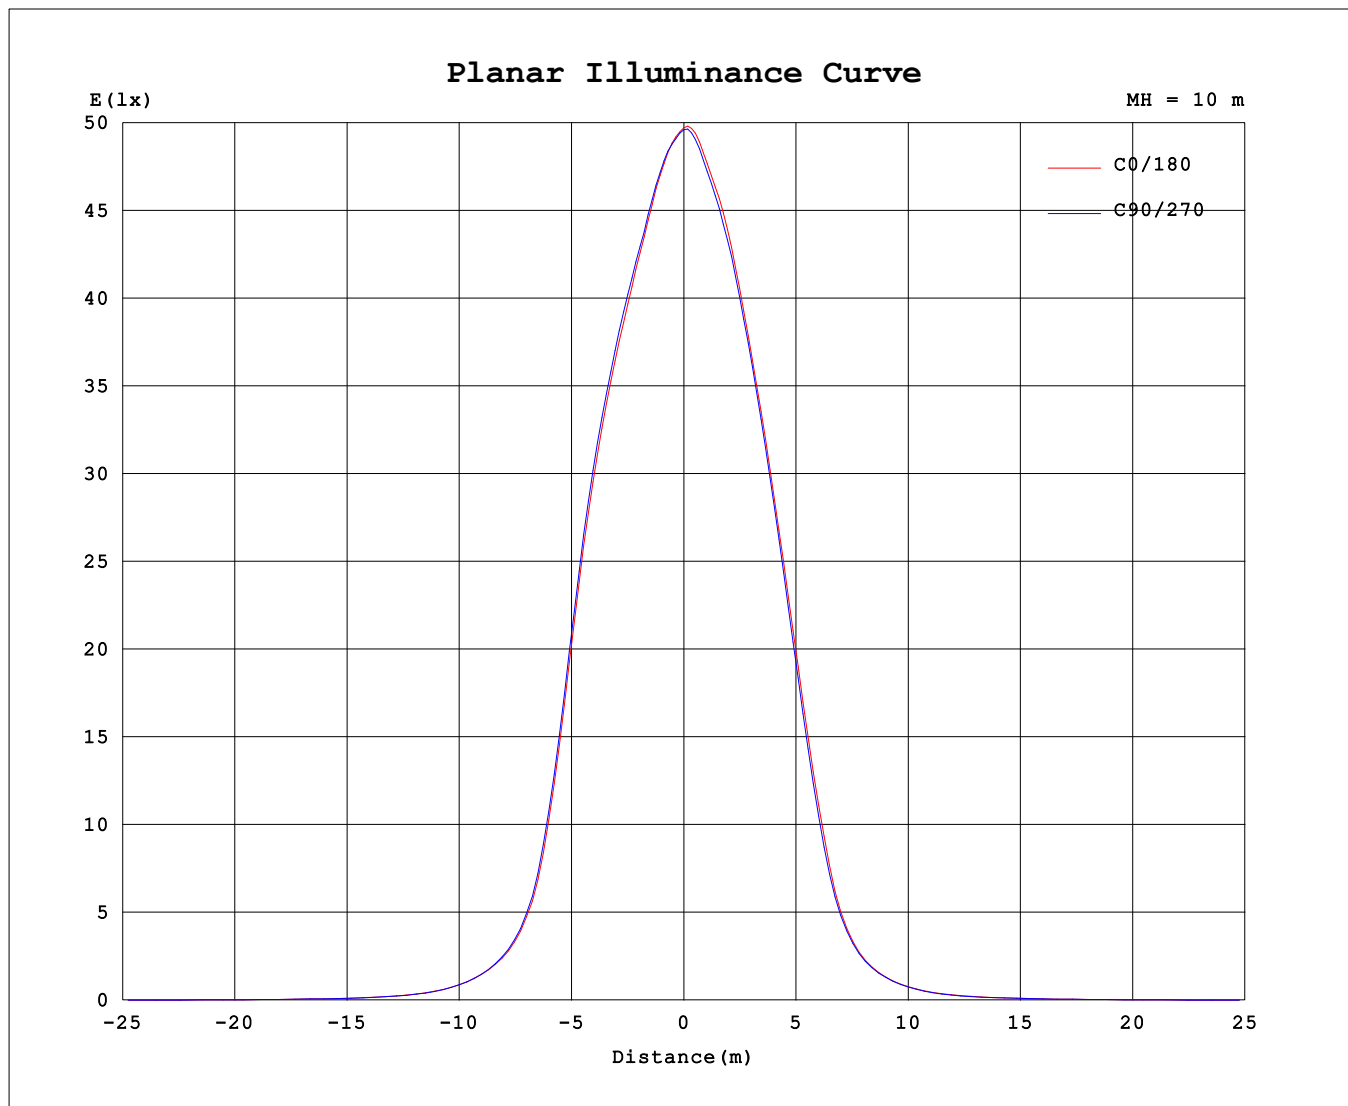

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	4962	4962	4962	4962	4962	4962	4962	4962
3.0	4895	4875	4901	4935	4951	4929	4927	4929
6.0	4771	4757	4799	4847	4837	4807	4802	4811
9.0	4603	4578	4646	4714	4731	4704	4683	4684
12.0	4443	4402	4498	4560	4575	4514	4531	4524
15.0	4280	4279	4357	4346	4349	4299	4305	4321
18.0	4095	4126	4167	4078	4068	4022	4031	4075
21.0	3816	3895	3906	3760	3712	3659	3662	3753
24.0	3394	3496	3483	3321	3261	3180	3193	3310
27.0	2715	2816	2810	2687	2687	2603	2597	2695
30.0	1896	1980	1981	1938	2000	1940	1905	1950
33.0	1162	1231	1227	1208	1298	1274	1219	1213
36.0	743.5	780.2	773.4	738.8	773.4	773.6	745.0	746.4
39.0	510.7	528.3	525.4	490.3	482.2	480.9	472.8	494.9
42.0	360.1	372.3	364.5	337.1	319.7	313.6	315.8	346.3
45.0	249.2	257.1	249.7	231.1	220.3	209.8	215.4	238.1
48.0	170.6	176.1	168.4	154.4	150.3	142.8	145.3	161.9
51.0	118.6	122.2	116.3	107.2	105.8	100.6	101.9	113.1
54.0	86.45	88.13	84.87	78.49	78.37	75.27	75.22	83.25
57.0	65.11	66.48	64.80	60.83	61.24	58.69	58.13	63.99
60.0	49.42	51.10	50.64	47.79	48.67	46.45	45.51	49.59
63.0	32.85	35.61	36.86	36.18	37.79	35.21	33.16	34.79
66.0	21.58	23.10	24.17	24.41	25.94	23.95	22.32	22.95
69.0	14.52	15.60	16.37	16.81	17.78	16.53	15.37	15.60
72.0	9.376	9.924	10.65	11.19	12.02	11.10	10.18	10.21
75.0	4.250	4.625	5.442	6.493	7.560	6.689	5.453	4.928
78.0	2.681	2.832	3.093	3.462	3.685	3.420	3.092	2.890
81.0	1.958	2.070	2.365	2.799	2.707	2.490	2.312	2.169
84.0	0.6500	0.6516	0.7679	1.063	1.134	0.9143	0.8176	0.7176
87.0	0.2464	0.2417	0.3313	0.4328	0.4596	0.3872	0.3497	0.2827
90.0	0.1446	0.1092	0.1401	0.2001	0.1254	0.1054	0.1170	0.1088

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: