


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909 Lamp Flux:4498.01x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 101.46 lm/W			
MODEL		I <sub>max</sub> (cd)	62042	S/MH(C0/180)	0.20
NOMINAL POWER(W)	45	LOR(%)	100.0	S/MH(C90/270)	0.21
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	4498.0	η UP,DN(C0-180)	0.0,50.9
NOMINAL FLUX(lm)	4498.01	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.1
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	240.23	η down(%)	100.0	CIBSE SHR MAX	0.20

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

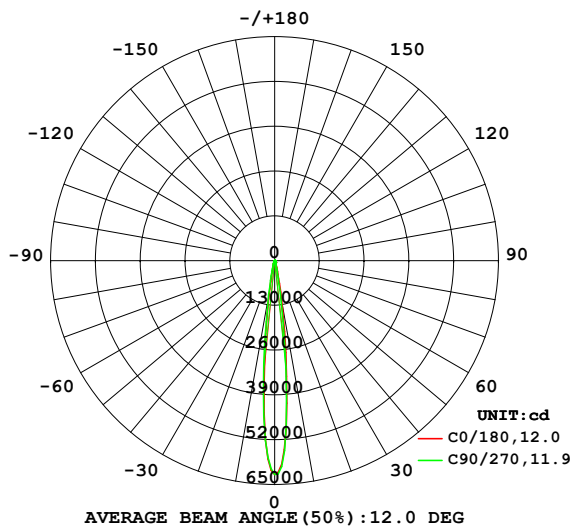

PLANAR ISOLUX DIAGRAM(UNIT:lx)

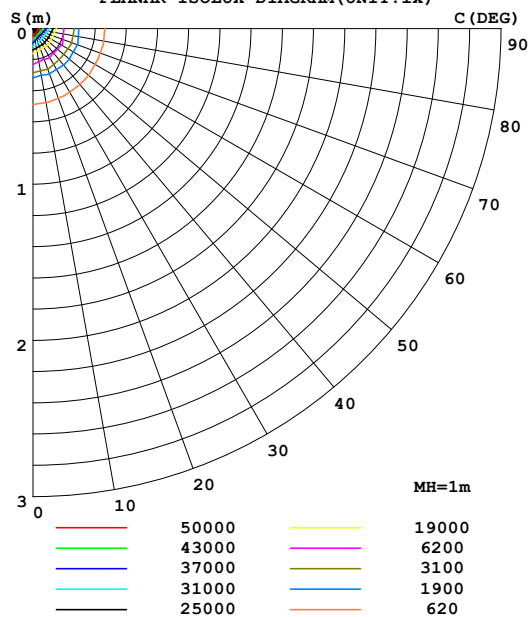

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1182	1093	978.8	821.3	835.7	955.5	1016	1106	0- 10	2674	2674	59.5,59.5
20	144.4	132.9	123.3	120.2	125.4	126.6	134.9	141.9	10- 20	930.9	3605	80.1,80.1
30	59.21	53.96	51.11	49.17	50.91	51.84	55.25	58.33	20- 30	384.4	3990	88.7,88.7
40	28.07	26.25	25.16	23.96	24.26	24.84	26.66	27.48	30- 40	235.0	4224	93.9,93.9
50	14.05	13.34	12.58	11.89	12.09	12.37	13.15	13.67	40- 50	143.8	4368	97.1,97.1
60	6.238	5.878	5.451	5.175	5.315	5.699	5.871	6.175	50- 60	80.09	4448	98.9,98.9
70	2.112	2.096	2.039	1.951	1.942	1.978	1.976	2.111	60- 70	37.76	4486	99.7,99.7
80	0.3365	0.3386	0.3479	0.3457	0.3379	0.3221	0.3189	0.3133	70- 80	10.53	4497	100,100
90	0.0241	0.0145	0.0261	0.0274	0.0235	0.0152	0.0188	0.0145	80- 90	1.383	4498	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 4305.6 lm

%lum = 95.7%

%lamp = 95.7%

Conical surface Flux(120deg): 4448.3 lm

%lum = 98.9%


%lamp = 98.9%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909 Lamp Flux:4498.01x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

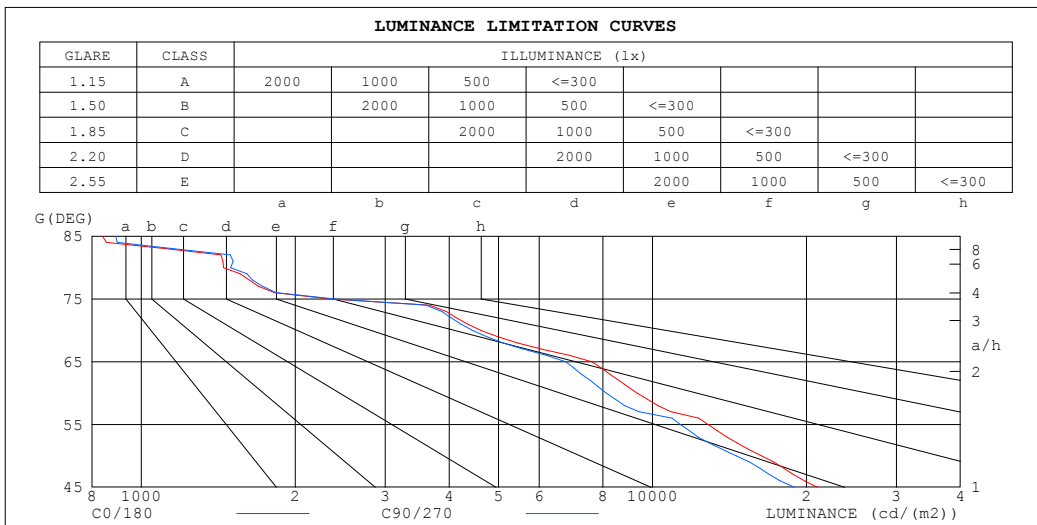


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909 Lamp Flux:4498.01x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 4500K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

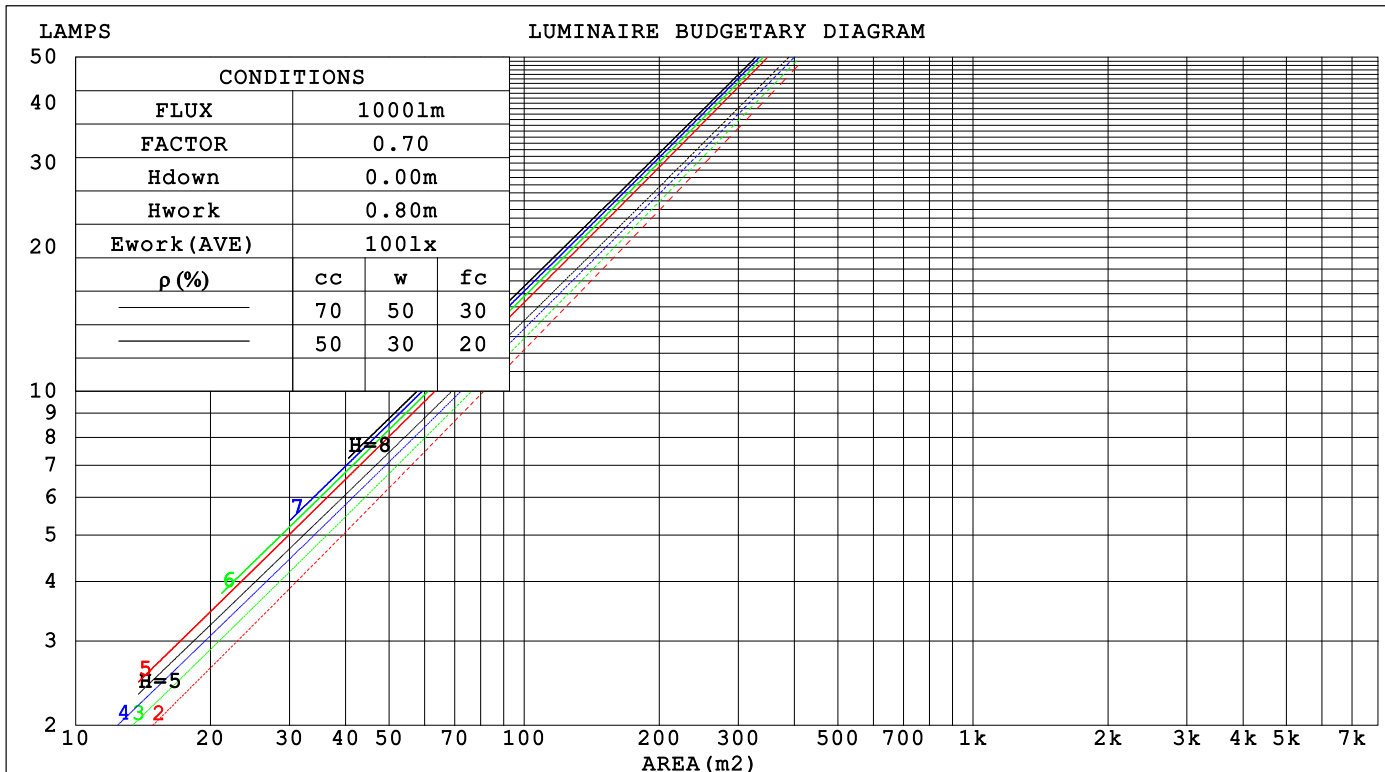

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909 Lamp Flux:4498.01x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.131	.075	.024	.125	.071	.023	.112	.065	.021	.101	.058	.019	.091	.053	.017															
2.0	.122	.067	.020	.116	.064	.020	.106	.059	.018	.097	.054	.017	.088	.050	.016															
3.0	.113	.060	.018	.108	.058	.017	.100	.054	.016	.092	.050	.015	.085	.047	.014															
4.0	.104	.054	.016	.101	.053	.016	.094	.050	.015	.087	.047	.014	.081	.044	.013															
5.0	.097	.050	.014	.094	.048	.014	.088	.046	.014	.083	.044	.013	.077	.041	.012															
6.0	.091	.046	.013	.088	.045	.013	.083	.043	.012	.078	.041	.012	.074	.039	.012															
7.0	.086	.042	.012	.083	.041	.012	.079	.040	.011	.075	.038	.011	.071	.037	.011															
8.0	.081	.039	.011	.079	.039	.011	.075	.037	.011	.071	.036	.010	.068	.035	.010															
9.0	.076	.037	.010	.074	.036	.010	.071	.035	.010	.068	.034	.010	.065	.033	.010															
10.0	.072	.035	.010	.071	.034	.010	.068	.033	.009	.065	.032	.009	.062	.031	.009															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.148	.144	.135	.128	.098	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.150	.133	.119	.128	.114	.103	.088	.079	.072	.051	.046	.042	.016	.015	.014	
3.0	.134	.113	.097	.115	.098	.084	.079	.068	.059	.046	.040	.035	.015	.013	.011	
4.0	.121	.098	.080	.104	.084	.069	.072	.059	.049	.041	.034	.029	.013	.011	.010	
5.0	.110	.085	.067	.095	.074	.058	.065	.052	.041	.038	.030	.024	.012	.010	.008	
6.0	.101	.075	.057	.087	.065	.049	.060	.046	.035	.035	.027	.021	.011	.009	.007	
7.0	.093	.067	.049	.080	.058	.042	.055	.041	.030	.032	.024	.018	.010	.008	.006	
8.0	.086	.060	.042	.074	.052	.037	.051	.036	.026	.030	.021	.016	.010	.007	.005	
9.0	.080	.054	.037	.069	.047	.032	.047	.033	.023	.028	.019	.014	.009	.006	.004	
10.0	.074	.049	.032	.064	.043	.028	.044	.030	.020	.026	.018	.012	.008	.006	.004	

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz											
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909 Lamp Flux:4498.01x1 lm											
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:						WEIGHT:					
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Norming lighting						SUR.: 131mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	15.5	16.1	15.7	16.2	16.3	15.0	15.6	15.2	15.7	15.9	
	3H	15.7	16.3	15.9	16.5	16.6	15.2	15.8	15.5	16.0	16.2
	4H	15.7	16.3	16.0	16.5	16.7	15.2	15.8	15.5	16.0	16.2
	6H	15.7	16.2	15.9	16.4	16.6	15.2	15.7	15.5	15.9	16.2
	8H	15.6	16.1	15.9	16.4	16.6	15.2	15.6	15.4	15.9	16.1
	12H	15.6	16.1	15.9	16.3	16.6	15.1	15.6	15.4	15.8	16.1
4H	2H	15.6	16.1	15.8	16.3	16.5	15.1	15.7	15.4	15.9	16.1
	3H	15.9	16.3	16.2	16.6	16.9	15.4	15.9	15.7	16.2	16.4
	4H	15.9	16.3	16.2	16.6	16.9	15.5	15.9	15.8	16.2	16.5
	6H	15.8	16.2	16.2	16.5	16.9	15.4	15.8	15.8	16.1	16.5
	8H	15.8	16.1	16.1	16.5	16.8	15.4	15.7	15.7	16.1	16.4
	12H	15.7	16.0	16.1	16.4	16.8	15.3	15.6	15.7	16.0	16.4
8H	4H	15.8	16.1	16.2	16.5	16.8	15.4	15.7	15.8	16.1	16.4
	6H	15.7	16.0	16.1	16.4	16.8	15.3	15.6	15.7	16.0	16.4
	8H	15.7	15.9	16.1	16.3	16.8	15.3	15.5	15.7	15.9	16.4
	12H	15.6	15.8	16.1	16.3	16.7	15.2	15.4	15.7	15.9	16.3
12H	4H	15.7	16.1	16.1	16.4	16.8	15.3	15.7	15.7	16.0	16.4
	6H	15.6	15.9	16.1	16.3	16.8	15.2	15.5	15.7	15.9	16.4
	8H	15.6	15.8	16.1	16.3	16.7	15.2	15.4	15.7	15.9	16.3
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 1.2 / - 1.9					+ 1.2 / - 1.9					
1.5H	+ 1.6 / - 0.9					+ 1.2 / - 1.0					
2.0H	+ 2.3 / - 2.0					+ 2.2 / - 2.1					

CIE Pub.117, 4498 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.2)  
Area: 0.0134 m2

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909		Lamp Flux:4498.01x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	81	78	87	81	78	86	81	77	74
0.80	95	89	86	94	89	85	93	88	85	81
1.00	99	94	90	99	93	90	97	93	90	86
1.25	103	98	95	102	98	94	100	96	94	89
1.50	106	101	98	105	101	98	103	99	96	92
2.00	109	105	101	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909 Lamp Flux:4498.01x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

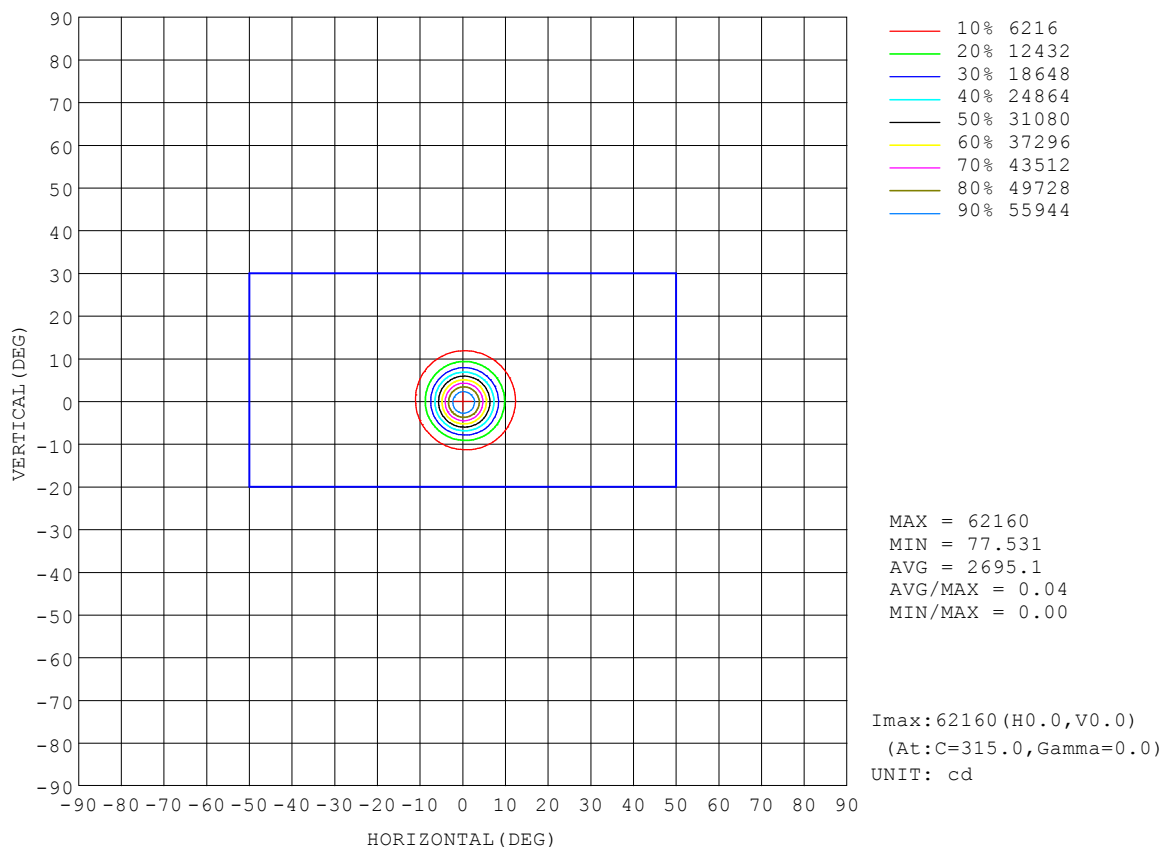


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909		Lamp Flux:4498.0lx1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

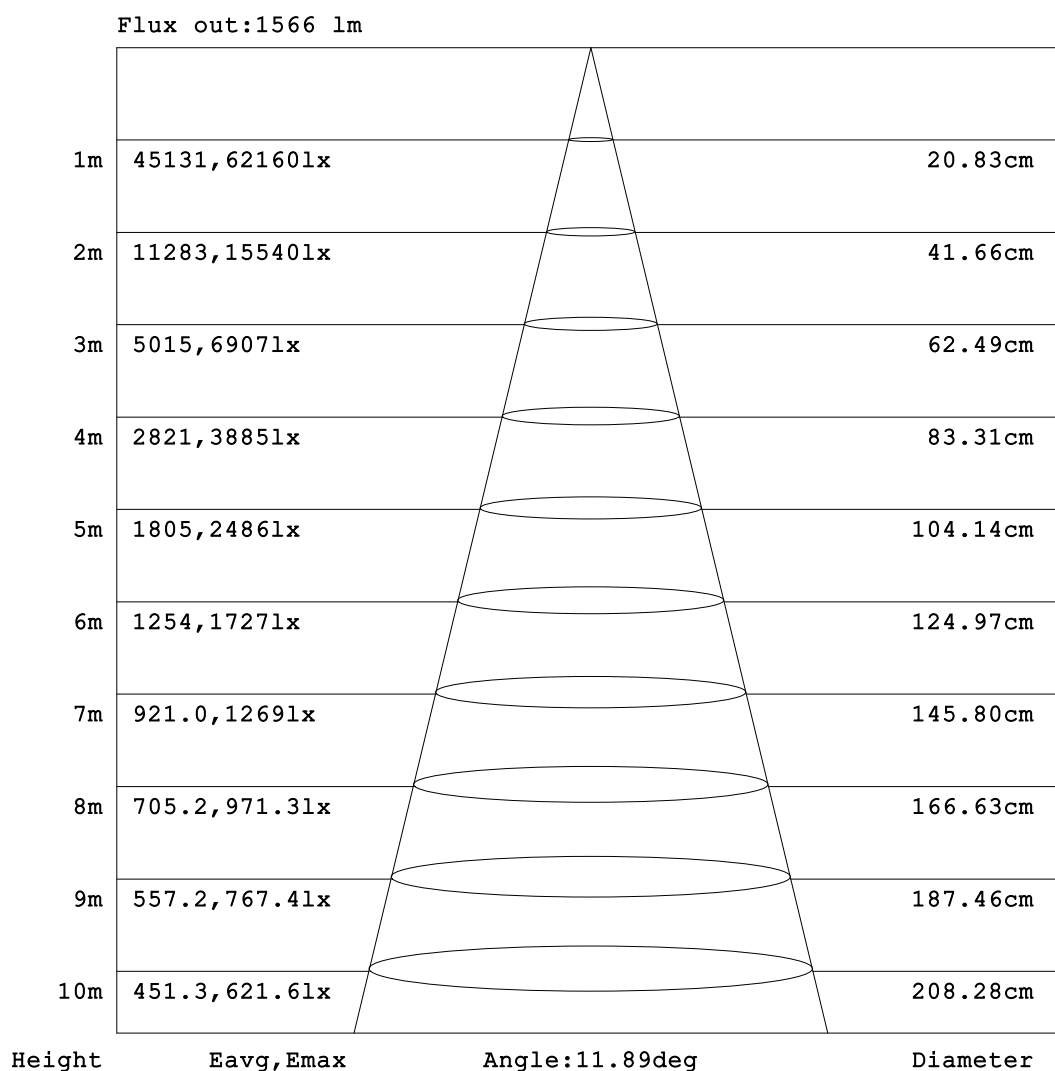


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909		Lamp Flux:4498.01x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

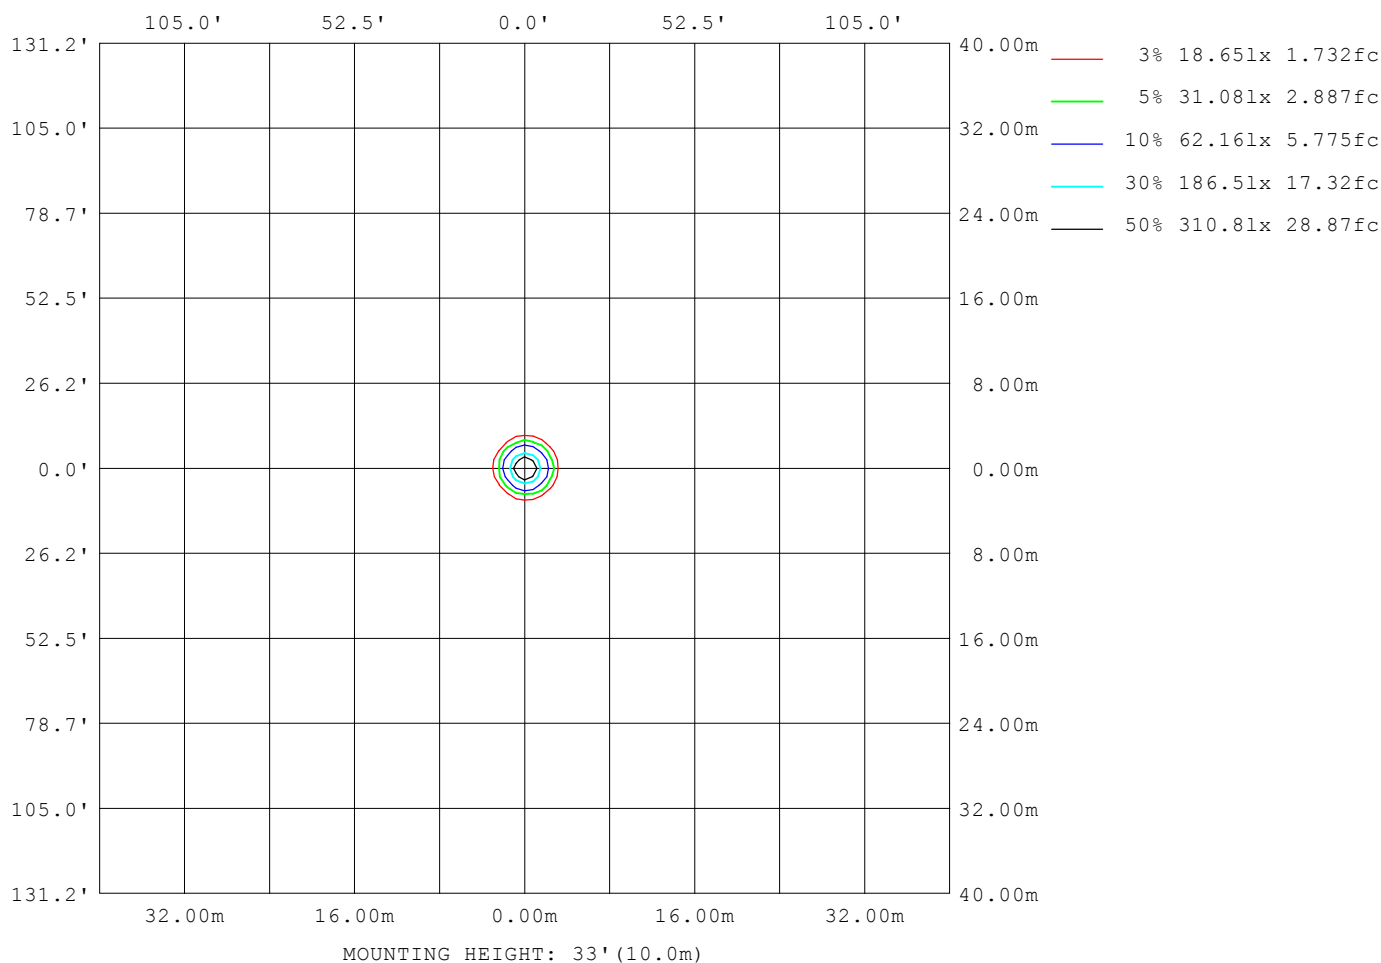

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.3V I:0.1863A P:44.3W PF:0.9902 Freq:49.99Hz		
UTHDi:0.16% ITHDi:3.98% KDisp:0.9909 Lamp Flux:4498.01x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 4000K RA90 15D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7049
L_0~180 (75) av	2167
L_0~180 (85) av	825
L_90~270 (65) av	6887
L_90~270 (75) av	2167
L_90~270 (85) av	821
L_45 (65) av	7020
L_45 (75) av	2178
L_45 (85) av	747

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: MEDIUM  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-28

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

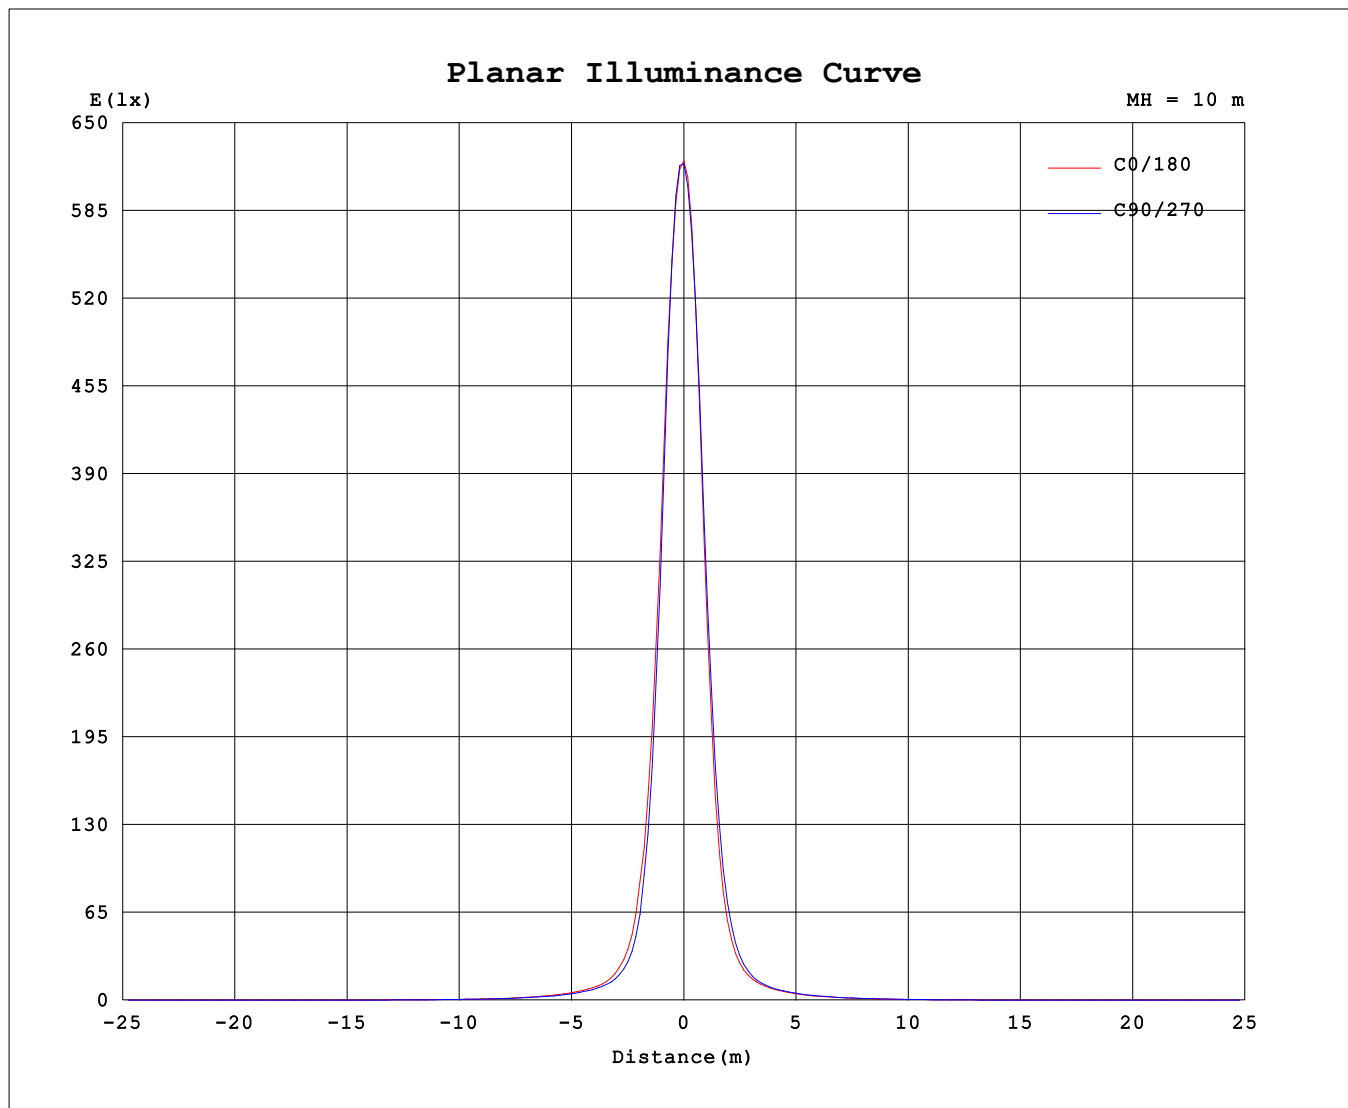

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	62042	62042	62042	62042	62042	62042	62042	62042
3.0	54936	55389	55153	53759	51941	51471	52134	53424
6.0	33745	33263	31335	29487	28219	28905	30249	32137
9.0	15704	14848	12840	11550	11361	12209	13492	14672
12.0	6825	6095	5053	4549	4791	5298	5925	6429
15.0	3316	2967	2559	2371	2492	2695	2973	3168
18.0	1900	1724	1566	1510	1572	1610	1743	1843
21.0	1296	1194	1112	1087	1132	1141	1211	1273
24.0	982.2	896.8	842.9	824.8	856.5	865.2	917.5	963.9
27.0	765.0	695.3	656.3	635.4	659.8	672.4	712.2	752.0
30.0	592.1	539.6	511.1	491.7	509.1	518.4	552.5	583.3
33.0	471.1	431.1	409.2	391.7	403.9	414.2	442.9	464.3
36.0	378.7	350.7	334.5	320.2	326.0	333.4	355.8	373.1
39.0	301.1	281.5	268.8	256.8	260.1	266.0	285.7	295.0
42.0	244.8	229.5	220.0	209.5	213.8	217.8	231.7	239.8
45.0	198.6	187.9	179.5	172.6	177.4	180.1	189.5	194.9
48.0	161.9	153.6	145.7	137.9	139.7	142.5	152.3	159.4
51.0	129.9	123.4	115.7	110.7	112.6	115.6	122.2	126.8
54.0	105.1	99.93	93.02	90.23	92.13	95.64	100.3	103.0
57.0	79.21	75.27	68.75	65.10	66.57	71.20	73.74	77.24
60.0	62.38	58.78	54.51	51.75	53.15	56.99	58.71	61.75
63.0	50.10	47.40	44.20	41.96	43.25	46.17	47.24	50.16
66.0	37.41	36.42	33.86	32.04	31.96	33.46	33.58	36.54
69.0	23.80	23.52	22.72	21.54	21.48	22.18	21.89	23.69
72.0	17.05	16.98	16.72	15.91	15.77	16.09	15.99	17.16
75.0	8.131	8.429	8.314	7.585	6.900	6.778	6.715	7.428
78.0	4.524	4.500	4.607	4.565	4.461	4.317	4.341	4.309
81.0	3.022	2.961	3.172	3.205	3.090	2.908	2.934	2.881
84.0	1.195	1.138	1.258	1.242	1.188	1.004	1.086	1.001
87.0	0.5819	0.4977	0.6133	0.5529	0.4641	0.3849	0.4942	0.4152
90.0	0.2408	0.1446	0.2611	0.2743	0.2347	0.1517	0.1881	0.1450

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: MEDIUM  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: