


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909 Lamp Flux:4373.03x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 45WPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.13 lm/W
MODEL		Imax (cd)	13566	S/MH(C0/180)	0.49	
NOMINAL POWER(W)	45	LOR(%)	100.0	S/MH(C90/270)	0.51	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	4373.0	$\eta$ UP,DN(C0-180)	0.0,50.3	
NOMINAL FLUX(lm)	4373.03	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,49.7	
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.29	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

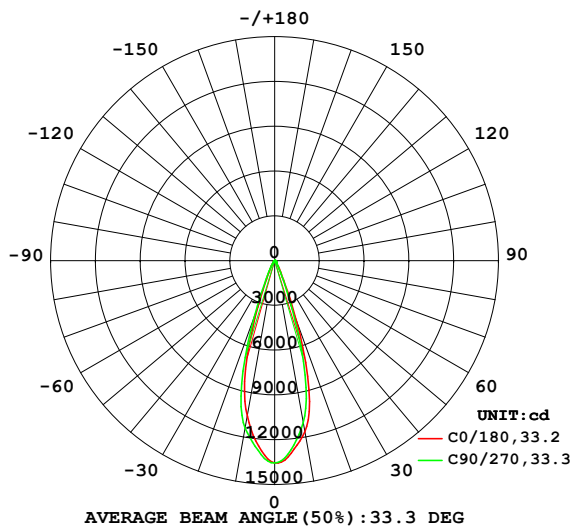

PLANAR ISOLUX DIAGRAM(UNIT:lx)

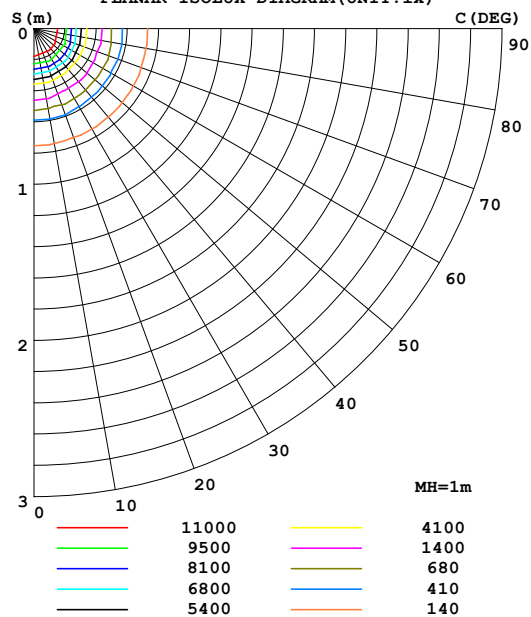

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1165	1160	1102	1076	1060	1081	1142	1147	0- 10	1164	1164	26.6,26.6
20	431.2	410.8	348.3	330.0	333.3	351.9	404.6	416.4	10- 20	2135	3299	75.4,75.4
30	64.87	61.38	53.42	51.72	52.24	54.28	60.69	64.07	20- 30	692.4	3991	91.3,91.3
40	17.83	17.67	16.80	16.49	16.28	16.30	17.29	18.00	30- 40	200.5	4192	95.9,95.9
50	8.638	8.473	8.197	8.119	8.091	8.101	8.568	8.870	40- 50	93.46	4285	98,98
60	3.994	3.919	3.817	3.699	3.688	3.696	3.974	4.030	50- 60	53.32	4338	99.2,99.2
70	1.633	1.538	1.527	1.461	1.419	1.470	1.590	1.600	60- 70	25.89	4364	99.8,99.8
80	0.2469	0.2374	0.2428	0.2366	0.2519	0.2329	0.2363	0.2389	70- 80	7.685	4372	100,100
90	0.0182	0.0121	0.0186	0.0154	0.0242	0.0127	0.0144	0.0121	80- 90	1.002	4373	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 4244.1 lm

%lum = 97.1%

%lamp = 97.1%

Conical surface Flux(120deg): 4338.5 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909 Lamp Flux:4373.03x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

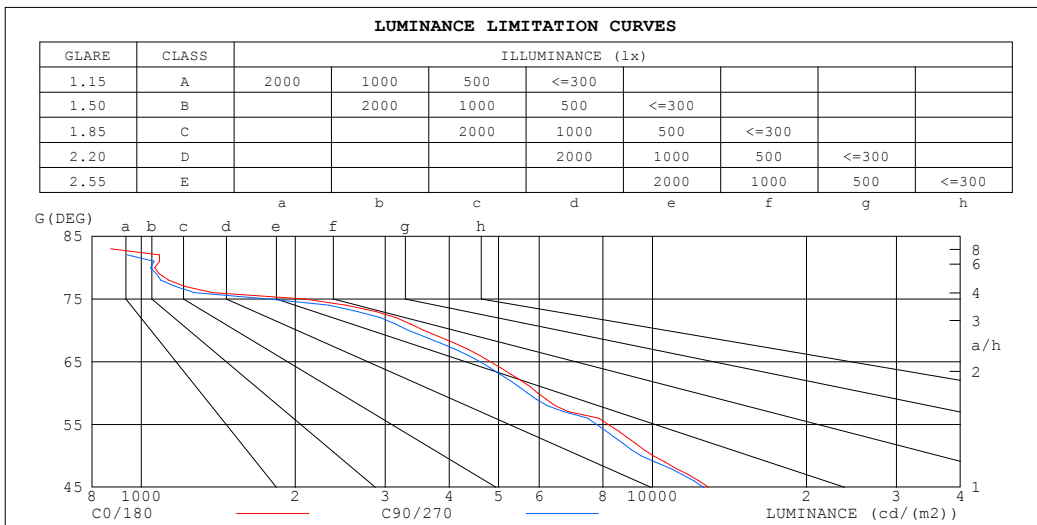


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909 Lamp Flux:4373.03x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

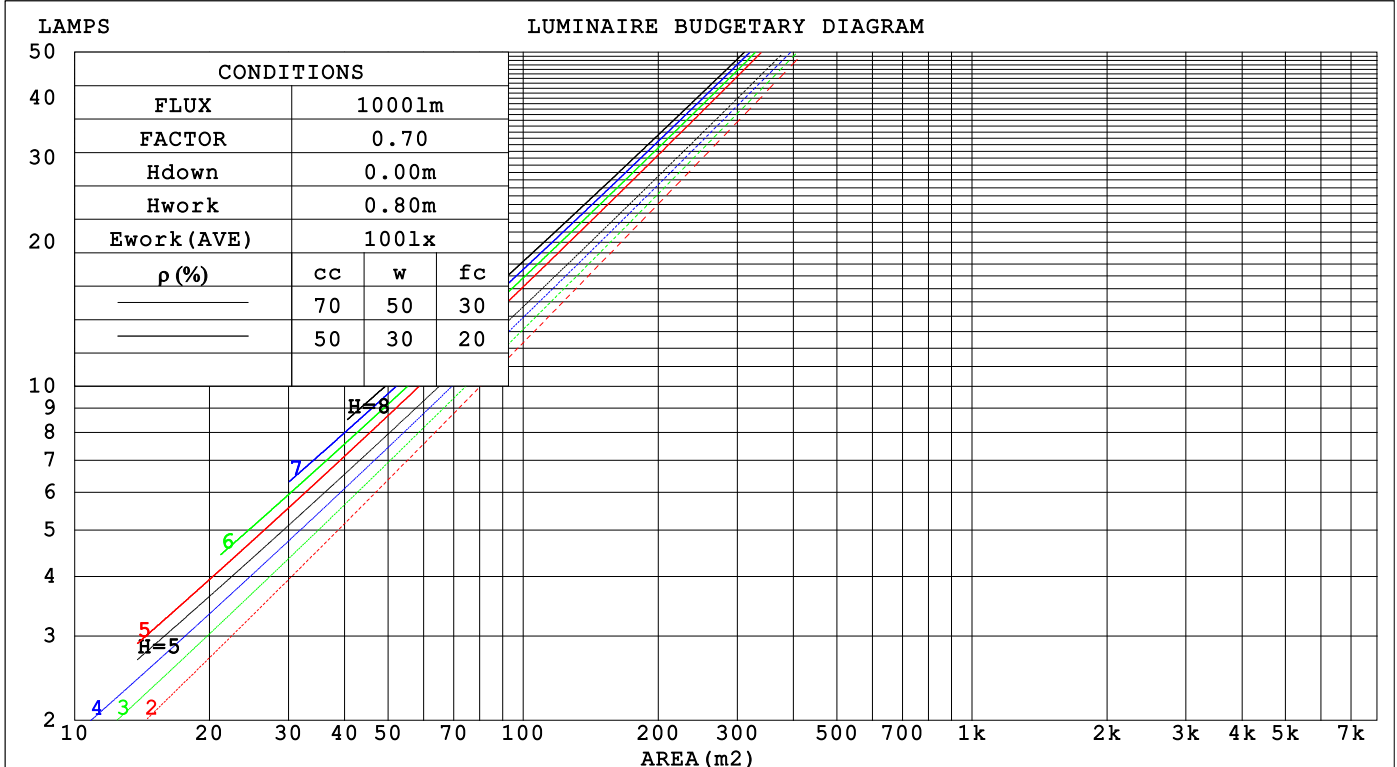

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### WEC AND CCEC

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909 Lamp Flux:4373.03x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 131mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.148	.084	.027	.141	.080	.026	.129	.074	.024	.117	.068	.022	.107	.062	.020		
2.0	.138	.076	.023	.133	.073	.023	.122	.068	.021	.113	.063	.020	.104	.059	.019		
3.0	.129	.069	.021	.125	.067	.020	.116	.063	.019	.108	.059	.018	.101	.056	.017		
4.0	.122	.063	.019	.118	.062	.018	.110	.059	.017	.104	.056	.017	.097	.053	.016		
5.0	.115	.058	.017	.111	.057	.017	.105	.055	.016	.099	.052	.016	.094	.050	.015		
6.0	.109	.054	.016	.106	.053	.015	.100	.051	.015	.095	.050	.015	.091	.048	.014		
7.0	.103	.051	.014	.101	.050	.014	.096	.049	.014	.092	.047	.014	.087	.045	.013		
8.0	.099	.048	.014	.096	.047	.013	.092	.046	.013	.088	.045	.013	.085	.043	.013		
9.0	.094	.046	.013	.092	.045	.013	.089	.044	.012	.085	.043	.012	.082	.042	.012		
10.0	.090	.043	.012	.089	.043	.012	.085	.042	.012	.082	.041	.012	.079	.040	.011		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016		
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013		
3.0	.137	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011		
4.0	.125	.098	.077	.108	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.115	.086	.064	.099	.074	.056	.068	.052	.040	.040	.031	.023	.013	.010	.008		
6.0	.107	.076	.054	.092	.066	.047	.063	.046	.033	.037	.027	.020	.012	.009	.007		
7.0	.099	.068	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006		
8.0	.093	.061	.040	.080	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005		
9.0	.087	.056	.035	.075	.049	.030	.052	.034	.021	.030	.020	.013	.010	.007	.004		
10.0	.083	.051	.030	.071	.045	.027	.049	.031	.019	.029	.019	.011	.009	.006	.004		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz UTHDi:0.18% ITHDi:3.86% KDisp:0.9909 Lamp Flux:4373.03x1 lm											
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:						WEIGHT:					
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 131mm		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H		13.0	13.7	13.2	13.9	14.0	12.7	13.4	12.9	13.5	13.7
	3H	13.3	13.9	13.5	14.1	14.3	12.9	13.6	13.2	13.8	14.0
	4H	13.3	13.9	13.6	14.1	14.3	12.9	13.6	13.2	13.8	14.0
	6H	13.2	13.8	13.5	14.1	14.3	12.9	13.5	13.2	13.7	13.9
	8H	13.2	13.8	13.5	14.0	14.3	12.8	13.4	13.1	13.7	13.9
	12H	13.1	13.7	13.5	14.0	14.2	12.8	13.3	13.1	13.6	13.9
4H	2H	13.1	13.7	13.4	13.9	14.2	12.8	13.4	13.0	13.6	13.8
	3H	13.4	14.0	13.7	14.2	14.5	13.1	13.7	13.4	13.9	14.2
	4H	13.4	13.9	13.8	14.2	14.5	13.1	13.6	13.5	13.9	14.2
	6H	13.4	13.8	13.7	14.1	14.5	13.0	13.5	13.4	13.8	14.2
	8H	13.3	13.7	13.7	14.1	14.5	13.0	13.4	13.4	13.8	14.1
	12H	13.3	13.7	13.7	14.0	14.4	13.0	13.3	13.4	13.7	14.1
8H	4H	13.3	13.8	13.7	14.1	14.5	13.0	13.4	13.4	13.8	14.2
	6H	13.3	13.6	13.7	14.0	14.4	13.0	13.3	13.4	13.7	14.1
	8H	13.2	13.5	13.7	14.0	14.4	12.9	13.2	13.4	13.6	14.1
	12H	13.2	13.4	13.6	13.9	14.4	12.9	13.1	13.3	13.6	14.0
12H	4H	13.3	13.7	13.7	14.0	14.4	13.0	13.4	13.4	13.7	14.1
	6H	13.2	13.5	13.7	13.9	14.4	12.9	13.2	13.4	13.6	14.1
	8H	13.2	13.4	13.6	13.9	14.4	12.9	13.1	13.3	13.6	14.0
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.5 / - 1.9					+ 1.2 / - 1.8				
1.5H		+ 2.2 / - 1.0					+ 1.7 / - 1.1				
2.0H		+ 2.2 / - 2.0					+ 2.2 / - 2.0				

CIE Pub.117, 4373 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.1)  
Area: 0.0134 m2

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909 Lamp Flux:4373.03x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	83	79	88	82	79	76
0.80	96	91	87	95	90	87	94	90	87	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	99	95	101	97	95	91
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	96
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	109	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909 Lamp Flux:4373.03x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

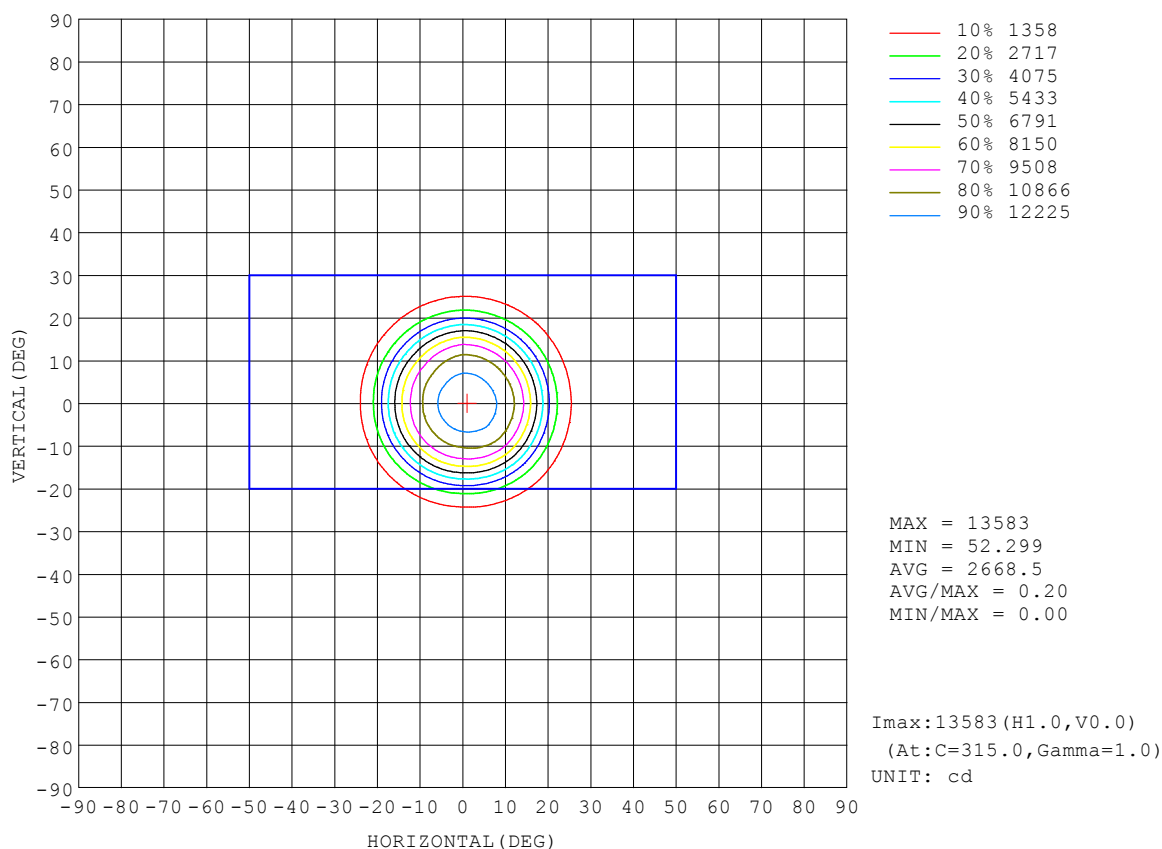


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



AAI Figure

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909		Lamp Flux:4373.03x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

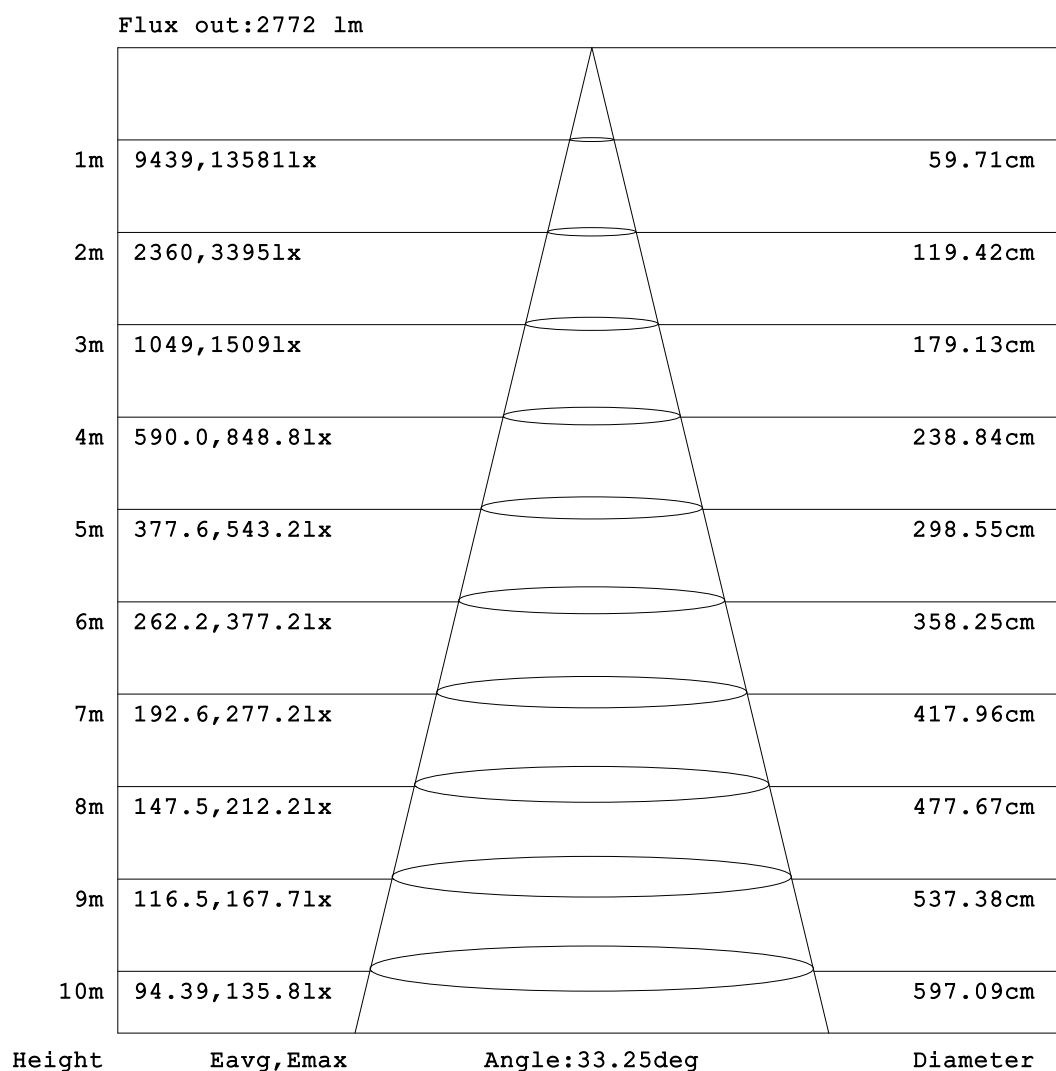


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909		Lamp Flux:4373.03x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

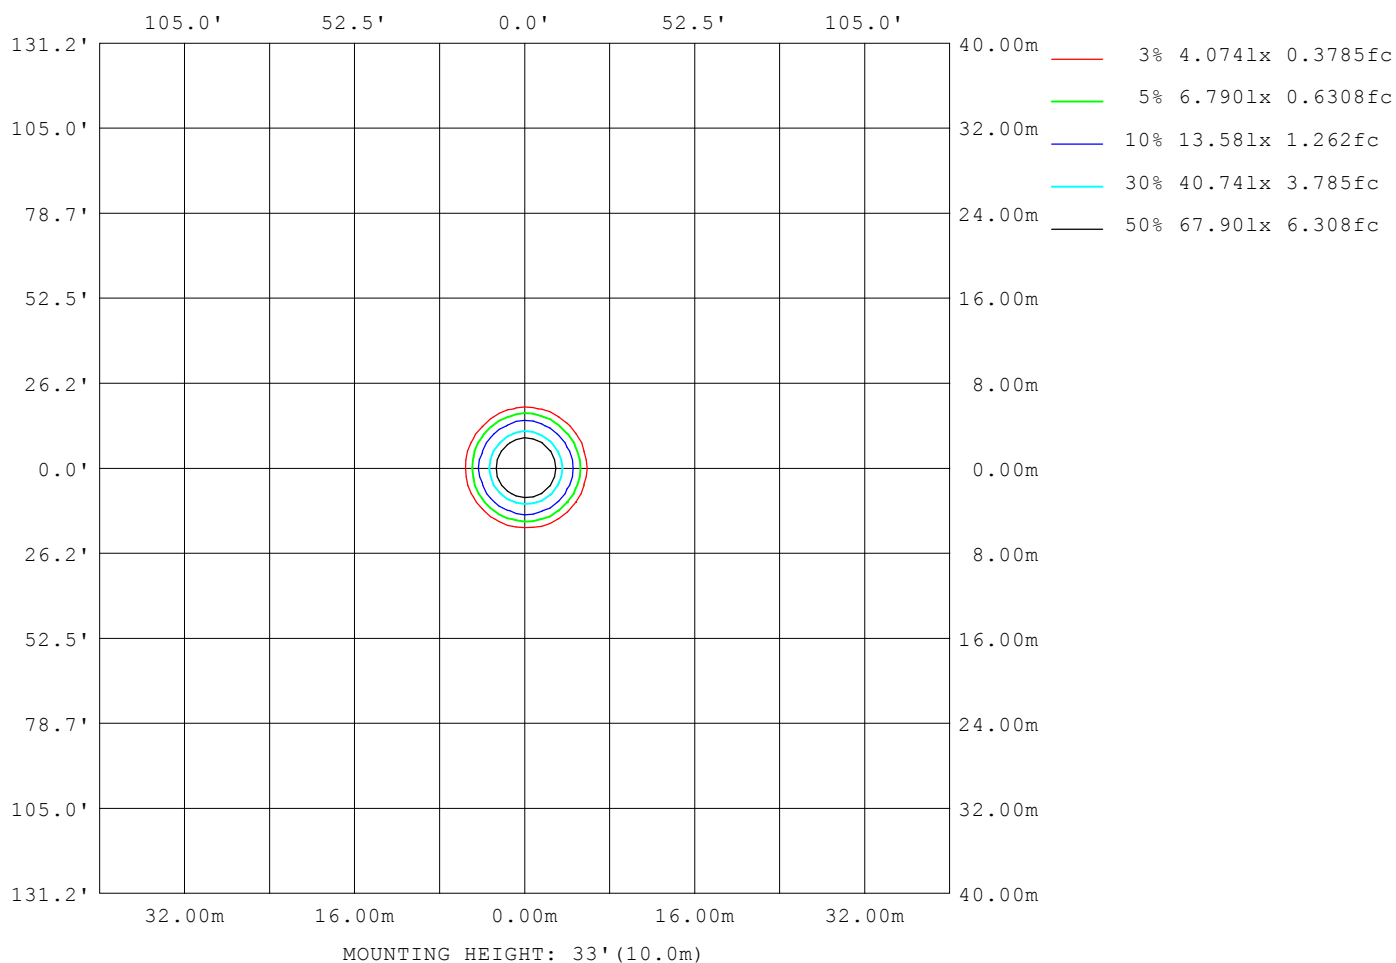

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.3V I:0.1872A P:44.6W PF:0.9902 Freq:49.99Hz		
UTHDi:0.18% ITHDi:3.86% KDisp:0.9909 Lamp Flux:4373.03x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 2700K RA90 36D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4572
L_0~180 (75) av	1785
L_0~180 (85) av	656
L_90~270 (65) av	4654
L_90~270 (75) av	1859
L_90~270 (85) av	571
L_45 (65) av	4549
L_45 (75) av	1786
L_45 (85) av	523

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

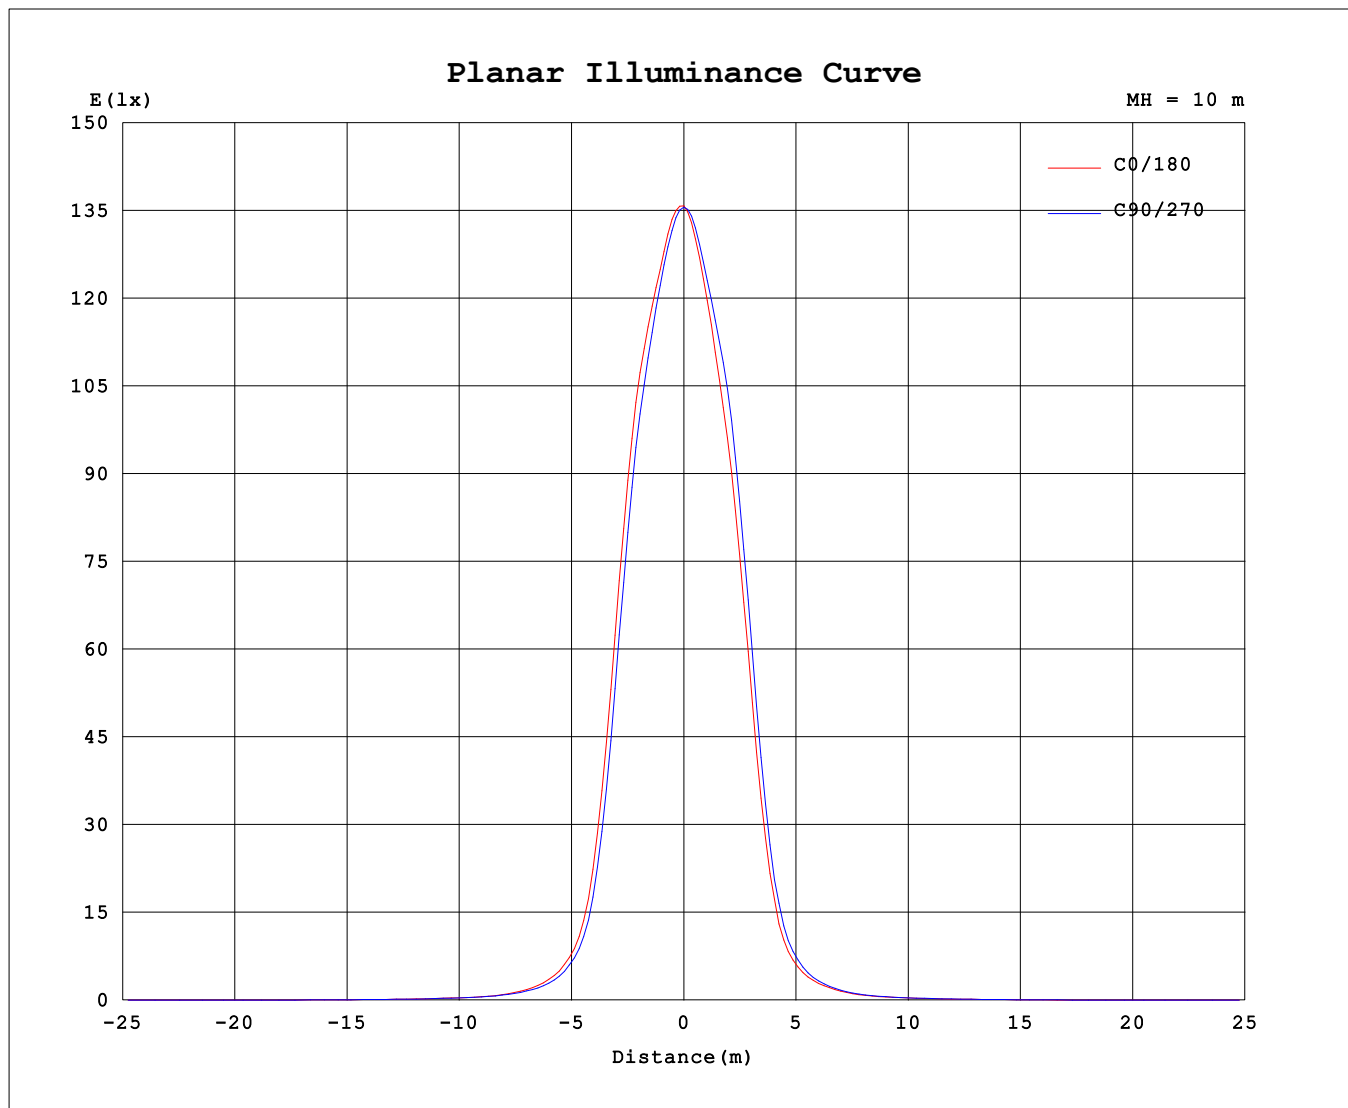

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-10-28

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

### Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	13563	13563	13563	13563	13563	13563	13563	13563
3.0	13385	13356	13221	13107	13051	13092	13263	13353
6.0	12681	12660	12427	12217	12140	12214	12516	12607
9.0	11932	11892	11400	11130	10997	11181	11688	11764
12.0	10908	10781	10100	9826	9635	9860	10598	10730
15.0	8934	8732	7927	7637	7541	7737	8556	8747
18.0	6164	5948	5159	4907	4920	5154	5844	6014
21.0	3512	3338	2799	2649	2665	2822	3270	3368
24.0	1788	1687	1429	1341	1350	1433	1669	1727
27.0	1032	972.8	856.0	798.4	801.7	857.9	971.3	1010
30.0	648.7	613.8	534.2	517.2	522.4	542.8	606.9	640.7
33.0	426.6	405.0	360.9	357.9	361.9	372.1	403.9	434.8
36.0	294.0	282.8	258.0	254.2	248.8	250.9	274.6	283.3
39.0	198.8	197.3	187.7	182.1	178.6	179.1	190.3	197.6
42.0	149.1	148.1	141.6	140.3	139.6	140.6	146.9	152.8
45.0	121.9	122.7	119.2	117.9	117.9	118.1	121.2	126.1
48.0	99.43	99.31	97.19	94.72	94.56	94.49	99.19	102.5
51.0	80.91	79.02	76.56	76.04	76.09	76.22	80.39	83.20
54.0	67.26	65.57	63.76	63.05	62.87	63.11	66.77	68.77
57.0	49.96	49.91	49.05	46.09	45.71	46.00	49.34	50.58
60.0	39.94	39.19	38.17	36.99	36.88	36.96	39.74	40.30
63.0	32.11	31.04	30.64	29.44	29.15	29.37	31.46	31.92
66.0	24.99	23.92	23.77	22.72	22.30	22.78	24.34	24.59
69.0	18.29	17.31	17.15	16.35	15.89	16.43	17.73	17.93
72.0	13.02	12.27	12.16	11.45	11.10	11.60	12.67	12.75
75.0	7.244	6.799	6.158	5.217	5.135	5.617	6.739	7.141
78.0	3.147	3.058	3.041	2.956	3.000	2.895	3.052	3.098
81.0	2.273	2.165	2.222	2.121	2.336	2.133	2.178	2.175
84.0	0.8968	0.7813	0.7976	0.7203	0.9536	0.7333	0.8362	0.8563
87.0	0.4408	0.3421	0.3657	0.2845	0.3109	0.3042	0.4041	0.3841
90.0	0.1823	0.1214	0.1861	0.1538	0.2416	0.1268	0.1437	0.1210

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-10-28

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: