


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914 Lamp Flux:4263.46x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 45 TYPE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 94.92 lm/W
MODEL		Imax (cd)	5348	S/MH(C0/180)	0.80	
NOMINAL POWER(W)	45	LOR(%)	100.0	S/MH(C90/270)	0.81	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	4263.5	η UP,DN(C0-180)	0.0,52.1	
NOMINAL FLUX(lm)	4263.46	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,47.9	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	240.26	η down (%)	100.0	CIBSE SHR MAX	0.85	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

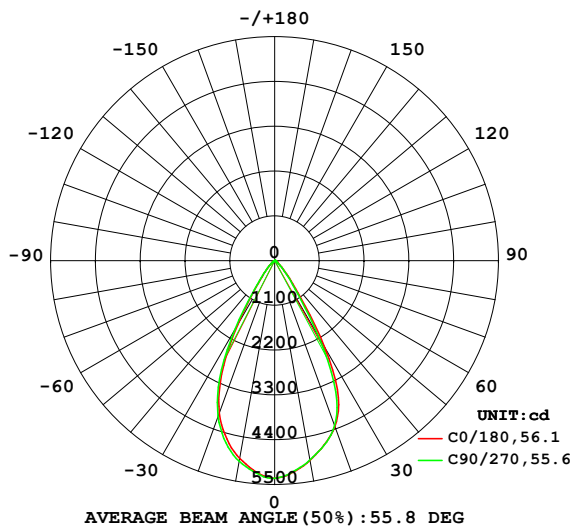

PLANAR ISOLUX DIAGRAM(UNIT:lx)

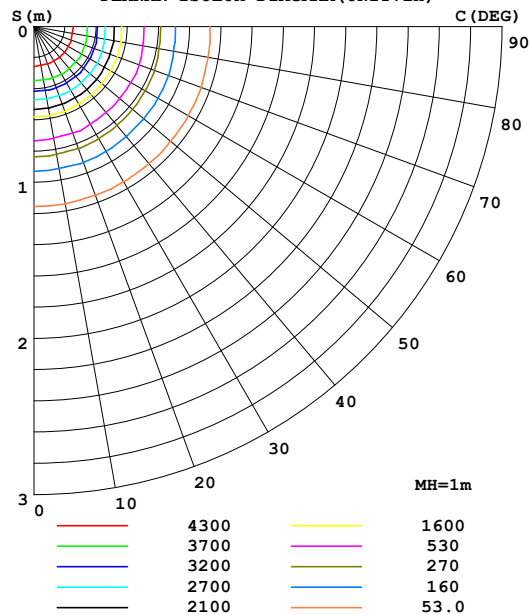

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4986	4979	4974	4941	4934	4983	5009	5024	0- 10	490.6	490.6	11.5,11.5
20	4332	4395	4310	4106	3983	4007	4067	4203	10- 20	1298	1789	42,42
30	2477	2378	2191	2035	1838	1781	1956	2228	20- 30	1498	3286	77.1,77.1
40	563.3	549.8	510.4	465.9	403.9	387.6	420.2	488.9	30- 40	656.4	3943	92.5,92.5
50	163.2	161.8	147.5	131.6	115.5	108.2	115.9	140.0	40- 50	205.6	4148	97.3,97.3
60	59.18	59.11	56.50	50.35	47.70	45.98	48.30	54.95	50- 60	75.66	4224	99.1,99.1
70	17.23	16.43	15.33	13.94	13.49	13.27	14.98	17.01	60- 70	30.69	4255	99.8,99.8
80	3.008	2.792	2.615	2.489	2.577	2.681	3.220	3.000	70- 80	7.661	4262	100,100
90	0.1455	0.1108	0.1492	0.1233	0.1334	0.1342	0.2345	0.1182	80- 90	1.137	4263	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 4072.7 lm

%lum = 95.5%

%lamp = 95.5%

Conical surface Flux(120deg): 4224 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914 Lamp Flux:4263.46x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

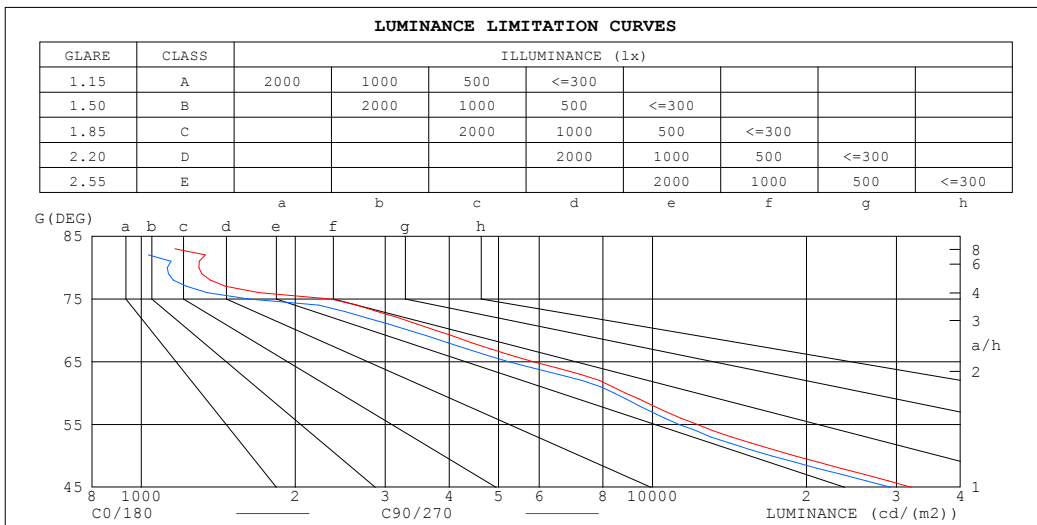


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914 Lamp Flux:4263.46x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 450PE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.11	1.08	1.06	1.09	1.07	1.05	1.05	1.03	1.01	1.01	.00	.98	.98	.96	.95	.94														
2.0	1.03	.99	.96	1.02	.98	.95	.98	.95	.93	.95	.93	.91	.93	.91	.89	.87														
3.0	.97	.92	.88	.95	.91	.87	.93	.89	.86	.90	.87	.84	.88	.85	.83	.82														
4.0	.91	.85	.81	.89	.84	.81	.87	.83	.80	.85	.82	.79	.83	.80	.78	.76														
5.0	.85	.79	.75	.84	.79	.75	.82	.78	.74	.81	.77	.73	.79	.76	.73	.71														
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67														
7.0	.75	.70	.66	.75	.69	.65	.74	.69	.65	.72	.68	.65	.71	.67	.64	.63														
8.0	.71	.66	.62	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59														
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.57	.64	.60	.57	.56														
10.0	.64	.58	.55	.64	.58	.55	.63	.58	.55	.62	.58	.54	.61	.57	.54	.53														

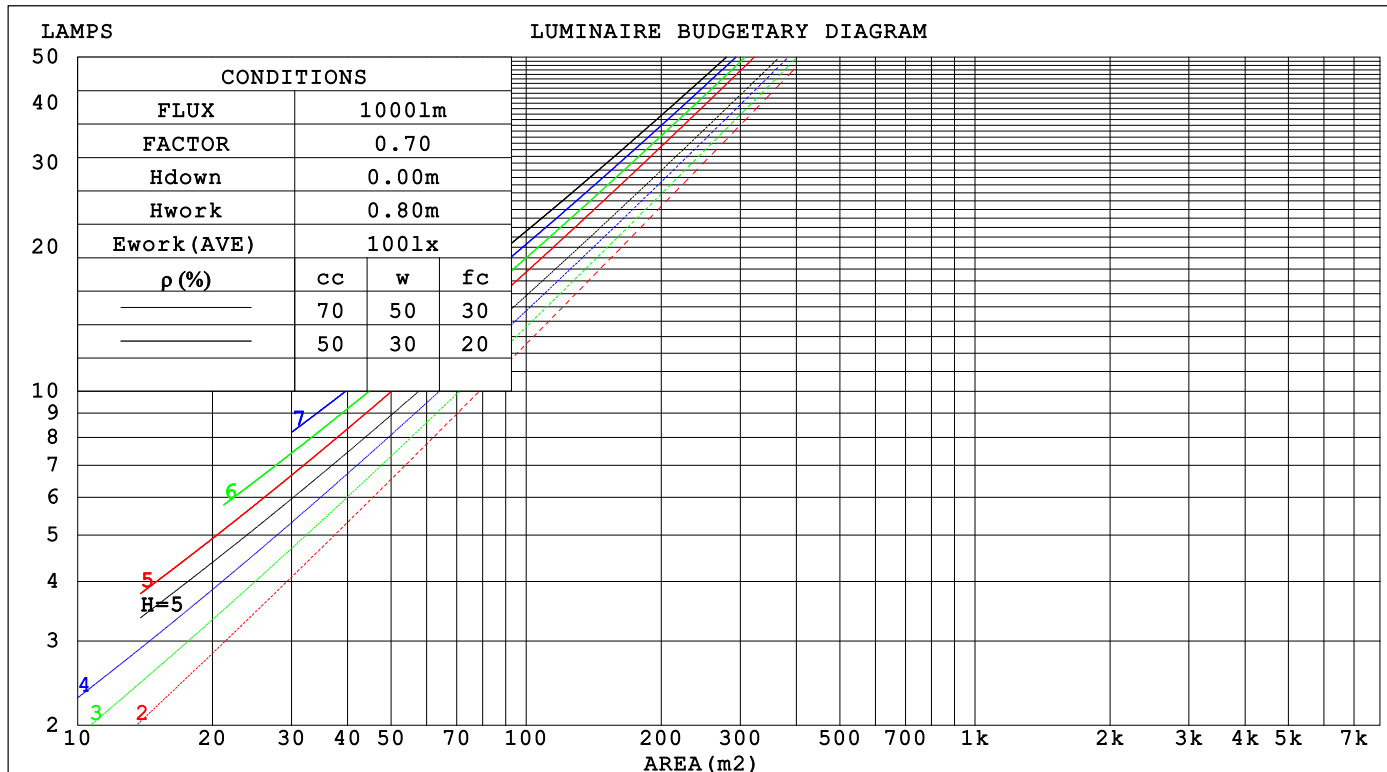

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914 Lamp Flux:4263.46x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 450PE:		WEIGHT:
SPEC.:		SERIAL No.:
MFR.: Norming lighting		Shielding Angle:
SUR.: 131mm		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.175	.100	.032	.169	.096	.031	.156	.090	.029	.144	.083	.027	.134	.078	.025		
2.0	.168	.092	.028	.162	.089	.027	.151	.084	.026	.142	.079	.025	.133	.075	.024		
3.0	.159	.085	.025	.155	.083	.025	.146	.079	.024	.137	.075	.023	.130	.072	.022		
4.0	.152	.079	.023	.148	.077	.023	.140	.074	.022	.133	.071	.021	.126	.068	.021		
5.0	.144	.074	.021	.141	.072	.021	.134	.070	.021	.128	.067	.020	.122	.065	.020		
6.0	.138	.069	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018		
7.0	.132	.065	.018	.129	.064	.018	.124	.063	.018	.119	.061	.018	.114	.059	.017		
8.0	.126	.062	.017	.124	.061	.017	.119	.059	.017	.114	.058	.017	.110	.057	.016		
9.0	.121	.058	.016	.119	.058	.016	.114	.057	.016	.110	.055	.016	.107	.054	.016		
10.0	.116	.056	.015	.114	.055	.015	.110	.054	.015	.106	.053	.015	.103	.052	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016		
2.0	.156	.133	.113	.133	.114	.098	.091	.079	.068	.053	.046	.040	.017	.015	.013		
3.0	.143	.114	.090	.123	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011		
4.0	.133	.099	.073	.114	.085	.063	.078	.060	.045	.045	.035	.026	.015	.011	.009		
5.0	.124	.087	.060	.107	.075	.052	.073	.053	.037	.043	.031	.022	.014	.010	.007		
6.0	.117	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006		
7.0	.110	.070	.042	.095	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005		
8.0	.104	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004		
9.0	.099	.059	.031	.085	.051	.027	.059	.036	.020	.035	.021	.012	.011	.007	.004		
10.0	.095	.054	.028	.082	.047	.024	.057	.033	.017	.033	.020	.010	.011	.006	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz UTHDi:0.17% ITHDi:3.85% KDisp:0.9914 Lamp Flux:4263.46x1 lm										
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 450PE:								WEIGHT:		
SPEC.:				DIM.:				SERIAL No.:		
MFR.: Norming lighting				SUR.: 131mm				Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.1	21.0	20.3	21.2	21.4	19.5	20.5	19.8	20.6	20.8
3H	20.0	20.9	20.3	21.1	21.3	19.4	20.3	19.7	20.5	20.7
4H	19.9	20.7	20.2	21.0	21.2	19.4	20.2	19.6	20.4	20.6
6H	19.8	20.6	20.1	20.8	21.1	19.3	20.0	19.6	20.3	20.5
8H	19.8	20.5	20.1	20.8	21.0	19.2	20.0	19.5	20.2	20.5
12H	19.8	20.5	20.1	20.7	21.0	19.2	19.9	19.5	20.1	20.4
4H 2H	19.9	20.7	20.2	21.0	21.2	19.4	20.2	19.6	20.4	20.6
3H	19.8	20.5	20.2	20.8	21.1	19.3	20.0	19.6	20.2	20.5
4H	19.8	20.4	20.1	20.7	21.0	19.2	19.8	19.6	20.1	20.4
6H	19.7	20.2	20.0	20.6	20.9	19.1	19.7	19.5	20.0	20.3
8H	19.6	20.1	20.0	20.5	20.9	19.1	19.6	19.5	19.9	20.3
12H	19.6	20.0	20.0	20.4	20.8	19.0	19.5	19.4	19.9	20.2
8H 4H	19.6	20.1	20.0	20.5	20.9	19.1	19.6	19.5	19.9	20.3
6H	19.5	20.0	20.0	20.3	20.8	19.0	19.4	19.4	19.8	20.2
8H	19.5	19.9	19.9	20.3	20.7	18.9	19.3	19.4	19.7	20.2
12H	19.4	19.8	19.9	20.2	20.7	18.9	19.2	19.3	19.6	20.1
12H 4H	19.6	20.0	20.0	20.4	20.8	19.0	19.5	19.4	19.9	20.3
6H	19.5	19.9	19.9	20.3	20.7	18.9	19.3	19.4	19.7	20.2
8H	19.4	19.8	19.9	20.2	20.7	18.9	19.2	19.3	19.6	20.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / - 5.4					+ 2.4 / - 5.3				
1.5H	+ 4.4 / - 4.3					+ 3.9 / - 4.0				
2.0H	+ 4.3 / - 3.8					+ 4.1 / - 3.8				

CIE Pub.117, 4263 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.0)
Area: 0.0134 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914 Lamp Flux:4263.46x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 45°		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	77	86	80	76	85	80	76	73
0.80	94	88	85	94	88	84	92	87	84	80
1.00	99	93	90	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	101	95
3.00	112	108	106	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	107	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914 Lamp Flux:4263.46x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

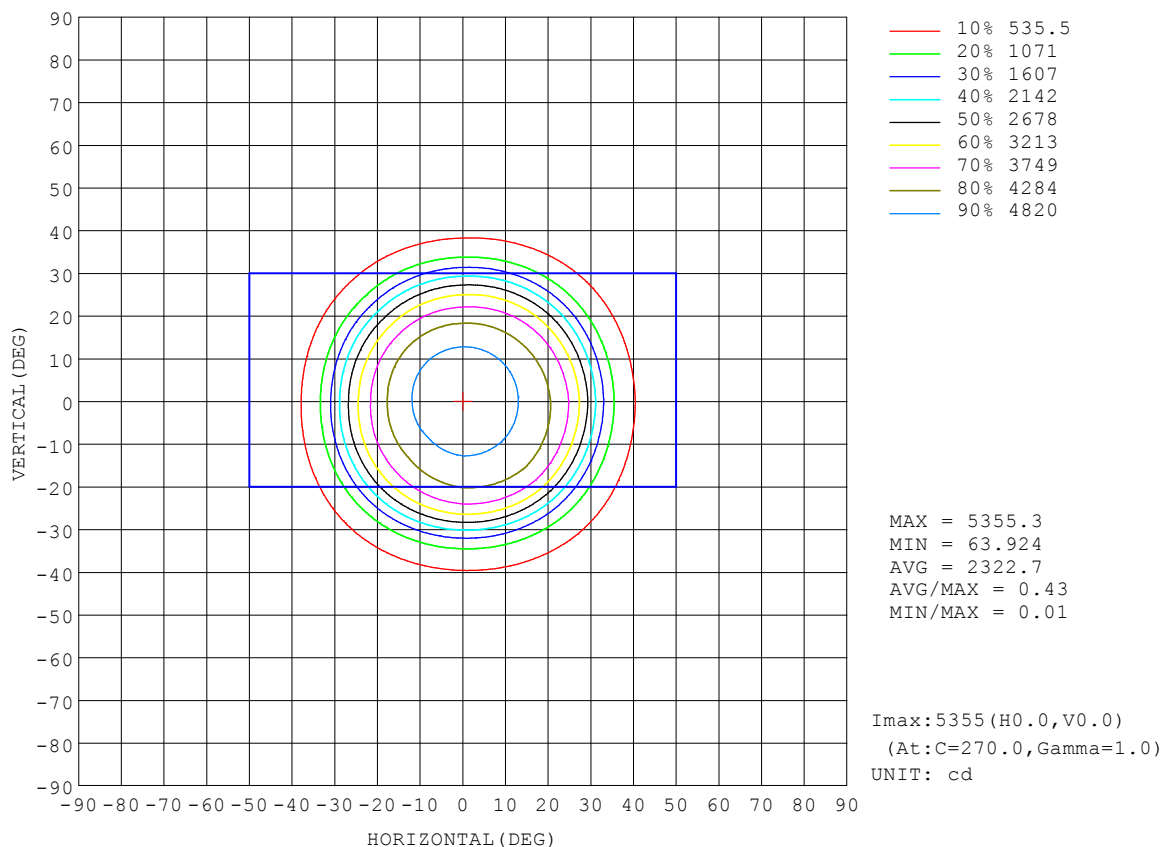


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914		Lamp Flux:4263.46x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

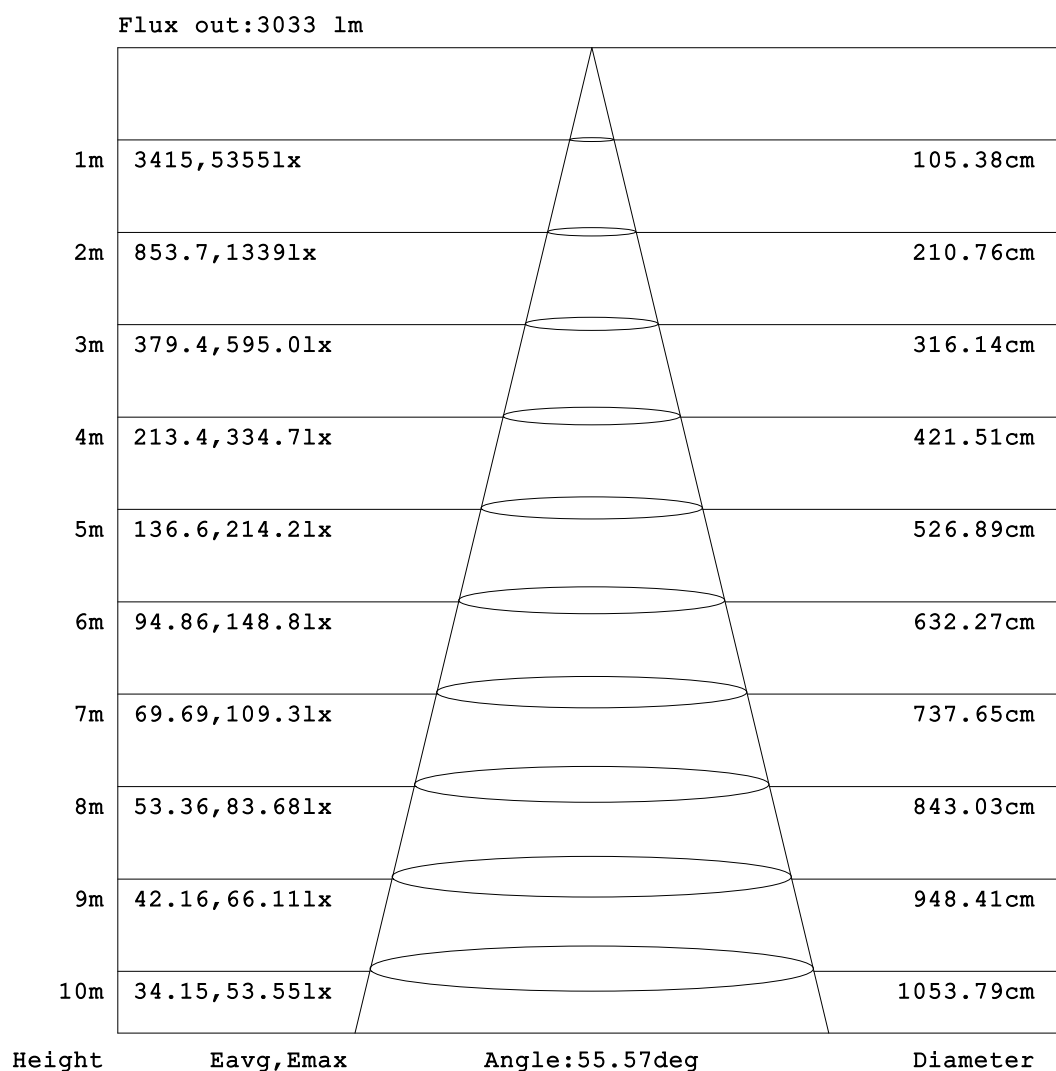


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914		Lamp Flux:4263.46x1 lm
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 450PE:		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

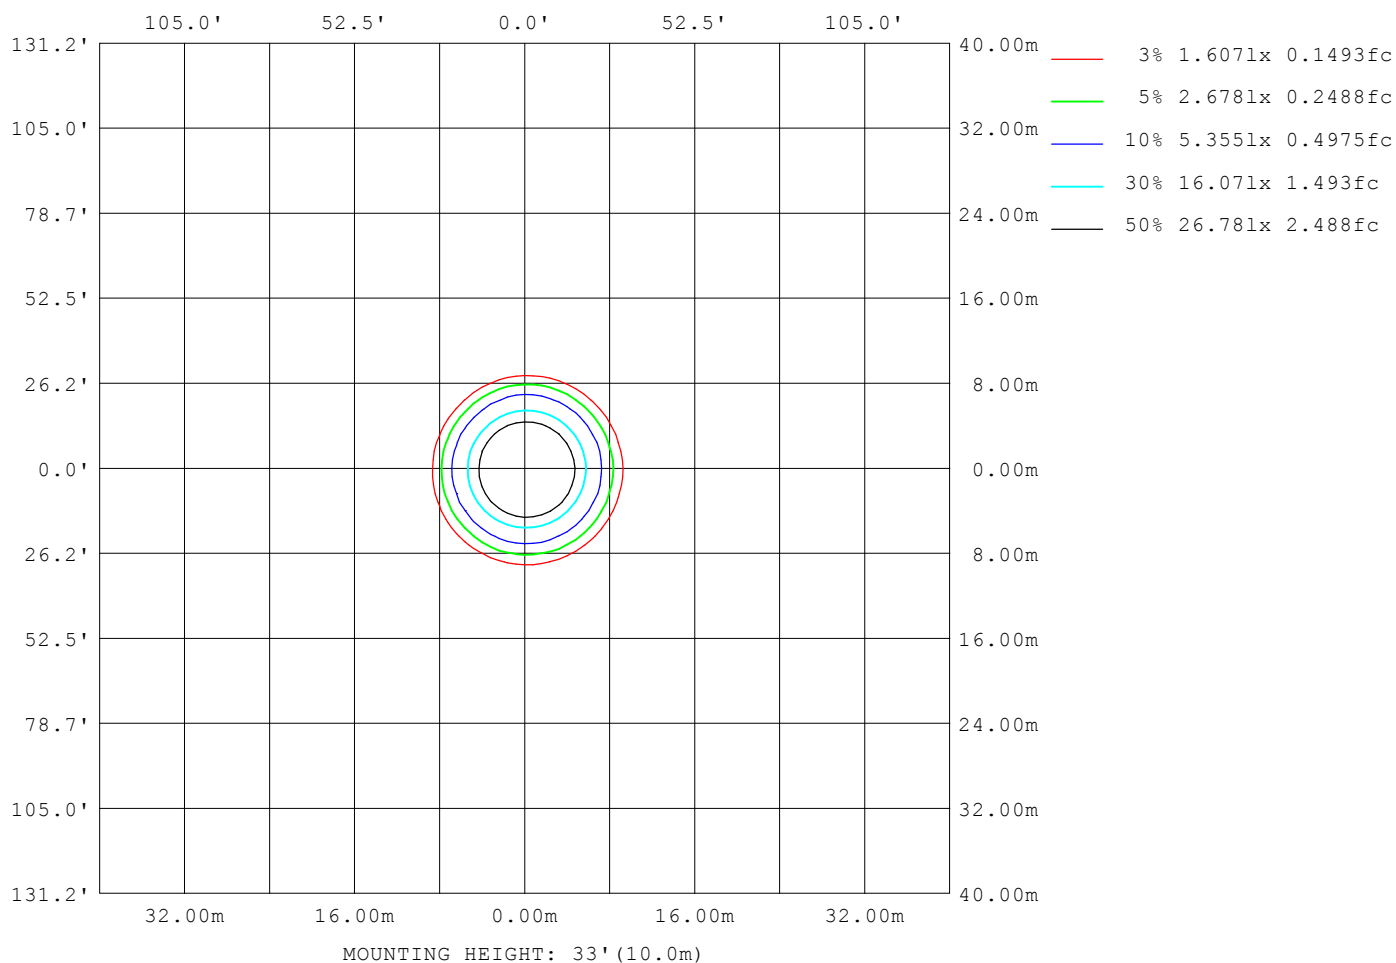

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.3V I:0.1887A P:44.9W PF:0.9903 Freq:49.99Hz		
UTHDi:0.17% ITHDi:3.85% KDisp:0.9914 Lamp Flux:4263.46x1 lm		
NAME: FUSION GT-TR03-AHD-045-COB-01SC 3000K RA90 60D 450PE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5202
L_0~180 (75) av	1857
L_0~180 (85) av	587
L_90~270 (65) av	5095
L_90~270 (75) av	1747
L_90~270 (85) av	760
L_45 (65) av	5133
L_45 (75) av	1812
L_45 (85) av	561

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

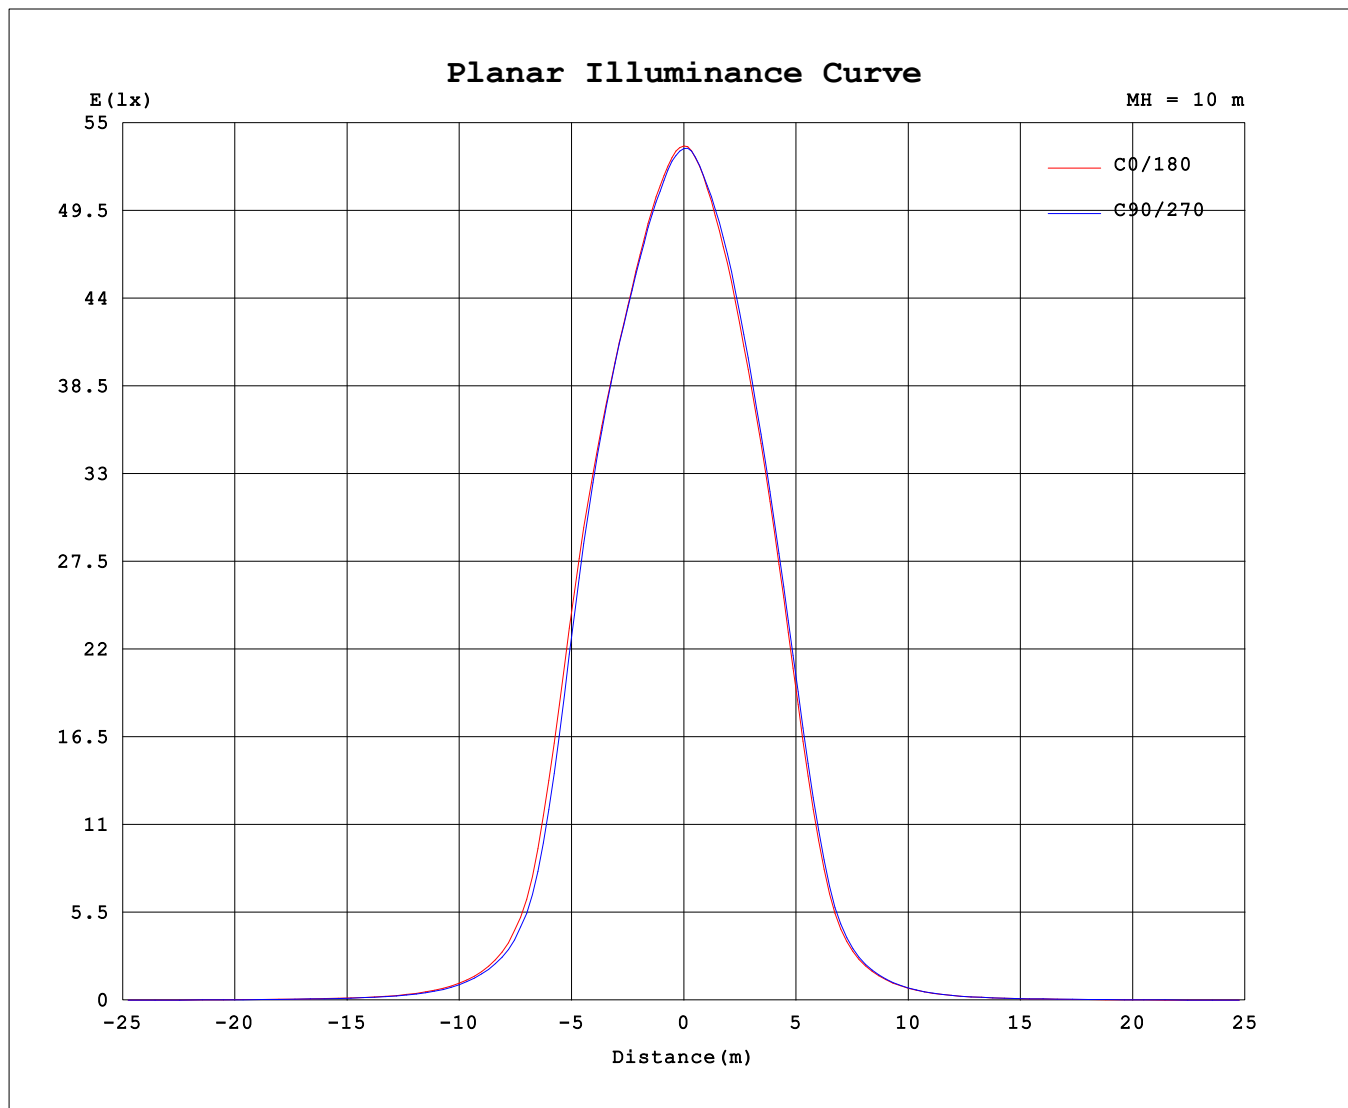

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	5343	5343	5343	5343	5343	5343	5343	5343
3.0	5292	5259	5286	5301	5291	5294	5311	5318
6.0	5179	5158	5162	5167	5161	5196	5195	5202
9.0	5042	5033	5031	5005	4994	5046	5065	5070
12.0	4871	4870	4865	4812	4798	4847	4882	4899
15.0	4692	4729	4697	4576	4539	4594	4636	4677
18.0	4496	4551	4495	4316	4236	4284	4319	4409
21.0	4235	4301	4205	3983	3833	3844	3920	4085
24.0	3877	3916	3758	3519	3303	3278	3404	3658
27.0	3290	3267	3070	2847	2615	2570	2737	3013
30.0	2477	2378	2191	2035	1838	1781	1956	2228
33.0	1608	1513	1370	1261	1128	1088	1213	1421
36.0	981.5	947.2	868.8	780.2	693.5	676.5	742.3	874.6
39.0	641.1	624.9	575.8	525.6	458.6	443.4	479.7	558.5
42.0	438.5	431.0	402.8	364.7	314.6	298.6	326.1	378.9
45.0	303.1	299.9	277.2	247.7	214.8	200.8	221.1	260.5
48.0	209.0	208.5	188.6	168.4	145.9	136.3	147.5	178.6
51.0	144.6	143.4	130.9	117.1	103.6	97.21	103.9	124.4
54.0	103.0	102.6	95.84	85.32	77.91	74.19	77.73	91.60
57.0	77.39	76.71	72.64	65.40	61.20	58.58	61.03	70.41
60.0	59.18	59.11	56.50	50.35	47.70	45.98	48.30	54.95
63.0	43.80	42.76	39.81	34.97	33.85	33.30	36.54	42.01
66.0	28.80	27.74	25.93	23.47	22.80	22.34	24.66	28.27
69.0	19.61	18.89	17.57	16.03	15.53	15.25	17.02	19.32
72.0	13.12	12.39	11.38	10.26	9.902	10.05	11.39	12.94
75.0	8.134	7.354	5.643	4.868	4.747	5.017	6.474	7.902
78.0	3.796	3.509	3.222	3.026	3.039	3.166	3.658	3.776
81.0	2.715	2.552	2.398	2.214	2.256	2.418	3.157	2.754
84.0	1.081	0.8719	0.7887	0.7237	0.7512	0.7974	1.343	1.024
87.0	0.4691	0.3715	0.3346	0.2544	0.2552	0.2920	0.4905	0.4285
90.0	0.1455	0.1108	0.1492	0.1233	0.1334	0.1342	0.2345	0.1182

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: