
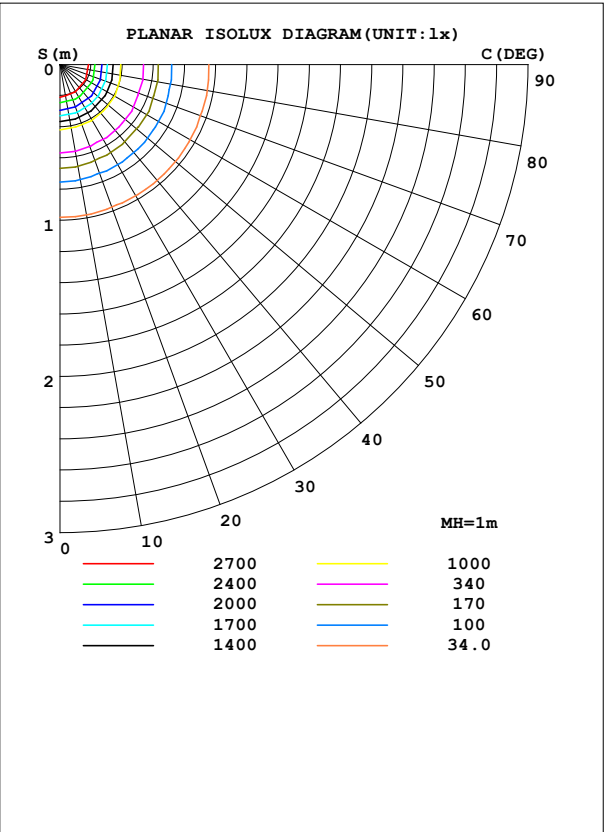


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 104.36 lm/W
MODEL		I _{max} (cd)	3389	S/MH(C0/180)		0.56
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)		0.60
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1545.0	η UP,DN(C0-180)		0.0,50.8
NOMINAL FLUX(lm)	1545	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,49.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)	240.4	η down (%)	100.0	CIBSE SHR MAX		0.60

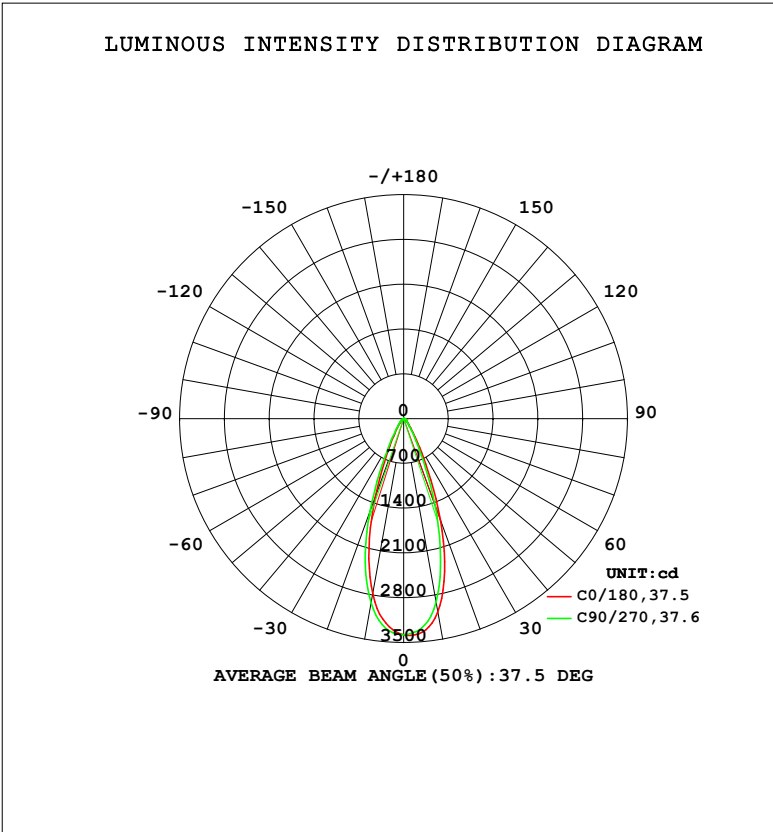

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3075	3029	2916	2828	2785	2819	2932	3034	0- 10	302.3	302.3	19.6,19.6
20	1688	1606	1438	1326	1290	1368	1536	1634	10- 20	617.8	920.1	59.6,59.6
30	449.7	415.8	357.7	331.4	318.9	339.9	390.5	440.1	20- 30	368.5	1289	83.4,83.4
40	136.0	130.0	119.1	110.8	108.2	113.1	127.2	135.1	30- 40	135.2	1424	92.1,92.1
50	60.54	58.83	57.02	52.44	50.33	51.19	57.38	59.16	40- 50	63.57	1487	96.3,96.3
60	30.89	29.95	28.87	25.94	24.70	25.91	29.63	30.59	50- 60	35.98	1523	98.6,98.6
70	10.38	9.686	8.646	7.489	6.988	7.907	9.122	10.05	60- 70	17.81	1541	99.7,99.7
80	1.391	1.326	1.244	1.200	1.291	1.367	1.419	1.378	70- 80	3.473	1545	100,100
90	0.0450	0.0241	0.0453	0.0295	0.0325	0.0273	0.0318	0.0241	80- 90	0.4600	1545	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1460.3 lm

%lum = 94.5%

%lamp = 94.5%

Conical surface Flux(120deg): 1523.3 lm

%lum = 98.6%


%lamp = 98.6%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

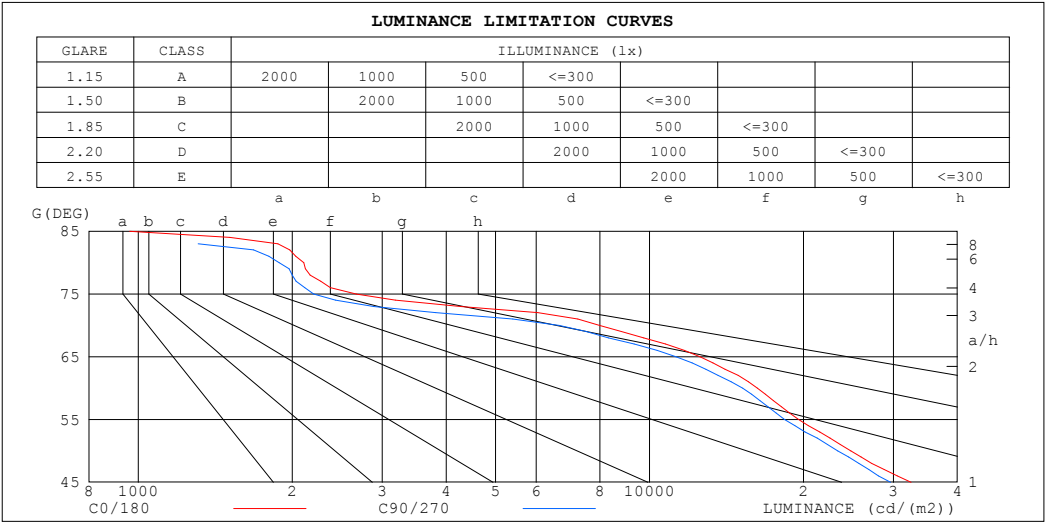

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	961	517
80	2106	1886
75	2669	2202
70	7982	6656
65	12555	11277
60	16245	15205
55	19564	18385
50	24769	23356
45	32487	29635


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	.90	.97	.90	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.94	.91	.97	.93	.90	.95	.91	.88	.92	.89	.87	.90	.88	.86	.84
4.0	.93	.88	.85	.92	.88	.84	.90	.86	.83	.88	.85	.82	.86	.84	.81	.80
5.0	.88	.83	.80	.88	.83	.79	.86	.82	.78	.84	.81	.78	.83	.80	.77	.76
6.0	.84	.79	.75	.83	.78	.75	.82	.78	.74	.81	.77	.74	.79	.76	.73	.72
7.0	.80	.75	.71	.80	.75	.71	.78	.74	.71	.77	.73	.70	.76	.73	.70	.69
8.0	.77	.72	.68	.76	.71	.68	.75	.71	.68	.74	.70	.67	.73	.70	.67	.66
9.0	.73	.68	.65	.73	.68	.65	.72	.68	.65	.71	.67	.64	.71	.67	.64	.63
10.0	.71	.65	.62	.70	.65	.62	.69	.65	.62	.69	.65	.62	.68	.64	.62	.60

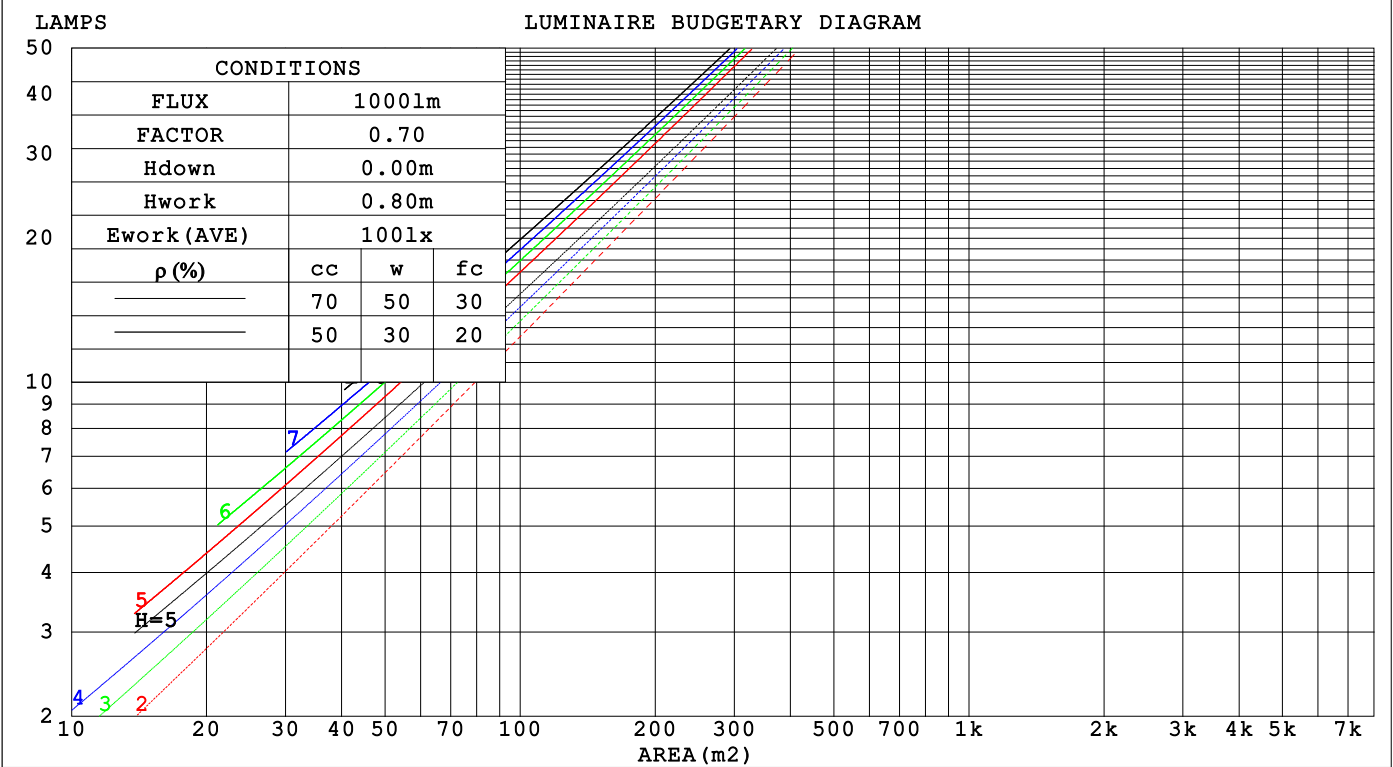

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.164	.093	.030	.157	.090	.028	.145	.083	.026	.133	.077	.025	.122	.071	.023	
2.0	.155	.085	.026	.150	.082	.025	.139	.077	.024	.130	.073	.023	.121	.068	.022	
3.0	.146	.078	.023	.142	.076	.023	.133	.072	.022	.125	.068	.021	.117	.065	.020	
4.0	.138	.072	.021	.134	.070	.021	.127	.067	.020	.120	.064	.019	.113	.062	.019	
5.0	.131	.067	.019	.128	.066	.019	.121	.063	.019	.115	.061	.018	.109	.058	.018	
6.0	.124	.062	.018	.121	.061	.018	.116	.059	.017	.110	.057	.017	.105	.055	.016	
7.0	.118	.059	.017	.116	.058	.016	.111	.056	.016	.106	.054	.016	.102	.053	.016	
8.0	.113	.055	.016	.111	.054	.015	.106	.053	.015	.102	.052	.015	.098	.050	.015	
9.0	.108	.052	.015	.106	.052	.014	.102	.050	.014	.098	.049	.014	.095	.048	.014	
10.0	.103	.050	.014	.102	.049	.014	.098	.048	.014	.095	.047	.013	.091	.046	.013	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.146	.135	.126	.100	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.154	.133	.115	.132	.114	.099	.090	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.141	.113	.092	.121	.098	.080	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.130	.099	.075	.111	.085	.065	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.120	.087	.062	.103	.075	.054	.071	.052	.038	.041	.031	.023	.013	.010	.007	
6.0	.112	.077	.052	.096	.067	.045	.066	.047	.032	.039	.027	.019	.012	.009	.006	
7.0	.105	.069	.044	.090	.060	.038	.062	.042	.027	.036	.025	.016	.012	.008	.005	
8.0	.099	.063	.038	.085	.054	.033	.059	.038	.023	.034	.023	.014	.011	.007	.005	
9.0	.094	.057	.033	.081	.050	.029	.056	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.089	.053	.029	.077	.046	.025	.053	.032	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz											
UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm											
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:			
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		18.6	19.5	18.9	19.6	19.8	18.2	19.0	18.4	19.2	19.3
	3H	18.9	19.6	19.1	19.8	20.0	18.3	19.1	18.6	19.3	19.5
	4H	18.8	19.5	19.1	19.7	20.0	18.3	19.0	18.5	19.2	19.4
	6H	18.7	19.4	19.0	19.7	19.9	18.2	18.9	18.5	19.1	19.4
	8H	18.7	19.3	19.0	19.6	19.9	18.2	18.8	18.5	19.1	19.3
	12H	18.6	19.3	19.0	19.5	19.8	18.1	18.8	18.4	19.0	19.3
4H	2H	18.7	19.4	19.0	19.7	19.9	18.3	19.0	18.6	19.2	19.4
	3H	19.0	19.6	19.3	19.9	20.1	18.5	19.1	18.8	19.4	19.7
	4H	18.9	19.5	19.2	19.8	20.1	18.4	19.0	18.8	19.3	19.6
	6H	18.8	19.3	19.2	19.7	20.0	18.3	18.9	18.7	19.2	19.5
	8H	18.8	19.3	19.2	19.6	20.0	18.3	18.8	18.7	19.1	19.5
	12H	18.7	19.2	19.1	19.5	19.9	18.2	18.7	18.7	19.1	19.4
8H	4H	18.8	19.3	19.2	19.6	20.0	18.3	18.8	18.7	19.1	19.5
	6H	18.7	19.1	19.1	19.5	19.9	18.2	18.6	18.7	19.0	19.4
	8H	18.7	19.0	19.1	19.4	19.9	18.2	18.5	18.6	18.9	19.4
	12H	18.6	18.9	19.1	19.3	19.8	18.1	18.4	18.6	18.9	19.3
12H	4H	18.7	19.2	19.1	19.5	19.9	18.3	18.7	18.7	19.1	19.4
	6H	18.6	19.0	19.1	19.4	19.8	18.2	18.5	18.6	18.9	19.4
	8H	18.6	18.9	19.1	19.3	19.8	18.1	18.4	18.6	18.9	19.3
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.5 / - 2.1					+ 1.3 / - 2.0				
1.5H		+ 2.4 / - 1.3					+ 1.8 / - 1.1				
2.0H		+ 2.1 / - 1.7					+ 1.9 / - 1.6				

CIE Pub.117, 1545 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 1.5$)
Area: 0.0038 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	93	89	96	92	88	84
1.25	103	97	94	102	97	94	100	96	93	88
1.50	106	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

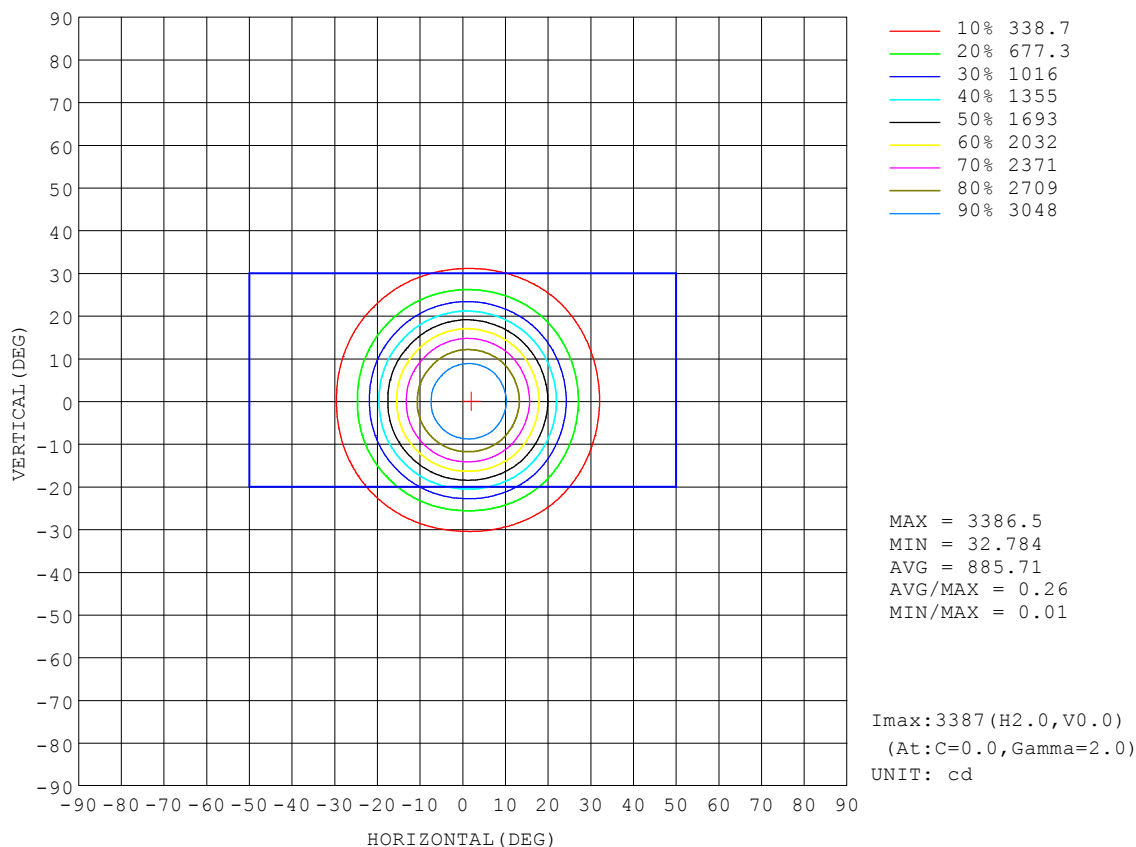


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

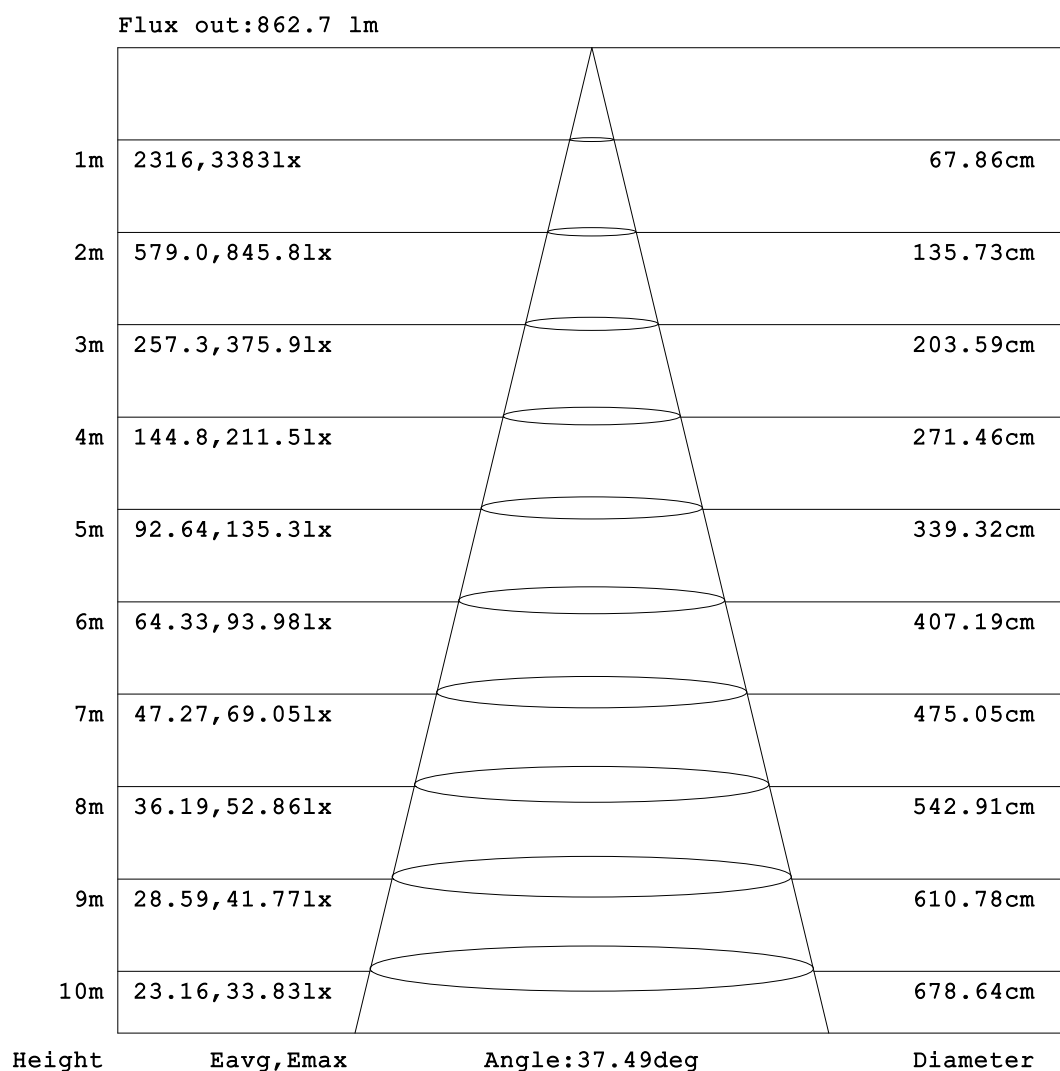


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

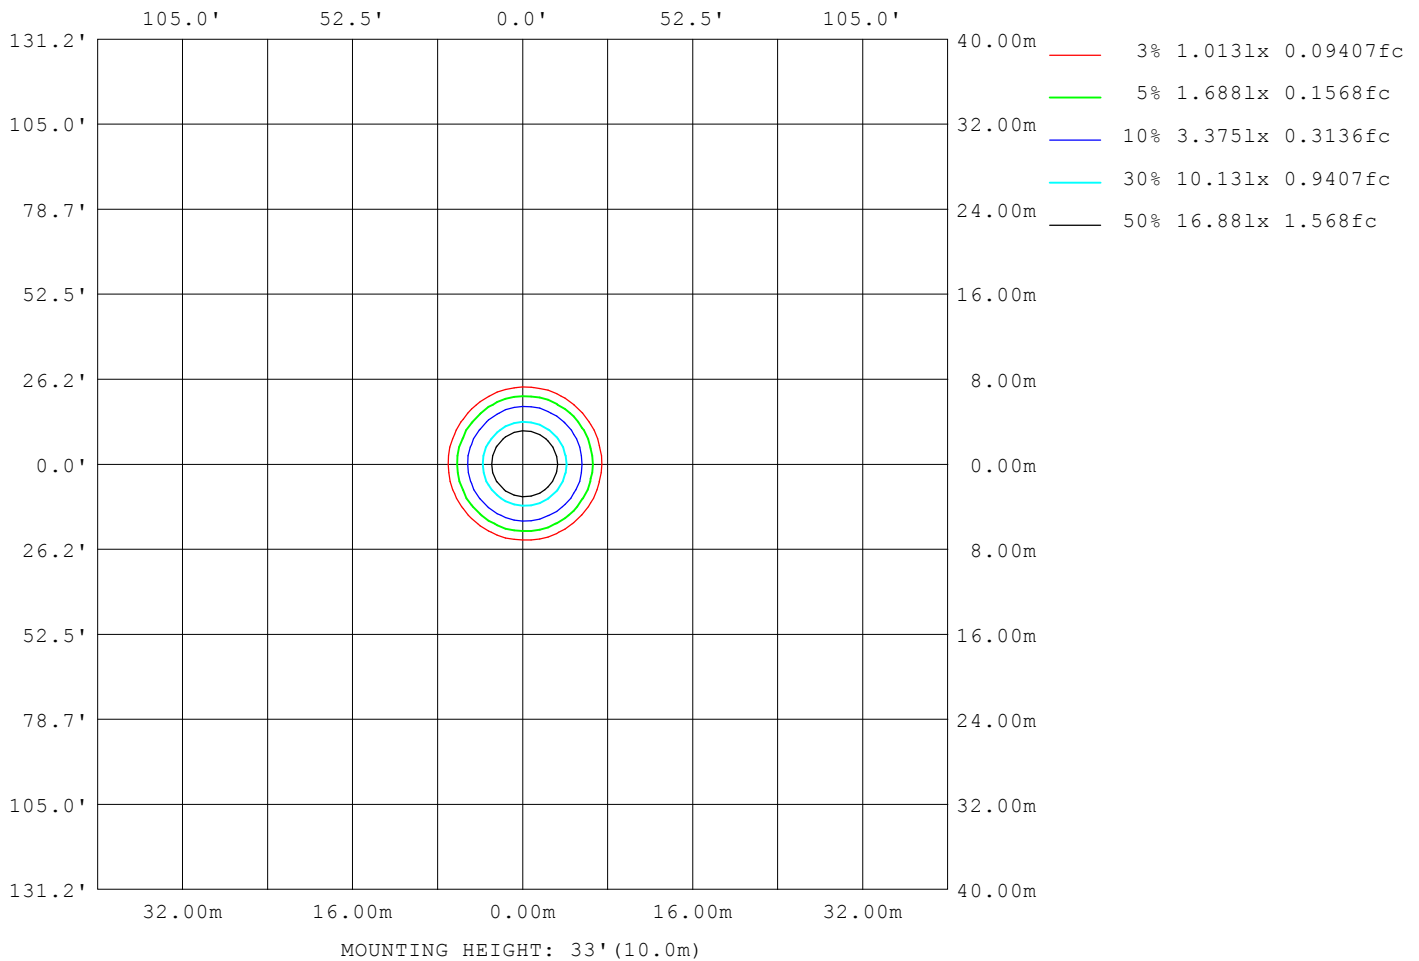

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0633A P:14.8W PF:0.9728 Freq:49.99Hz UTHDi:0.17% ITHDi:8.10% KDisp:0.9792 Lamp Flux:1545x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 36D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11037
L_0~180 (75) av	2481
L_0~180 (85) av	694
L_90~270 (65) av	11494
L_90~270 (75) av	2339
L_90~270 (85) av	521
L_45 (65) av	11106
L_45 (75) av	2388
L_45 (85) av	509

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

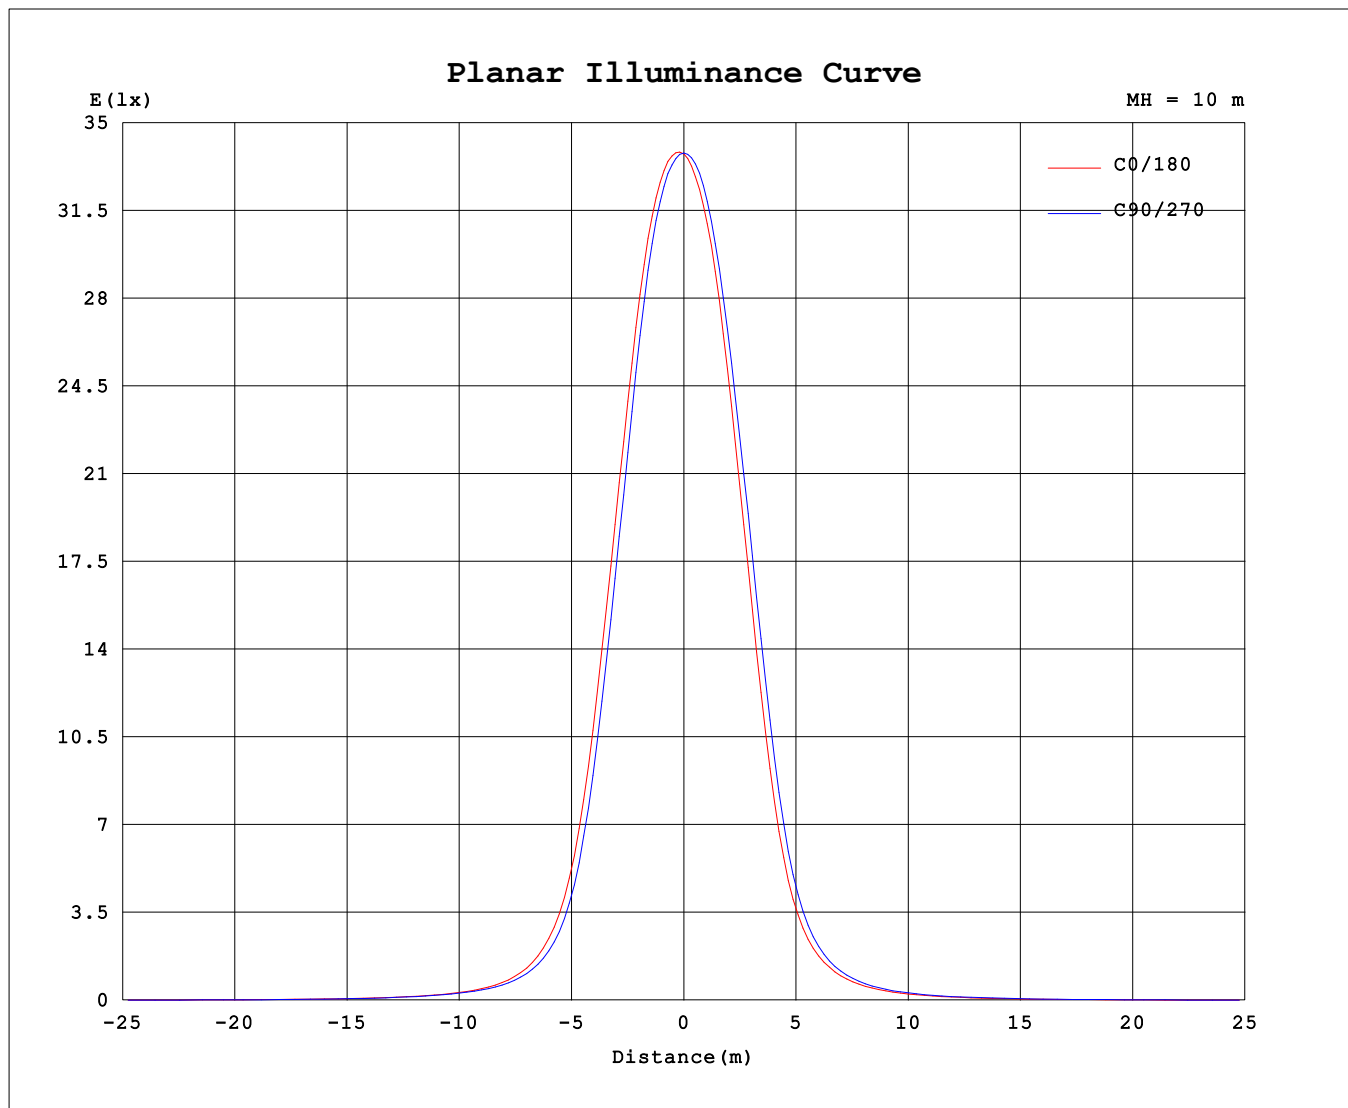

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	3378	3378	3378	3378	3378	3378	3378	3378
3.0	3384	3373	3344	3316	3300	3318	3348	3373
6.0	3319	3299	3236	3181	3151	3177	3237	3292
9.0	3157	3122	3021	2937	2898	2928	3025	3117
12.0	2869	2808	2674	2582	2534	2575	2714	2826
15.0	2474	2390	2236	2141	2106	2164	2328	2439
18.0	2015	1928	1764	1652	1617	1695	1867	1966
21.0	1520	1439	1278	1169	1137	1211	1373	1464
24.0	1052	985.7	859.7	770.3	746.4	796.6	922.5	1008
27.0	688.7	641.1	547.6	500.1	480.6	513.3	594.5	667.7
30.0	449.7	415.8	357.7	331.4	318.9	339.9	390.5	440.1
33.0	300.8	279.4	244.2	228.7	223.4	234.1	265.4	296.5
36.0	208.7	195.7	174.7	163.9	159.9	167.9	189.3	206.4
39.0	150.4	143.0	130.2	121.5	118.8	124.3	139.9	149.2
42.0	112.4	108.3	100.4	92.73	90.63	95.22	106.5	111.9
45.0	87.35	84.32	79.58	72.53	70.70	73.94	83.22	86.74
48.0	69.25	67.54	65.26	60.26	57.93	58.68	66.21	68.50
51.0	56.52	54.96	53.28	48.73	46.74	47.80	53.56	55.13
54.0	45.70	44.24	42.93	38.80	37.45	38.95	44.23	45.32
57.0	37.50	36.41	35.26	31.75	30.42	31.66	36.09	37.11
60.0	30.89	29.95	28.87	25.94	24.70	25.91	29.63	30.59
63.0	24.24	23.23	22.21	19.94	18.91	20.03	22.91	23.81
66.0	18.10	17.05	15.99	14.22	13.43	14.45	16.75	17.64
69.0	12.00	11.19	10.23	9.027	8.583	9.371	10.70	11.53
72.0	7.108	5.620	4.477	3.720	3.578	4.153	5.295	6.629
75.0	2.627	2.337	2.165	2.127	2.254	2.351	2.437	2.579
78.0	1.714	1.641	1.579	1.589	1.727	1.808	1.784	1.717
81.0	1.210	1.143	1.070	1.009	1.059	1.143	1.233	1.205
84.0	0.6003	0.4526	0.2989	0.1828	0.1770	0.2087	0.3847	0.5152
87.0	0.1299	0.0989	0.1007	0.0661	0.0726	0.0697	0.1032	0.1034
90.0	0.0450	0.0241	0.0453	0.0295	0.0325	0.0273	0.0318	0.0241

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: