
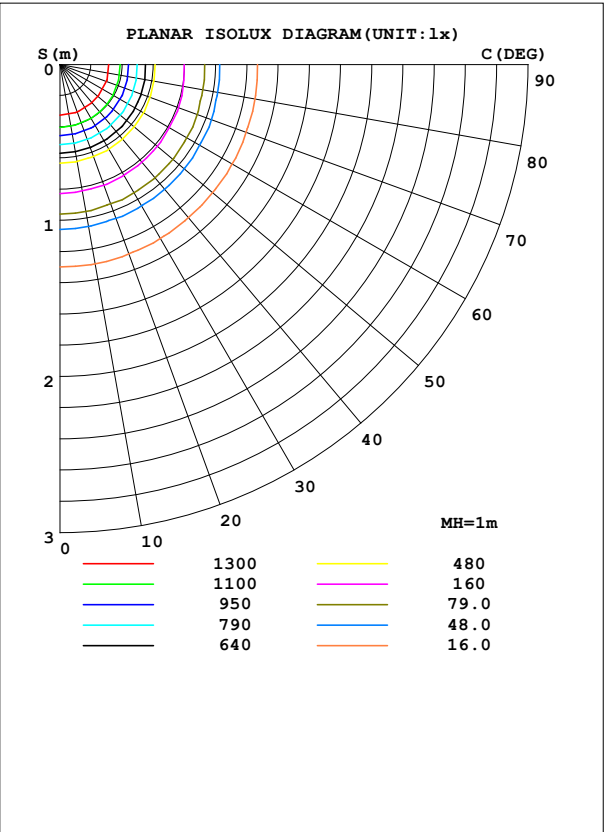


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 112.30 lm/W
MODEL		Imax (cd)	1616	S/MH(C0/180)		0.91
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)		0.94
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1676.5	η UP,DN(C0-180)		0.0,49.6
NOMINAL FLUX(lm)	1676.53	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,50.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.75
TEST VOLTAGE(V)	240.39	η down (%)	100.0	CIBSE SHR MAX		0.95

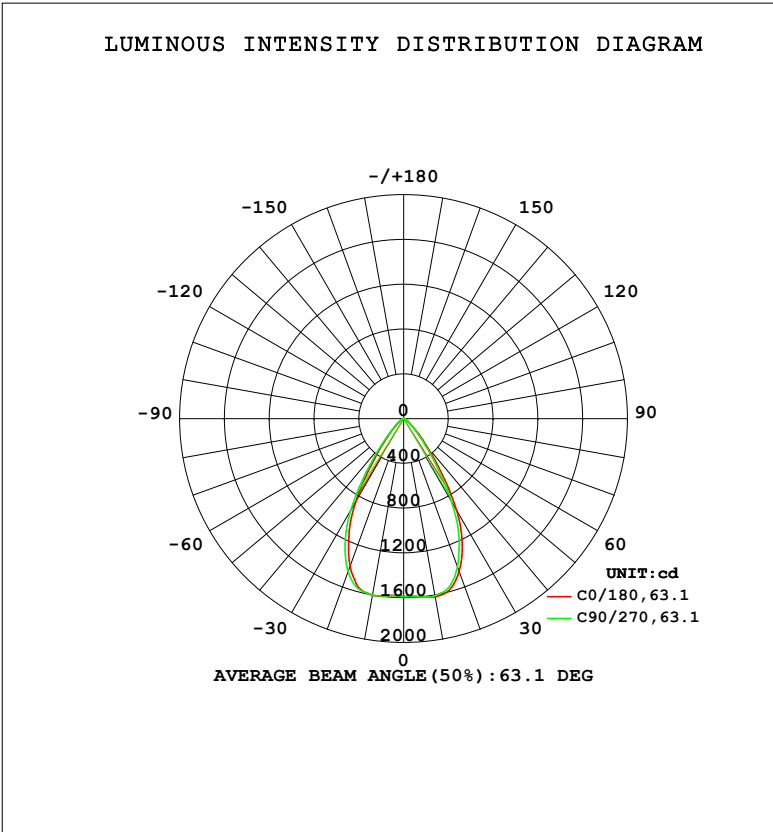

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1616	1611	1606	1599	1602	1592	1601	1609	0- 10	152.5	152.5	9.1,9.1
20	1451	1441	1407	1394	1401	1429	1452	1467	10- 20	436.6	589.1	35.1,35.1
30	951.5	920.1	862.3	834.8	861.6	909.2	951.5	963.3	20- 30	545.6	1135	67.7,67.7
40	324.4	308.5	276.8	265.4	269.9	297.4	319.4	333.8	30- 40	349.7	1484	88.5,88.5
50	94.20	87.78	80.47	77.14	76.97	81.75	91.68	97.39	40- 50	130.7	1615	96.3,96.3
60	27.61	25.69	24.69	21.90	21.46	23.31	26.35	28.14	50- 60	43.99	1659	99,99
70	7.720	7.201	6.819	6.289	6.199	6.623	7.106	7.655	60- 70	13.66	1673	99.8,99.8
80	1.661	1.557	1.388	1.272	1.267	1.317	1.454	1.554	70- 80	3.281	1676	100,100
90	0.0392	0.0251	0.0386	0.0280	0.0308	0.0299	0.0325	0.0241	80- 90	0.4755	1677	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1566.9 lm

%lum = 93.5%

%lamp = 93.5%

Conical surface Flux(120deg): 1659.1 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

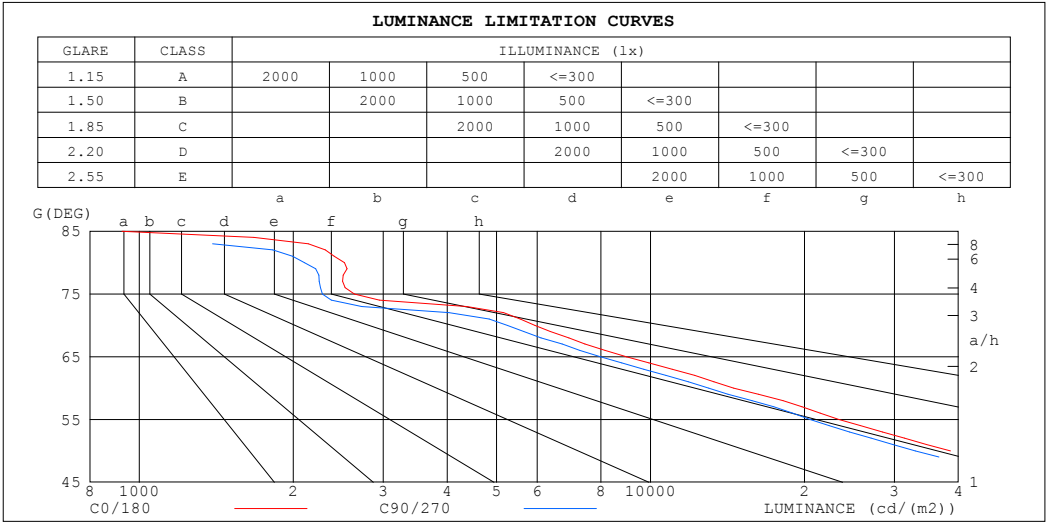

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	925	407
80	2520	2103
75	2635	2281
70	5944	5245
65	8980	7984
60	14542	12990
55	23392	20525
50	38589	32931
45	65017	55612


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

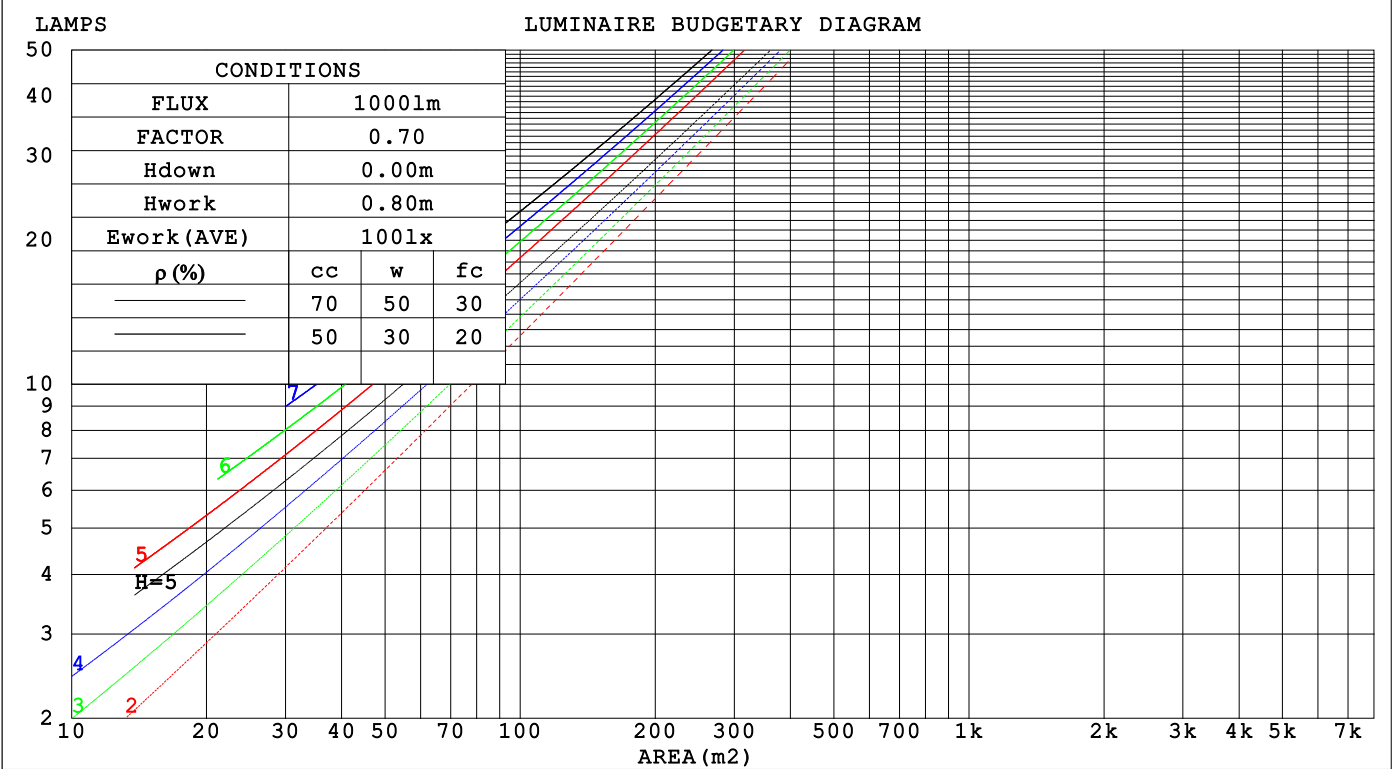

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## WEC AND CCEC

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz			UTHDi:0.17% ITHDi:8.12% KDisp:0.9800			Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 70mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.185	.105	.033	.178	.102	.032	.166	.095	.030	.154	.089	.029	.143	.083	.027															
2.0	.178	.098	.030	.173	.095	.029	.162	.090	.028	.152	.085	.027	.143	.081	.025															
3.0	.170	.091	.027	.165	.089	.027	.156	.085	.026	.148	.081	.025	.140	.077	.024															
4.0	.162	.084	.025	.158	.083	.024	.150	.080	.024	.143	.077	.023	.136	.074	.022															
5.0	.155	.079	.023	.151	.078	.023	.144	.075	.022	.138	.073	.022	.132	.070	.021															
6.0	.148	.074	.021	.144	.073	.021	.138	.071	.021	.132	.069	.020	.127	.067	.020															
7.0	.141	.070	.020	.138	.069	.020	.133	.067	.019	.128	.065	.019	.123	.064	.019															
8.0	.135	.066	.019	.132	.065	.018	.127	.064	.018	.123	.062	.018	.118	.061	.018															
9.0	.129	.062	.017	.127	.062	.017	.122	.060	.017	.118	.059	.017	.114	.058	.017															
10.0	.124	.059	.016	.121	.059	.016	.118	.058	.016	.114	.057	.016	.110	.055	.016															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.135	.114	.097	.092	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.145	.114	.088	.125	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.135	.099	.071	.116	.086	.062	.080	.060	.044	.046	.035	.026	.015	.011	.008	
5.0	.127	.088	.058	.109	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006	
7.0	.114	.071	.041	.098	.062	.036	.067	.043	.025	.039	.025	.015	.013	.008	.005	
8.0	.108	.065	.035	.093	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.103	.060	.031	.089	.052	.027	.061	.036	.019	.036	.022	.011	.012	.007	.004	
10.0	.098	.055	.027	.085	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz										
UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm										
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 70mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.9	23.9	23.1	24.1	24.2	22.3	23.4	22.6	23.5	23.7
3H	22.8	23.7	23.0	23.9	24.1	22.2	23.1	22.5	23.3	23.6
4H	22.7	23.6	23.0	23.8	24.0	22.1	23.0	22.4	23.2	23.5
6H	22.6	23.4	22.9	23.7	23.9	22.1	22.9	22.4	23.1	23.4
8H	22.6	23.3	22.9	23.6	23.9	22.0	22.8	22.3	23.0	23.3
12H	22.5	23.3	22.8	23.5	23.8	22.0	22.7	22.3	23.0	23.3
4H 2H	22.7	23.6	23.0	23.8	24.0	22.2	23.0	22.4	23.3	23.5
3H	22.6	23.3	22.9	23.6	23.9	22.0	22.8	22.4	23.1	23.3
4H	22.5	23.2	22.9	23.5	23.8	22.0	22.6	22.3	22.9	23.2
6H	22.4	23.0	22.8	23.3	23.7	21.9	22.5	22.3	22.8	23.1
8H	22.4	22.9	22.8	23.3	23.6	21.8	22.4	22.2	22.7	23.1
12H	22.3	22.8	22.7	23.2	23.6	21.8	22.3	22.2	22.7	23.0
8H 4H	22.4	22.9	22.8	23.3	23.6	21.8	22.4	22.2	22.7	23.1
6H	22.3	22.7	22.7	23.1	23.5	21.7	22.2	22.2	22.6	23.0
8H	22.2	22.6	22.7	23.0	23.5	21.7	22.1	22.1	22.5	22.9
12H	22.2	22.5	22.7	23.0	23.4	21.6	22.0	22.1	22.4	22.9
12H 4H	22.3	22.8	22.7	23.2	23.6	21.8	22.3	22.2	22.6	23.0
6H	22.2	22.6	22.7	23.0	23.5	21.7	22.1	22.1	22.5	22.9
8H	22.2	22.5	22.7	23.0	23.4	21.6	22.0	22.1	22.4	22.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / - 6.3					+ 2.4 / - 6.2				
1.5H	+ 4.3 / - 4.8					+ 3.9 / - 4.5				
2.0H	+ 4.9 / - 5.4					+ 4.4 / - 5.1				

CIE Pub.117, 1677 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 1.8$ )  
Area: 0.0038 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz		
UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	82	90	85	81	77
1.00	97	91	87	96	91	87	95	91	87	82
1.25	102	96	92	101	96	92	99	94	91	87
1.50	105	100	96	103	99	95	101	97	94	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	105	102	108	104	101	105	102	100	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2024-08-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 $\gamma$  Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

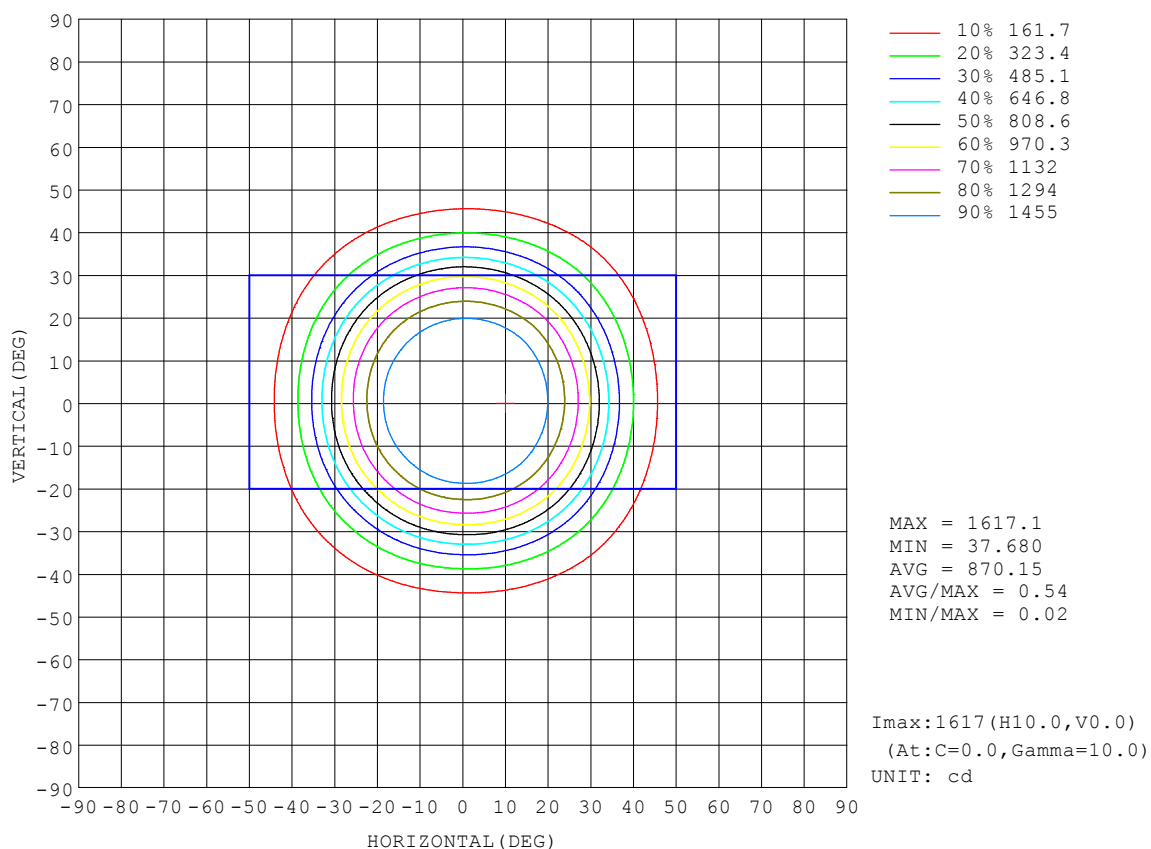


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:



## AAI Figure

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

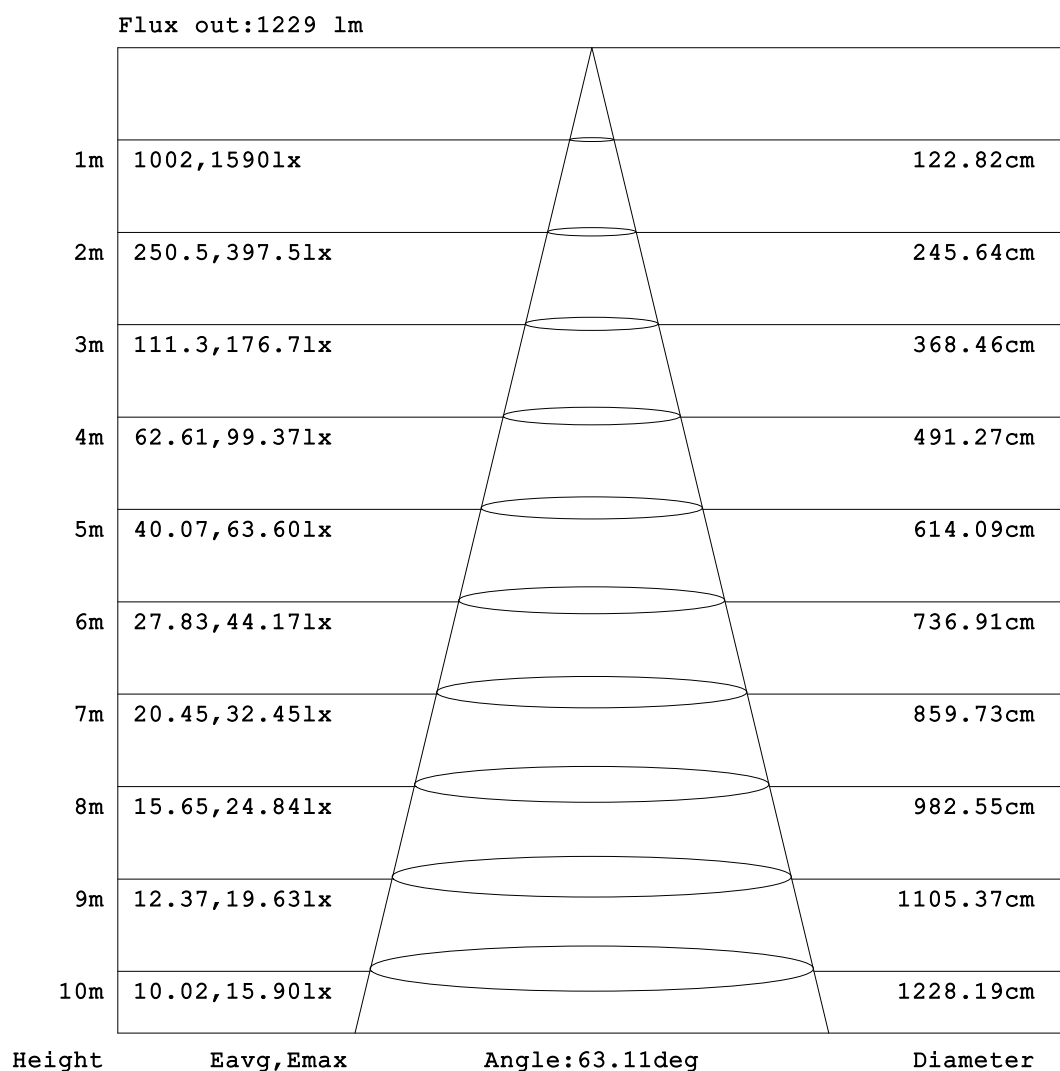


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360 DEG  
C Interval: 45.0 DEG  
Test Speed: HIGH  
Temperature: 25.3 DEG  
Operators: DAMIN  
Test Date: 2024-08-14

$\gamma$  Range: 0 - 90 DEG  
 $\gamma$  Interval: 1.0 DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

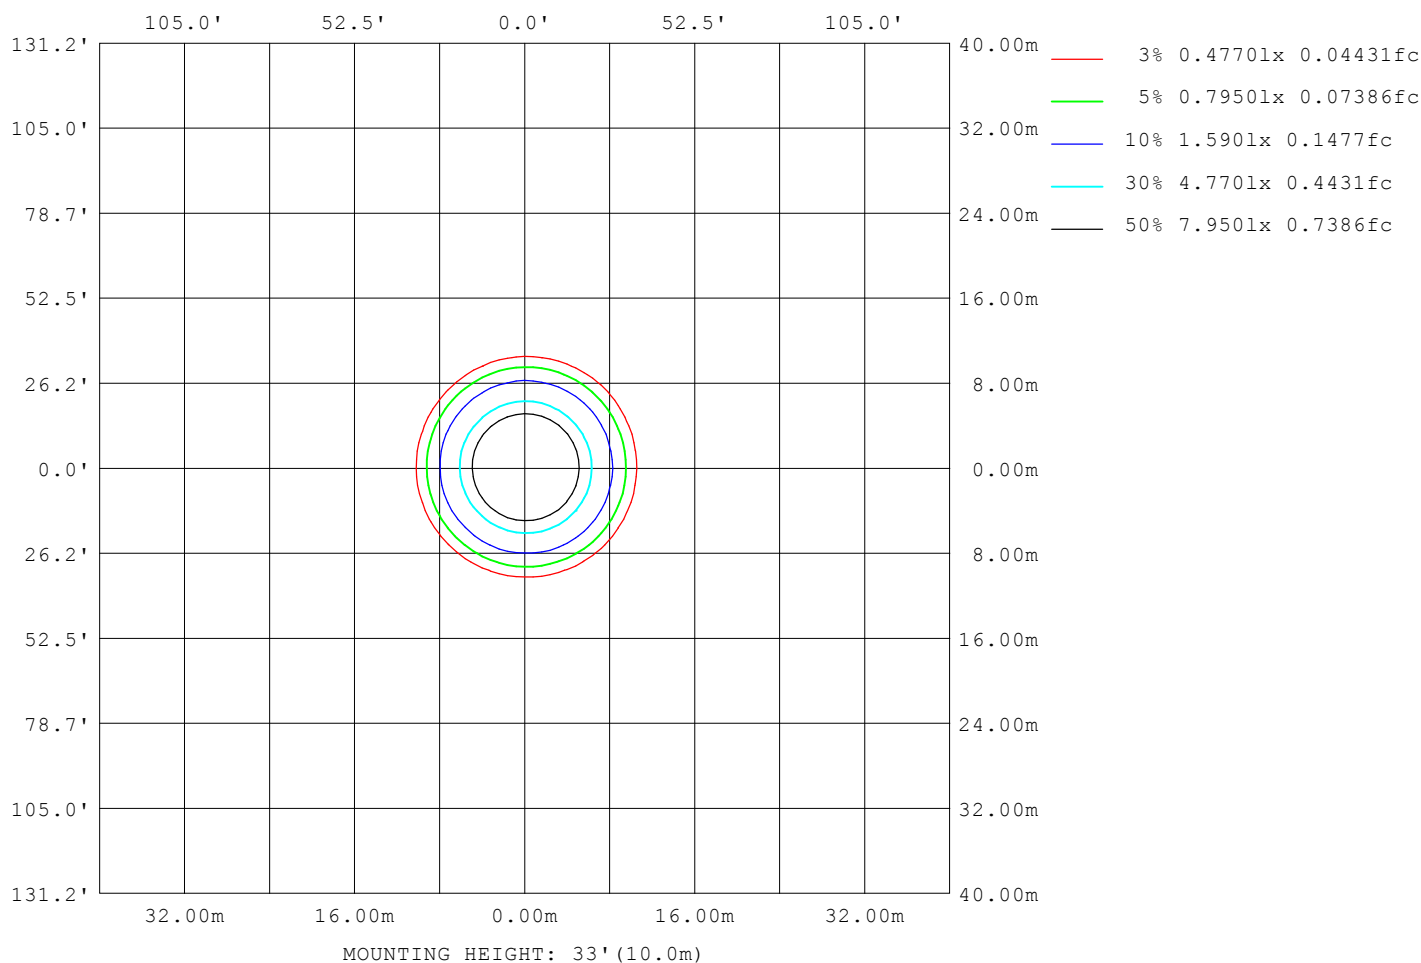

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-08-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:240.4V I:0.0637A P:14.9W PF:0.9740 Freq:49.99Hz UTHDi:0.17% ITHDi:8.12% KDisp:0.9800 Lamp Flux:1676.53x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7878
L_0~180 (75) av	2419
L_0~180 (85) av	628
L_90~270 (65) av	8136
L_90~270 (75) av	2340
L_90~270 (85) av	404
L_45 (65) av	7860
L_45 (75) av	2361
L_45 (85) av	422

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

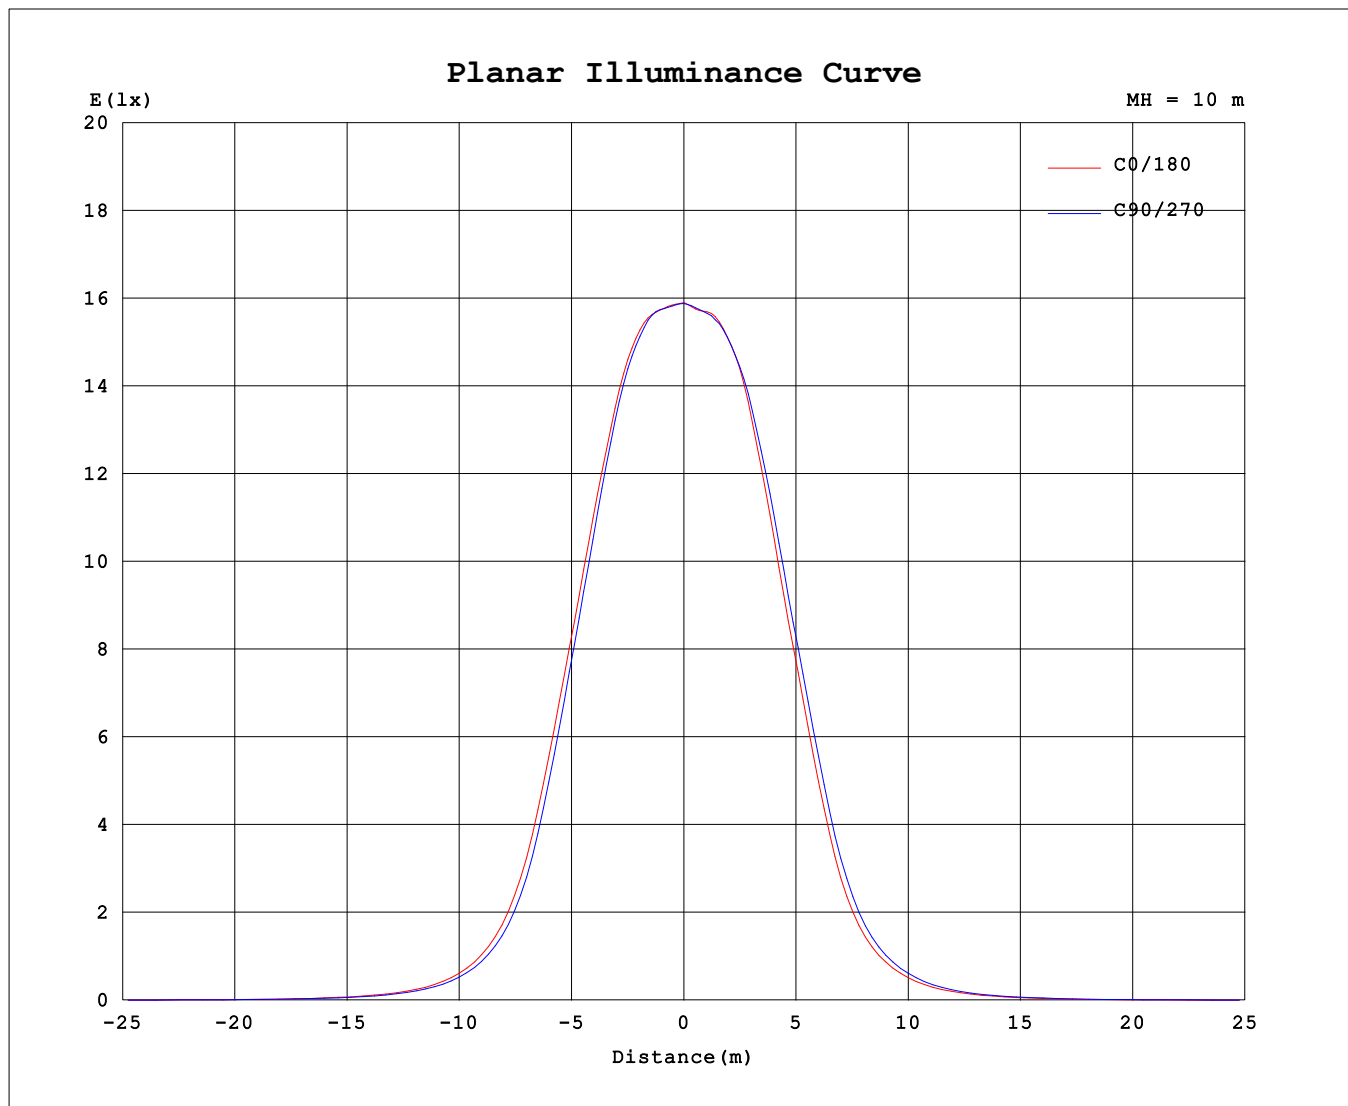

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-08-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity: 65.0%  
Test Distance: 3.090m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

## Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	1589	1589	1589	1589	1589	1589	1589	1589
3.0	1590	1590	1589	1585	1581	1583	1586	1587
6.0	1598	1601	1601	1596	1594	1591	1592	1593
9.0	1613	1614	1609	1604	1603	1595	1601	1606
12.0	1611	1603	1594	1589	1592	1581	1593	1611
15.0	1585	1575	1560	1554	1559	1555	1573	1591
18.0	1515	1505	1480	1469	1473	1487	1512	1525
21.0	1417	1402	1365	1352	1359	1393	1419	1434
24.0	1288	1264	1223	1202	1211	1263	1289	1310
27.0	1135	1109	1058	1037	1056	1105	1137	1158
30.0	951.5	920.1	862.3	834.8	861.6	909.2	951.5	963.3
33.0	736.5	703.5	645.9	617.8	644.1	688.4	731.9	735.7
36.0	527.2	500.8	452.4	430.9	447.1	487.7	524.1	530.1
39.0	366.5	348.5	313.0	300.0	306.1	337.9	361.7	375.5
42.0	253.2	241.5	216.5	209.0	212.4	230.8	250.0	262.0
45.0	174.6	166.2	149.5	143.7	145.4	157.2	173.5	181.8
48.0	119.6	113.1	102.4	98.63	99.31	105.4	118.5	125.3
51.0	82.84	77.51	71.26	68.02	68.04	72.29	81.04	86.88
54.0	57.50	53.49	49.97	46.64	46.89	49.65	55.57	59.31
57.0	40.89	38.00	36.09	32.98	32.87	35.03	39.49	41.71
60.0	27.61	25.69	24.69	21.90	21.46	23.31	26.35	28.14
63.0	19.01	17.46	16.74	14.58	14.14	15.33	17.53	18.77
66.0	12.59	11.63	11.24	9.935	9.664	10.49	11.68	12.43
69.0	8.667	8.087	7.700	7.069	6.949	7.401	7.976	8.586
72.0	6.053	5.447	4.738	3.889	3.469	4.406	5.247	5.977
75.0	2.590	2.407	2.244	2.163	2.168	2.242	2.358	2.477
78.0	1.977	1.893	1.774	1.699	1.703	1.752	1.854	1.910
81.0	1.430	1.334	1.186	1.060	1.034	1.100	1.252	1.345
84.0	0.6647	0.4805	0.2847	0.1516	0.1390	0.1757	0.3591	0.5355
87.0	0.1057	0.0817	0.0799	0.0567	0.0571	0.0570	0.0796	0.0784
90.0	0.0392	0.0251	0.0386	0.0280	0.0308	0.0299	0.0325	0.0241

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-08-14

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 $\gamma$  Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.453  
Humidity:65.0%  
Test Distance:3.090m [K=1.0000]  
Remarks: