


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 108.75 lm/W
MODEL		Imax (cd)	2081	S/MH(C0/180)	0.90	
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	0.94	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	2154.1	η UP,DN(C0-180)	0.0,49.4	
NOMINAL FLUX(lm)	2154.1	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.6	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	240.35	η down (%)	100.0	CIBSE SHR MAX	0.95	

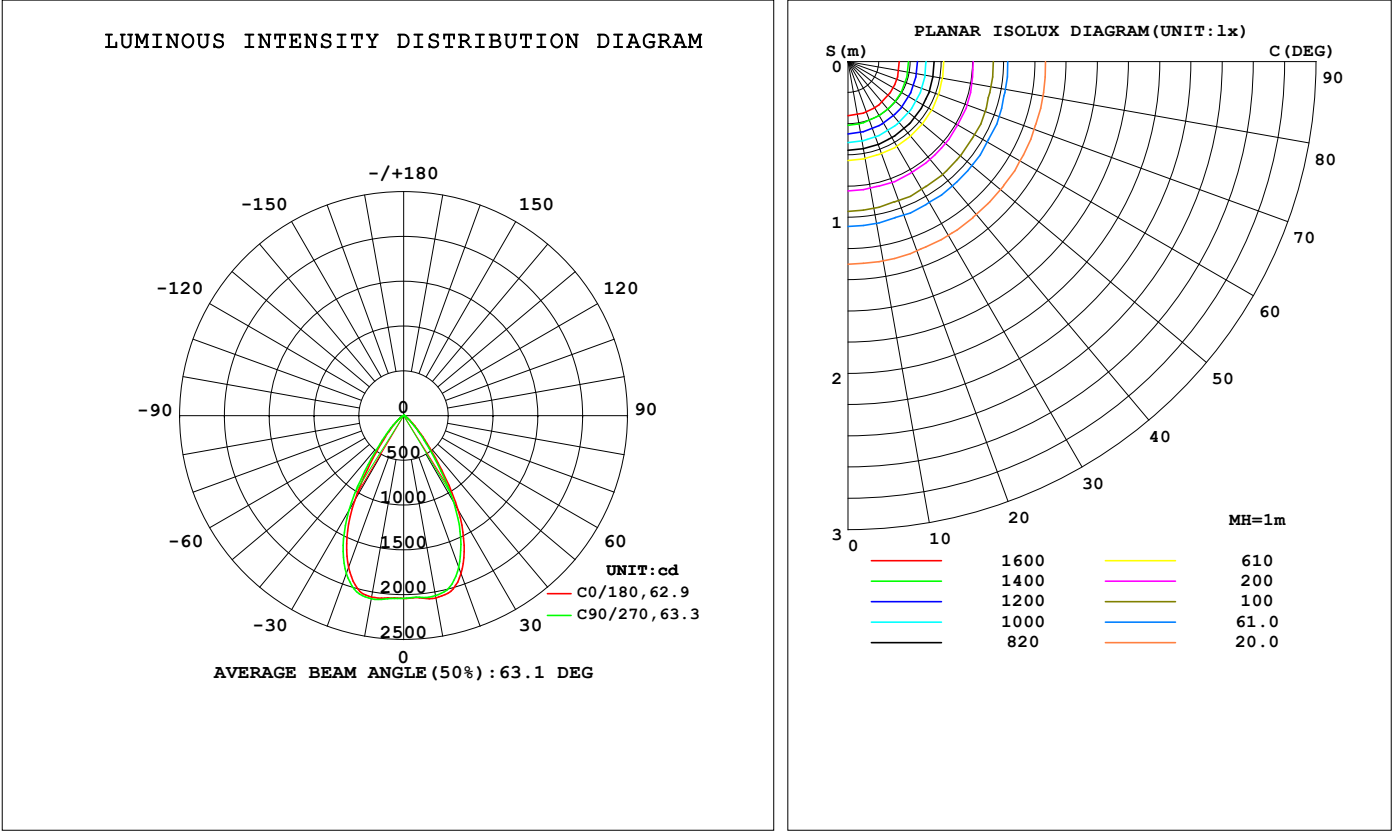

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2068	2062	2039	2036	2057	2070	2076	2081	0- 10	195.9	195.9	9.1,9.1
20	1877	1840	1799	1789	1801	1831	1875	1894	10- 20	560.5	756.5	35.1,35.1
30	1218	1172	1122	1099	1098	1150	1222	1239	20- 30	701.0	1458	67.7,67.7
40	408.0	388.0	359.4	347.9	355.4	379.6	415.9	427.6	30- 40	450.0	1907	88.6,88.6
50	118.0	109.6	99.97	97.83	102.3	108.7	119.9	123.5	40- 50	167.9	2075	96.3,96.3
60	33.08	31.39	30.68	27.98	28.96	31.98	35.30	35.25	50- 60	56.43	2132	99,99
70	9.587	8.864	8.402	8.089	8.351	8.958	9.319	9.800	60- 70	17.44	2149	99.8,99.8
80	1.989	1.928	1.780	1.689	1.728	1.789	1.862	1.876	70- 80	4.203	2153	100,100
90	0.0491	0.0408	0.0524	0.0393	0.0411	0.0395	0.0405	0.0332	80- 90	0.6082	2154	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2013.5 lm

%lum = 93.5%

%lamp = 93.5%

Conical surface Flux(120deg): 2131.9 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

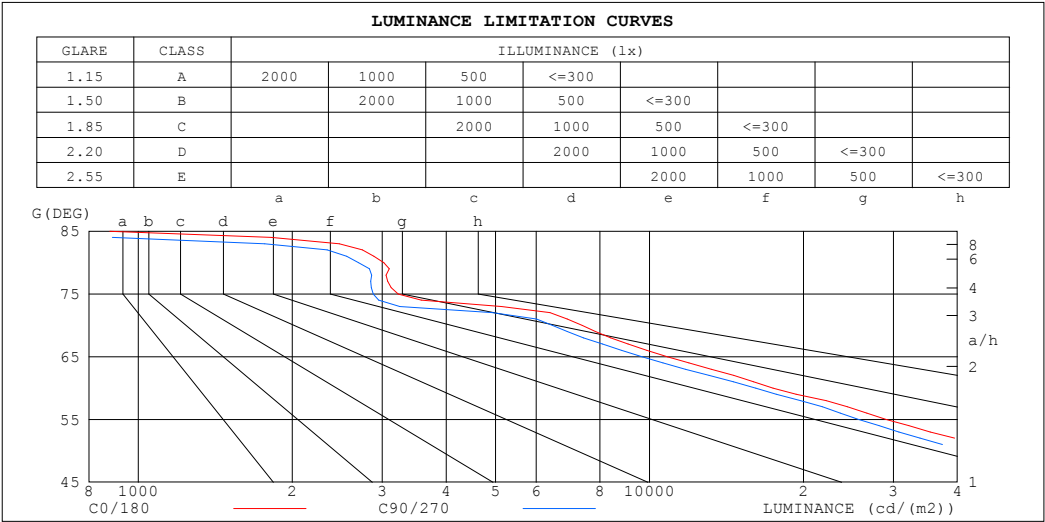

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	879	542
80	3021	2695
75	3225	2880
70	7390	6460
65	10843	9668
60	17442	16138
55	29076	25661
50	48399	40902
45	82551	71015


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.60% KDisp:0.9878		
Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.02	.98	.95	1.01	.97	.93	.97	.94	.91	.94	.92	.89	.92	.89	.88	.86
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.88	.85	.82	.86	.83	.81	.79
4.0	.88	.83	.78	.87	.82	.78	.85	.80	.77	.83	.79	.76	.81	.78	.75	.73
5.0	.82	.76	.72	.81	.76	.71	.80	.75	.71	.78	.74	.70	.76	.73	.70	.68
6.0	.77	.71	.66	.76	.70	.66	.75	.69	.66	.73	.69	.65	.72	.68	.65	.63
7.0	.72	.66	.62	.71	.66	.61	.70	.65	.61	.69	.64	.61	.68	.64	.60	.59
8.0	.68	.62	.57	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.56	.55
9.0	.64	.58	.54	.63	.57	.53	.62	.57	.53	.61	.57	.53	.61	.56	.53	.51
10.0	.60	.54	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.57	.53	.50	.48

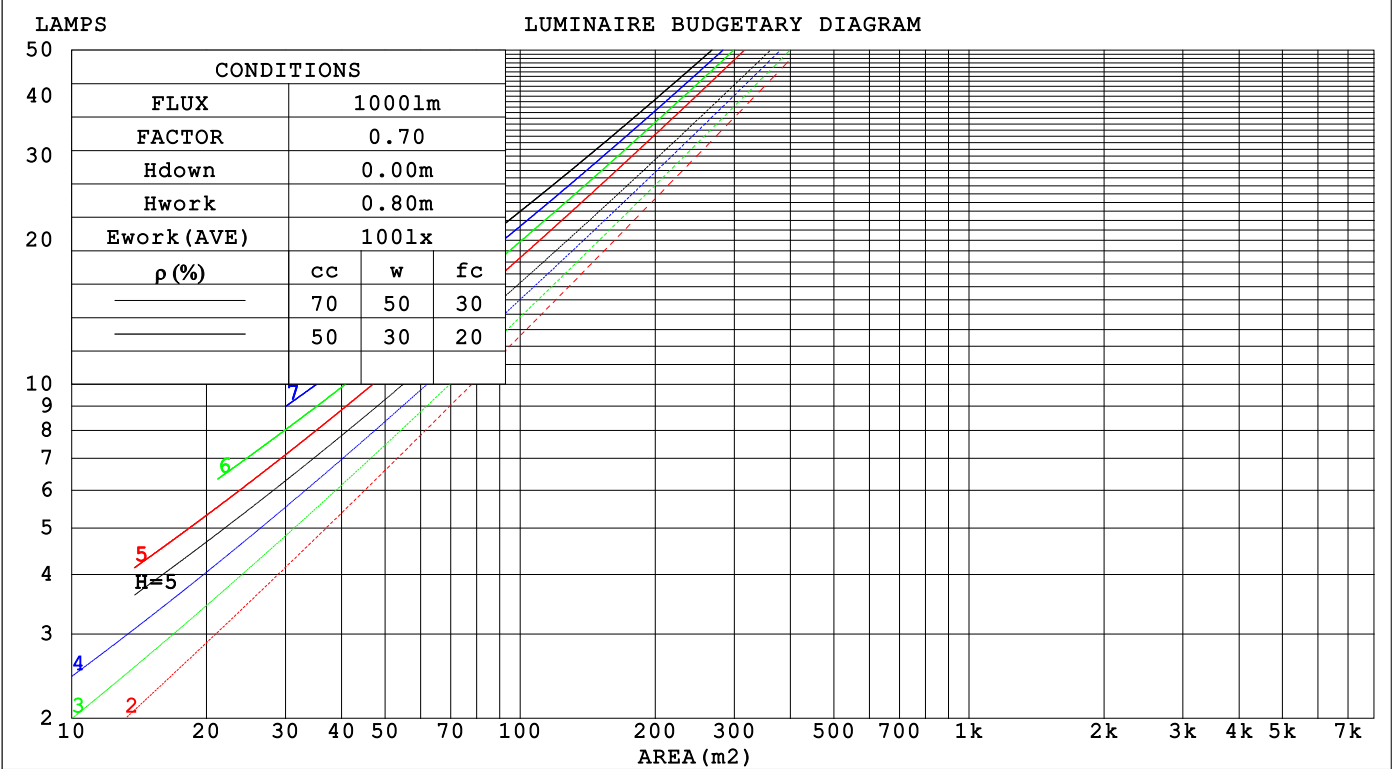

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.185	.105	.033	.178	.102	.032	.166	.095	.030	.154	.089	.029	.143	.083	.027															
2.0	.178	.098	.030	.173	.095	.029	.162	.090	.028	.152	.085	.027	.143	.081	.025															
3.0	.170	.091	.027	.165	.089	.027	.156	.085	.026	.148	.081	.025	.140	.077	.024															
4.0	.162	.084	.025	.158	.083	.024	.150	.080	.024	.143	.077	.023	.136	.074	.022															
5.0	.155	.079	.023	.151	.078	.023	.144	.075	.022	.138	.073	.022	.132	.070	.021															
6.0	.148	.074	.021	.144	.073	.021	.138	.071	.021	.133	.069	.020	.127	.067	.020															
7.0	.141	.070	.020	.138	.069	.020	.133	.067	.019	.128	.065	.019	.123	.064	.019															
8.0	.135	.066	.019	.132	.065	.018	.127	.064	.018	.123	.062	.018	.118	.061	.018															
9.0	.129	.062	.017	.127	.062	.017	.122	.060	.017	.118	.059	.017	.114	.058	.017															
10.0	.124	.059	.016	.122	.059	.016	.118	.058	.016	.114	.057	.016	.110	.056	.016															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.135	.114	.097	.092	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.145	.114	.088	.125	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.135	.099	.071	.116	.086	.062	.080	.060	.044	.046	.035	.026	.015	.011	.008	
5.0	.127	.088	.058	.109	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006	
7.0	.114	.071	.041	.098	.062	.036	.067	.043	.025	.039	.025	.015	.013	.008	.005	
8.0	.108	.065	.035	.093	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.103	.060	.031	.089	.052	.027	.061	.036	.019	.036	.022	.011	.012	.007	.004	
10.0	.098	.055	.027	.085	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz											
UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm											
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 70mm		Shielding Angle:			
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	23.7	24.7	23.9	24.8	25.0	23.2	24.2	23.4	24.3	24.5
	3H	23.5	24.4	23.8	24.6	24.9	23.0	24.0	23.3	24.2	24.4
	4H	23.4	24.3	23.7	24.5	24.8	23.0	23.8	23.2	24.1	24.3
	6H	23.4	24.2	23.7	24.4	24.7	22.9	23.7	23.2	23.9	24.2
	8H	23.3	24.1	23.6	24.4	24.6	22.8	23.6	23.1	23.9	24.1
	12H	23.3	24.0	23.6	24.3	24.6	22.8	23.5	23.1	23.8	24.1
4H	2H	23.4	24.3	23.7	24.5	24.8	23.0	23.8	23.3	24.1	24.3
	3H	23.3	24.1	23.7	24.3	24.6	22.9	23.6	23.2	23.9	24.2
	4H	23.2	23.9	23.6	24.2	24.5	22.8	23.4	23.1	23.7	24.1
	6H	23.2	23.8	23.5	24.1	24.4	22.7	23.3	23.1	23.6	24.0
	8H	23.1	23.7	23.5	24.0	24.4	22.6	23.2	23.0	23.5	23.9
	12H	23.1	23.6	23.5	23.9	24.3	22.6	23.1	23.0	23.5	23.9
8H	4H	23.1	23.7	23.5	24.0	24.4	22.6	23.2	23.0	23.5	23.9
	6H	23.0	23.5	23.4	23.9	24.3	22.5	23.0	23.0	23.4	23.8
	8H	23.0	23.4	23.4	23.8	24.2	22.5	22.9	22.9	23.3	23.8
	12H	22.9	23.3	23.4	23.7	24.2	22.4	22.8	22.9	23.2	23.7
12H	4H	23.1	23.6	23.5	23.9	24.3	22.6	23.1	23.0	23.5	23.9
	6H	23.0	23.4	23.4	23.8	24.2	22.5	22.9	22.9	23.3	23.8
	8H	22.9	23.3	23.4	23.7	24.2	22.4	22.8	22.9	23.2	23.7
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 2.8 / - 6.4					+ 2.6 / - 6.4				
1.5H		+ 4.3 / - 4.8					+ 4.1 / - 4.6				
2.0H		+ 5.0 / - 5.6					+ 4.6 / - 5.2				

CIE Pub.117, 2154 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.7$)
Area: 0.0038 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	92	85	82	90	85	81	77
1.00	97	91	87	96	91	87	95	91	87	82
1.25	102	96	92	101	96	92	99	94	91	87
1.50	105	100	96	103	99	95	101	97	94	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	105	102	108	104	101	105	102	100	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

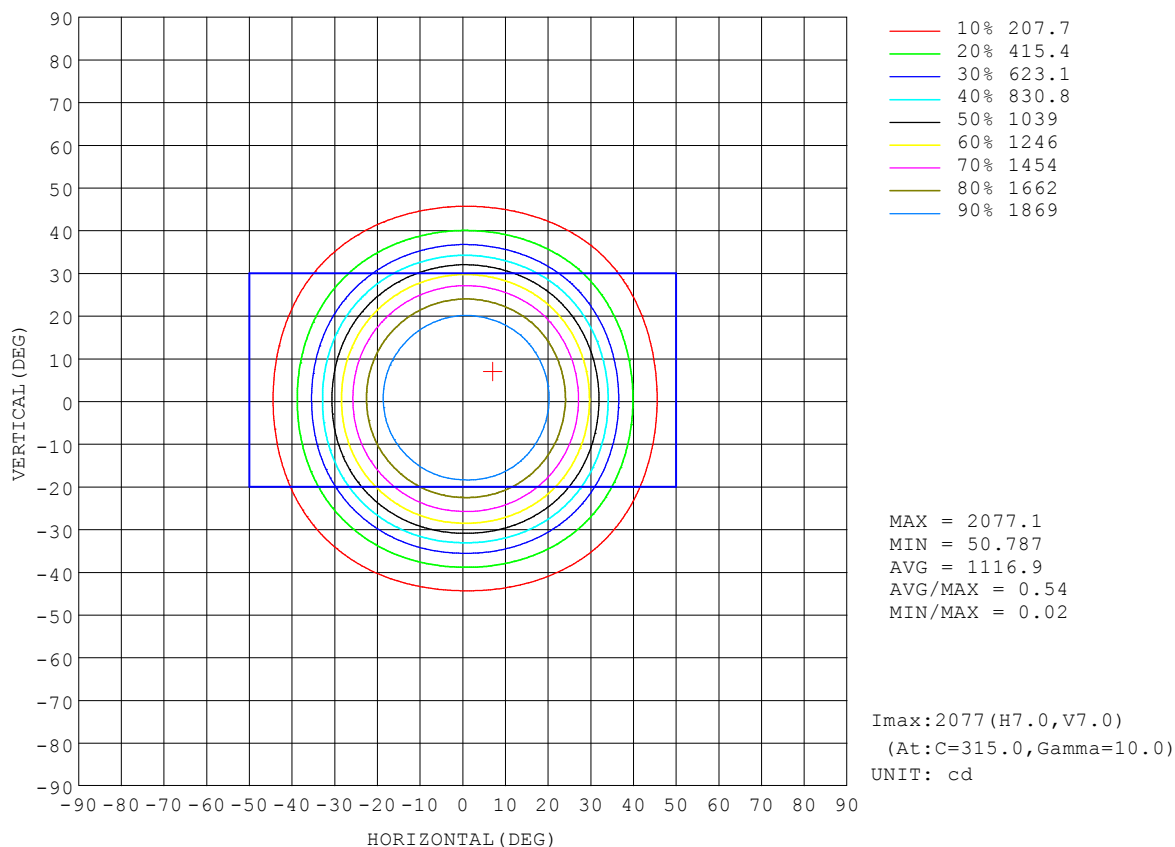


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz		
UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

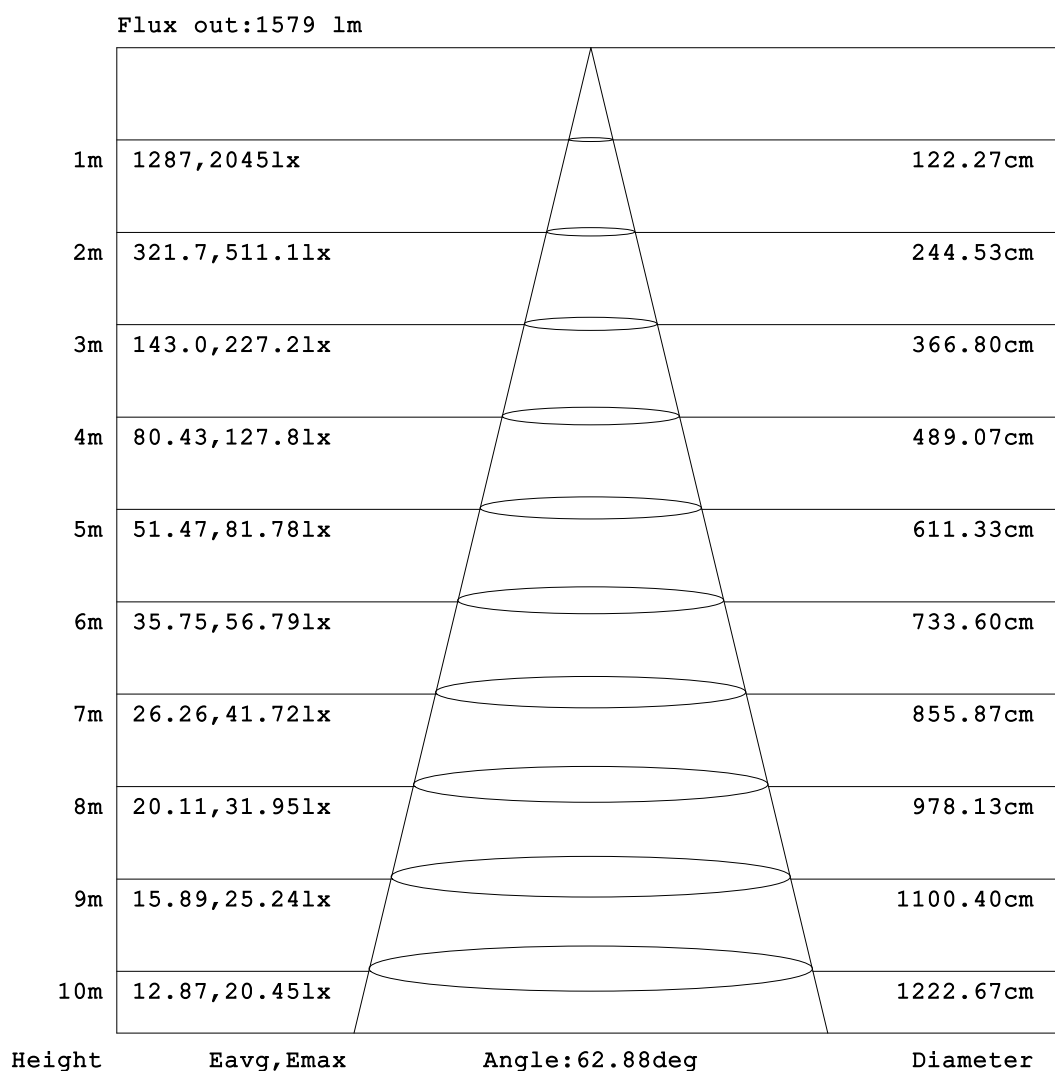


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:

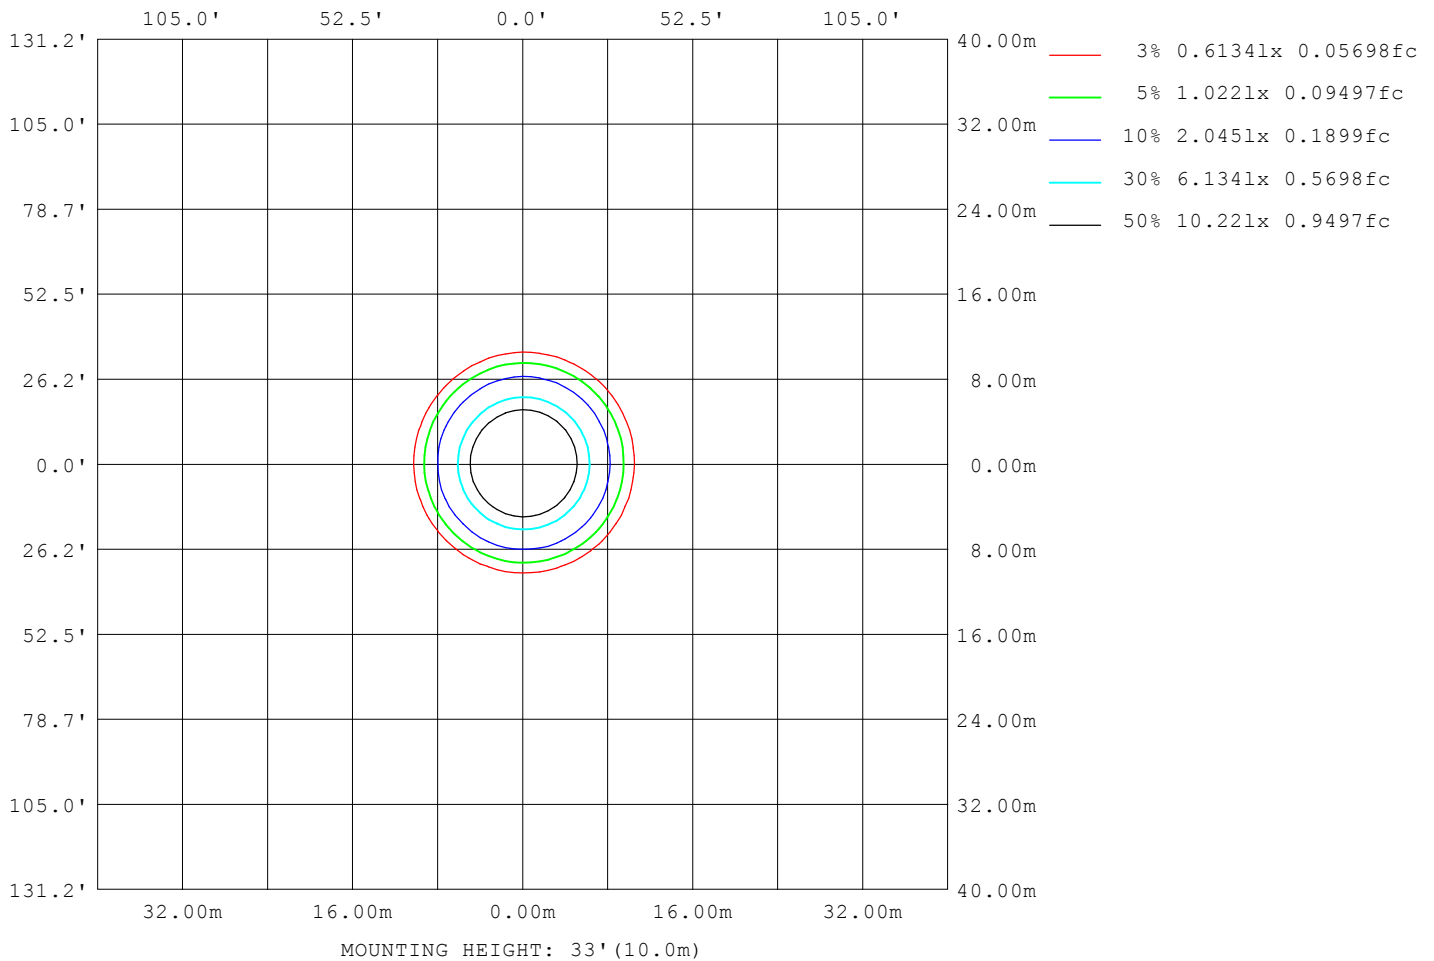

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0838A P:19.8W PF:0.9836 Freq:49.99Hz UTHDi:0.16% ITHDi:6.60% KDisp:0.9878 Lamp Flux:2154.1x1 lm		
NAME: TR11-20-XX-01+白色防眩环 2700K RA90 60D 20W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 70mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9974
L_0~180 (75) av	3072
L_0~180 (85) av	665
L_90~270 (65) av	10444
L_90~270 (75) av	3002
L_90~270 (85) av	529
L_45 (65) av	10039
L_45 (75) av	3021
L_45 (85) av	513

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

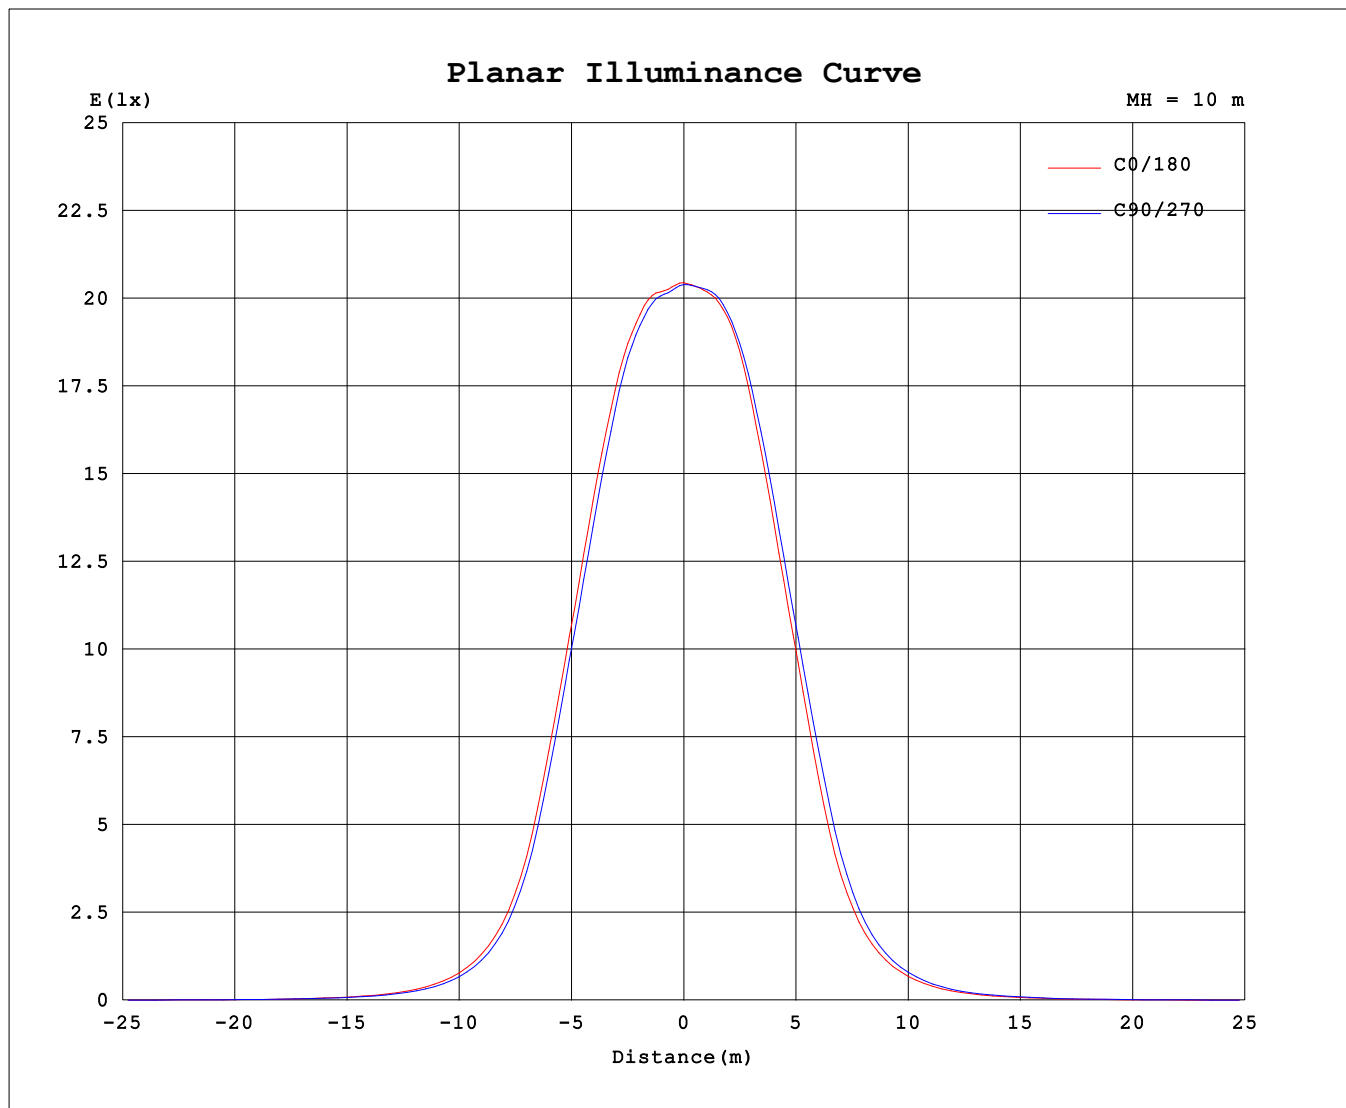

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	2041	2041	2041	2041	2041	2041	2041	2041
3.0	2037	2034	2032	2037	2038	2043	2044	2041
6.0	2048	2043	2041	2040	2048	2055	2060	2056
9.0	2067	2064	2045	2043	2057	2071	2076	2080
12.0	2056	2051	2027	2019	2048	2064	2069	2072
15.0	2031	2018	1984	1970	2000	2020	2036	2044
18.0	1953	1928	1885	1879	1892	1917	1951	1965
21.0	1832	1790	1747	1737	1750	1783	1829	1850
24.0	1664	1613	1574	1547	1566	1607	1661	1684
27.0	1462	1413	1370	1345	1358	1402	1462	1485
30.0	1218	1172	1122	1099	1098	1150	1222	1239
33.0	932.6	896.6	841.7	823.5	814.5	871.3	944.4	970.1
36.0	661.9	634.3	592.3	575.6	579.3	619.0	677.5	687.0
39.0	460.1	439.3	407.6	394.4	402.4	429.9	470.6	482.3
42.0	320.3	301.3	279.2	270.5	277.8	296.1	325.1	336.1
45.0	221.4	209.1	190.9	186.4	192.0	203.0	226.7	232.5
48.0	152.0	141.2	128.9	126.4	131.4	138.7	154.7	159.4
51.0	103.8	96.62	89.57	86.27	90.56	95.99	105.6	108.7
54.0	71.63	66.85	62.80	59.23	62.37	67.43	72.93	75.18
57.0	50.36	47.60	45.14	42.29	44.21	48.09	52.27	52.94
60.0	33.08	31.39	30.68	27.98	28.96	31.98	35.30	35.25
63.0	22.75	21.36	20.28	18.62	19.33	21.40	23.79	23.76
66.0	15.25	14.03	13.64	12.53	12.97	14.25	15.67	15.85
69.0	10.65	9.915	9.410	9.011	9.317	10.08	10.53	10.93
72.0	7.481	6.662	5.790	5.096	5.044	6.299	6.937	7.550
75.0	3.166	2.996	2.834	2.795	2.877	2.988	3.070	3.108
78.0	2.408	2.366	2.259	2.237	2.301	2.360	2.382	2.338
81.0	1.714	1.656	1.521	1.413	1.425	1.506	1.603	1.627
84.0	0.7212	0.5316	0.3534	0.2298	0.2042	0.3042	0.4852	0.6026
87.0	0.1290	0.1034	0.1063	0.0840	0.0865	0.0824	0.1060	0.1032
90.0	0.0491	0.0408	0.0524	0.0393	0.0411	0.0395	0.0405	0.0332

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: