


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz		
UTHDi:0.18% ITHDi:13.04% KDisp:0.9909 Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 104.93 lm/W
MODEL		Imax (cd)	14723	S/MH(C0/180)	0.40	
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.39	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3105.1	η UP,DN(C0-180)	0.0,50.3	
NOMINAL FLUX(lm)	3105.08	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.7	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	240.23	η down (%)	100.0	CIBSE SHR MAX	0.30	

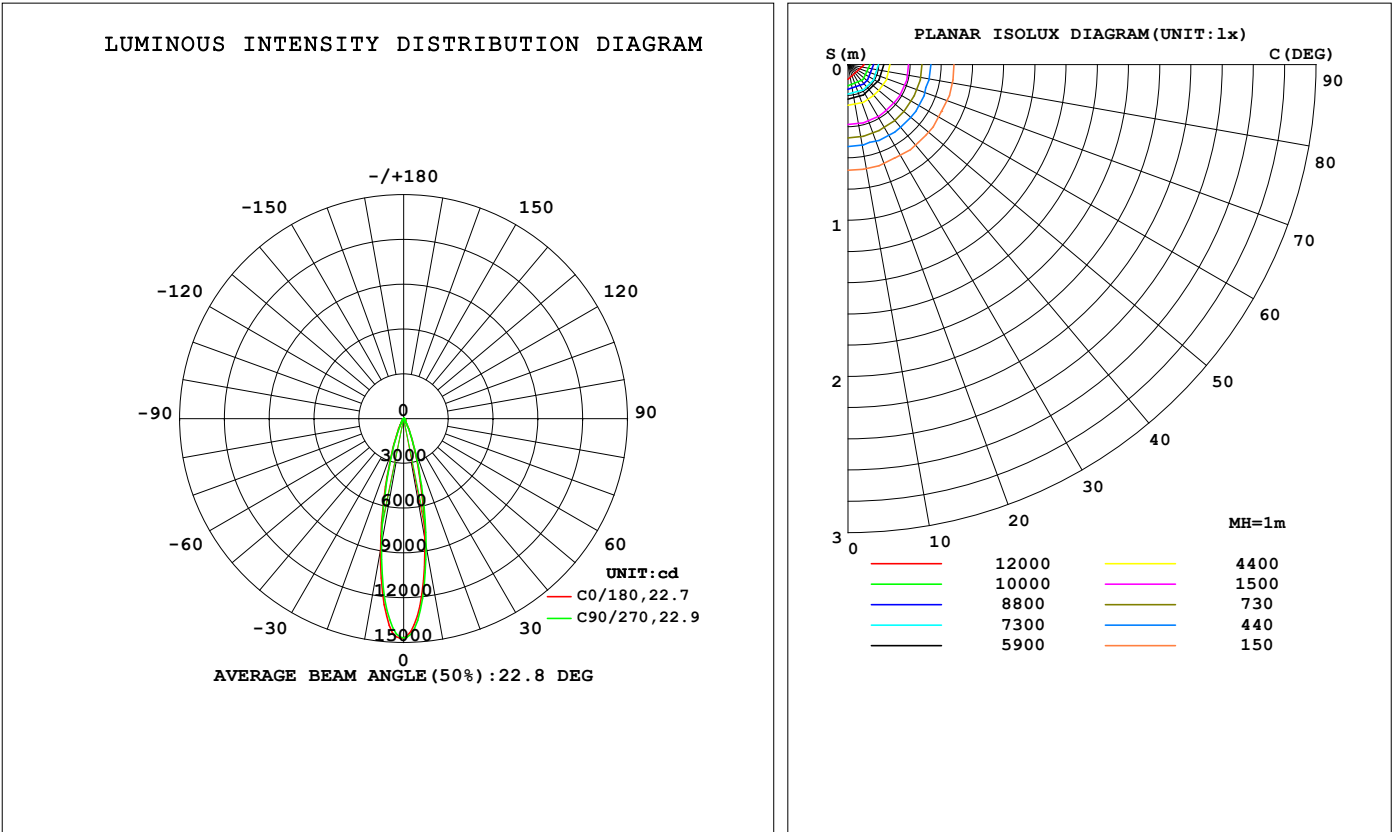

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	822.4	843.7	863.9	891.3	895.0	886.7	861.6	830.3	0- 10	1090	1090	35.1,35.1
20	204.3	212.7	216.4	219.0	213.9	201.4	202.1	196.8	10- 20	1272	2361	76,76
30	42.17	43.30	43.61	42.61	42.20	39.52	38.90	38.85	20- 30	450.5	2812	90.6,90.6
40	14.09	14.23	13.73	13.58	13.84	13.51	13.48	13.48	30- 40	147.7	2959	95.3,95.3
50	7.108	7.106	6.583	6.391	6.659	6.842	6.733	6.594	40- 50	74.12	3034	97.7,97.7
60	3.762	3.841	3.561	3.413	3.504	3.550	3.509	3.398	50- 60	44.88	3078	99.1,99.1
70	0.9581	0.9351	0.9594	0.9314	0.9190	0.8789	0.8911	0.8905	60- 70	22.07	3101	99.9,99.9
80	0.1513	0.1513	0.1557	0.1477	0.1489	0.1441	0.1802	0.1447	70- 80	3.845	3104	100,100
90	0.0097	0.0061	0.0119	0.0063	0.0065	0.0067	0.0170	0.0060	80- 90	0.7041	3105	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3001.4 lm

%lum = 96.7%

%lamp = 96.7%

Conical surface Flux(120deg): 3078.5 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz		
UTHDi:0.18% ITHDi:13.04% KDisp:0.9909 Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

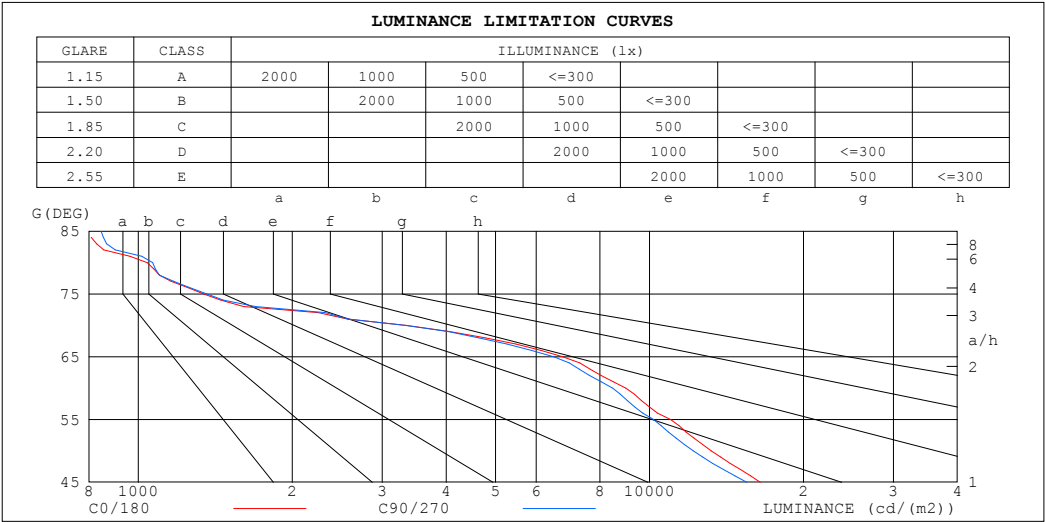

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	788	845
80	1041	1066
75	1343	1363
70	3347	3335
65	6767	6501
60	8988	8465
55	10990	10186
50	13210	12175
45	16469	15509


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz		
UTHDi:0.18% ITHDi:13.04% KDisp:0.9909		
Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.01	1.05	1.02	.00	1.02	.00	.98	.99	.97	.96	.97	.95	.94	.92
3.0	1.02	.98	.95	1.01	.97	.94	.98	.95	.93	.96	.93	.91	.94	.92	.90	.89
4.0	.98	.93	.90	.97	.93	.90	.95	.91	.89	.93	.90	.88	.91	.89	.87	.86
5.0	.94	.89	.86	.93	.89	.86	.91	.88	.85	.90	.87	.84	.88	.86	.84	.83
6.0	.90	.86	.83	.90	.86	.83	.88	.85	.82	.87	.84	.82	.86	.83	.81	.80
7.0	.87	.83	.80	.87	.83	.80	.86	.82	.79	.85	.81	.79	.84	.81	.78	.77
8.0	.84	.80	.77	.84	.80	.77	.83	.79	.77	.82	.79	.76	.81	.78	.76	.75
9.0	.82	.78	.75	.81	.77	.75	.81	.77	.74	.80	.77	.74	.79	.76	.74	.73
10.0	.80	.75	.73	.79	.75	.72	.78	.75	.72	.78	.75	.72	.77	.74	.72	.71

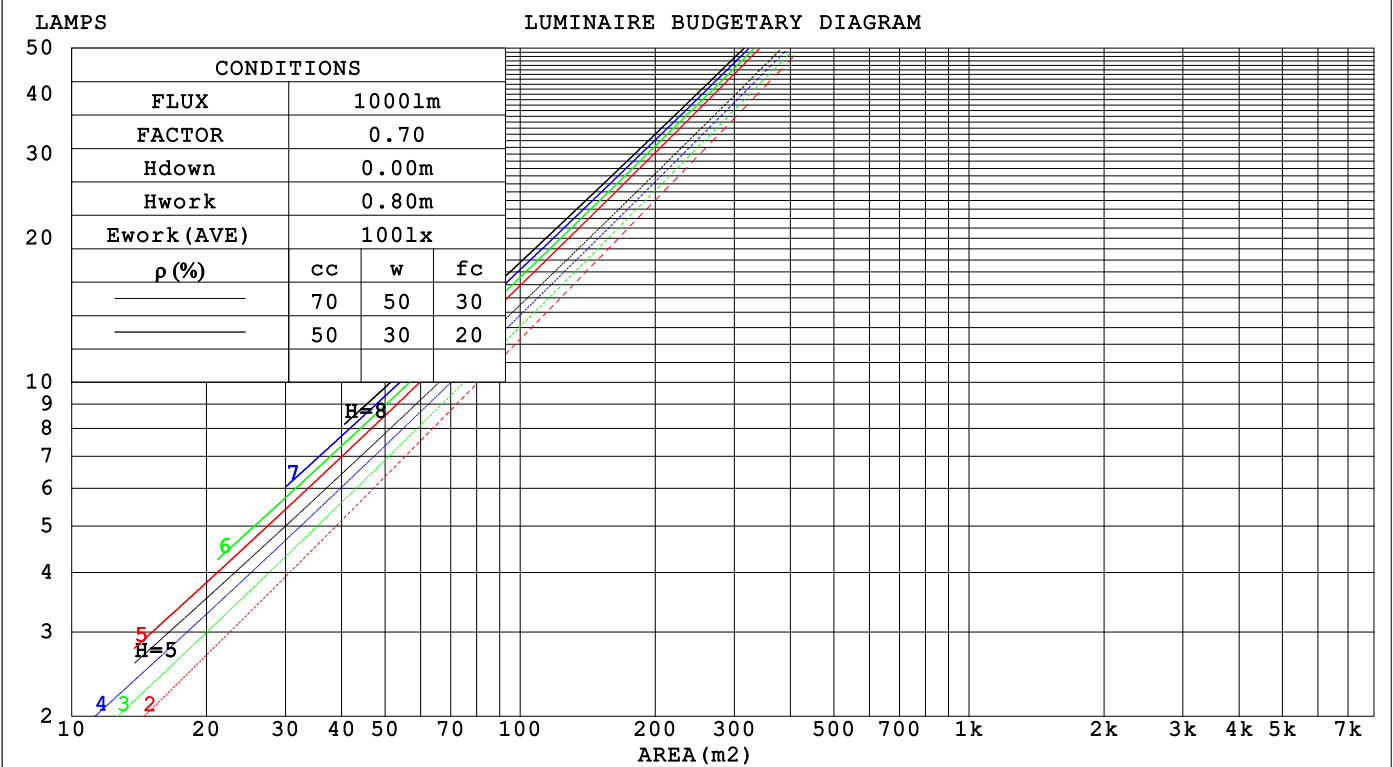

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz			UTHDi:0.18% ITHDi:13.04% KDisp:0.9909			Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 104mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.144	.082	.026	.137	.078	.025	.125	.071	.023	.113	.065	.021	.103	.059	.019															
2.0	.134	.073	.023	.129	.071	.022	.118	.066	.020	.109	.061	.019	.100	.057	.018															
3.0	.125	.067	.020	.121	.065	.019	.112	.061	.018	.104	.057	.017	.097	.054	.017															
4.0	.117	.061	.018	.114	.059	.018	.106	.056	.017	.100	.053	.016	.093	.051	.015															
5.0	.111	.056	.016	.107	.055	.016	.101	.053	.015	.095	.050	.015	.090	.048	.014															
6.0	.104	.052	.015	.102	.051	.015	.096	.049	.014	.091	.047	.014	.087	.046	.014															
7.0	.099	.049	.014	.097	.048	.014	.092	.046	.013	.088	.045	.013	.083	.043	.013															
8.0	.094	.046	.013	.092	.045	.013	.088	.044	.013	.084	.043	.012	.080	.041	.012															
9.0	.090	.043	.012	.088	.043	.012	.084	.042	.012	.081	.041	.012	.078	.039	.011															
10.0	.086	.041	.011	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011															

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.169	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017		
2.0	.151	.133	.117	.130	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.013		
3.0	.137	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011		
4.0	.124	.098	.078	.107	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009		
5.0	.114	.086	.065	.098	.074	.057	.067	.052	.040	.039	.030	.024	.013	.010	.008		
6.0	.105	.076	.055	.090	.066	.048	.062	.046	.034	.036	.027	.020	.012	.009	.007		
7.0	.098	.068	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006		
8.0	.091	.061	.040	.079	.053	.035	.054	.037	.025	.032	.022	.015	.010	.007	.005		
9.0	.086	.055	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004		
10.0	.081	.051	.031	.069	.044	.027	.048	.031	.019	.028	.018	.011	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz										
UTHDi:0.18% ITHDi:13.04% KDisp:0.9909					Lamp Flux:3105.08x1 lm					
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 104mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.3	15.0	14.5	15.2	15.3	14.2	14.9	14.4	15.0	15.2
3H	14.5	15.2	14.8	15.4	15.6	14.4	15.0	14.6	15.2	15.4
4H	14.5	15.1	14.7	15.3	15.5	14.3	14.9	14.6	15.1	15.4
6H	14.4	15.0	14.7	15.2	15.5	14.2	14.8	14.5	15.1	15.3
8H	14.4	14.9	14.7	15.2	15.4	14.2	14.8	14.5	15.0	15.3
12H	14.3	14.9	14.6	15.1	15.4	14.2	14.7	14.5	15.0	15.2
4H 2H	14.5	15.1	14.8	15.3	15.5	14.4	15.0	14.6	15.2	15.4
3H	14.7	15.2	15.0	15.5	15.8	14.6	15.1	14.9	15.4	15.6
4H	14.6	15.1	15.0	15.4	15.7	14.5	15.0	14.8	15.3	15.6
6H	14.6	15.0	14.9	15.3	15.7	14.4	14.9	14.8	15.2	15.5
8H	14.5	14.9	14.9	15.3	15.6	14.4	14.8	14.8	15.1	15.5
12H	14.5	14.8	14.9	15.2	15.6	14.3	14.7	14.7	15.1	15.5
8H 4H	14.5	14.9	14.9	15.3	15.6	14.4	14.8	14.8	15.1	15.5
6H	14.4	14.8	14.9	15.2	15.6	14.3	14.6	14.7	15.0	15.4
8H	14.4	14.7	14.8	15.1	15.5	14.2	14.5	14.7	15.0	15.4
12H	14.3	14.6	14.8	15.0	15.5	14.2	14.4	14.7	14.9	15.4
12H 4H	14.5	14.8	14.9	15.2	15.6	14.3	14.7	14.7	15.1	15.4
6H	14.4	14.7	14.8	15.1	15.5	14.2	14.5	14.7	14.9	15.4
8H	14.3	14.6	14.8	15.0	15.5	14.2	14.4	14.6	14.9	15.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.1 / - 1.7					+ 1.2 / - 1.8				
1.5H	+ 1.7 / - 0.9					+ 1.8 / - 1.2				
2.0H	+ 1.7 / - 1.3					+ 1.6 / - 1.4				

CIE Pub.117, 3105 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.9$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz		
UTHDi:0.18% ITHDi:13.04% KDisp:0.9909 Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	82	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz		
UTHDi:0.18% ITHDi:13.04% KDisp:0.9909 Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

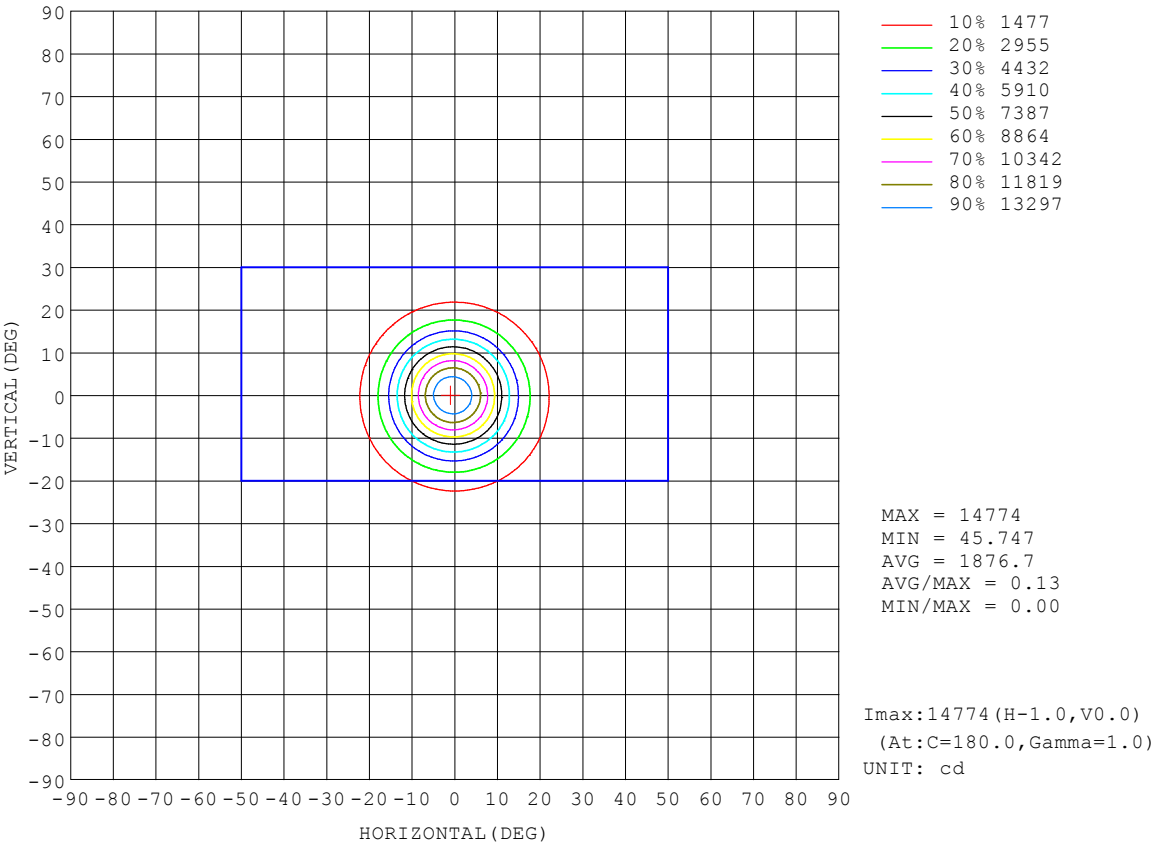

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 45.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Temperature:25.3DEG	Humidity:65.0%
Operators:DAMIN	Test Distance:3.090m [K=1.0000]
Test Date:2024-09-14	Remarks:

AAI Figure

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz		
UTHDi:0.18% ITHDi:13.04% KDisp:0.9909 Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

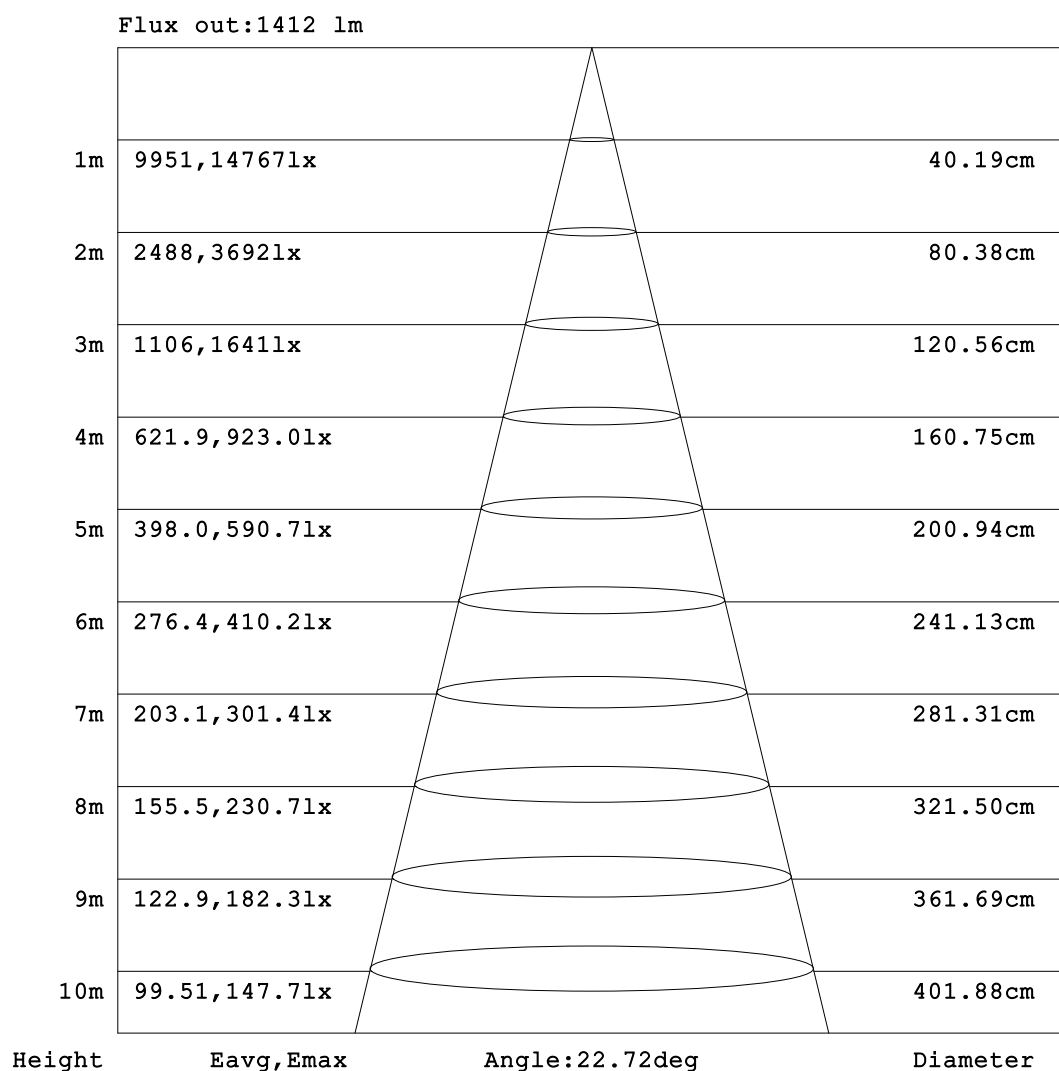


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz		
UTHDi:0.18% ITHDi:13.04% KDisp:0.9909 Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

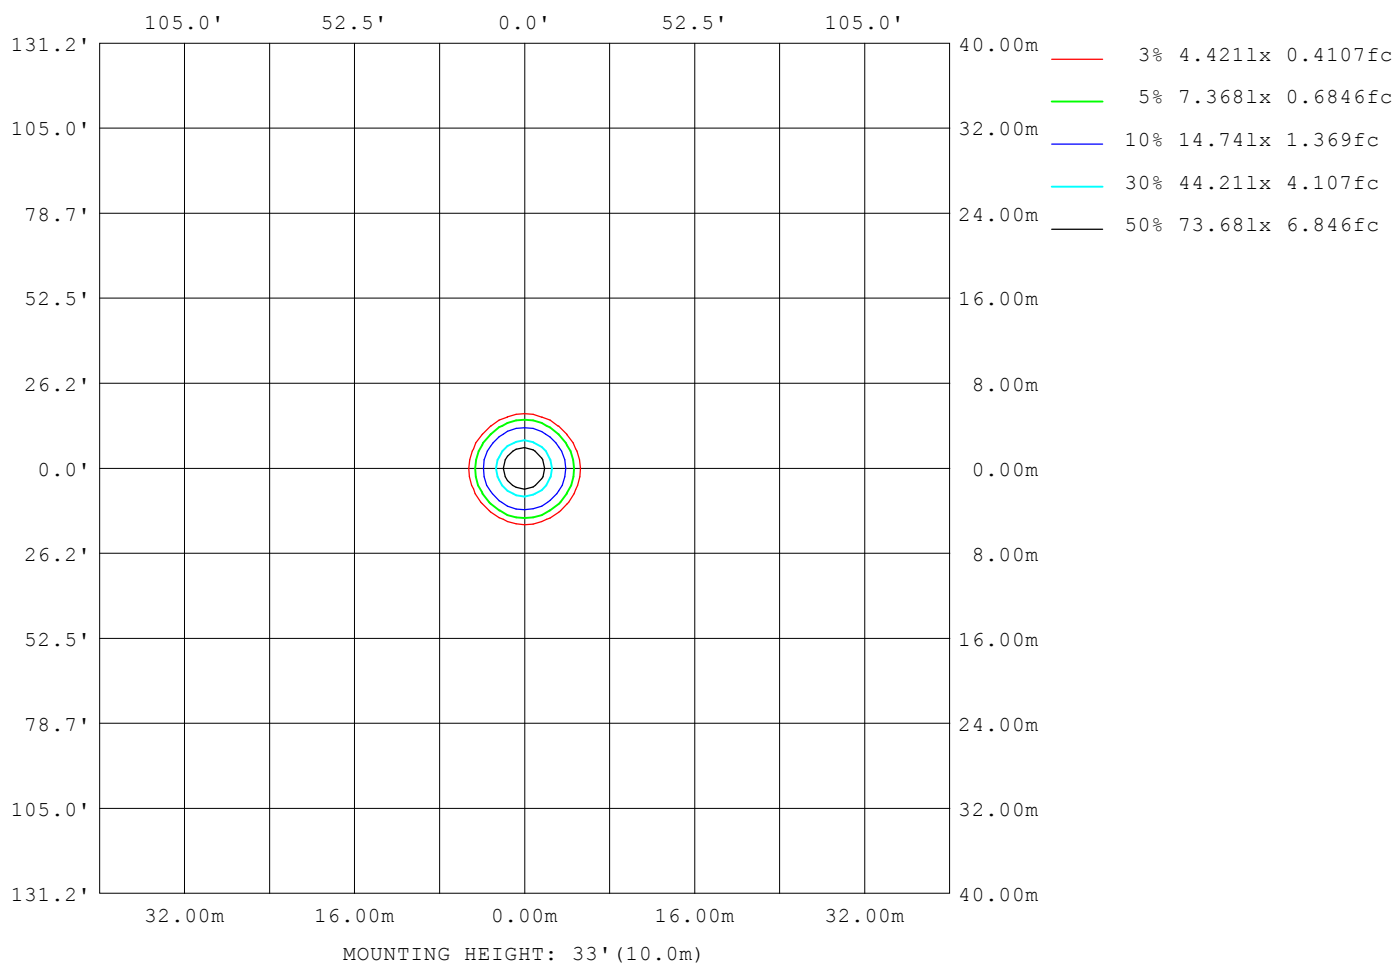

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.3V I:0.1245A P:29.6W PF:0.9888 Freq:49.99Hz UTHDi:0.18% ITHDi:13.04% KDisp:0.9909 Lamp Flux:3105.08x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6525
L_0~180 (75) av	1326
L_0~180 (85) av	819
L_90~270 (65) av	6379
L_90~270 (75) av	1383
L_90~270 (85) av	955
L_45 (65) av	6381
L_45 (75) av	1317
L_45 (85) av	751

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

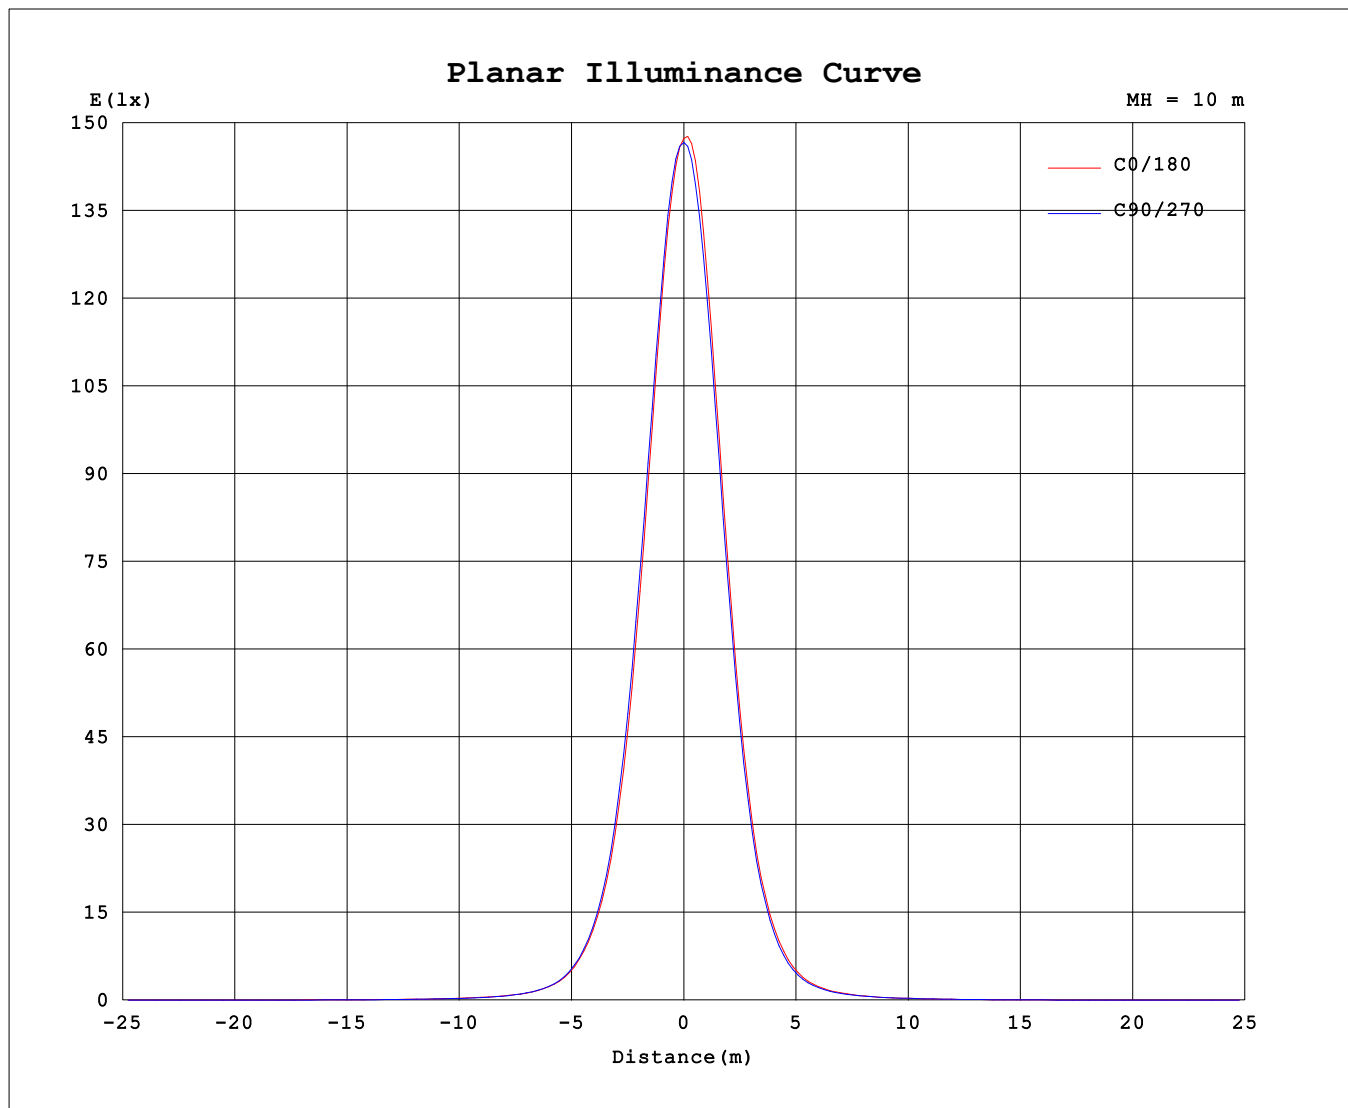

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	14686	14686	14686	14686	14686	14686	14686	14686
3.0	13814	13888	14069	14241	14362	14275	14033	13860
6.0	11799	11895	12123	12419	12533	12445	12181	11893
9.0	9128	9322	9547	9831	9897	9817	9560	9208
12.0	6530	6731	6932	7153	7130	7041	6843	6582
15.0	4367	4518	4678	4804	4739	4627	4495	4350
18.0	2784	2869	2967	3002	2925	2825	2777	2717
21.0	1753	1803	1848	1835	1795	1702	1689	1669
24.0	1093	1126	1143	1113	1096	1017	1010	1007
27.0	668.5	691.0	697.2	676.9	664.8	615.8	609.4	610.5
30.0	421.7	433.0	436.1	426.1	422.0	395.2	389.0	388.5
33.0	285.3	290.1	291.3	285.4	286.4	271.5	266.3	266.3
36.0	205.0	208.9	205.7	202.5	206.6	196.4	193.9	194.0
39.0	153.9	155.1	150.9	149.2	152.0	147.3	146.9	146.9
42.0	120.6	121.1	115.3	114.0	116.7	115.6	115.4	115.5
45.0	97.48	97.81	92.26	90.24	93.07	93.98	93.64	93.30
48.0	80.56	80.19	74.78	72.83	75.64	77.35	76.64	75.53
51.0	66.90	67.14	61.93	60.09	62.74	64.49	63.17	61.85
54.0	56.16	57.06	52.04	50.35	52.77	54.60	52.86	51.41
57.0	45.52	46.40	42.84	41.41	42.76	43.74	42.81	41.24
60.0	37.62	38.41	35.61	34.13	35.04	35.50	35.09	33.98
63.0	29.10	30.12	27.85	26.52	27.25	27.56	27.20	26.63
66.0	20.87	21.63	20.08	19.13	19.45	19.19	19.37	18.93
69.0	12.18	12.53	12.15	11.54	11.48	11.10	11.57	11.19
72.0	5.817	5.966	6.034	5.852	5.756	5.510	5.843	5.434
75.0	2.910	2.998	2.968	2.905	2.855	2.762	3.045	2.787
78.0	1.912	1.916	1.922	1.843	1.832	1.785	2.287	1.839
81.0	1.260	1.266	1.336	1.283	1.309	1.244	1.509	1.192
84.0	0.7072	0.6809	0.7506	0.7116	0.7574	0.6993	0.9030	0.6384
87.0	0.3276	0.2877	0.3679	0.3288	0.3523	0.3189	0.4678	0.2585
90.0	0.0973	0.0610	0.1187	0.0625	0.0653	0.0668	0.1699	0.0603

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: