


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:41.55% KDisp:0.9905 Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 110.58 lm/W			
MODEL		I _{max} (cd)	8318	S/MH(C0/180)	0.57
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.55
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3246.8	η UP,DN(C0-180)	0.0,50.3
NOMINAL FLUX(lm)	3246.84	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.7
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	240.29	η down(%)	100.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

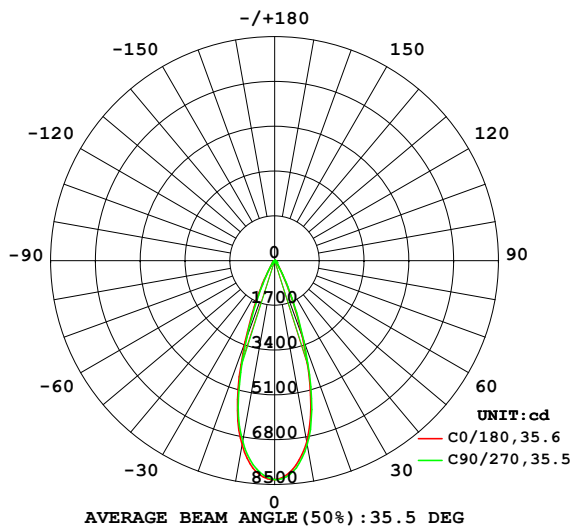

PLANAR ISOLUX DIAGRAM(UNIT:lx)

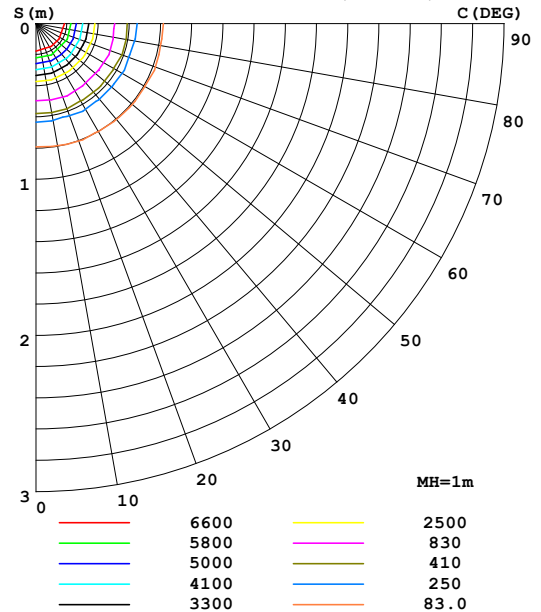

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6998	7054	7114	7125	7124	7047	6988	6969	0- 10	733.1	733.1	22.6,22.6
20	3090	3166	3232	3294	3303	3223	3115	3057	10- 20	1437	2170	66.8,66.8
30	570.2	611.9	638.4	672.2	678.8	611.4	572.5	548.2	20- 30	729.0	2899	89.3,89.3
40	141.7	154.3	164.3	175.6	169.7	150.3	139.9	133.7	30- 40	187.2	3086	95,95
50	70.70	77.60	84.21	84.24	84.66	76.26	68.63	65.13	40- 50	82.98	3169	97.6,97.6
60	36.01	38.59	39.07	38.86	39.73	38.42	35.61	33.67	50- 60	49.36	3218	99.1,99.1
70	11.59	12.34	12.73	13.04	13.07	12.38	11.76	11.27	60- 70	23.41	3242	99.8,99.8
80	1.690	1.676	1.738	1.723	1.716	1.654	1.775	1.659	70- 80	4.373	3246	100,100
90	0.0963	0.0649	0.1113	0.0651	0.0659	0.0694	0.1078	0.0693	80- 90	0.7430	3247	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3132.7 lm

%lum = 96.5%

%lamp = 96.5%

Conical surface Flux(120deg): 3218.3 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:41.55% KDisp:0.9905Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

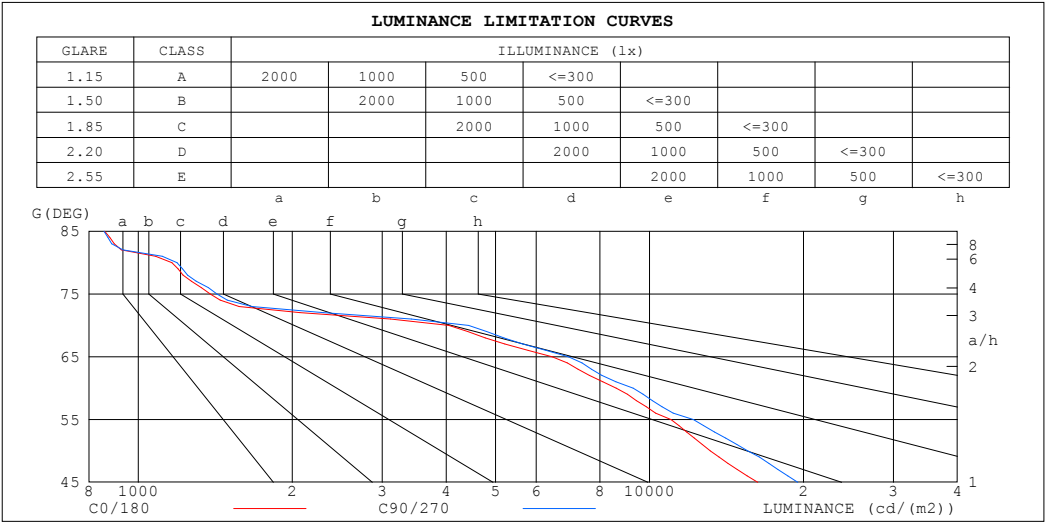

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	859	857
80	1163	1190
75	1382	1426
70	4051	4425
65	6451	6943
60	8609	9289
55	11016	12176
50	13148	15574
45	16273	19497


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:41.55% KDisp:0.9905		
Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.86
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.88	.86	.84	.82
5.0	.91	.86	.83	.90	.86	.82	.88	.84	.81	.87	.83	.81	.85	.82	.80	.79
6.0	.87	.82	.79	.86	.82	.78	.85	.81	.78	.83	.80	.77	.82	.79	.77	.76
7.0	.83	.78	.75	.83	.78	.75	.81	.77	.74	.80	.77	.74	.79	.76	.74	.73
8.0	.80	.75	.72	.79	.75	.72	.78	.74	.71	.78	.74	.71	.77	.73	.71	.70
9.0	.77	.72	.69	.76	.72	.69	.76	.71	.69	.75	.71	.68	.74	.71	.68	.67
10.0	.74	.69	.66	.74	.69	.66	.73	.69	.66	.72	.69	.66	.72	.68	.66	.65

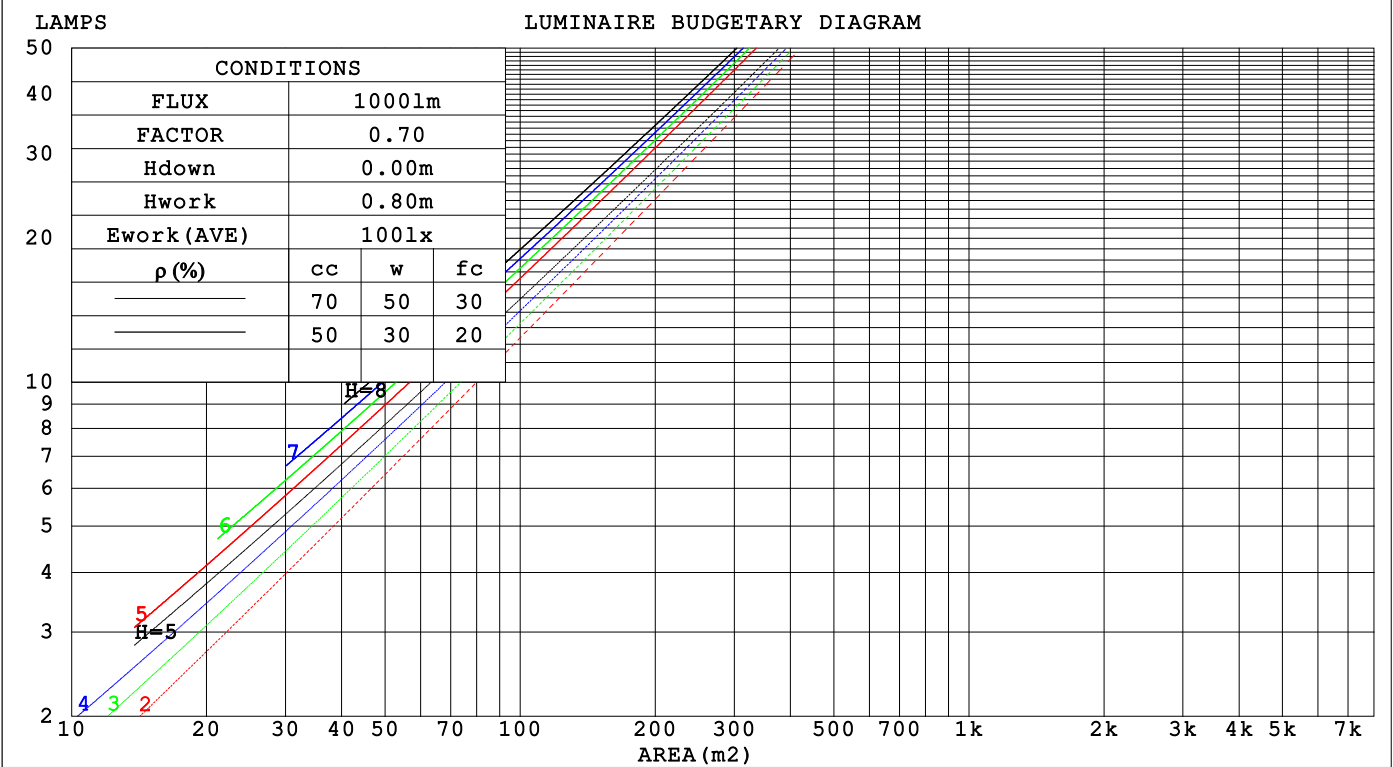

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz			UTHDi:0.18% ITHDi:41.55% KDisp:0.9905			Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 104mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.154	.088	.028	.148	.084	.027	.135	.078	.025	.124	.071	.023	.113	.066	.021															
2.0	.145	.080	.024	.140	.077	.024	.129	.072	.022	.120	.067	.021	.111	.063	.020															
3.0	.137	.073	.022	.132	.071	.021	.123	.067	.020	.115	.063	.019	.108	.060	.018															
4.0	.129	.067	.020	.125	.065	.019	.117	.062	.019	.110	.059	.018	.104	.057	.017															
5.0	.122	.062	.018	.118	.061	.018	.112	.058	.017	.106	.056	.017	.101	.054	.016															
6.0	.116	.058	.017	.113	.057	.016	.107	.055	.016	.102	.053	.016	.097	.051	.015															
7.0	.110	.054	.015	.108	.054	.015	.103	.052	.015	.098	.050	.015	.094	.049	.014															
8.0	.105	.051	.014	.103	.051	.014	.099	.049	.014	.095	.048	.014	.091	.047	.014															
9.0	.101	.049	.014	.099	.048	.013	.095	.047	.013	.091	.046	.013	.088	.045	.013															
10.0	.096	.046	.013	.095	.046	.013	.091	.045	.013	.088	.044	.012	.085	.043	.012															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011	
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.109	.077	.053	.094	.066	.046	.065	.046	.033	.038	.027	.019	.012	.009	.006	
7.0	.102	.069	.045	.088	.059	.039	.061	.042	.028	.035	.025	.017	.011	.008	.006	
8.0	.096	.062	.039	.082	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.090	.057	.034	.078	.049	.030	.054	.035	.021	.031	.020	.013	.010	.007	.004	
10.0	.086	.052	.030	.074	.045	.026	.051	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz										
UTHDi:0.18% ITHDi:41.55% KDisp:0.9905 Lamp Flux:3246.84x1 lm										
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 104mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.6	15.4	14.8	15.5	15.7	15.1	15.9	15.3	16.0	16.2
3H	14.8	15.5	15.0	15.7	15.9	15.2	16.0	15.5	16.2	16.3
4H	14.7	15.4	15.0	15.6	15.8	15.2	15.9	15.4	16.1	16.3
6H	14.6	15.3	14.9	15.5	15.8	15.1	15.7	15.4	16.0	16.2
8H	14.6	15.2	14.9	15.5	15.7	15.1	15.7	15.4	15.9	16.2
12H	14.6	15.1	14.9	15.4	15.7	15.0	15.6	15.3	15.9	16.1
4H 2H	14.7	15.4	15.0	15.6	15.8	15.2	15.8	15.4	16.0	16.3
3H	14.9	15.5	15.2	15.8	16.0	15.3	15.9	15.7	16.2	16.5
4H	14.9	15.4	15.2	15.7	16.0	15.3	15.8	15.6	16.1	16.4
6H	14.8	15.2	15.1	15.6	15.9	15.2	15.7	15.6	16.0	16.3
8H	14.7	15.2	15.1	15.5	15.9	15.1	15.6	15.5	15.9	16.3
12H	14.7	15.1	15.1	15.5	15.8	15.1	15.5	15.5	15.9	16.3
8H 4H	14.7	15.2	15.1	15.5	15.9	15.1	15.6	15.5	15.9	16.3
6H	14.6	15.0	15.1	15.4	15.8	15.1	15.4	15.5	15.8	16.2
8H	14.6	14.9	15.0	15.3	15.8	15.0	15.3	15.5	15.8	16.2
12H	14.5	14.8	15.0	15.3	15.7	15.0	15.2	15.4	15.7	16.1
12H 4H	14.7	15.1	15.1	15.5	15.8	15.1	15.5	15.5	15.9	16.3
6H	14.6	14.9	15.0	15.3	15.8	15.0	15.3	15.5	15.7	16.2
8H	14.5	14.8	15.0	15.3	15.7	15.0	15.2	15.4	15.7	16.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 1.8					+ 1.4 / - 1.9				
1.5H	+ 1.7 / - 1.1					+ 2.0 / - 1.2				
2.0H	+ 1.7 / - 1.6					+ 2.1 / - 1.9				

CIE Pub.117, 3247 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.1$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:41.55% KDisp:0.9905 Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	79	88	82	79	87	82	78	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	95	91	99	94	91	98	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:41.55% KDisp:0.9905 Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

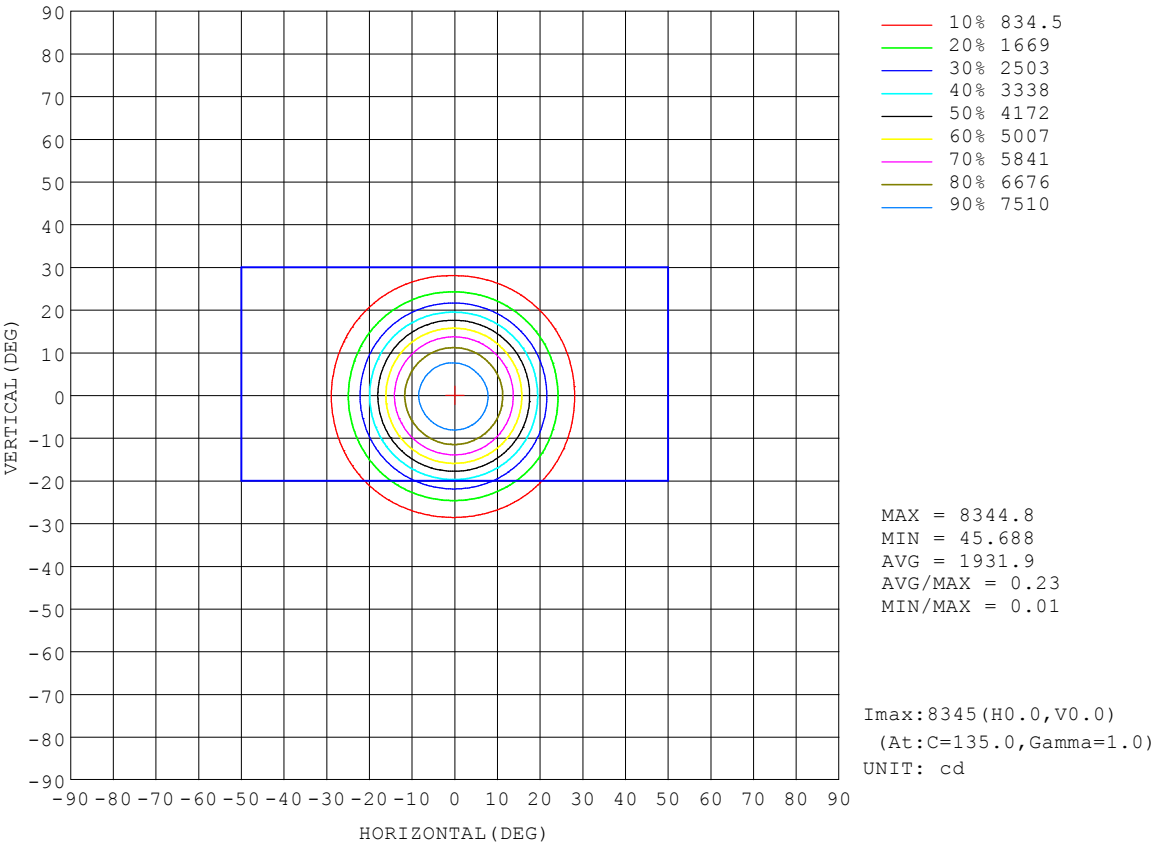

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 45.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Temperature:25.3DEG	Humidity:65.0%
Operators:DAMIN	Test Distance:3.090m [K=1.0000]
Test Date:2024-09-13	Remarks:

AAI Figure

Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:41.55% KDisp:0.9905 Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

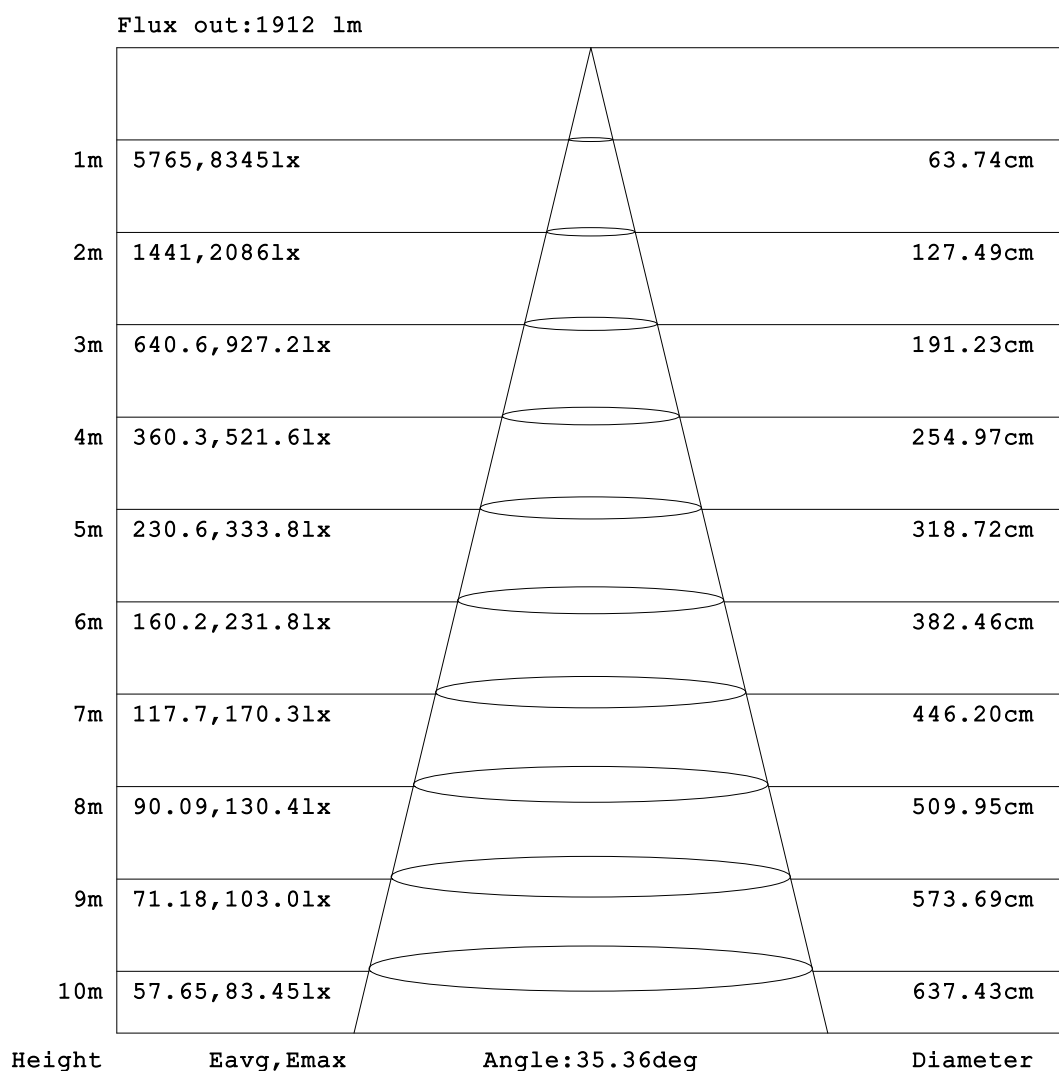


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz		
UTHDi:0.18% ITHDi:41.55% KDisp:0.9905 Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

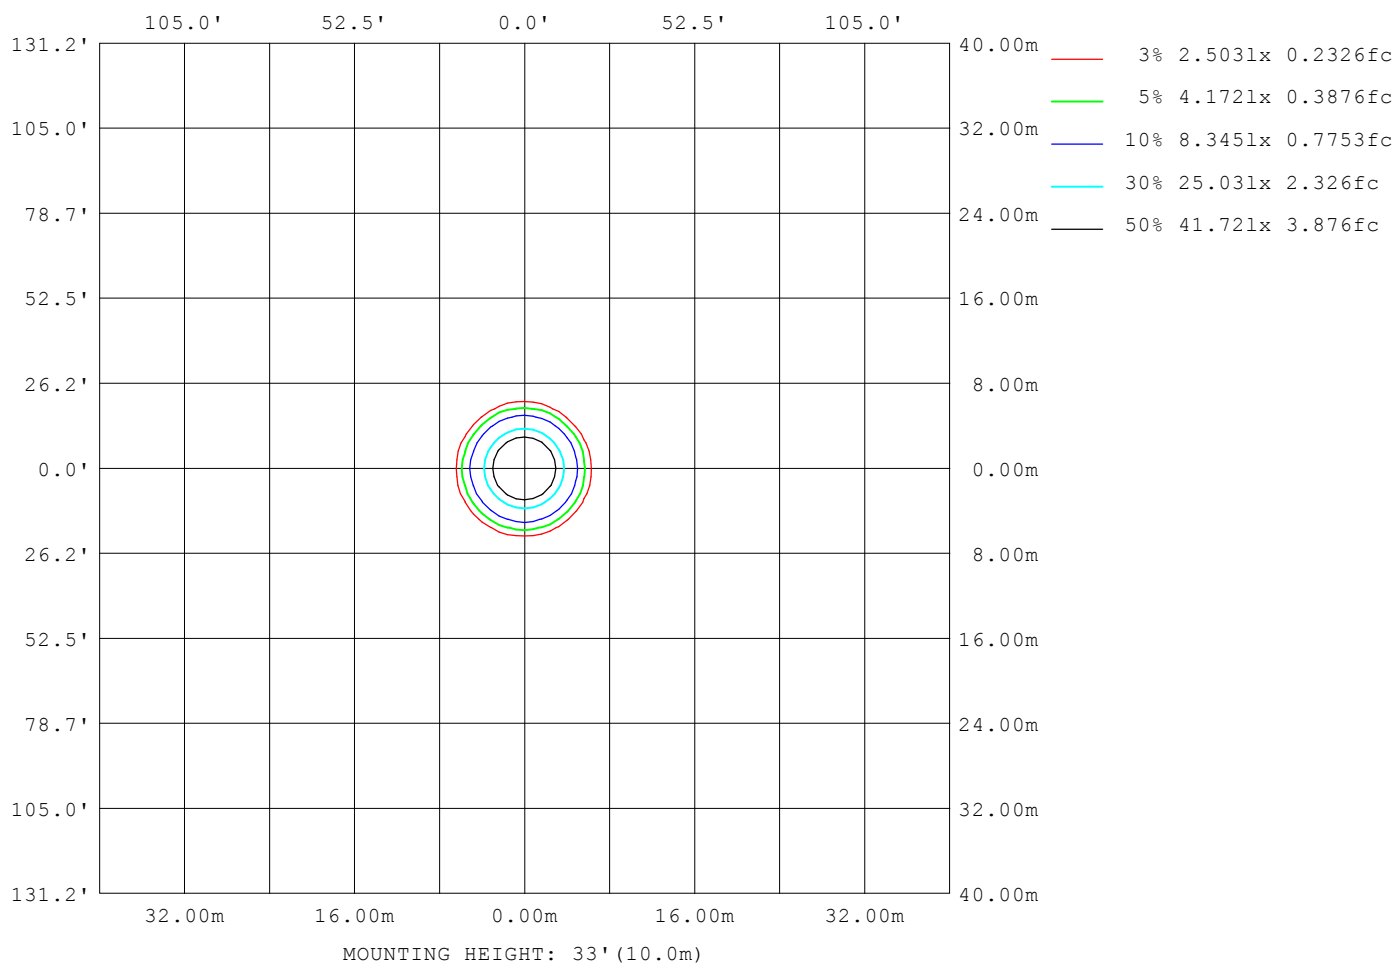

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.3V I:0.1236A P:29.4W PF:0.9884 Freq:49.99Hz UTHDi:0.18% ITHDi:41.55% KDisp:0.9905 Lamp Flux:3246.84x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 36D 30W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6806
L_0~180 (75) av	1412
L_0~180 (85) av	856
L_90~270 (65) av	6702
L_90~270 (75) av	1432
L_90~270 (85) av	886
L_45 (65) av	6696
L_45 (75) av	1412
L_45 (85) av	805

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

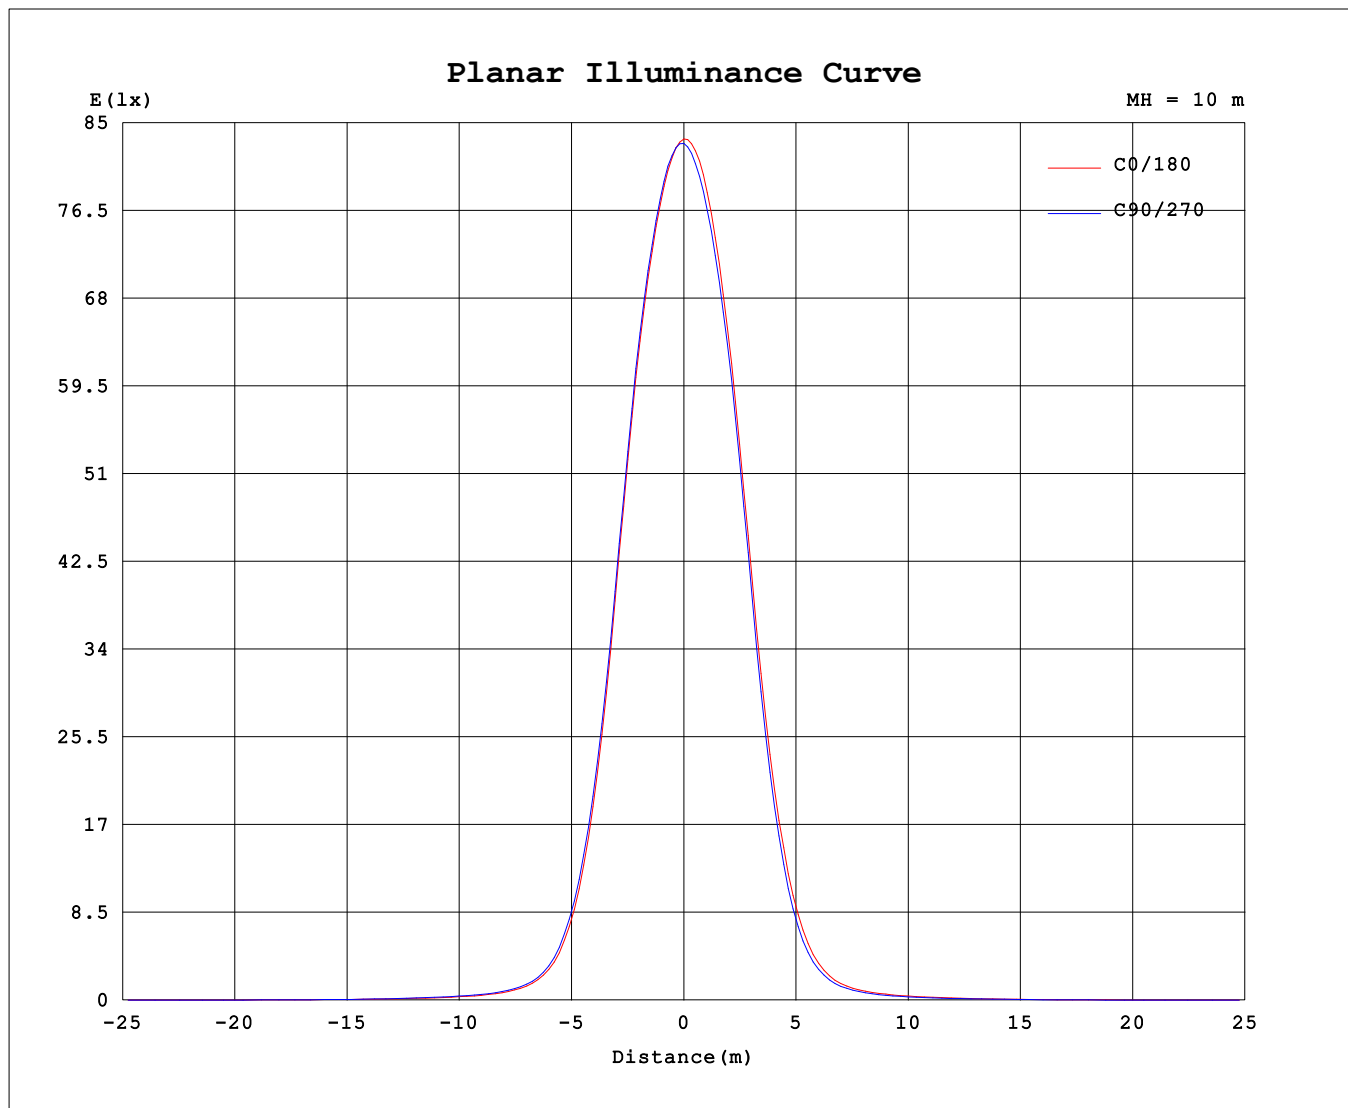

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	8311	8311	8311	8311	8311	8311	8311	8311
3.0	8161	8210	8228	8236	8228	8185	8150	8137
6.0	7802	7875	7901	7913	7921	7874	7790	7773
9.0	7234	7296	7347	7364	7370	7288	7226	7204
12.0	6421	6480	6548	6585	6569	6493	6434	6413
15.0	5291	5360	5415	5464	5464	5400	5318	5286
18.0	3951	4030	4085	4155	4165	4100	3985	3937
21.0	2702	2779	2844	2903	2913	2826	2721	2663
24.0	1713	1791	1850	1914	1931	1807	1729	1673
27.0	1005	1067	1111	1154	1172	1076	1012	970.1
30.0	570.2	611.9	638.4	672.2	678.8	611.4	572.5	548.2
33.0	338.9	364.1	378.8	401.6	399.2	359.4	335.6	325.1
36.0	220.1	236.6	248.6	263.6	259.0	232.5	220.2	210.1
39.0	156.1	169.6	180.1	191.7	186.6	165.2	154.4	148.0
42.0	118.9	130.7	140.8	148.6	143.5	127.1	117.5	111.5
45.0	96.27	106.2	116.0	119.3	116.0	102.7	93.91	89.52
48.0	79.65	87.74	96.36	96.84	96.09	85.90	77.39	73.45
51.0	66.78	73.04	78.45	78.56	79.38	71.89	64.74	61.47
54.0	56.16	60.68	63.11	63.43	64.78	59.88	54.37	52.18
57.0	44.88	47.97	48.46	47.91	49.18	47.59	44.04	41.61
60.0	36.01	38.59	39.07	38.86	39.73	38.42	35.61	33.67
63.0	27.54	29.37	29.42	28.97	30.30	29.71	27.65	26.12
66.0	19.70	21.22	21.46	21.46	22.29	21.37	20.03	18.55
69.0	13.22	14.11	14.47	14.73	14.88	14.29	13.38	12.85
72.0	5.353	5.675	5.981	6.261	6.277	5.716	5.527	5.197
75.0	2.993	3.072	3.104	3.199	3.146	3.031	3.120	2.980
78.0	2.128	2.131	2.183	2.196	2.175	2.093	2.185	2.093
81.0	1.414	1.399	1.466	1.451	1.459	1.400	1.505	1.385
84.0	0.7692	0.7248	0.7669	0.7344	0.7740	0.7405	0.8203	0.7347
87.0	0.3541	0.3144	0.3649	0.3266	0.3482	0.3260	0.3916	0.3126
90.0	0.0963	0.0649	0.1113	0.0651	0.0659	0.0694	0.1078	0.0693

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: